

TITANIUM

TECHNOLOGY



Led Engines

2022



TT-335-L600 Page 4

Voltage		Luminous flux (lm/m)				Power		
12vDC	30K	40K	60K		7,88w / m	2,4w / feet	39,6w / roll	
24vDC	840	945	1050					



TT-2216-L1500 Page 5

Voltage		Luminous flux (lm/m)					Power		
24vDC	27K	30K	35K	40K	60K	34,12w / m	10,40w / feet	170,56w / roll	
	1399	1403	1438	1502	1649				



TT-2216-L1280 Page 6

Voltage		Luminous flux (lm/m)		Power		
24vDC		1800		23w / m	7w / feet	115w / roll



TT-2835-L600 Page 7

Voltage		Luminous flux (lm/m)					Power		
12vDC	27K	30K	35K	40K	60K	16,4w / m	5w / feet	82w / roll	
24vDC	800	808	810	815	817				



TT-2835-L600-HP Page 8

Voltage		Luminous flux (lm/m)					Power		
12vDC	27K	30K	35K	40K	60K	20w / m	7,5w / feet	120w / roll	
24vDC	1704	1727	1801	1952	1964				



TT-2835-L1200 Page 9

Voltage		Luminous flux (lm/m)					Power		
24vDC	27K	30K	35K	40K	60K	30,4w / m	9,26w / feet	152w / roll	
	1493	1500	1507	1510	1512				



TT-3528-L300 Page 10

Voltage		Luminous flux (lm/m)					Power		
12vDC	27K	30K	35K	40K	60K	5,8w / m	1,77w / feet	29w / roll	
24vDC	125	147	148	149	154				



TT-3528-L600 Page 11

Voltage		Luminous flux (lm/m)					Power		
12vDC	27K	30K	35K	40K	60K	9,84w / m	3w / feet	49,2w / roll	
24vDC	383	391	399	402	405				



TT-3535-L600 Page 12

Voltage		Luminous flux (lm/m)					Power		
24vDC		-				24w / m	7,5w / feet	120w / roll	



TT-5050-L300-RGBW-4:1 Page 13

Voltage		Luminous flux (lm/m)					Power		
12vDC		-				18,27w / m	5,57w / feet	91,35w / roll	
24vDC									





TT-5050-L300-RGBCCT-5:1 Page 14

Voltage	Luminous flux (lm/m)		Power			
12vDC	-	12vDC	-	10,32w / m	3,24w / feet	51,36w / roll
24vDC	-	24vDC	-	13,44w / m	4,08w / feet	66,24w / roll



TT-DIGITAL-DMX-05V Page 15

Voltage	Luminous flux (lm/m)		Power			
5vDC	-	-	-	-	-	-



TT-DIGITAL-DMX-24V Page 16

Voltage	Luminous flux (lm/m)		Power			
24vDC	-	-	-	-	-	-



TT-DIGITAL-STRIP-SPI Page 17

Voltage	Luminous flux (lm/m)		Power			
5vDC	-	30/m	-	7,2w / m	2,25w / feet	
		60/m	-	14,4w / m	4,5w / feet	
		144/m	-	34w / m	10,8w / feet	



PRODUCT BUILDER CODE

TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	CLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet	27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	20 65	12 24	Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum	empty No lead out Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum	NE No end cap EC With end cap	NC No Clip xC xxGTE	n/a No psu P Plug-in CV Dimmable CV-BOX Dimmable with box CV67 IP67 psu 120V No dimmable 120v psu 347V No dimmable 347V PSU O10 0-10v PSU
			28/6 H 527 lm/feet 6,25W/feet *24v only	RE RED GR GREEN							
			28/12 456 lm/feet 9W/feet *24v only	BL BLUE							
			35/3 45 lm/feet 1,5W/feet	AM AMBER							
			35/6 120 lm/feet 3W/feet	PK PINK *28/6 only							
			22/15 425 lm/feet 9W/feet *24v only	CB CYAN *28/6 only OR ORANGE *28/6 only							
			50/3 4,5W/feet	UV *28/6 only							
			DX/24 DIGITAL DMX *24V only	RGB *50/3, 28/6 or 35/6 only RGBWW *50/3 only RGBNW *50/3 only RGBCW *50/3 only RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TITANIUM

TECHNOLOGY

TT-335-L600



- 5m roll of SMD335 LED Strip in 5 meter roll. Side emitting led

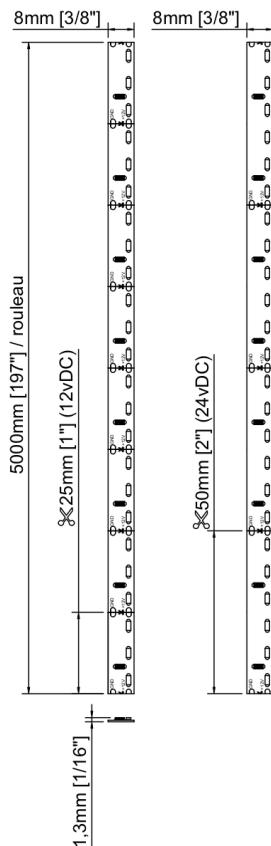

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	7,88w / m 2,4w / feet 39.6w / roll	
Lumen	30K - 840 / m 40K - 945 / m 60K - 1050 / m	
Angle	120°	
Size	IP20	10mm x 1,3mm x 5000mm $\frac{3}{8}'' \times \frac{1}{16}'' \times 196\frac{7}{8}''$
	IP65	10mm x 1,8mm x 5000mm $\frac{3}{8}'' \times \frac{1}{16}'' \times 196\frac{7}{8}''$
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65	


TITANIUM

TECHNOLOGY

TT-2216-L1500



- Del SMD2216 tape in 5 meter roll.

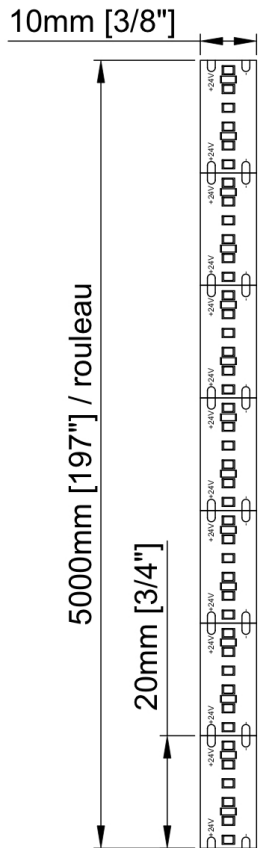


Voltage	24vDC	
LED/m	300 / m	
Power	34,12w / m 10,40w / feet 170,56w / roll	
Amperage	1,34 / m 0,44 / feet 7,11 / roll	
Lumen	27K - 1399 lm 30K - 1403 lm 35K - 1438 lm 40K - 1502 lm 60K - 1649 lm	
CRI	90	
Angle	120°	
Size	IP20	10mm x 1,1mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{16}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 2,5mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "
Cut line	20 mm $\frac{3}{4}$ "	
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

TITANIUM

TECHNOLOGY

TT-2216-L1280

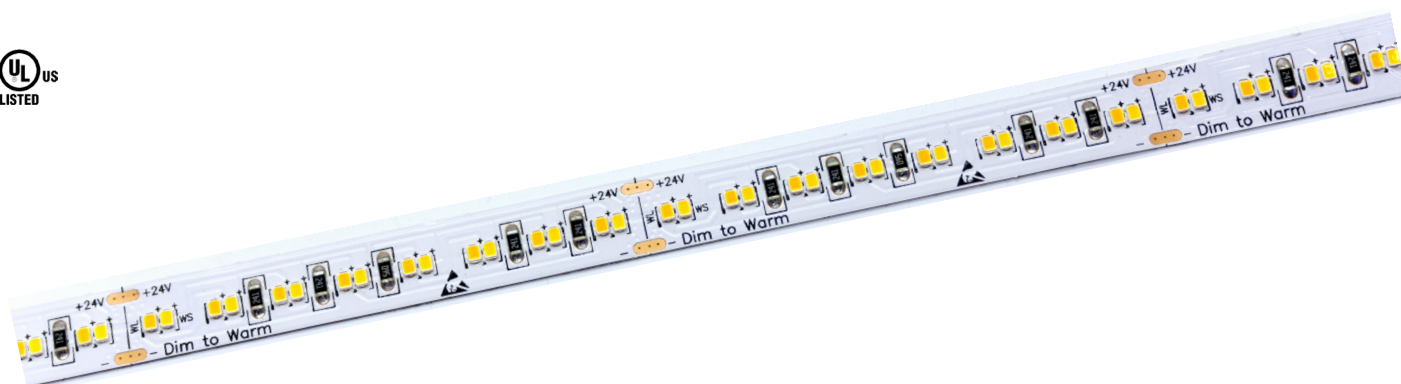

- Del SMD2835 tape in 5 meter roll.
- The color temperature varies according to the intensity. 3000K at 100% dimmable at 1800K at 10%





Voltage	24vDC
LED/m	256 LED/m
Power	23w / m
	7w / feet 115w / roll
Amperage	1A / m
	0,3A / feet 4,8A / roll
Lumen	1800 lm
CRI (RA)	90
Angle	120°
Size	10mm x 1,1mm x 5000mm
	$\frac{3}{8}$ " x $\frac{1}{16}$ " x $196\frac{7}{8}$ "
Cut line	62,5 mm
	2 $\frac{1}{2}$ "
Finish	White
Dimmable	Yes - PWM
LED Colour	DW - Warm white 3000K~1800K
Working temp.	-40°C ~ 70°C
IP	20 - 67

TITANIUM

TECHNOLOGY

TT-2835-L600

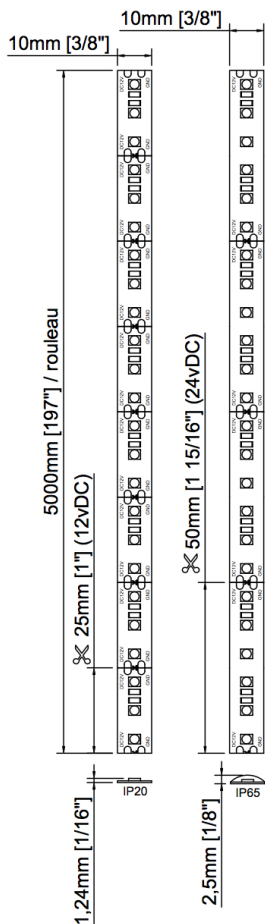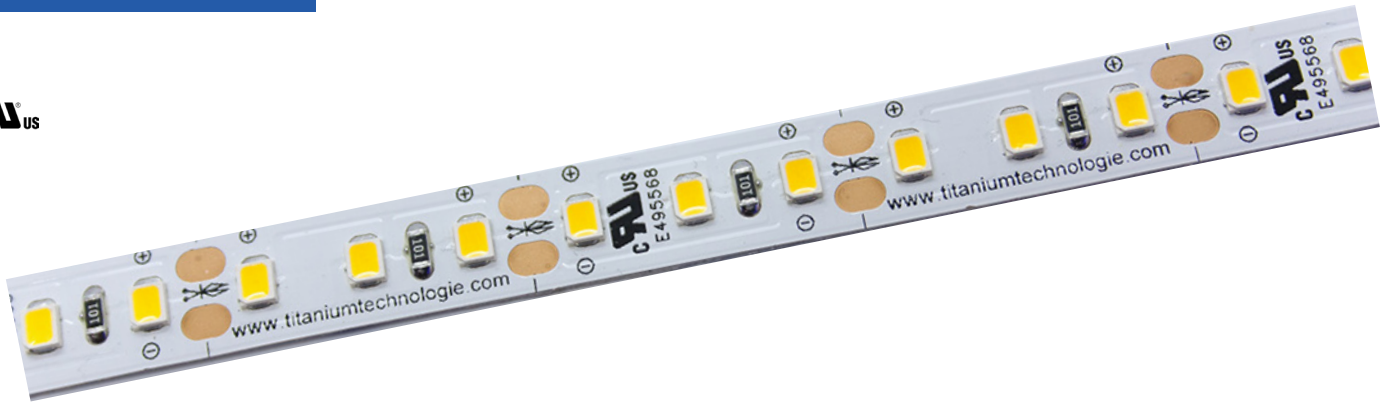


Voltage	12vDC	24vDC
LED/m	120 / m	
Power	16,4w / m 5w / feet 82w / roll	
Amperage	1,37A / m 0,42A / feet 6,84A / roll	0,69A / m 0,21A / feet 3,42A / roll
Lumen	27K - 800 / m 30K - 808 / m 35K - 810 / m 40K - 815 / m 60K - 817 / m	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{16}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 2,5mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue CB - Crystal Blue A - Amber O - Orange P - Pink UV - UV 395~400nm RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

TITANIUM

TECHNOLOGY

TT-2835-L600-HP

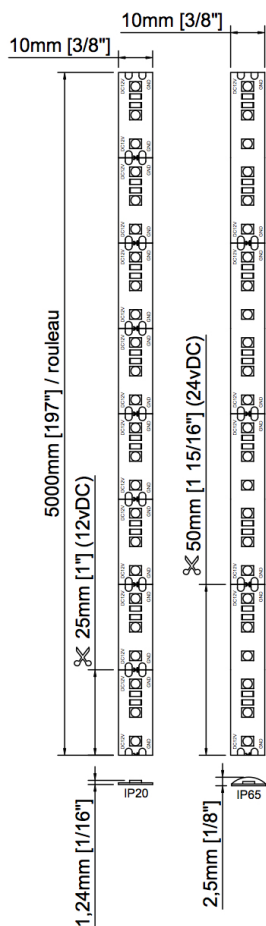

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	20w / m 7,5w / feet 120w / roll	
Amperage	1,27A / m 0,43A / feet 6,5A / roll	0,64A / m 0,22A / feet 3,25A / roll
Lumen	27K - 1704 lm 30K - 1727 lm 35K - 1801 lm 40K - 1952 lm 60K -1964 lm	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm 3/8" x 1/16" x 1967/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 1967/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K -Cold white 6000K	
Working temp.	-40°C ~ 70°C	
IP	20, 67	


TITANIUM

TECHNOLOGY

TT-2835-L1200



- 5m roll of SMD2835 LED Strip in 5 meter roll.

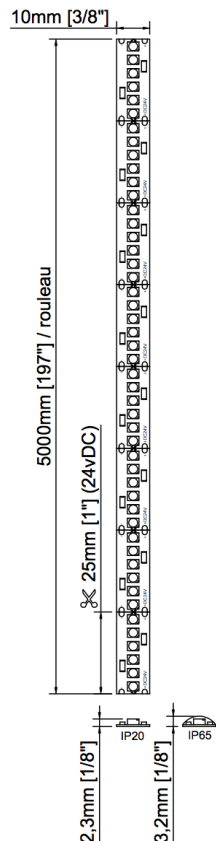

Voltage	24vDC	
LED/m	240 / m	
Power	30,4 w / m 9,26 w / feet 152 w / roll	
Amperage	1,27 A / m 0,39 A / feet 6,34 A / roll	
Lumen	27K - 1493 lm 30K - 1500 lm 35K - 1507 lm 40K - 1510 lm 60K - 1512 lm	
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 3,2mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "
Cut line	25 mm 1"	
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	


TITANIUM

TECHNOLOGY

TT-3528-L300



- 5m roll of SMD3528 LED Strip in 5 meter roll.

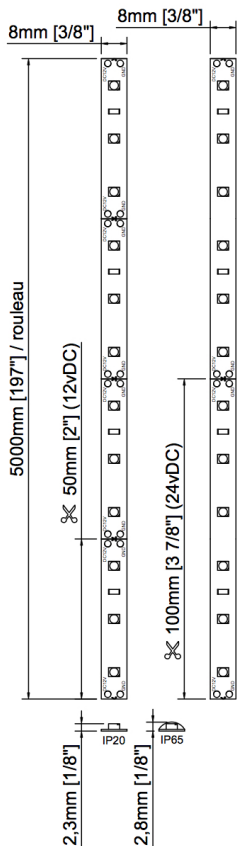

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	5,8w / m 1,77w / feet 29w / roll	
Amperage	0,49A / m 0,15A / feet 2,42A / roll	0,25A / m 0,07A / feet 1,21A / roll
Lumen	27K - 125 lm 30K - 147 lm 35K - 148 lm 40K - 149 lm 60K - 154 lm	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm 3/8" x 1/8" x 1967/8"
	IP65	10mm x 2,8mm x 5000mm 3/8" x 1/8" x 1967/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 1967/8"
Cut line	50 mm 2"	100 mm 4"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	


TITANIUM

TECHNOLOGY


TT-3528-L600




- 5m roll of SMD3528 LED Strip in 5 meter roll.

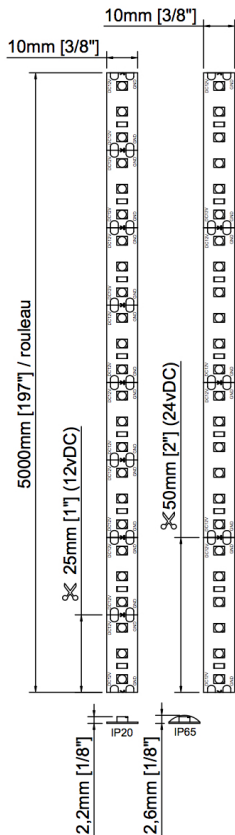

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	9,84w / m 3w / feet 49,2w / roll	
Amperage	0,82A / m 0,25A / feet 4,1A / roll	0,41A / m 0,13A / feet 2,05A / roll
Lumen	27K - 383 lm 30K - 391 lm 35K - 399 lm 40K - 402 lm 60K - 405 lm	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,2mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 2,6mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

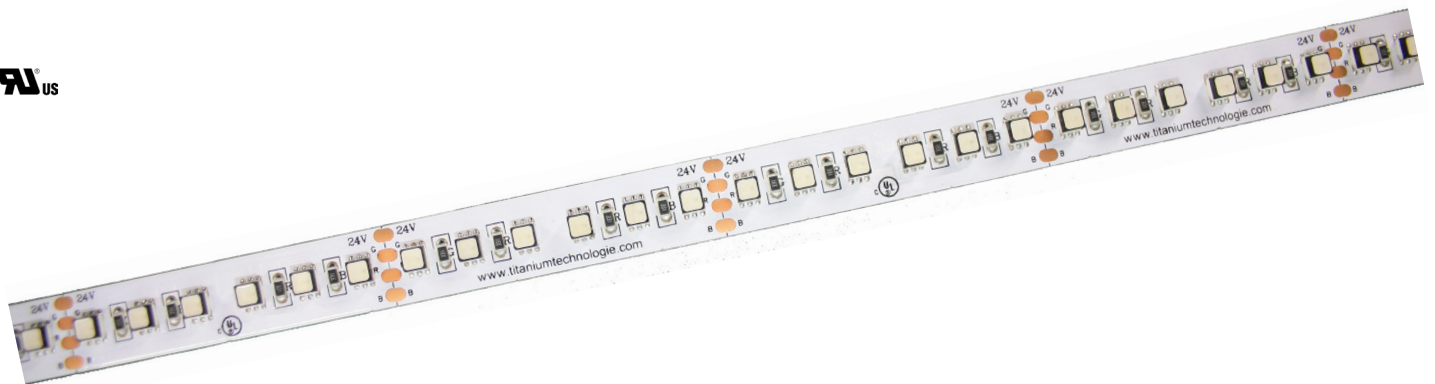

- 5m roll of SMD3535 LED Strip in 5 meter roll.

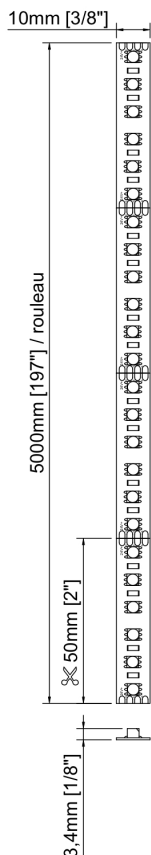

Voltage	24vDC
LED/m	120 / m
Power	24w / m 7,5w / feet 120w / roll
Amperage	1A / m 0,32A / feet 5A / roll
Angle	120°
Size	12mm x 3,4mm x 5000mm 1/2" x 1/8" x 1967/8"
Cut line	50 mm 2"
Finish	White
Dimmable	Yes
LED Colour	RGB - Color mixing 3:1
Working temp.	-40°C ~ 70°C
IP	20


TITANIUM

TECHNOLOGY

TT-5050-L300-RGBW 4:1



- 4 in 1 SMD5050 LED Strip.

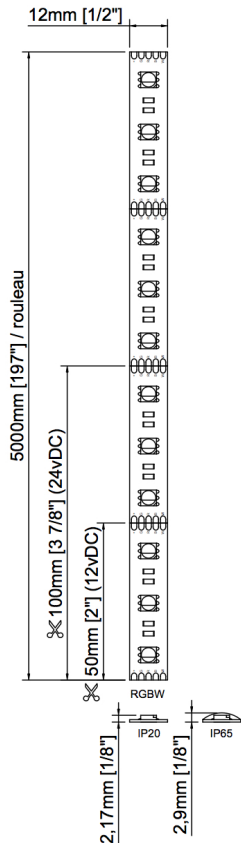

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	18,27w / m	
	5,57w / pied feet	
	91,35w / roll	
Amperage	1,53A / m	0,77A / m
	0,47A / feet	0,23A / feet
	7,62A / roll	3,81A / roll
Angle	120°	
Size	IP20	12mm x 2,17mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12mm x 2,9mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	50 mm	100 mm
	2"	4"
Finish	White	
Dimmable	Yes	
LED Colour	RGBA - RGB + Amer 4:1 RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	


TITANIUM

TECHNOLOGY

TT-5050-L300-RGBCCT 5:1



- 5m roll of SMD3535 LED Strip in 5 meter roll.

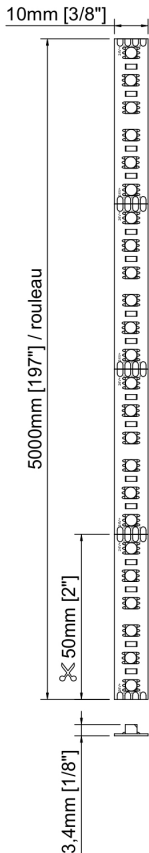


Voltage	12vDC	24vDC
LED/m	60 / m	
Power	10,32w / m	13,44w / m
	3,24w / feet	4,08w / feet
Amperage	51,36 / roll	66,24 / roll
	0,86A / m	0,56A / m
Angle	0,27A / feet	0,17A / feet
	4,28A / roll	2,76A / roll
Size	IP20	12mm x 2,04mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12mm x 2,8mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	99,5 mm 3 7/8"	
Finish	White	
Dimmable	Yes	
LED Colour	RGBCCT - RGB + Warm white 3000K + Cold white 6000K	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

TT-DIGITAL-DMX-05V



- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

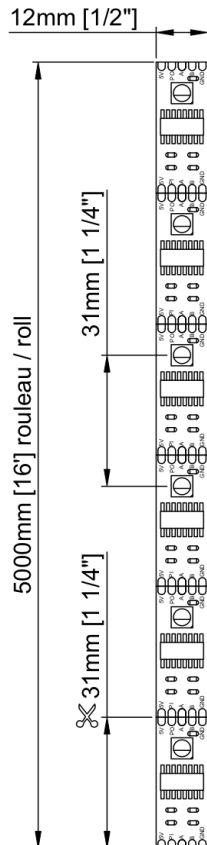

Voltage	5vDC	
LED/m	32 / m	
Power	w / m w / feet w / roll	
Amperage	A / m A / feet A / roll	
LED / pixel	1 LED / pixel	
Pixel / m	32 pixels / m	
Length / DMX universe	4 m (158") / DMX (RGBW) 5,3 m (209") / DMX (RGB)	
Angle	120°	
Size	IP20	12mm x 2,3mm x 5000mm 1/2" x 1/8" x 1967/8"
	IP67	16mm x 5mm x 5000mm 5/8" x 3/16" x 1967/8"
Cut line	31mm 1 1/4"	
Finish	Black	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



TT-DIGITAL-DMX
-WRITER


TITANIUM

TECHNOLOGY

TT-DIGITAL-DMX-24V



- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

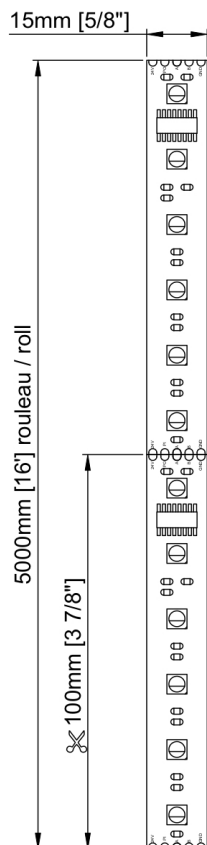

Voltage	24vDC	
LED/m	60 / m	
Power	w / m w / pied feet w / roll	
Amperage	A / m A / pied feet A / rouleau roll	
LED / pixel	6 LED / pixel	
Pixel / m	10 pixels / m	
Length / DMX universe	12,8 m (504") / DMX (RGBW) 17 m (670") / DMX (RGB)	
Angle	120°	
Size	IP20	15mm x 2,3mm x 5000mm 5/8" x 1/8" x 1967/8"
	IP67	16mm x 5mm x 5000mm 5/8" x 3/16" x 1967/8"
Cut line	100 mm 4"	
Finish	Noir / Black	
Dimmable	Oui / Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



TT-DIGITAL-DMX
-WRITER

TT-DIGITAL-STRIP-SPI



- SMD5050 LED tape in 5 meter roll. Digital LED controlled one by one via ArtNet / DMX.

Voltage	5vDC	
LED/m	30, 60, 144	
Power	30/m	7,2w / m 2,25w / feet
	60/m	14,4w / m 4,5w /feet
	144/m	34w / m 10,8 w /feet
Angle	120°	
Size	IP20	12mm x 2,17mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	12mm x 2,8mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
Cut line	30/m	33mm 1 $\frac{5}{16}$ "
	60/m	17mm $\frac{11}{16}$ "
	144/m	7mm $\frac{5}{16}$ "
Finish	White	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



TT-DIGITAL-DMX-SPI



TT-DIGITAL-U8

LIMITED THREE (3) YEARS WARRANTY



Titanium Technology offers this limited warranty for three (3) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of three (3) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|-----------------|-------------------|-------------------------------|
| 1) TT-2216-XX * | 6) TT-5630-XX * | 11) TT-FL-XX-XX |
| 2) TT-2835-XX * | 7) TT-DOWN-007-XX | 12) TT-PSU-IP20-XX (MEANWELL) |
| 3) TT-335-XX * | 8) TT-DOWN-008-XX | 13) TT-PUCK-2.2W-XX |
| 4) TT-3528-XX * | 9) TT-DOWN-016-XX | 14) TT-PUCK-3W-XX |
| 5) TT-5050-XX * | 10) TT-DR-CV-XX | 15) TT-PUCK-400-V3 |

* LED strips are only guaranteed if they are installed in our aluminum profiles and use our transformers.

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

TITANIUM

TECHNOLOGY



TITANIUM TECHNOLOGY

2323, boulevard Versant Nord #111
Québec, QC
G1N 4P4 CANADA
(866) 476-8115

www.titaniumtechnology.com
sales@titaniumtechnology.com
www.facebook.com/titaniumtechnologie