



TITANIUM

TECHNOLOGY

Catalog
2024

TITANIUM TECHNOLOGY

Titanium Technology is a company that works in the field of LED lighting. We are from the era where technologies are exploding and taking more and more space in our lives, we offer people tailor-made solutions that live up to their expectations. The Titanium Technology team is working with its distributors to complete their LED lighting projects. The challenges of our customers are our greatest motivation.

Discover Titanium Technology.

TABLE OF CONTENTS

OUR LED LIGHT SOURCES

LED light sources	4
-------------------------	---

GLOB

Glob	6
------------	---

ALUMINUM PROFILE

Surface	38
Recessed	66
Pendant	80
Black shadow series	112
Trim-less mud-in	128
Trim-less tiles	140
Bottom wall	146
Closet	150
Stairs	152
Trim-less concrete	154
Suspended ceiling	156
Edge	158
Flex	162

LED ENGINES

LED engines	166
-------------------	-----

CABINETS AND MILLWORK

Cabinet and millwork	184
----------------------------	-----

ARCHITECTURAL

Architectural	198
---------------------	-----

RECESSED SPOTLIGHT

Recessed spotlight	220
--------------------------	-----

TRACK LIGHTING SYSTEM

Linear	241
Curved	276

POWER SUPPLY

Dimmable	307
Fixed voltage	325

CONTROLS

Wall mount	344
Wireless	349
Stick	366
Sunlite suite 3	367
Stand alone	368
Decoders	369
Amplifier	372

ACCESSORIES

Housings	378
Sensors	380
Connector 2,1mm	386
Connector FL serie	388
Cable	396
EZ-Clip	403
Fastclip	408
Doubleface 3M	409

ANNEXE

Annexe	410
--------------	-----

OUR LED LIGHT SOURCES ---



L150


(30 mm distance between points)

With a distance of 30mm between points, the light sources will be relatively spaced apart. This may create the appearance of distinct points of light, but the overall lighting may appear less even and consistent.

L300

(15 mm distance between points)

At a distance of 15mm between points, the light sources will be closer together, which can give more even lighting while still maintaining some distinction between individual points.

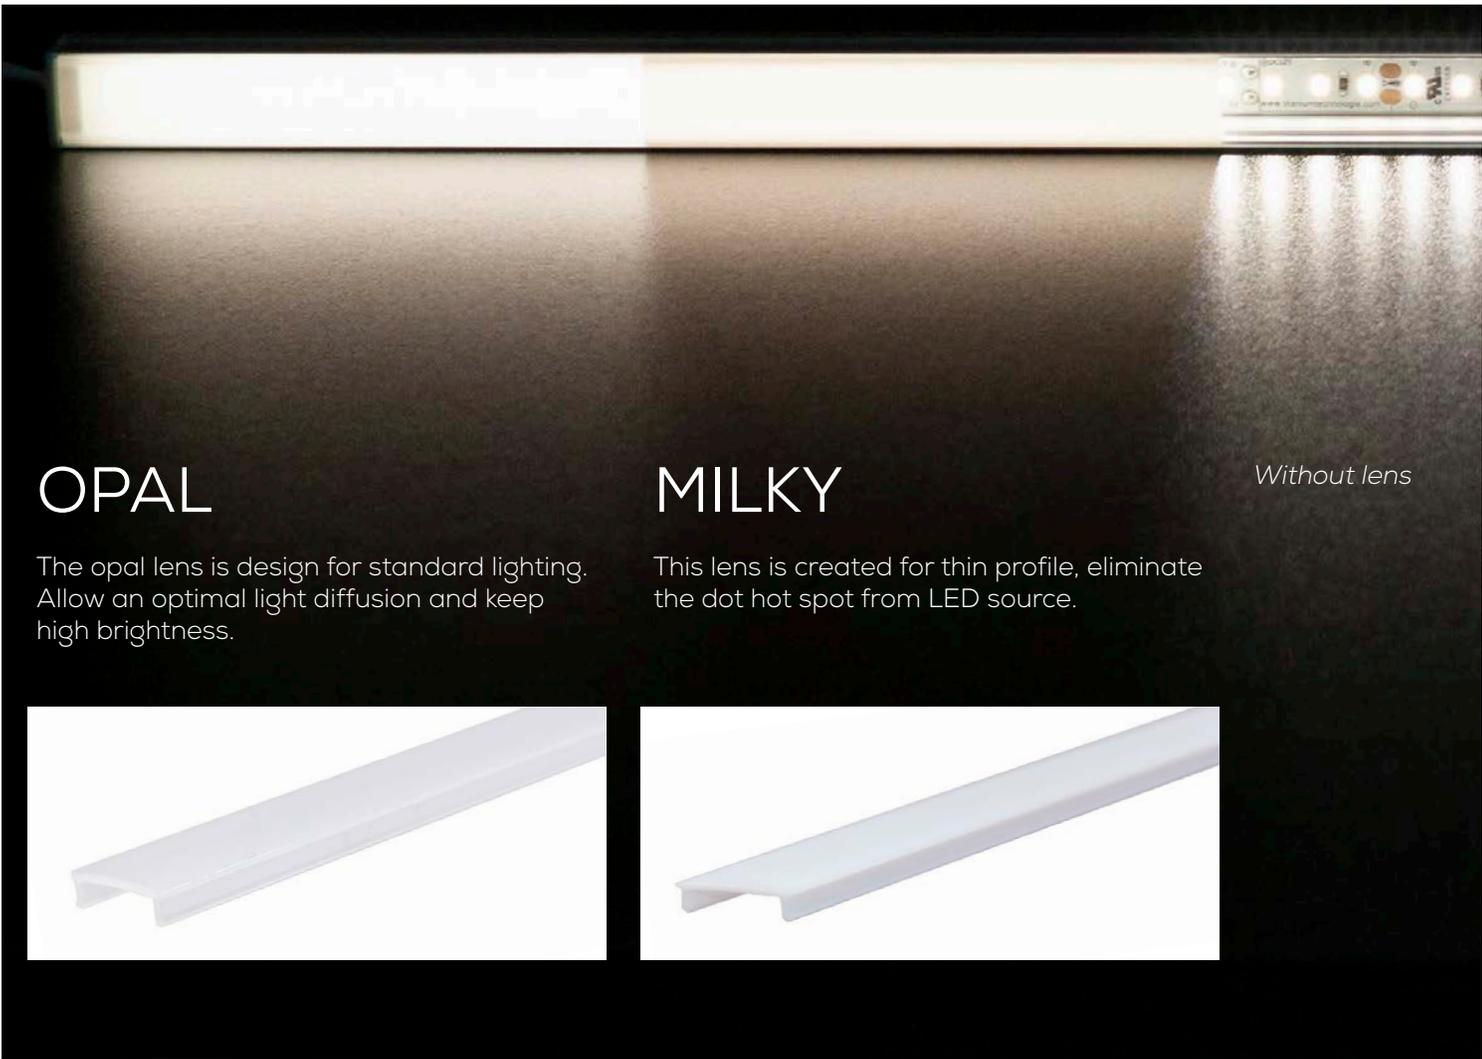

OPAL

The opal lens is design for standard lighting. Allow an optimal light diffusion and keep high brightness.

MILKY

This lens is created for thin profile, eliminate the dot hot spot from LED source.

Without lens





L600


(7 mm distance between points)

With a distance of just 7mm between points, the light sources will be even closer together, which can create more even and soft lighting, with less distinction between individual points.

L1500

(3 mm distance between points)

With a distance of only 3mm between points, the light sources will be very close together, providing extremely even and continuous lighting. This gives the best result in terms of uniformity and softness of lighting, with minimal perception of individual points of light.

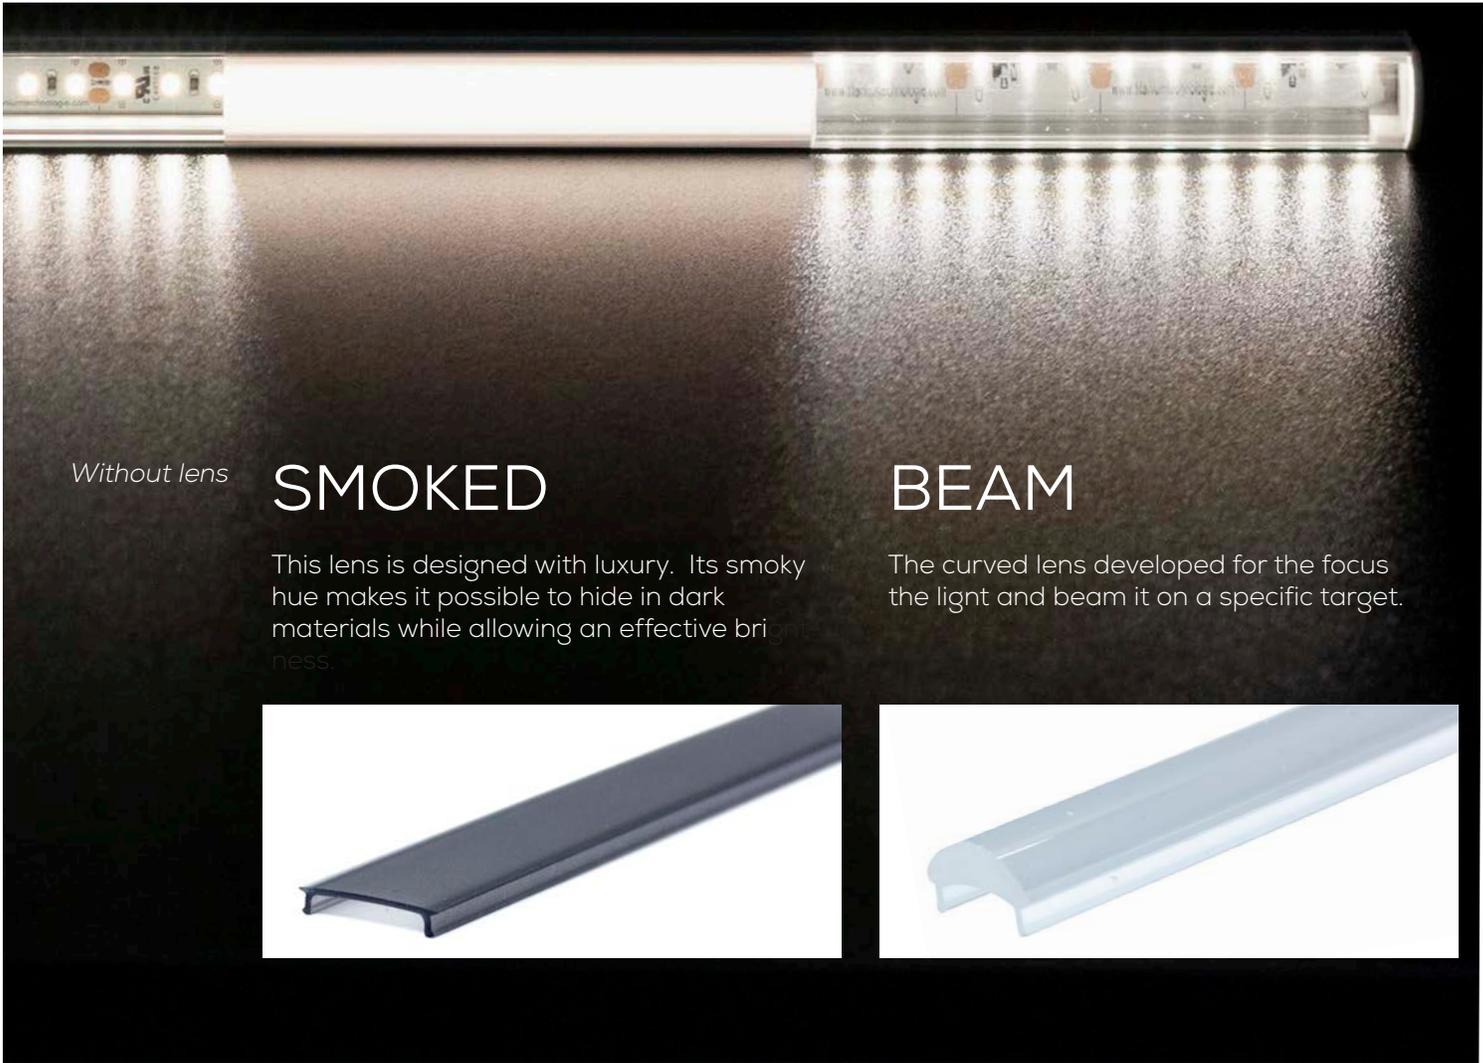

Without lens

SMOKED

This lens is designed with luxury. Its smoky hue makes it possible to hide in dark materials while allowing an effective brightness.

BEAM

The curved lens developed for the focus the light and beam it on a specific target.



GLOB





GLOB



TT-GLOB-15006 Page 12

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15008 Page 13

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15042 Page 14

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	290	100



TT-GLOB-15043 Page 15

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15052 Page 16

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15056 Page 17

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15058 Page 18

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	230	200



TT-GLOB-15060 Page 19

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	6	250	300



TT-GLOB-15070 Page 20

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15071 Page 21

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	200



TT-GLOB-15073 Page 22

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15075 Page 23

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15076 Page 24

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15078 Page 25

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15079 Page 26

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	340	300



TT-GLOB-10135 Page 27

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	1 x E26	-



TT-GLOB-10164 Page 28

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10165 Page 29

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-



TT-GLOB-10166 Page 30

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	7 x E26	-




TT-GLOB-10167 Page 31

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10168 Page 32

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-



TT-GLOB-10170 Page 33

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10173 Page 34

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-



TT-GLOB-10176 Page 35

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	9 x E26	-





- The 125 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT - SERIE - MODEL

TT - GLOB - 15006

TT-GLOB-15008



- The 200 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15008

TT-GLOB-15042



- The R80 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	290
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	80 mm (3 1/8")
Height	100 mm (4")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15042

TT-GLOB-15043



- The R200 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200 mm (7 7/8")
Height	1100 mm (43 1/4")

PRODUCT CODE

TT - SERIE - MODEL

TT - GLOB - 15043

TT-GLOB-15052



- The Lucentia series evokes timeless elegance in a bulb. A bubble of interior smoked glass 125, delicate and captivating, captures imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	115mm (4 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15052

TT-GLOB-15056



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 125, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT - SERIE - MODEL
TT - GLOB - 15056

TT-GLOB-15058



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 200, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15058

TT-GLOB-15060



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 300, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	6w
Dimmable	Yes
Lumen	250
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	300mm (11 ³ / ₄ "
Height	320mm (12 ⁵ / ₈ "

PRODUCT CODE

TT - SERIE - MODEL
TT - GLOB - 15060



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 125 twisted, delicate and captivating, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15070

TT-GLOB-15071



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 200 twisted, delicate and captivating, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT - SERIE - MODEL
TT - GLOB - 15071



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 125 line gilded glass bubble, symbol of refinement, capturing the radiance of the setting sun. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15073

TT-GLOB-15075



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 200 line gilded glass bubble, symbol of refinement, capturing the radiance of the setting sun. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15075

TT-GLOB-15076



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 125 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15076

TT-GLOB-15078



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 200 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT - SERIE - MODEL
TT - GLOB - 15078



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 300 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	340
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	300mm (11 ³ / ₄ "
Height	320mm (12 ⁵ / ₈ "

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15079

TT-GLOB-10135



- Discover the canopy, a essential element of the Lucentia series. Measuring 3 meters in length, it can be adjusted according to your needs. Equipped with an E26 neck compatible with bulbs from the series, it combines functionality and aesthetics to illuminate your space with elegance.

Voltage	120vAC
Power	57w max.
Socket Type	1 x E26
Cable Type	1 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50mm x 80mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10135

TT-GLOB-10164



- The beautiful three-branched canopy from the Lucentia series offers timeless elegance. With a length of 3 meters, it easily adapts to any space. Its adjustable design allows for optimal flexibility. Finished with an E26 neck, it gracefully accommodates the series' bulbs, adding a touch of sophistication to every room.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50mm x 80mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10164

TT-GLOB-10165



- Discover the magnificent canopy five-pointed series Lucentia. Measuring 3 meters in length, it adapts perfectly to your needs thanks to its adjustability. Its elegant design ends with an E26 neck compatible with bulbs in the series. A perfect combination of functionality and aesthetics to illuminate your space with style.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10165




- The seven-branched canopy of the Lucentia series offers contemporary elegance. With its 3 meters of adjustable length, it adapts perfectly to any space. Its minimalist design highlights every detail. Finished with an E26 neck, it easily accepts bulbs from the series, illuminating your interior with style.

Voltage	120vAC
Power	57w max.
Socket Type	7 x E26
Cable Type	7 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 ¾" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10166

TT-GLOB-10167

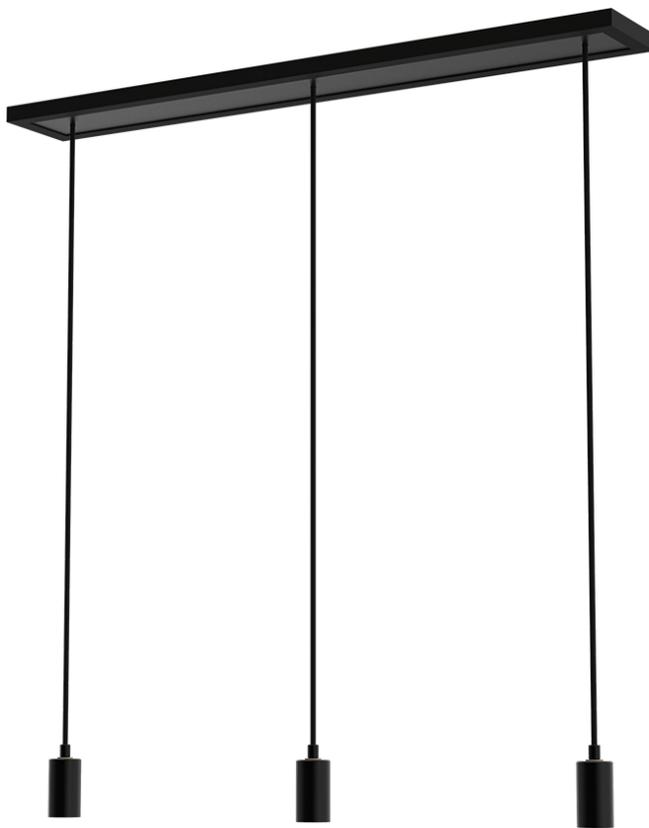


- The Lucentia series offers a rectangular canopy with three branches 3 meters long, adjustable according to needs. Its elegant design ends with an E26 neck compatible with the bulbs of the series, offering a luminous solution versatile and aesthetic for any space.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 1,5m
Colour	Black
Canopy Size	990mm x 150mm x 25mm (39" x 5 7/8" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10167

TT-GLOB-10168

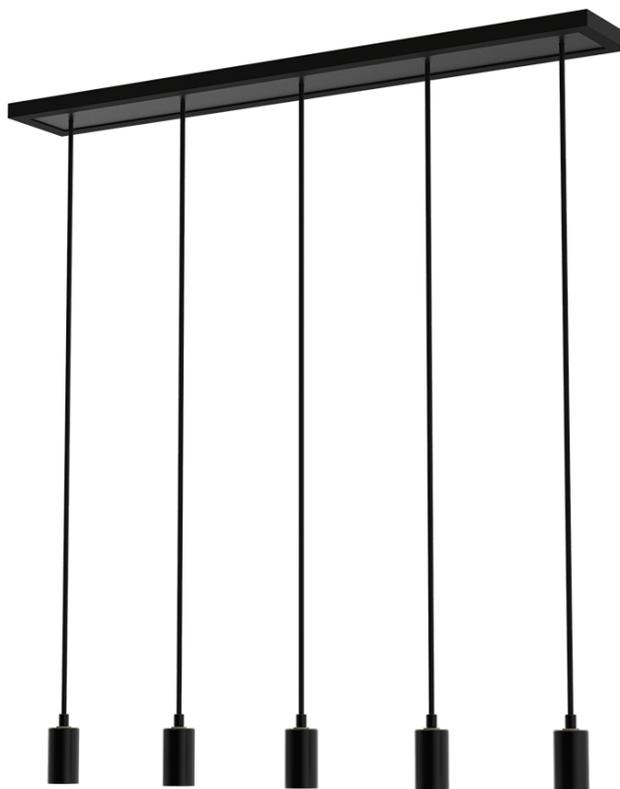

- The rectangular canopy with five branches from the Lucentia series offers contemporary elegance. Measuring 3 meters long, it easily adapts to various spaces. Its E26 neck allows the use of compatible bulbs, thus harmonizing the lighting with the style of the series. Its adjustability ensures an arrangement perfect as needed.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 1,5m
Colour	Black
Canopy Size	990mm x 150mm x 25mm (39" x 5 7/8" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10168

TT-GLOB-10170



- Discover the superb square canopy with three branches from the Lucentia series. With its 3 meters of adjustable length according to your needs, it offers unparalleled elegance and functionality. Featuring an E26 neck compatible with series bulbs, it will illuminate your space with style and sophistication.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 3/4" x 12 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10170

TT-GLOB-10173



- The square canopy with five branches of the series Lucentia offers contemporary elegance. Measuring 3 meters long, it easily adjusts according to the needs. Its modern design is completed with an E26 neck, compatible with bulbs in the range. A perfect fusion of functionality and style for any space.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 3/4" x 12 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10173

TT-GLOB-10176



- Discover the magnificent nine-branched square canopy from the Lucentia series. Measuring 3 meters long, it adapts to your needs thanks to its flexible adjustment. Its elegant design ends with an E26 neck compatible with bulbs in the series. A perfect fusion of functionality and contemporary aesthetics.

Voltage	120vAC
Power	57w max.
Socket Type	9 x E26
Cable Type	9 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 3/4" x 12 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10176

ALUMINUM PROFILE



Credit photo: Maison Profab



SURFACE



Credit photo: Cuisines Simard



TT-01-3000 Page 43

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-04-3000 Page 44

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-06-3000 Page 45

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-07-3000 Page 46

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-08-3000 Page 47

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-09-3000 Page 48

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-10-3000 Page 49

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-16-3000 Page 50

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-21-3000 Page 51

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-22-3000 Page 52



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-23-2000 Page 53



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-24-2000 Page 54



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-25-3000 Page 55



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-32-2000 Page 56



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-38-3000 Page 57



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-2000 Page 58



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-3000-BK Page 59



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-52-3000 Page 60





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-64-3000 Page 61



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-65-3000 Page 62



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-66-2000 Page 63



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-68-3000 Page 64



TT-76-3000 Page 65

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TITANIUM

TECHNOLOGY


TT-01-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

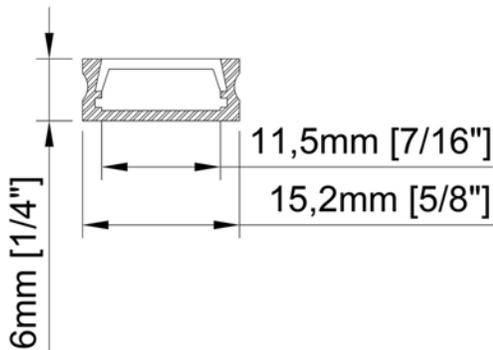

Size	15,2mm x 6mm x 3000mm 5/8" x 1/4" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

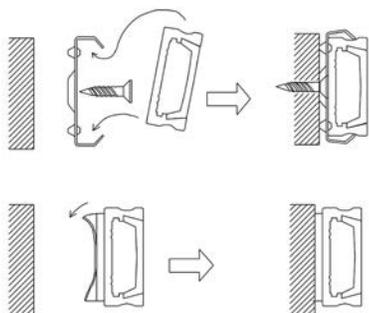

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	01	-	3000	-	O


TITANIUM

TECHNOLOGY

TT-04-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

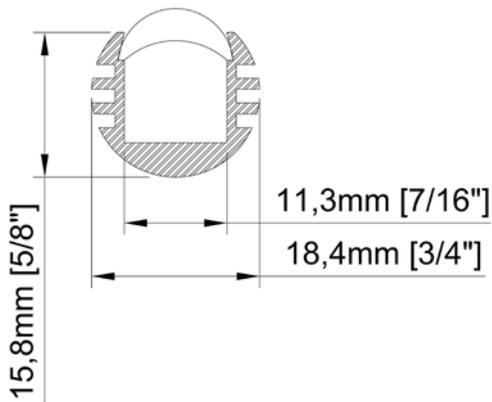


Size $\varnothing 18,4\text{mm} \times 3000\text{mm}$
 $\varnothing 3/4" \times 118 1/8"$

Length 3000mm
 118 1/8"

Internal width 11,3mm
 7/16"

Cover Opal

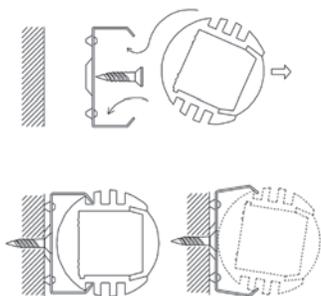

Accessories



TT-04-CLIP



TT-04-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	04	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-06-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

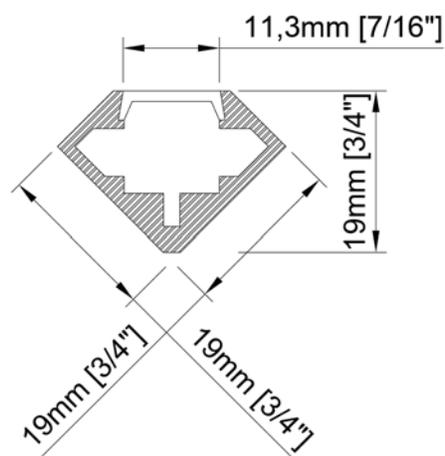

Size	18,4mm x 18,4mm x 3000mm $\frac{3}{4}'' \times \frac{3}{4}'' \times 118 \frac{1}{8}''$
Lenght	3000mm $118 \frac{1}{8}''$
Internal width	14,1mm $\frac{9}{16}''$
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

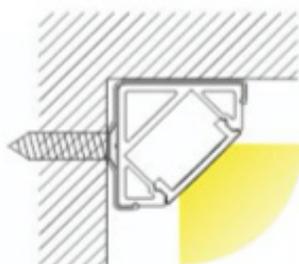

Accessories



TT-06-CLIP



TT-06-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	06	-	3000	-	O


TITANIUM

TECHNOLOGY

TT-07-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

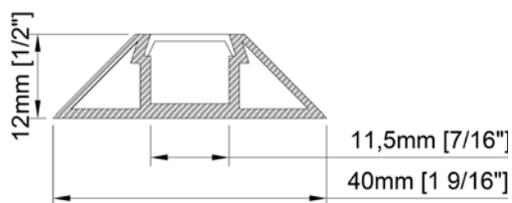


Size 40mm x 12mm x 3000mm
1 9/16" x 1/2" x 118 1/8"

Lenght 3000mm
118 1/8"

Internal width 11,5mm
7/16"

Cover Opal

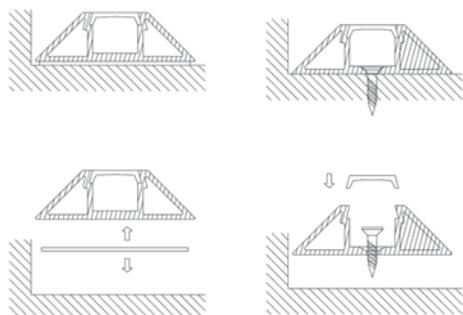

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	07	-	3000	-	O


TITANIUM

TECHNOLOGY



TT-08-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

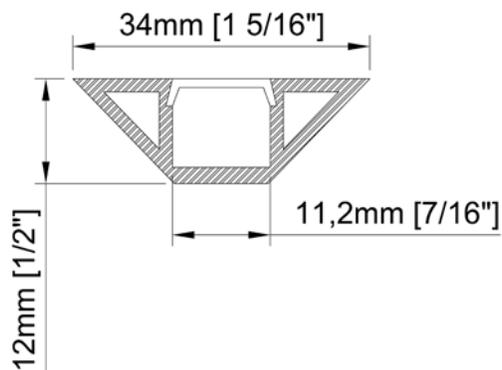

Size	34mm x 12mm x 3000mm 1 ⁵ / ₁₆ " x 1/2" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,2mm 7/16"
Cover	Opal

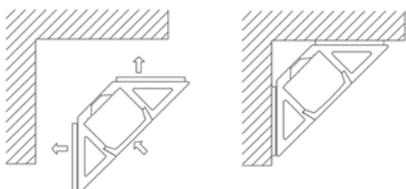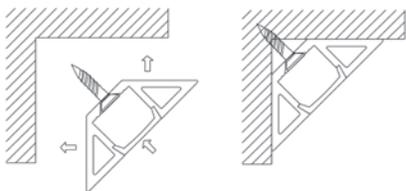

Accessories



TT-08-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	08	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-09-3000-O

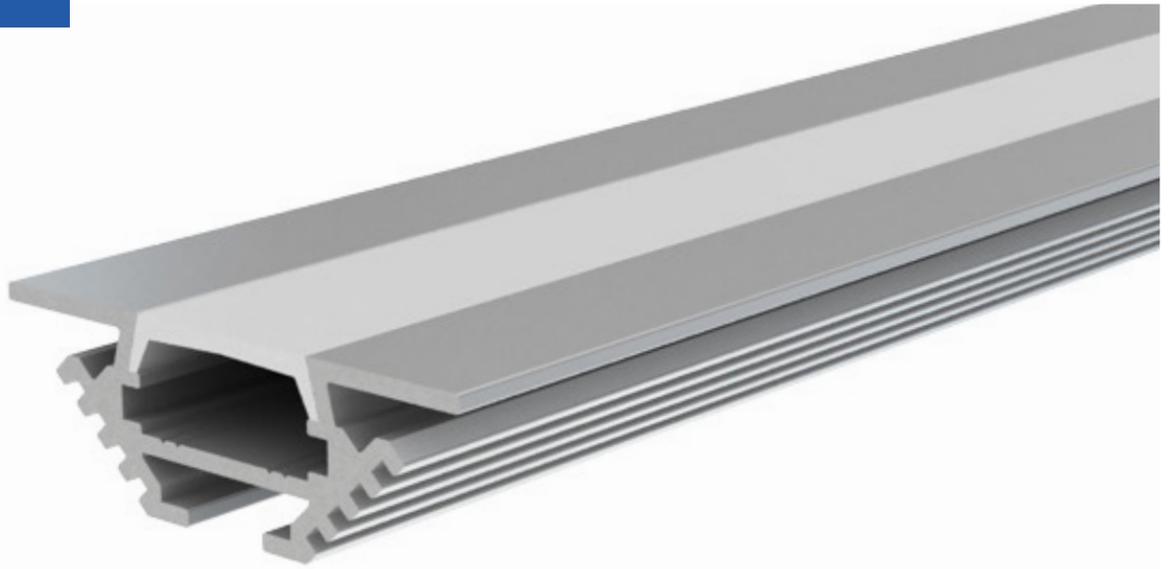

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118").

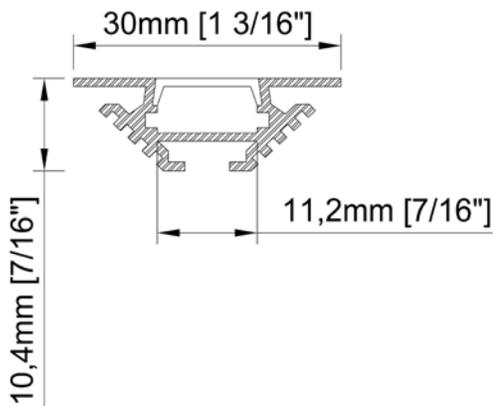

Size	30mm x 10,4mm x 3000mm 1 ³ / ₁₆ " x 7 ⁷ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	11,2mm 7 ⁷ / ₁₆ "
Cover	Opal

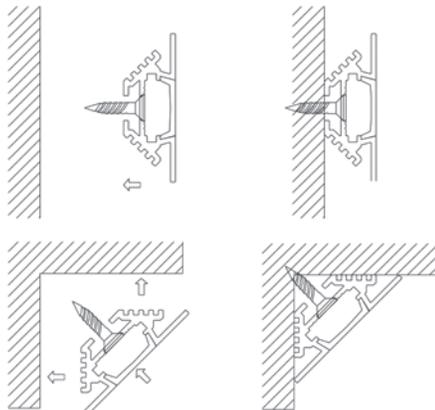

Accessories



TT-09-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	09	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-10-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

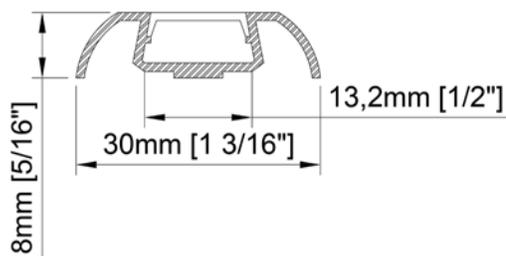

Size	30mm x 8mm x 3000mm 1 ³ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 1 ¹ / ₈ "
Internal width	13,2mm 1 ¹ / ₂ "
Cover	Opal

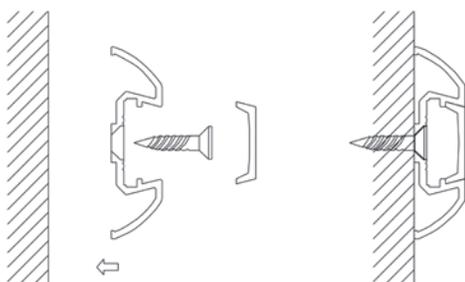

Accessories



PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	10	-	3000	-	O

TITANIUM

TECHNOLOGY

TT-16-2000-O

- Aluminum profile for attaching a glass shelf of 8mm.
- Designed to cover the LED strips and diffuse the light in the glass.
- Designed to be wall mounted.
- Available in lengths 2000 mm (78³/₄").

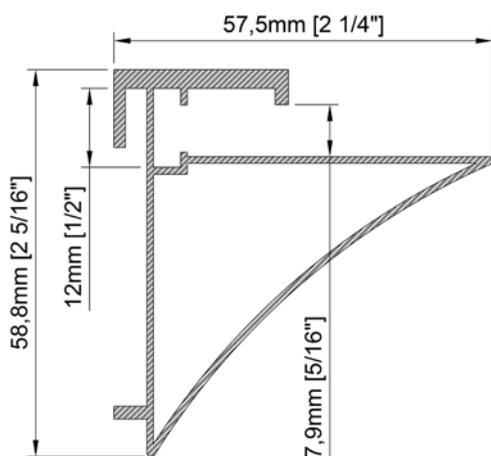

Size	57,5mm x 58,8mm x 2000mm 2 ¹ / ₄ " x 2 ⁵ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	None

*Glass not include.

Accessories



TT-16-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	16	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-21-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

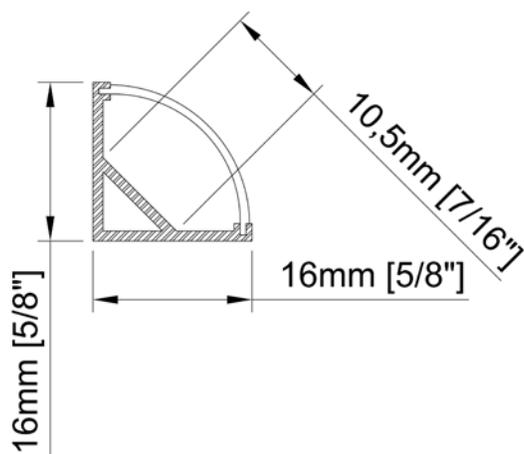

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

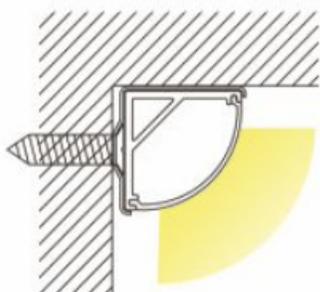

Accessories



TT-21-CLIP



TT-21-END

PRODUCT CODE


TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	21	-	3000	-	O

TITANIUM



TECHNOLOGY

TT-22-3000-O

- Aluminum profile with clear acrylic.
- Designed to cover the LED ribbons and dissipate heat.
- Acrylic lens concentrates the light in a range of 30°
- Swivel attachment to guide the light.
- Available in lengths 3000 mm (118¹/₈").

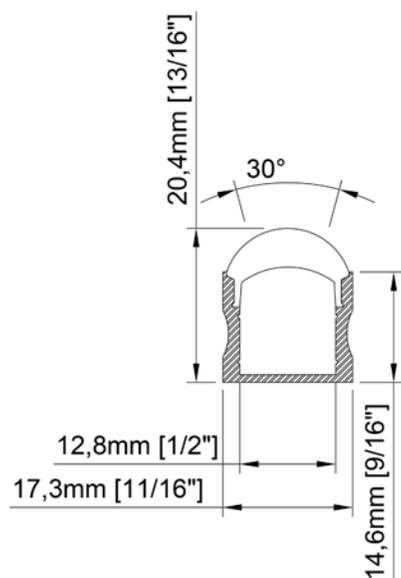

Size	20,4mm x 17,3mm x 3000mm 1 ³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1/2"
Cover	Clear, 30° lens



Accessories



TT-22-CLIP



TT-22-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	22	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-23-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

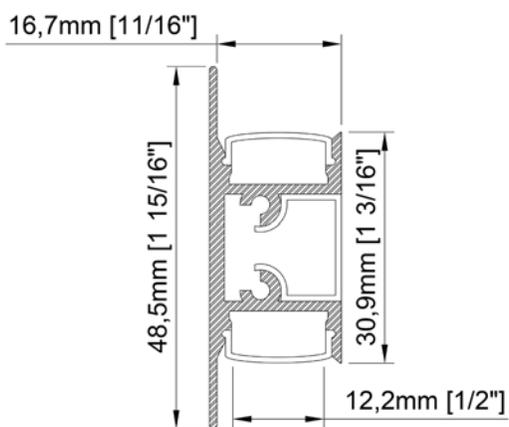

Size	48,5mm x 16,7mm x 2000mm 1 ¹⁵ / ₁₆ " x 1 ¹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	2 x 12,2mm 2 x 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

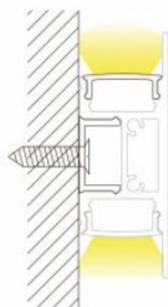

Accessories



TT-23-CLIP



TT-23-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	23	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-24-2000-O



- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

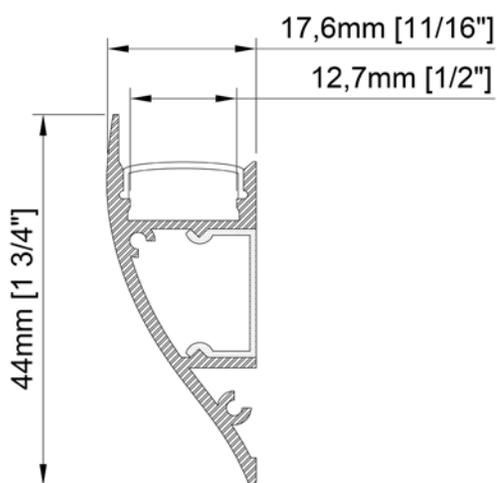

Size	44mm x 17,6mm x 2000mm 1 ³ / ₄ " x 1 ¹ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12,7mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

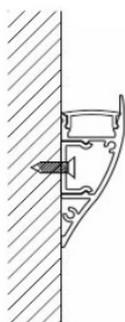

Accessories



TT-24-CLIP



TT-24-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	24	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-25-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

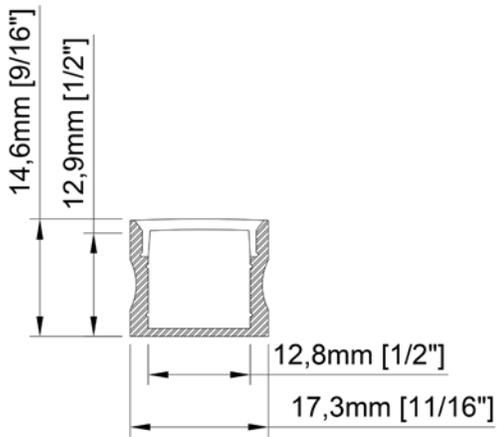

Size	17,3mm x 14,6mm x 3000mm 11/16" x 9/16" x 118 1/8"
Length	3000mm 118 1/8"
Internal width	12,8mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

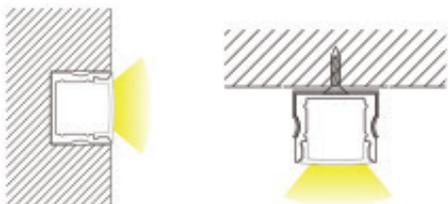

Accessories



TT-25-CLIP



TT-25-END

PRODUCT CODE



TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	25	-	3000	-	O

TITANIUM

TECHNOLOGY

TT-32-2000-O

- Aluminum profile with opal acrylic.
- Designed in flexible aluminum to conceal LED ribbons and dissipate heat on curved surfaces.
- Available in lengths 2000 mm (78³/₄ ").

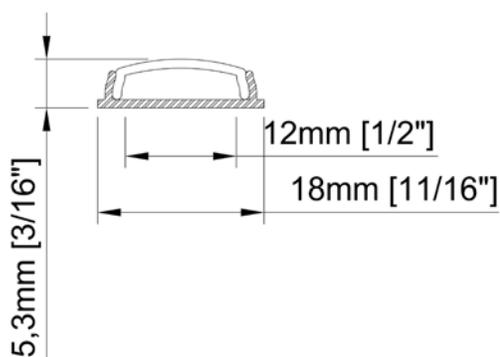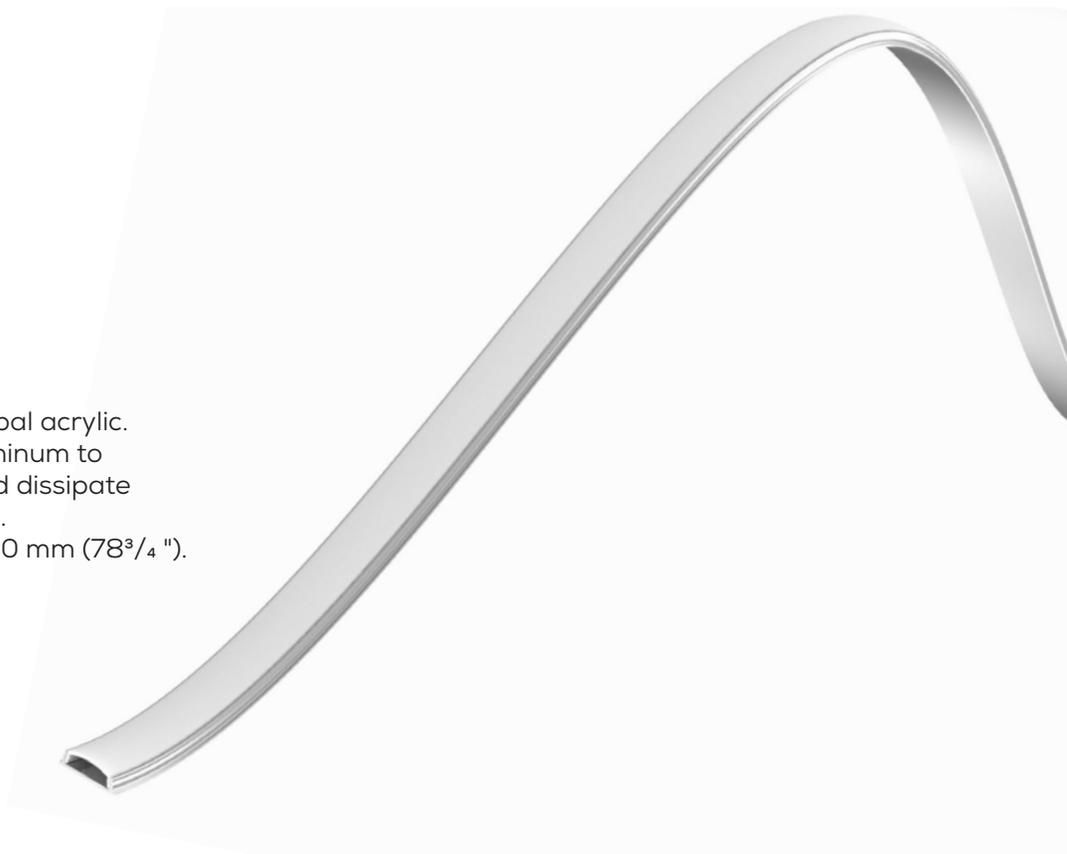

Size	18mm x 5,3mm x 2000mm 1 ¹ / ₁₆ " x 3 ³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	Opal PC diffuser

Accessories



TT-32-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	32	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-38-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

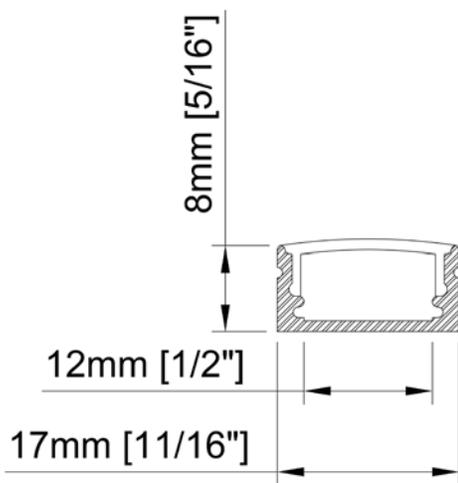

Size	17mm x 8mm x 3000mm 1 ¹ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Length	3000 mm 118 ¹ / ₈ "
Internal width	12mm 1 ¹ / ₂ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

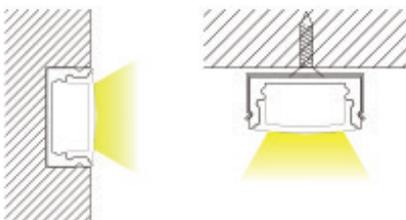

Accessories



TT-38-CLIP



TT-38-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	38	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-40-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

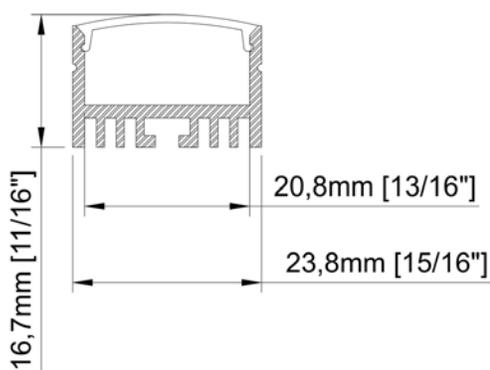

Size	23,5mm x 15mm x 2000mm $15/16'' \times 5/8'' \times 78^3/4''$
Length	2000mm $78^3/4''$
Internal width	20,4mm $13/16''$
Cover	PC diffused

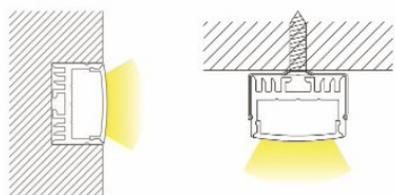

Accessories



TT-40-CLIP



TT-40-END



TT-40-SUSP

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	40	2000	O


TITANIUM

TECHNOLOGY


TT-40-3000-O-BK



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

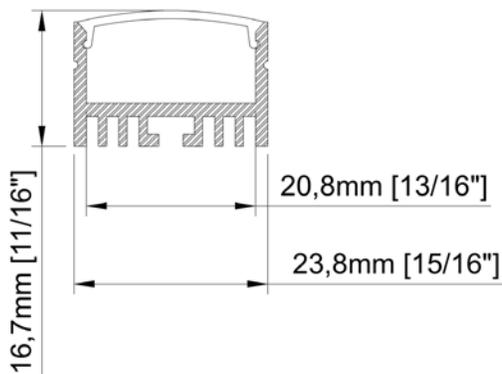

Size	23,8mm x 16,7mm x 3000mm 1 ⁵ / ₁₆ " x 1 ¹¹ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	20,8mm 1 ³ / ₁₆ "
Cover	PC diffused

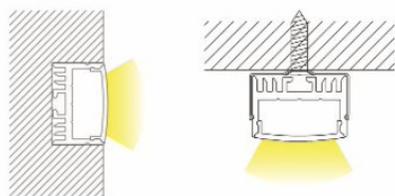

Accessories



PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	40	3000	O	BK


TITANIUM

TECHNOLOGY


TT-52-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

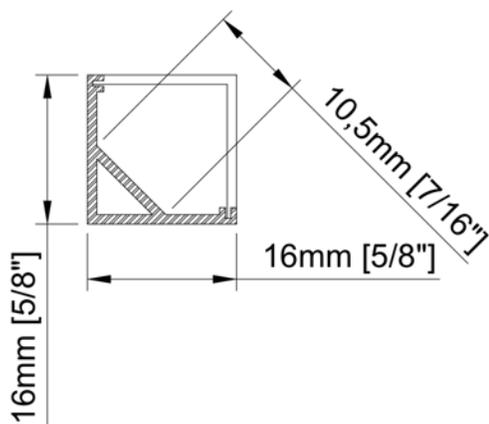

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Matte opal PMMA

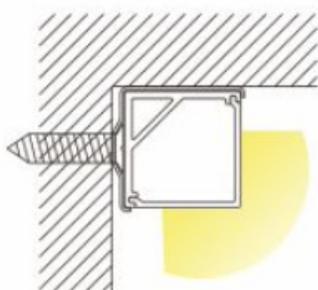

Accessories



TT-52-CLIP



TT-52-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	52	-	3000	-	O


TITANIUM

TECHNOLOGY

TT-64-3000-O



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

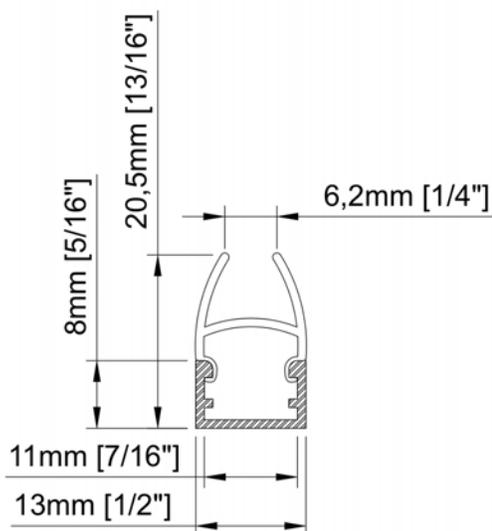

Size	13mm x 20,5mm x 3000mm 1/2" x 13/16" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	11mm 7/16"
Finish	BK - Black (n/a) Grey
Cover	PC diffused

*Glass not include.

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	64	3000	O


TITANIUM

TECHNOLOGY


TT-65-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

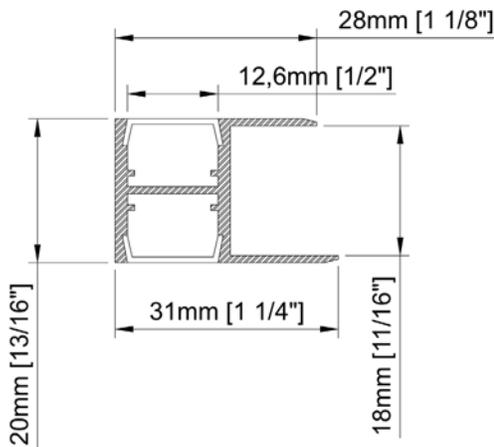

Size	31mm x 20mm x 3000mm 1 ¹ / ₄ " x 1 ³ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	2 x 12,6mm 2 x 1/2"
Finish	BK - Black (n/a) Grey
Cover	PC diffused

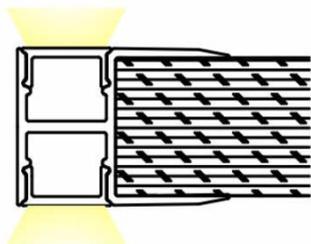

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	65	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-66-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

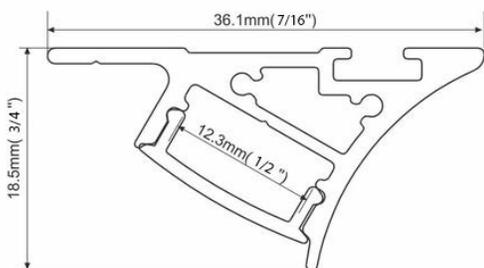

Size	31,6mm x 18,5mm x 2000mm 7/16" x 3/4" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12,3mm 1/2"
Cover	PC diffused

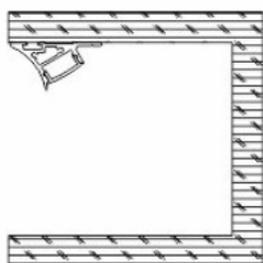

Accessories



TT-66-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	66	-	2000	-	O


TITANIUM

TECHNOLOGY

TT-68-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

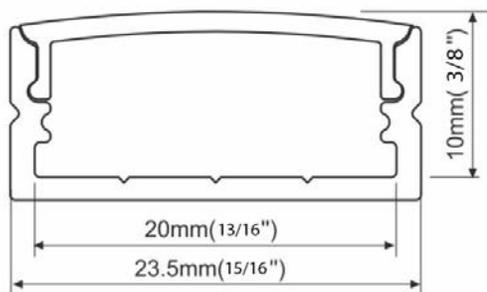


Size 23,5mm x 10mm x 3000mm
1⁵/₁₆" x 3³/₈" x 118¹/₈"

Lenght 3000mm
118¹/₈"

Internal width 20mm
1³/₁₆"

Cover Matte opal PMMA

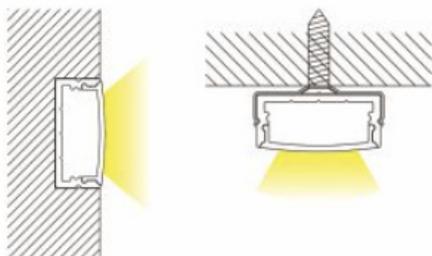

Accessories



TT-68-CLIP



TT-68-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	68	-	3000	-	O

TITANIUM

TECHNOLOGY

TT-76-3000-O

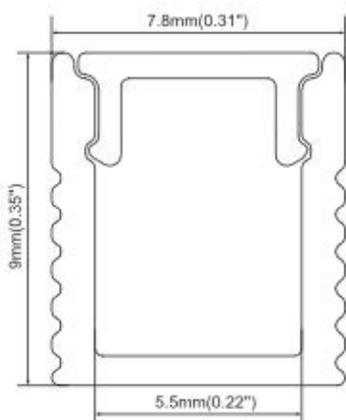

Size	7,8mm x 9mm x 3000mm $5/16" \times 3/8" \times 118 1/8"$
Lenght	3000mm $118 1/8"$
Internal width	5,5mm $1/4"$
Cover	PC

Accessories



TT-76-CLIP



TT-76-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	76	-	3000	-	O

RECESSED



Credit photo: Christian Marcoux



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-02-3000 Page 69



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-03-3000 Page 70



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-14-3000 Page 71



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-17-2500 Page 72



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-18-2500 Page 73



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-19-2000 Page 74




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-39-3000 Page 75



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-49-2000 Page 76

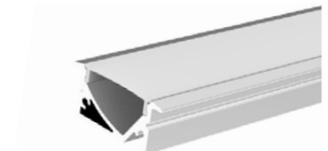

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-50-2000 Page 77





TT-69-3000 Page 78

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-74-3000 Page 79

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE

TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											

28/6 221 lm/foot 5W/foot	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
28/6 H 527 lm/foot 6,25W/foot *24v only	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=OTE	P Plug-in
28/12 456 lm/foot 9W/foot *24v only	35 3500K			DCxxxx 12 inchs minimum	DCxxxx 12 inchs minimum			CV Dimmable
28/12 456 lm/foot 9W/foot *24v only	40 4000K							CV-BOX Dimmable with box
35/3 45 lm/foot 1,5W/foot	60 6000K							CV67 IP67 psu
35/6 120 lm/foot 3W/foot	RE RED							120V No dimmable 120v psu
22/15 425 lm/foot 9W/foot *24v only	GR GREEN							347V No dimmable 347V PSU
50/3 4,5W/foot	BL BLUE							010 0-10v PSU
DX/24 DIGITAL DMX *24v only	AM AMBER							
	PK PINK *28/6 only							
	CB CYAN *28/6 only							
	OR ORANGE *28/6 only							
	UV *28/6 only							
	RGB *50/3, 28/6 or 35/6 only							
	RGBWW *50/3 only							
	RGBNW *50/3 only							
	RGBCW *50/3 only							
	RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TITANIUM

TECHNOLOGY


TT-02-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 1/8").

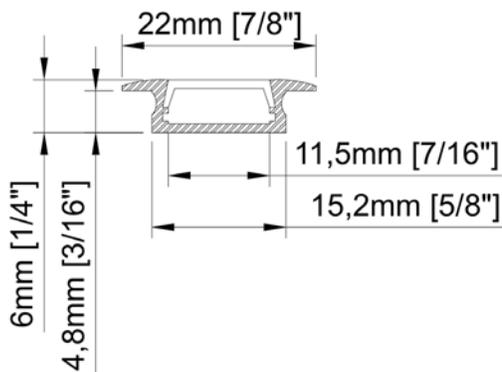

Size	15,2mm x 4,8mm x 3000mm 5/8" x 3/16" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

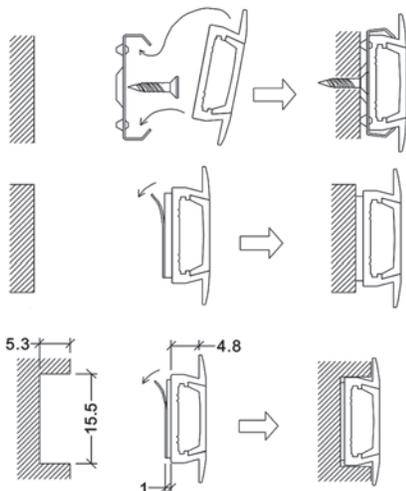

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	02	-	3000	-	O


TITANIUM

TECHNOLOGY




TT-03-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 1/8").

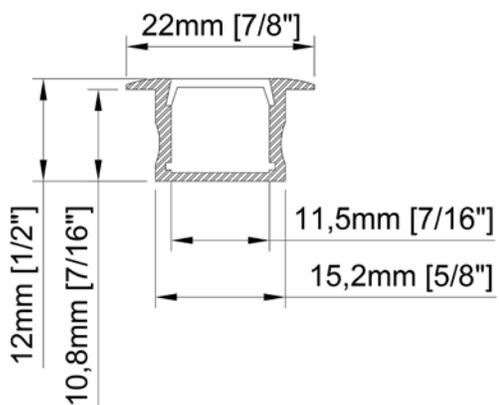

Size	15,2mm x 10,8mm x 3000mm 5/8" x 7/16" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

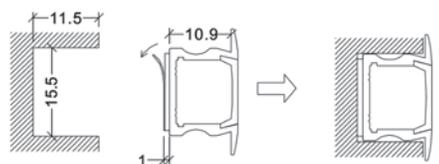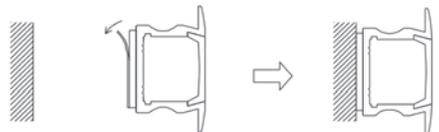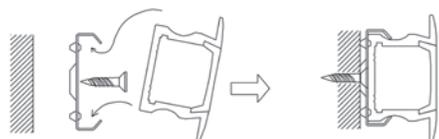

Accessories



TT-03-CLIP



TT-03-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	03	-	3000	-	O


TITANIUM

TECHNOLOGY



TT-14-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

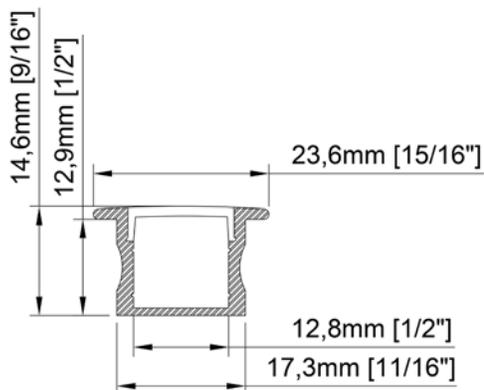

Size	17,3mm x 12,9mm x 3000mm 11 ¹ / ₁₆ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1 ¹ / ₂ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

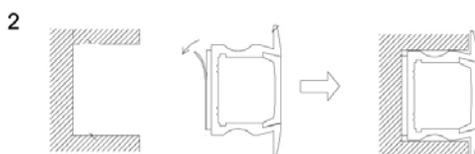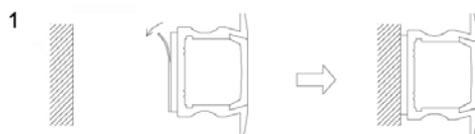

Accessories



TT-14-CLIP



TT-14-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	14	-	3000	-	O


TITANIUM

TECHNOLOGY

TT-17-2500-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

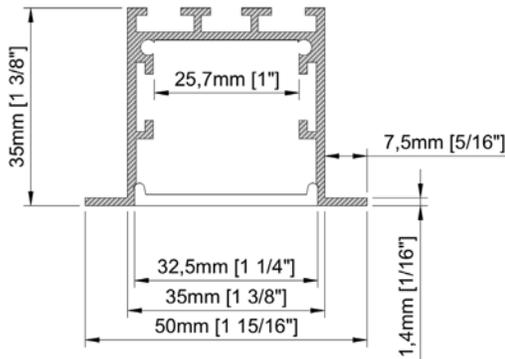

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	25,7mm 1"
Cover	PC diffused

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	17	-	2500	-	O


TITANIUM

TECHNOLOGY

TT-18-2500-O

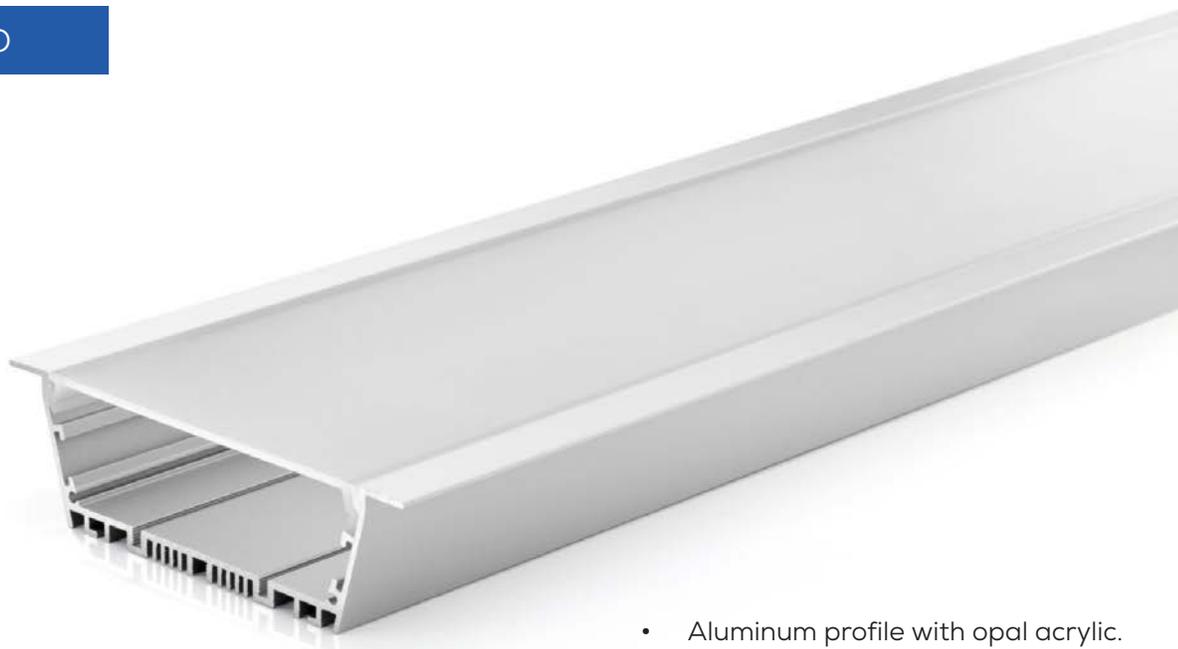

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

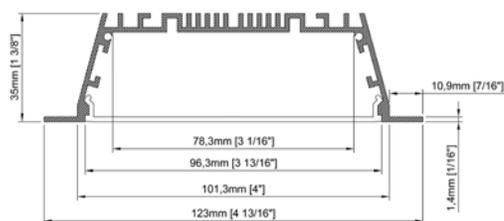


Size 123mm x 35mm x 2500mm
4⁷/₈" x 1¹/₂" x 98³/₈"

Lenght 2500mm
98³/₈"

Internal width 77,5mm
3"

Cover PC diffuse

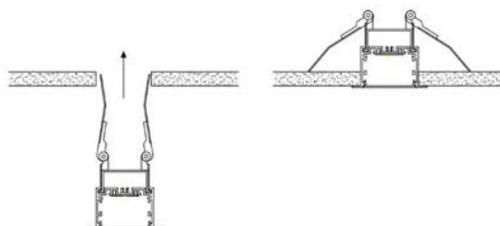

Accessories



TT-18-SNAP



TT-18-L



TT-18-T



TT-18-X



TT-18-I



TT-18-END



TT-18-EXT



TT-18-EXT-90



TT-18-EXT-90IL



TT-18-EXT-60



TT-18-EXT-120

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	18	-	2500	-	O


TITANIUM

TECHNOLOGY

TT-19-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

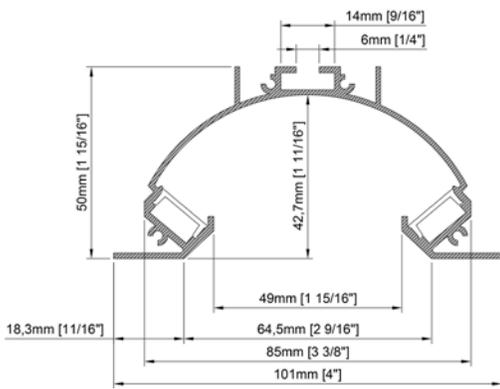


Size 101mm x 50mm x 2000mm
4" x 2" x 78³/₄"

Lenght 2000mm
78³/₄"

Internal width 2 x 12mm
2 x 1/2"

Cover Semi clear PMMA

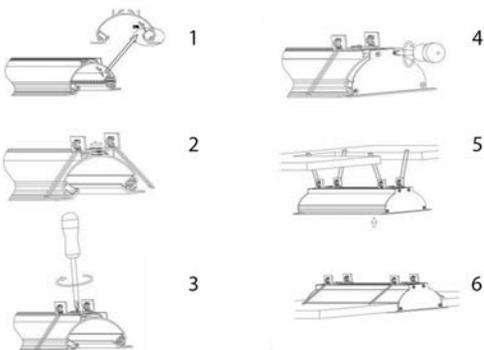

Accessories



TT-19-SNAP



TT-19-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	19	-	2000	-	O


TITANIUM

TECHNOLOGY



TT-39-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

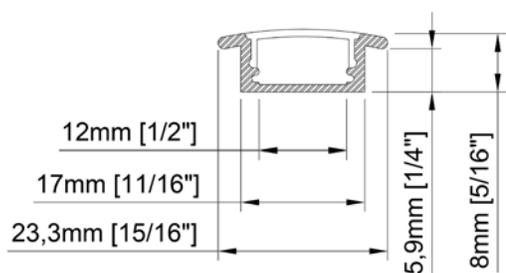

Size	23,3mm x 5,9mm x 3000mm 1 ⁵ / ₁₆ " x 1/4" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-39-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	39	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-49-2000-O

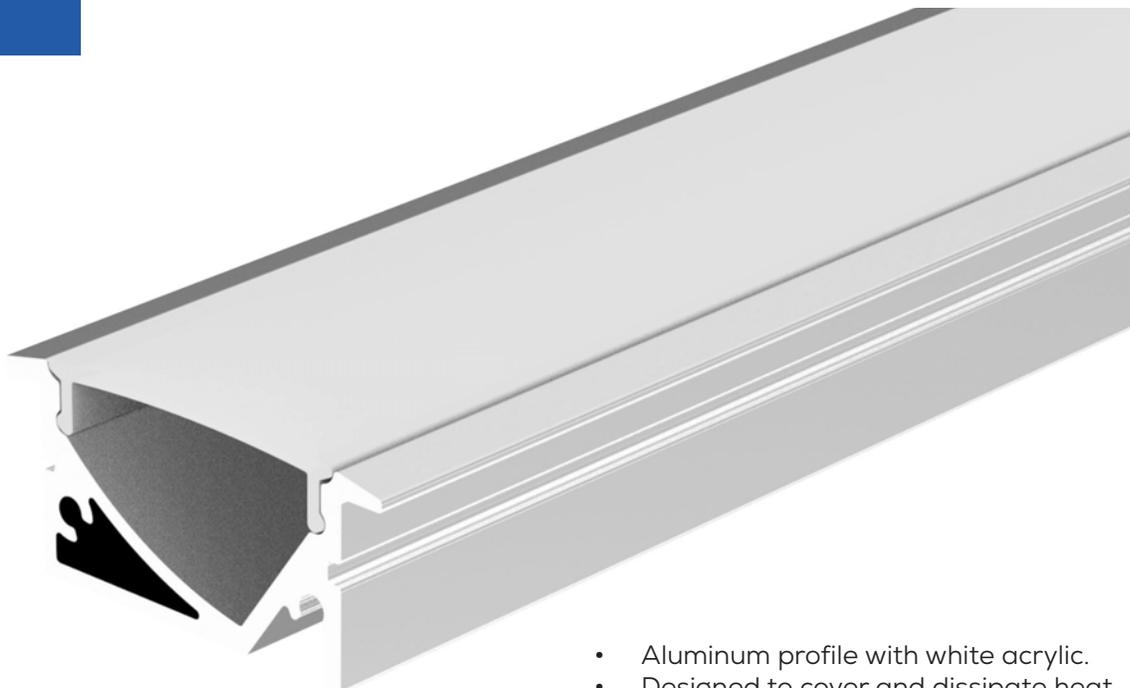

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

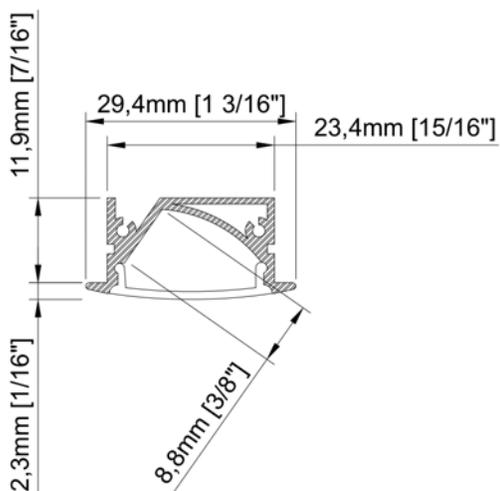

Size	29,4 x 14,2 x 2000 mm 1 ³ / ₁₆ " x 9/ ₁₆ " x 78 ³ / ₄ "
Length	2000 mm 78 ³ / ₄ "
Internal width	8,8 mm 3/ ₈ "
Cover	PC diffused



Accessories



TT-49-SNAP



TT-49-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	49	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-50-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

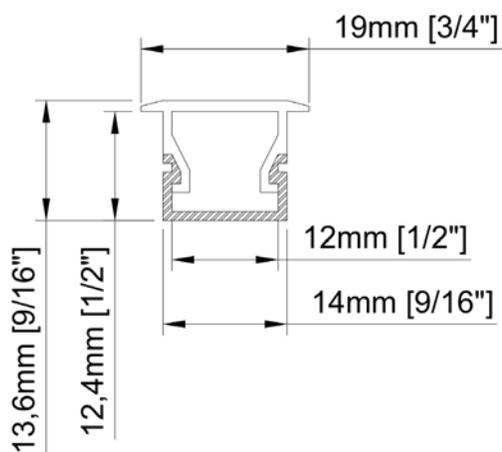

Size	19mm x 13,6mm x 2000mm 3/4" x 9/16" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

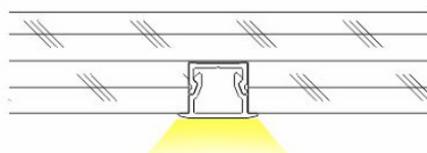

Accessories



TT-50-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	50	-	2000	-	O


TITANIUM

TECHNOLOGY

TT-69-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

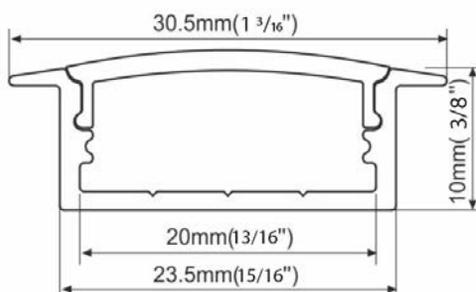

Size	30,5mm x 10mm x 3000mm 1 ³ / ₁₆ " x 3/ ₈ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	20mm 1 ³ / ₁₆ "
Cover	Matte Opal PMMA



Accessories



TT-69-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	69	-	3000	-	O

TITANIUM

TECHNOLOGY

TT-74-3000-O

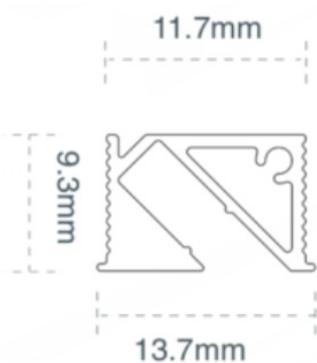

Size	13,7mm x 9,3mm x 3000mm $\frac{9}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	11,7mm $\frac{7}{16}''$
Cover	Silicone

Accessories




TT-74-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	74	-	3000	-	O

PENDANT

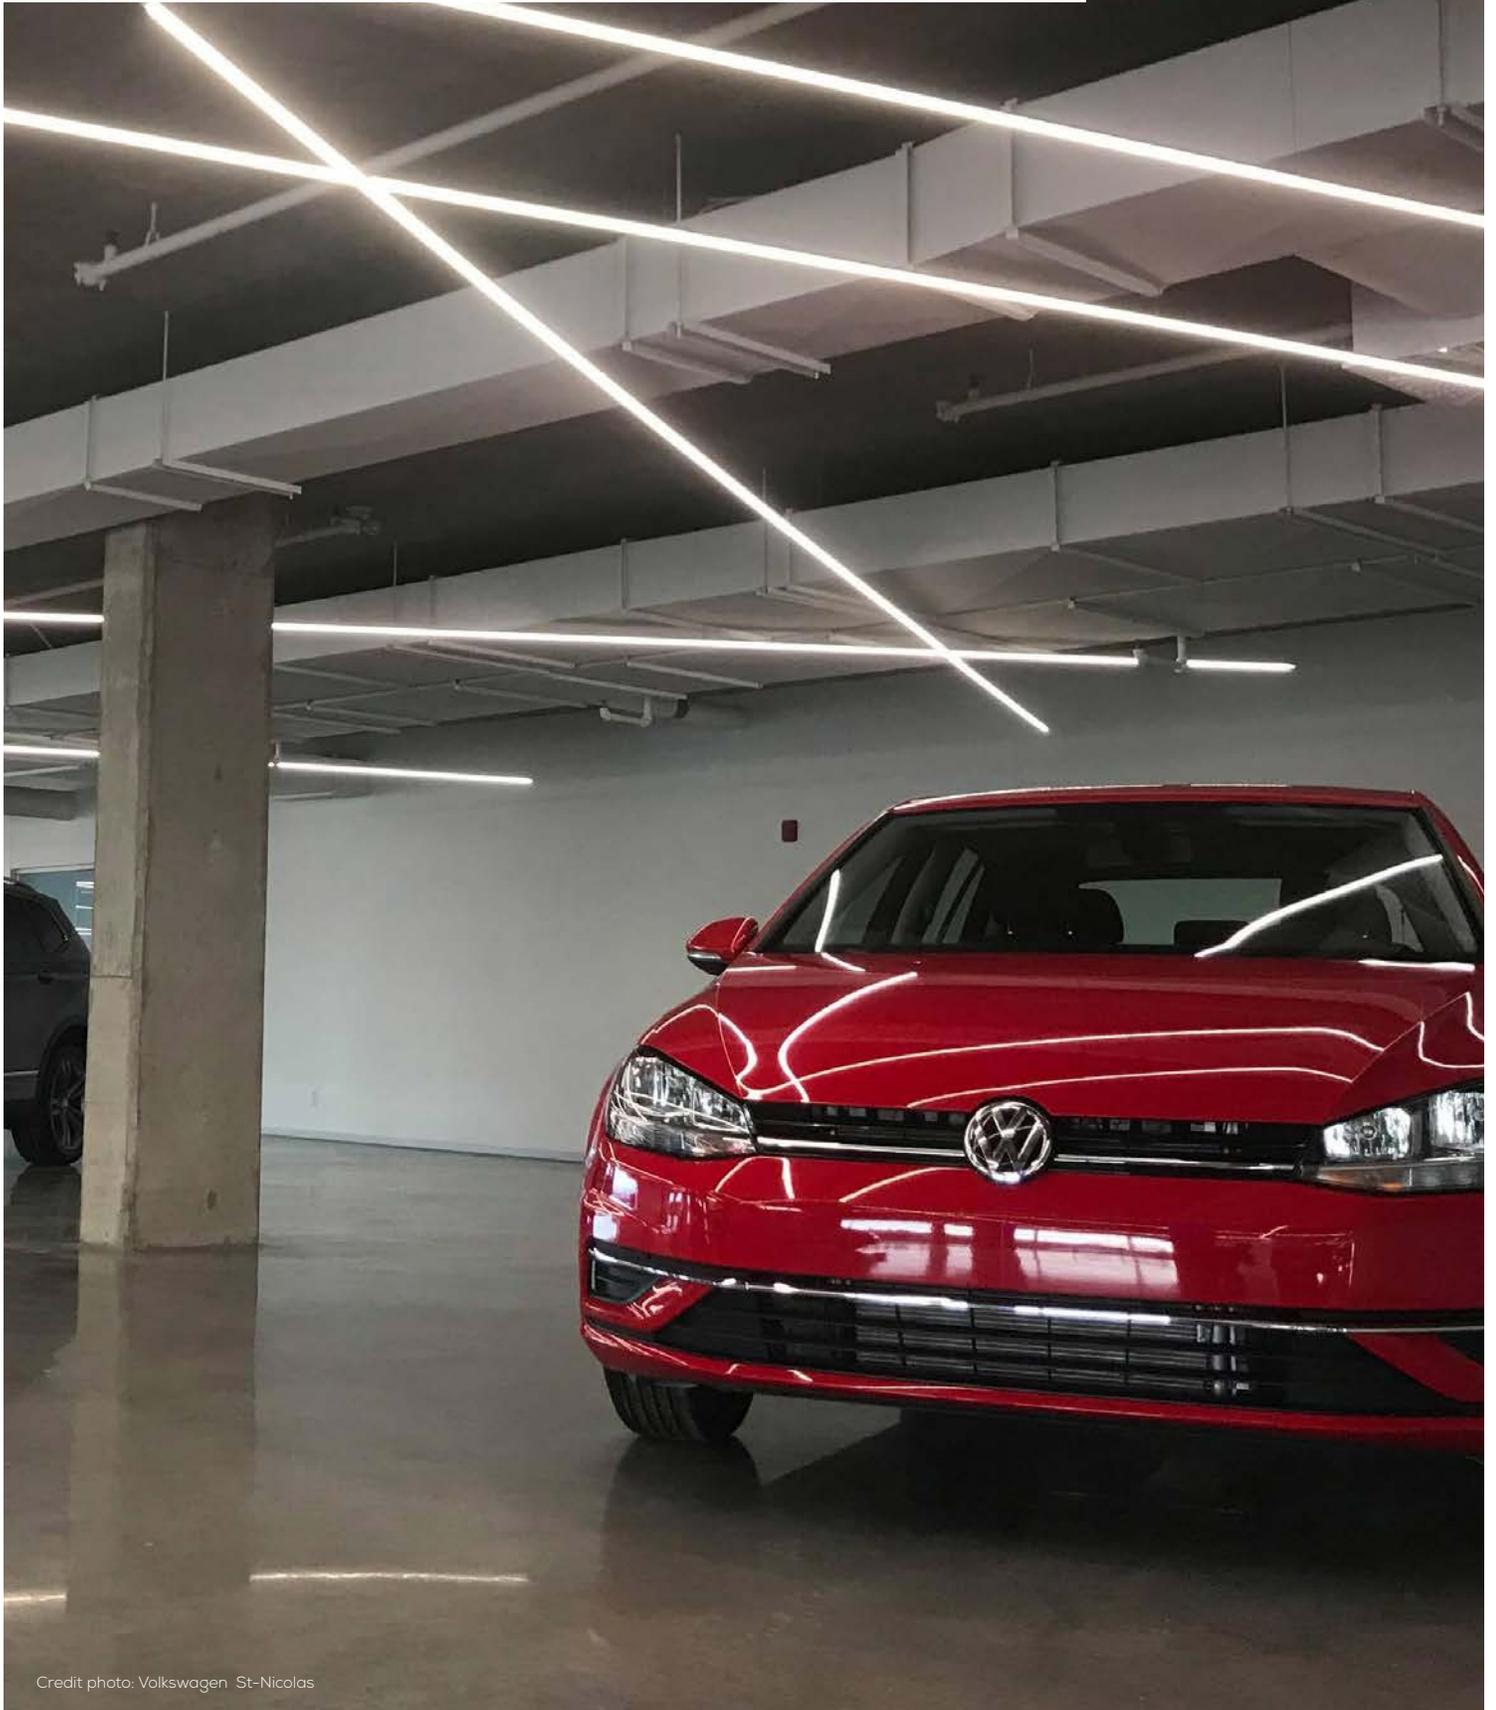

Credit photo: Volkswagen St-Nicolas



TT-13-3000 Page 85

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-15-3000 Page 86

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-15-3000-BK Page 87

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-20-2000 Page 88

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-31-2500 Page 89

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

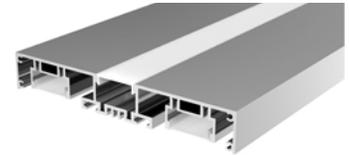

TT-37-2500 Page 90

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-46-2500 Page 91

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-47-2500 Page 92

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-48-2500 Page 93

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-48-2500-BK Page 94

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





TT-53-2000 Page 95

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-54-2000-BK Page 96

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-54-2000-WH Page 97

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-R25-600 Page 98

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8




TT-R25-900 Page 99

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16




TT-R25-1270 Page 100

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50

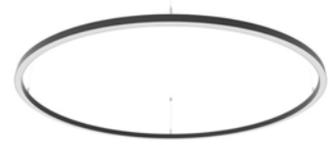

TT-R25-1800 Page 101

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8

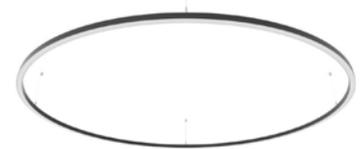

TT-R30-600 Page 102

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8



TT-R30-900 Page 103

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16



TT-R30-1200 Page 104

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 47 1/4





TT-R50-900 Page 105

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16



TT-R50-1270 Page 106

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50



TT-R50-1800 Page 107

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8



TT-CANOPY-01 Page 108

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 11



TT-CANOPY-02 Page 109

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 13



TT-CANOPY-03 Page 110

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-



TT-CANOPY-04 Page 111

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-




TITANIUM

TECHNOLOGY


TT-13-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

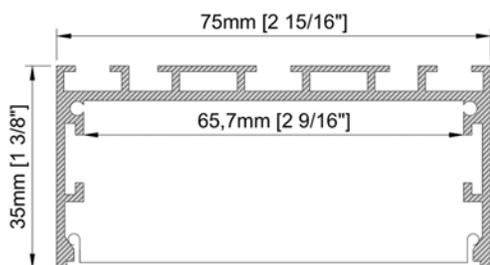

Size	75mm x 35mm x 3000mm 3" x 1 ³ / ₈ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	64mm 2 ¹ / ₂ "
Cover	PC diffused

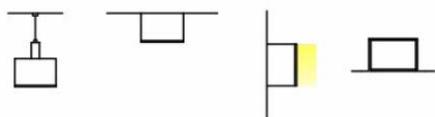

Accessories



TT-13-END

TT-13-SUSP

TT-13-L

TT-13-T

TT-13-X

TT-13-EXT

TT-13-EXT-90

TT-13-EXT-90IL

TT-13-EXT-60

TT-13-EXT-120

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	13	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-15-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

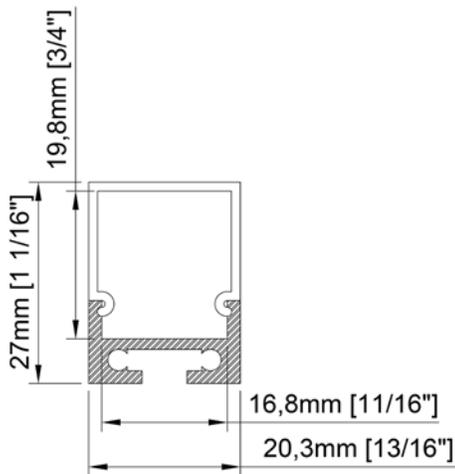

Size	20,3mm x 27mm x 3000mm 1 ³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₄ "
Internal width	16,8mm 1 ¹ / ₁₆ "
Cover	Matte opal PMMA

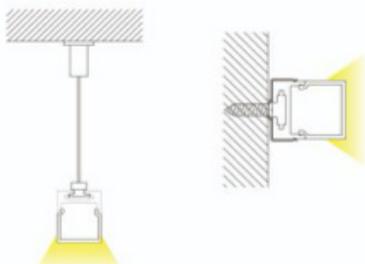

Accessories



TT-15-CLIP



TT-15-SUSP



TT-15-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	15	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-15-3000-O-BK



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

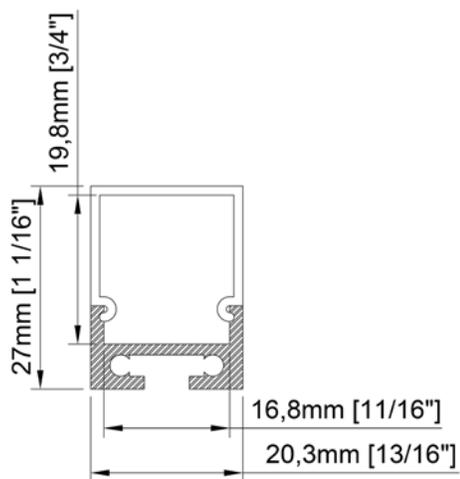

Size	20,3mm x 27mm x 3000mm ¹³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₄ "
Internal width	16,8mm ¹¹ / ₁₆ "
Cover	Matte opal PMMA
Finish	Black



Accessories



TT-15-CLIP



TT-15-SUSP



TT-15-END-BK

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER	-	FINISH
TT	-	15	-	3000	-	O	-	BK


TITANIUM

TECHNOLOGY


TT-20-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

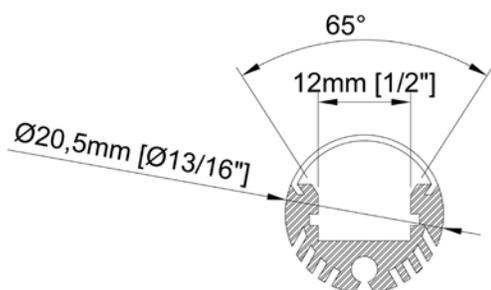

Size	Ø20,5mm x 2000mm Ø ¹³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	Matte opal PMMA

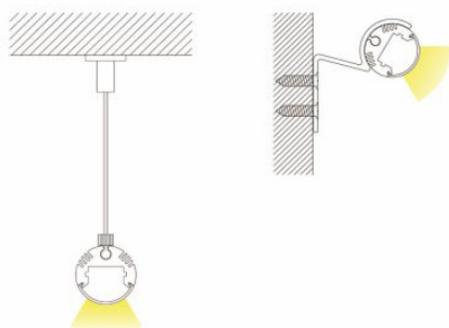

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	20	-	2000	-	O



TITANIUM

TECHNOLOGY

TT-37-2500-O




- Extruded aluminum with opal acrylic cylinder.
- Available in length of 2500 mm (98³/₈ ").

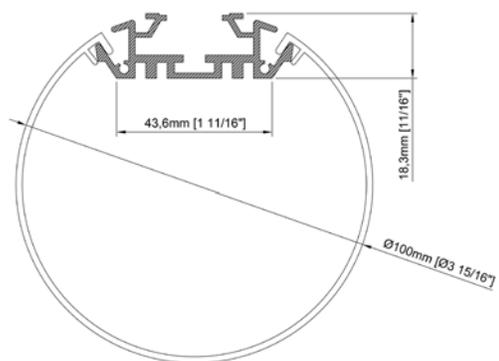

Size	Ø100 mm x 2500 mm 3 ¹⁵ / ₁₆ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	43mm 1 ¹¹ / ₁₆ "
Cover	PC diffused

Accessories

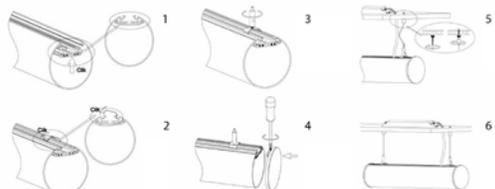

PRODUCT CODE

TT - MODEL - LENGTH (mm) - COVER

TT	-	37	-	2500	-	O
----	---	----	---	------	---	---


TITANIUM

TECHNOLOGY


TT-46-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

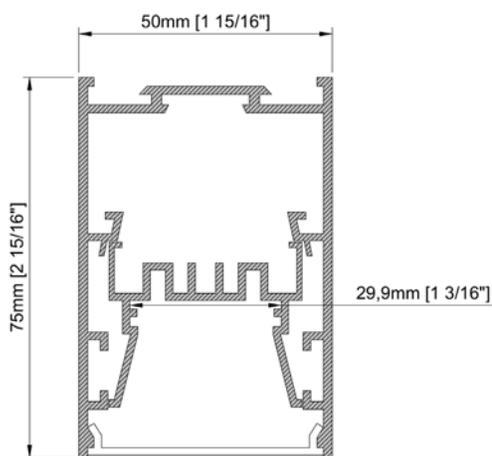

Size	75mm x 50mm x 2500mm 2 ¹⁵ / ₁₆ " x 1 ¹⁵ / ₁₆ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	29,9mm 1 ³ / ₁₆ "
Cover	PC frosted

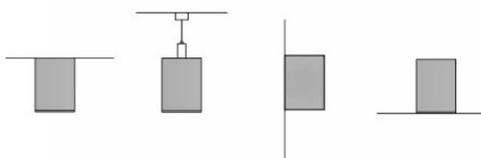

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	46	-	2500	-	O


TITANIUM

TECHNOLOGY

TT-47-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

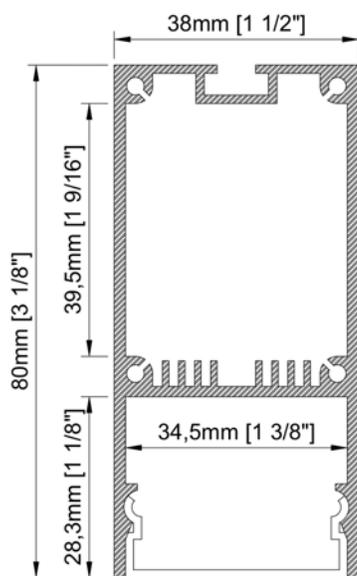

Size	80mm x 38mm x 2500mm 3 ¹ / ₈ " x 1 ¹ / ₂ " x 98 ³ / ₈ "
------	--

Lenght	2500mm 98 ³ / ₈ "
--------	--

Internal width	34,5mm 1 ³ / ₈ "
----------------	---

Cover	PC diffused
-------	-------------



Accessories



TT-47-SUSP



TT-47-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
----	---	-------	---	-------------	---	-------

TT	-	47	-	2500	-	O
----	---	----	---	------	---	---


TITANIUM

TECHNOLOGY


TT-48-2500-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

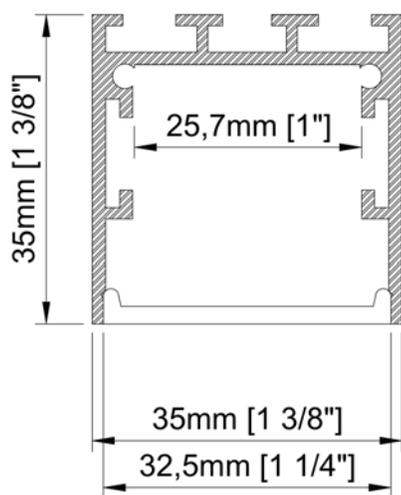

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	2,57mm 1"
Cover	PC diffused

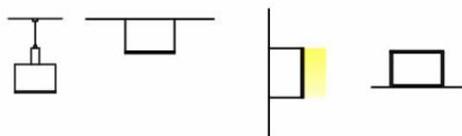

Accessories

TT-48-SUSP	TT-48-CLIP	TT-48-L	TT-48-T	TT-48-X	TT-48-I
TT-48-EXT	TT-48-EXT-90	TT-48-EXT-90IL	TT-48-EXT-60	TT-48-EXT-120	TT-48-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	48	-	2500	-	O


TITANIUM

TECHNOLOGY

TT-48-2500-O-BK



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

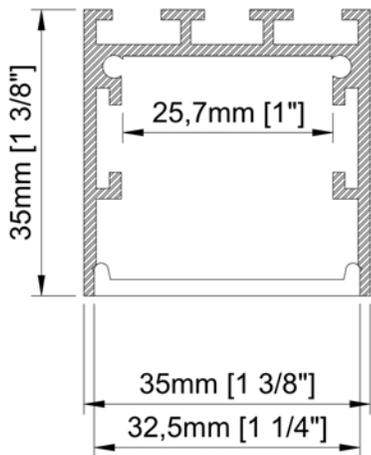

Size 35mm x 35mm x 2500mm
1³/₈" x 1³/₈" x 98³/₈"


Lenght 2500mm
98³/₈"

Internal width 25,7mm
1"

Cover PC diffused

Finish BK-Black

Accessories

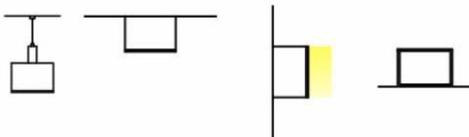

TT-48-SUSP-BK



TT-48-CLIP



TT-48-L-BK



TT-48-T-BK



TT-48-X-BK



TT-48-I-BK



TT-48-EXT



TT-48-EXT-90



TT-48-EXT-90IL



TT-48-EXT-60



TT-48-EXT-120



TT-48-END-BK

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER - FINISH

TT - 50 - 2000 - O - BK


TITANIUM

TECHNOLOGY

TT-53-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

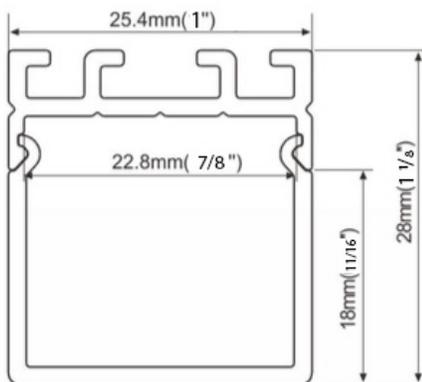


Size	25,4mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
------	---

Lenght	2000mm 78 ³ / ₄ "
--------	--

Internal width	22,8mm 7/ ₈ "
----------------	-----------------------------

Cover	PC diffused
-------	-------------

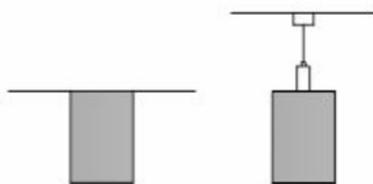

Accessories



TT-53-CLIP



TT-53-SUSP



TT-53-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	53	-	2000	-	O


TITANIUM

TECHNOLOGY

TT-54-2000-O-BK

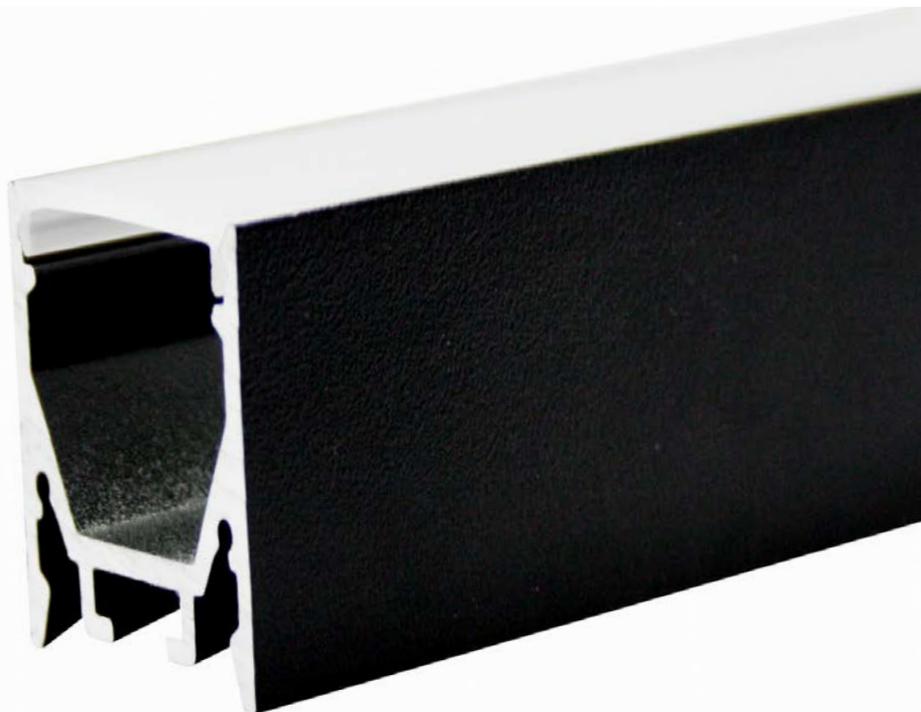

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

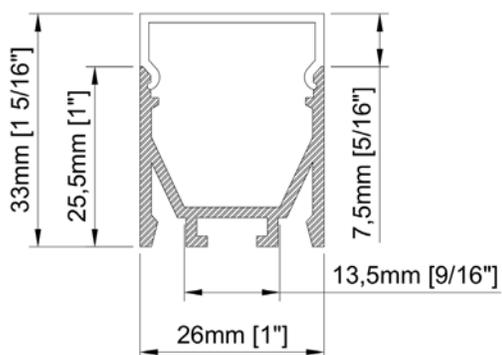


Size 25mm x 25mm x 2000mm
1" x 1" x 78³/₄"

Length 2000mm
78³/₄"

Internal width 13,2mm
1/2"

Cover PC diffused

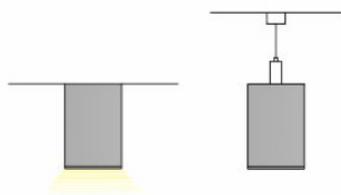

Accessories



TT-54-CLIP



TT-54-SUSP



TT-54-END-BK

PRODUCT CODE

TT - MODEL - LENGTH (mm) - COVER - FINISH


TT - 54 - 2000 - O - BK

TITANIUM


TECHNOLOGY

TT-54-2000-O-WH

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

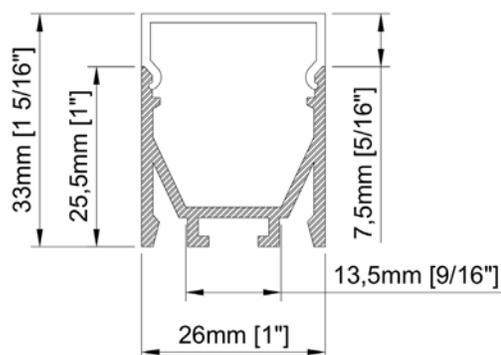

Size	25mm x 25mm x 2000mm 1" x 1" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	13,2mm 1/2"
Cover	PC diffused

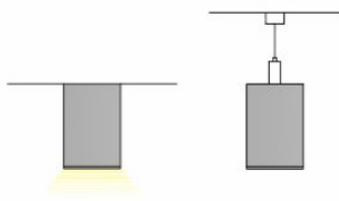

Accessories



TT-54-CLIP



TT-54-SUSP



TT-54-END-WH





PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	54	2000	O	WH

TITANIUM

TECHNOLOGY

TT-R25-600

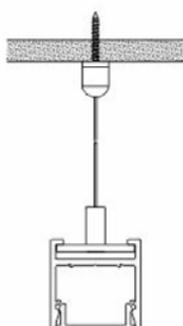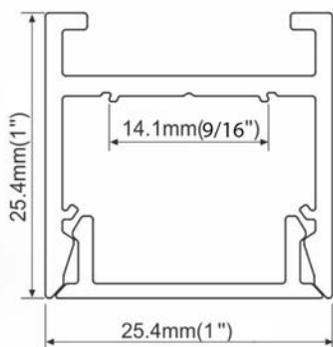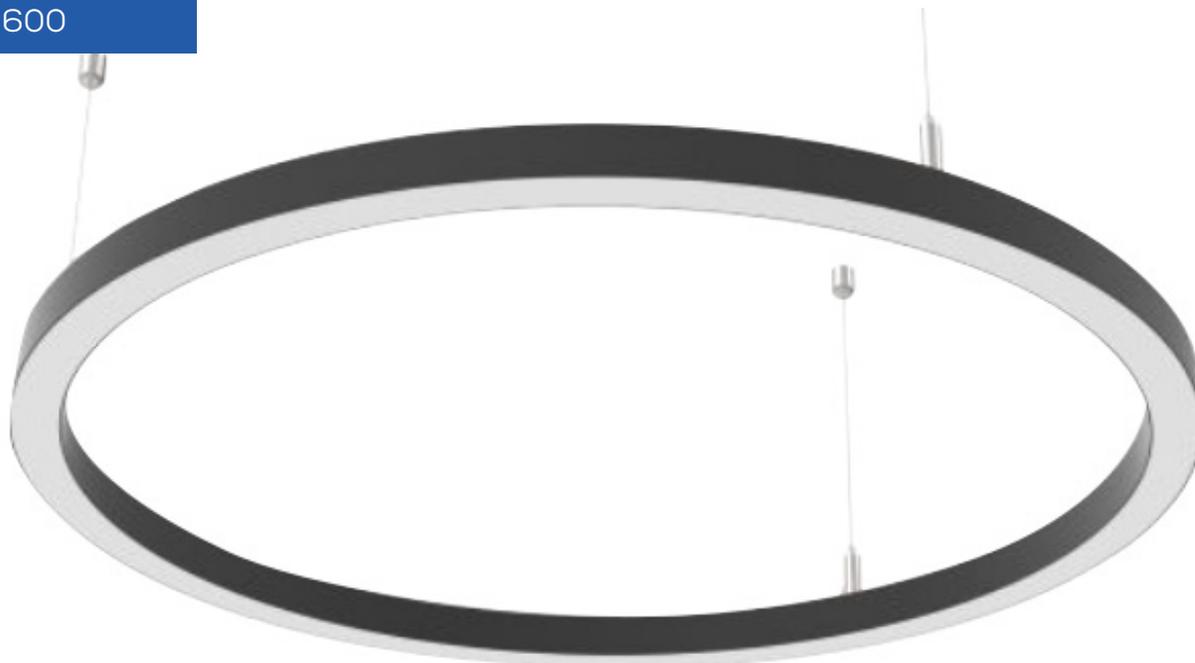

Size	25,4mm x 25,4mm x Ø 600mm 1" x 1" x 23 ⁵ / ₈ "
Diameter	Ø 600mm 23 ⁵ / ₈ "
Internal width	14,1mm 9/16"

Accessories and power supply included



TT-R25-LED



TT-R25-SUSP



TT-R25-EXT





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R25	-	600

TITANIUM

TECHNOLOGY

TT-R25-900

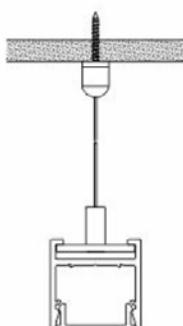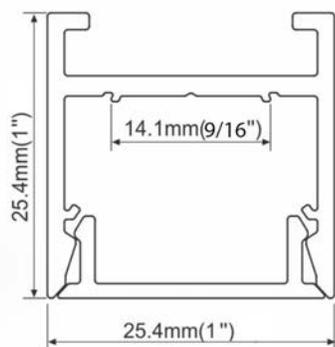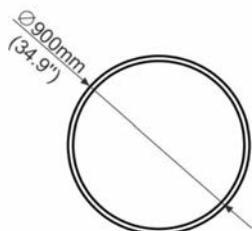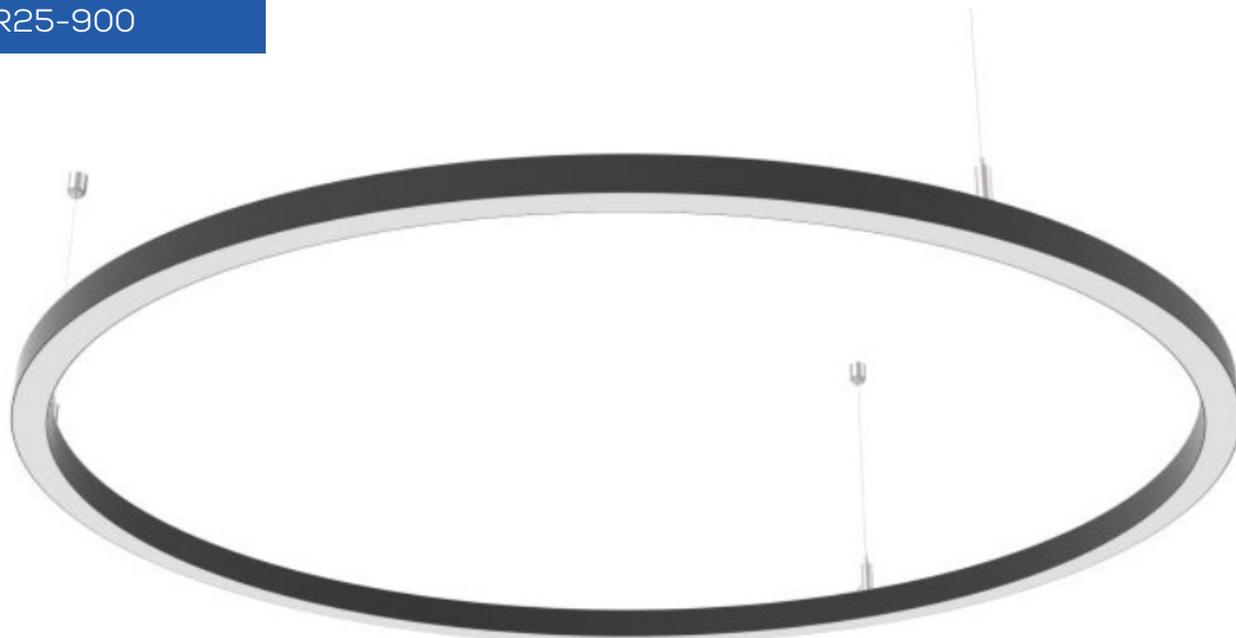

Size	25,4mm x 25,4mm x Ø 900mm 1" x 1" x 35 ⁷ / ₁₆ "
Diameter	Ø 900mm 35 ⁷ / ₁₆ "
Internal width	14,1mm 9 ⁹ / ₁₆ "

Accessories and power supply included







PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R25	-	900

TITANIUM

TECHNOLOGY

TT-R25-1270

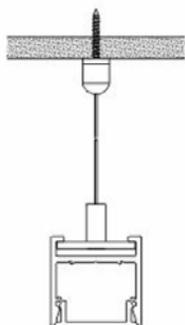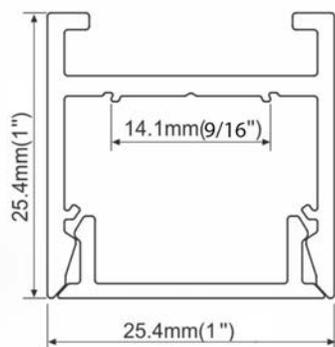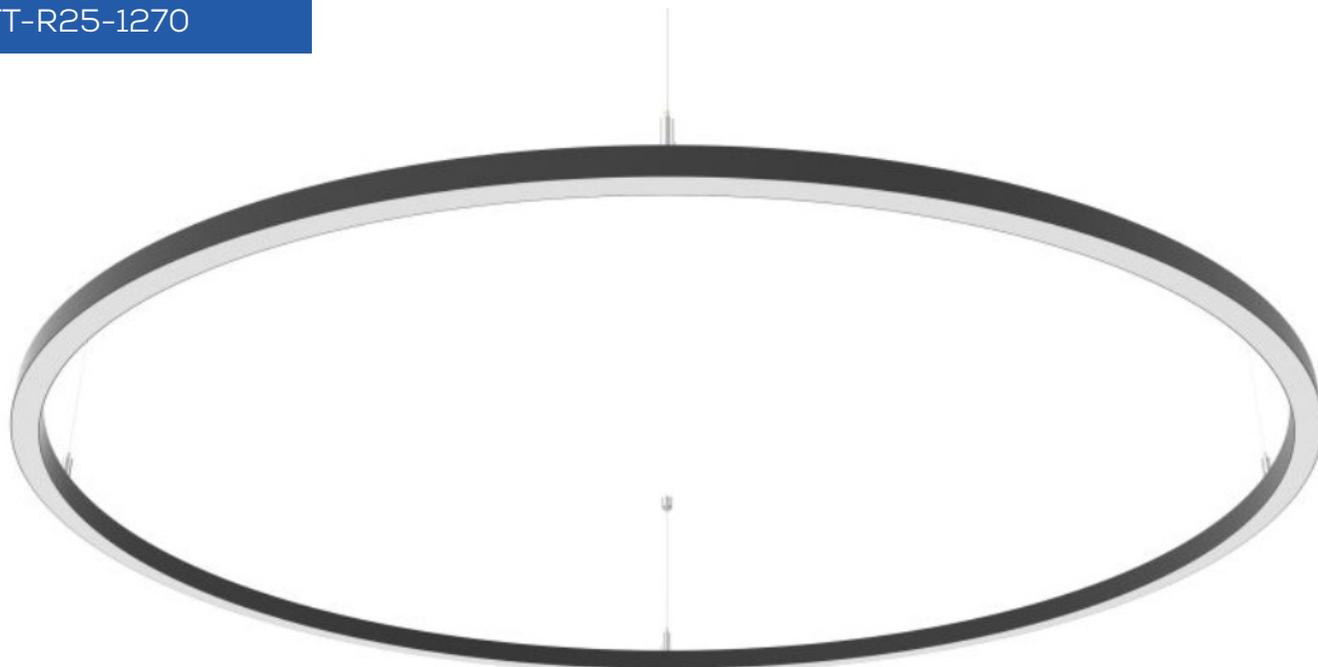

Size	25,4mm x 25,4mm x Ø 1270mm 1" x 1" x 50"
Diameter	Ø 1270mm 50"
Internal width	14,1mm 9/16"

Accessories and power supply included







PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R25	-	1270

TITANIUM

TECHNOLOGY

TT-R25-1800

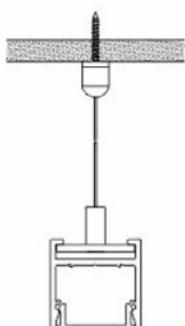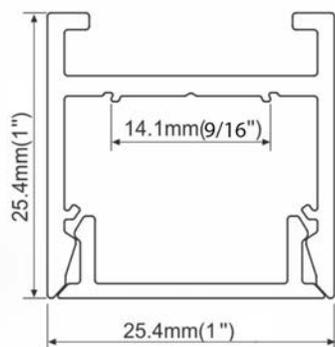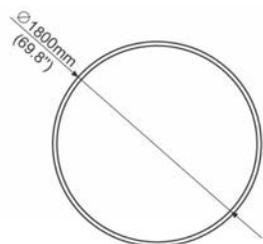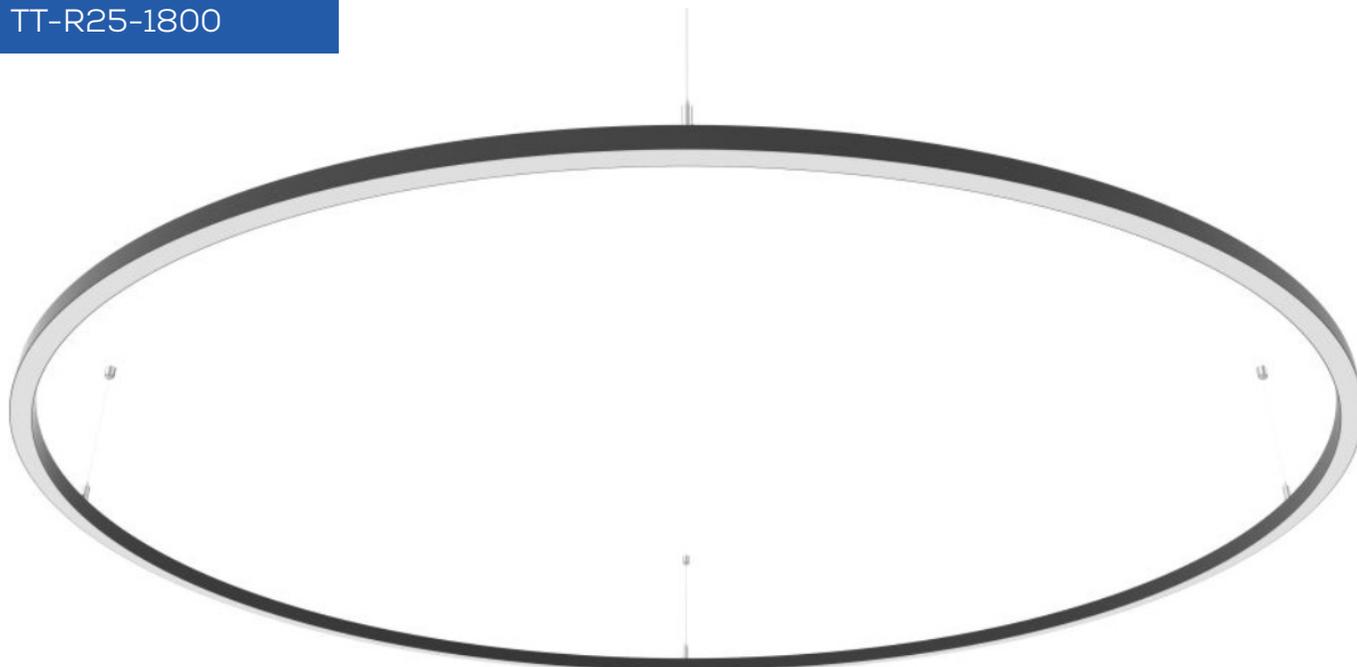

Size	25,4mm x 25,4mm x Ø 1800mm 1" x 1" x 70 ⁷ / ₈ "
Diameter	Ø 1800mm 70 ⁷ / ₈ "
Internal width	14,1mm 9/16"

Accessories and power supply included



TT-R25-LED



TT-R25-SUSP



TT-R25-EXT





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R25	-	1800

TITANIUM

TECHNOLOGY

TT-R30-600

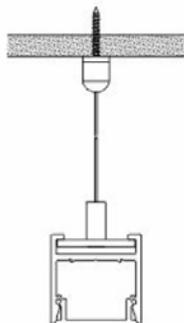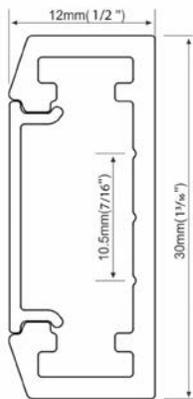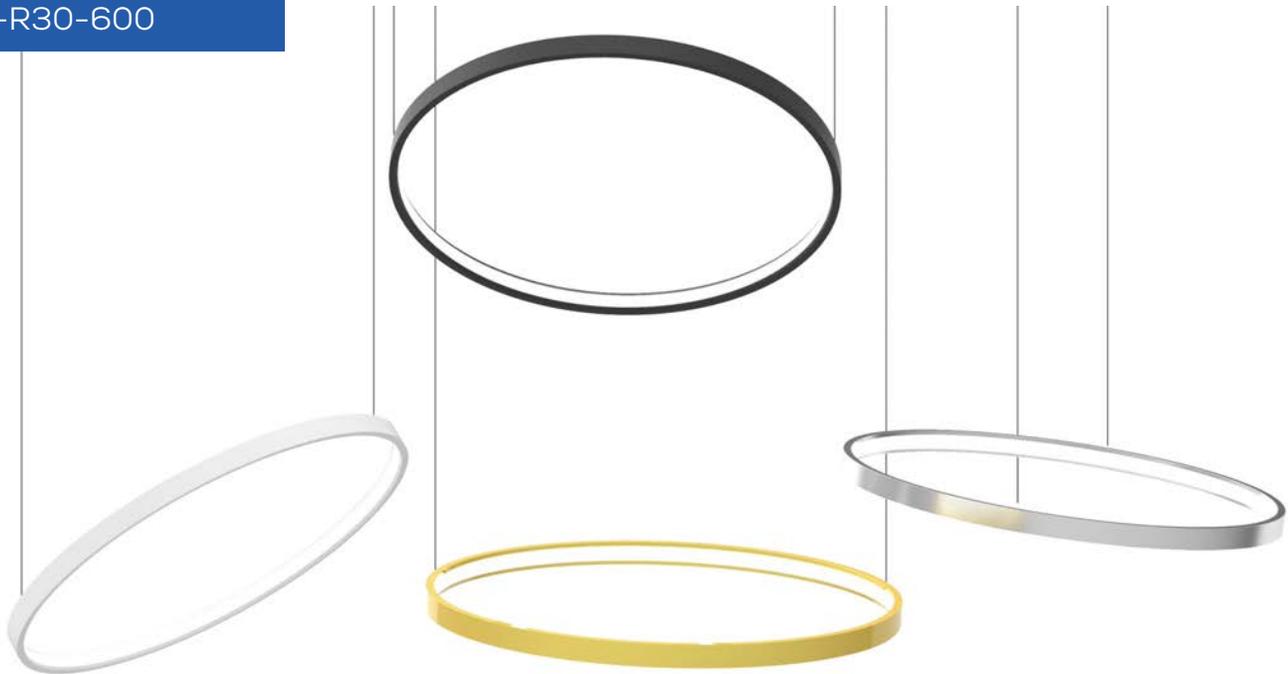

Size	12mm x 30mm x Ø 600mm 1/2" x 1 3/16" x 23 5/8"
Diameter	Ø 600mm 23 5/8"
Internal width	10,5mm 7/16"

Accessories and power supply included



TT-R30-SUSP





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R30	-	600

TITANIUM

TECHNOLOGY

TT-R30-900

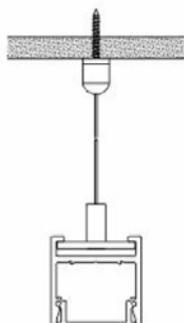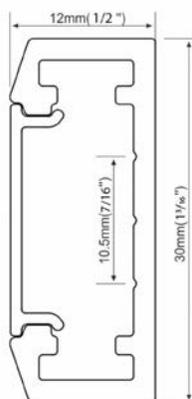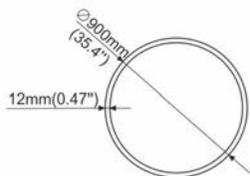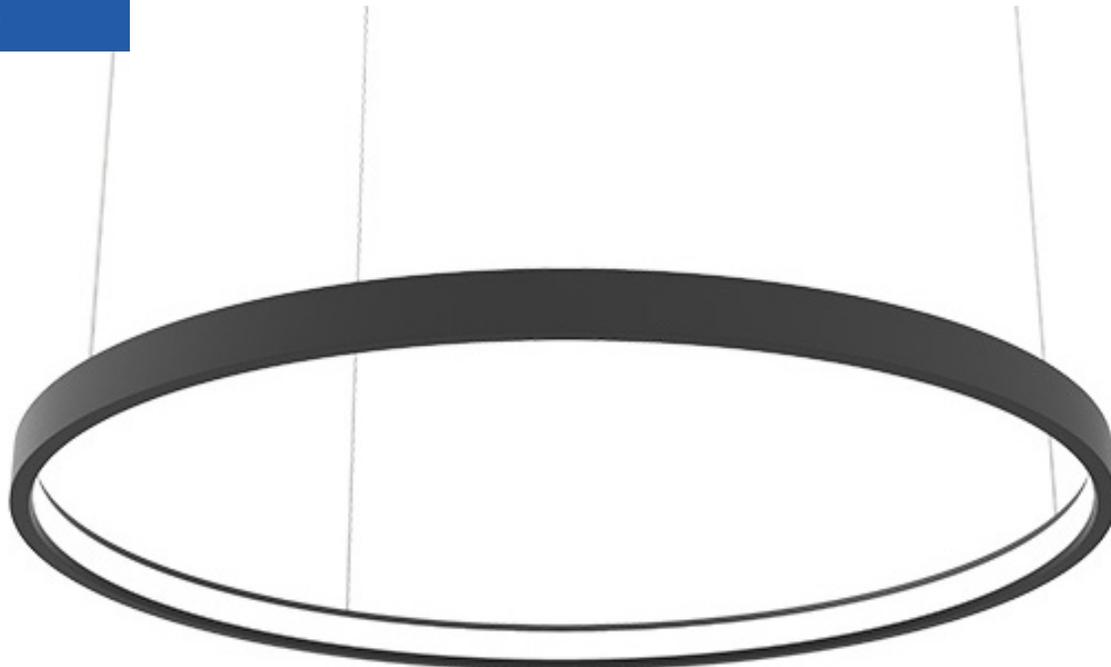

Size	12mm x 30mm x Ø 900mm 1/2" x 1 3/16" x 35 7/16"
Diameter	Ø 900mm 35 7/16"
Internal width	10,5mm 7/16"

Accessories and power supply included



TT-R30-SUSP





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R30	-	900

TITANIUM

TECHNOLOGY

TT-R30-1200

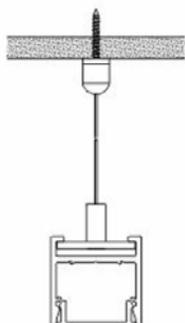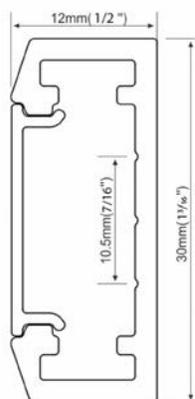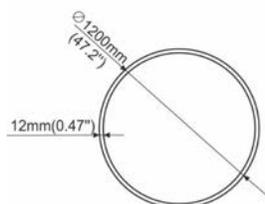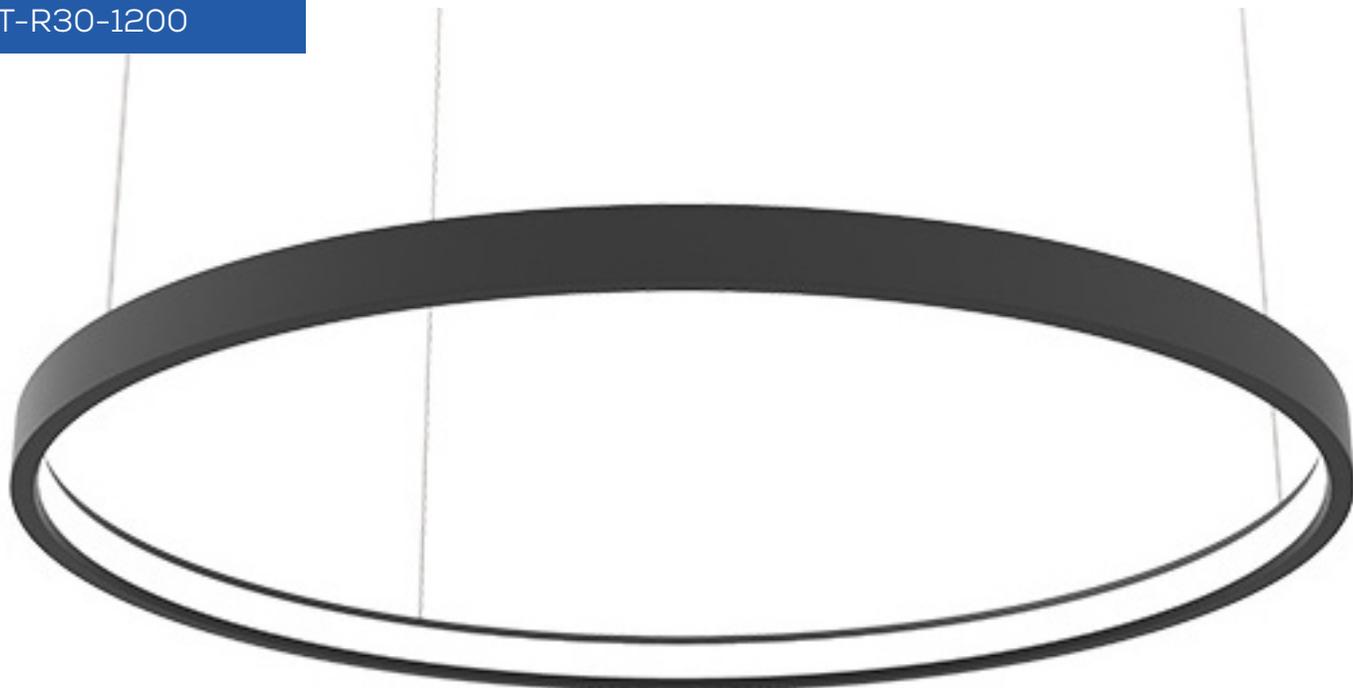

Size	12mm x 30mm x Ø 1200mm 1/2" x 1 3/16" x 47 1/4"
Diameter	Ø 1200mm 47 1/4"
Internal width	10,5mm 7/16"

Accessories and power supply included



TT-R30-SUSP




PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R30	-	1200

TITANIUM

TECHNOLOGY

TT-R50-900

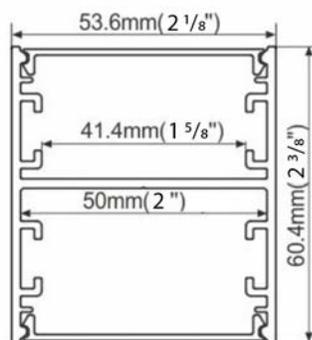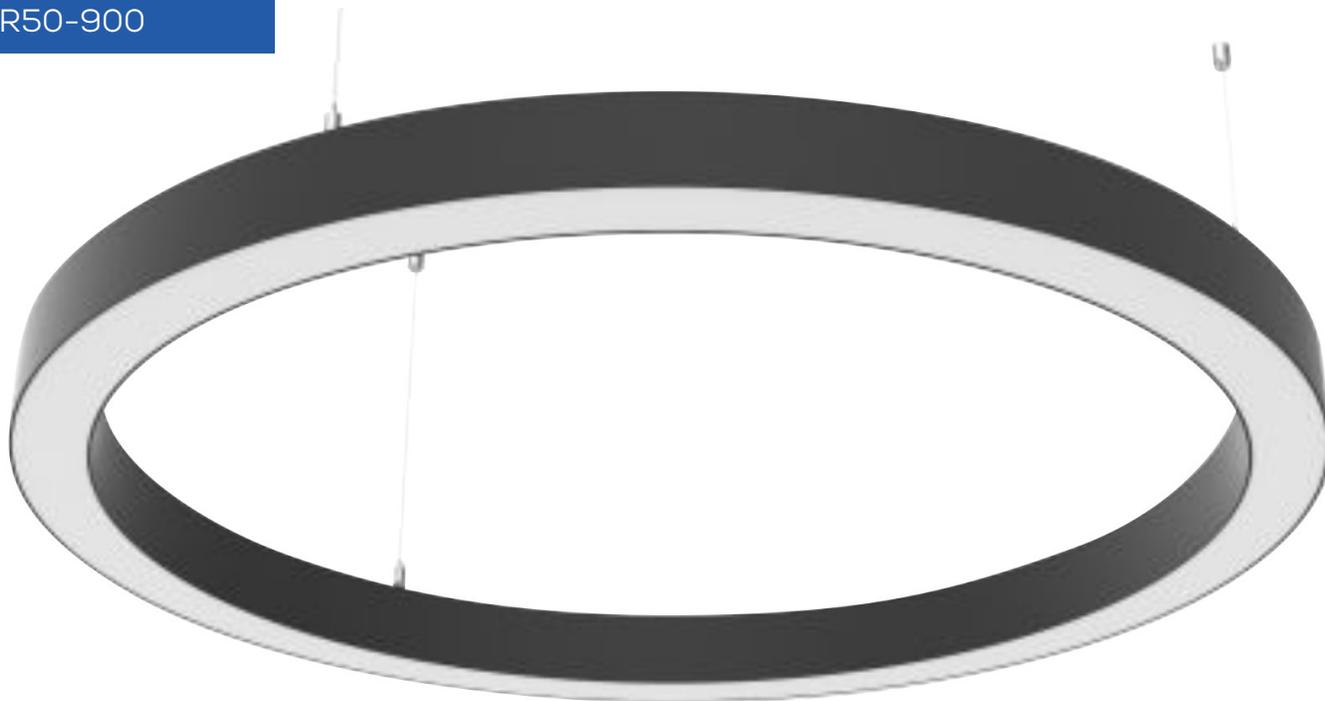

Size	53,6mm x 60,4mm x Ø 900mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 35 ⁷ / ₁₆ "
Diameter	Ø 900mm 35 ⁷ / ₁₆ "
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included



TT-R50-LED



TT-R50-SUSP



TT-R50-EXT



TT-R50-CLIP





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R50	-	900

TITANIUM

TECHNOLOGY

TT-R50-1270

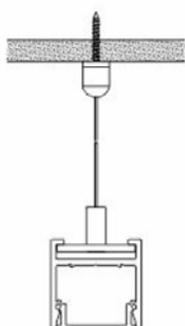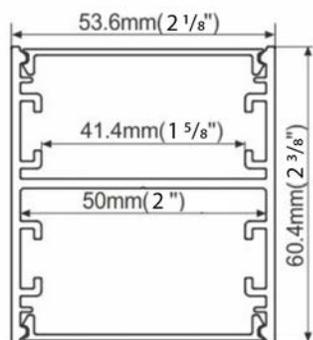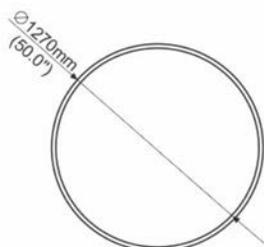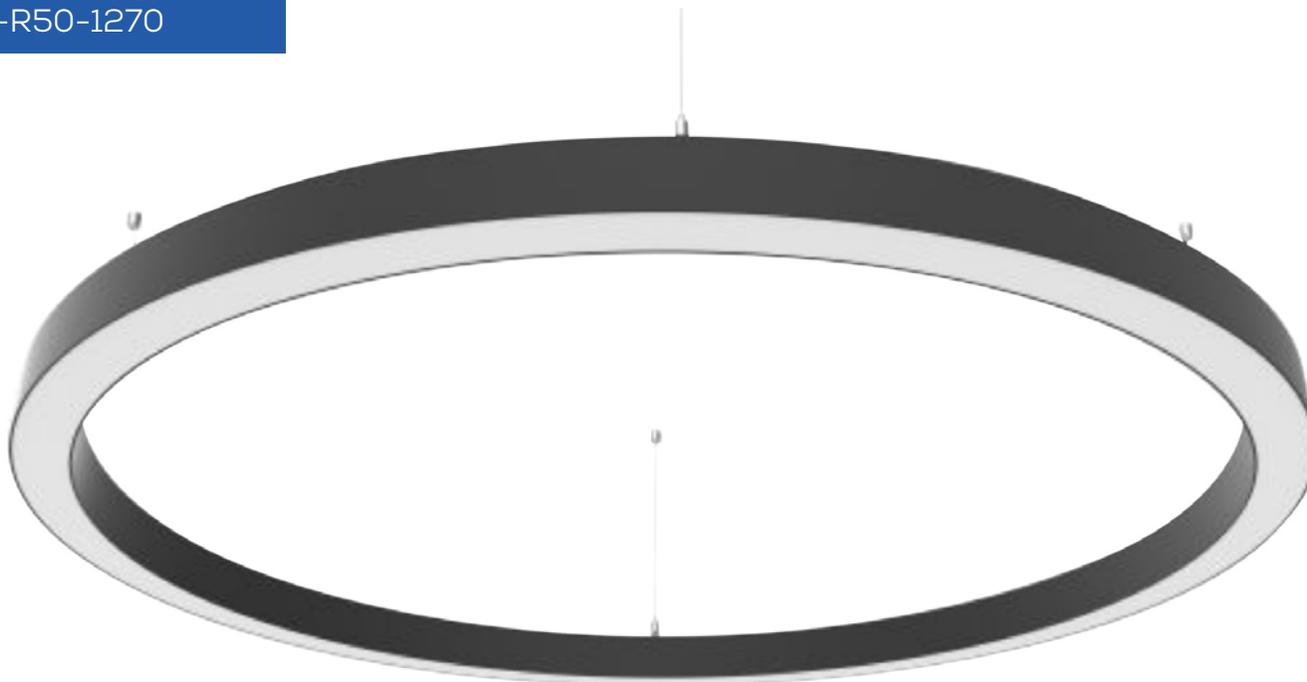

Size	53,6mm x 60,4mm x Ø 1270mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 50"
Diameter	Ø 1270mm 50"
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included







PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R50	-	1270

TITANIUM

TECHNOLOGY

TT-R50-1800

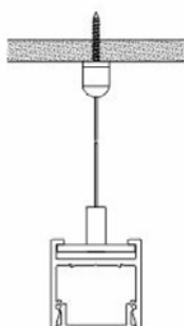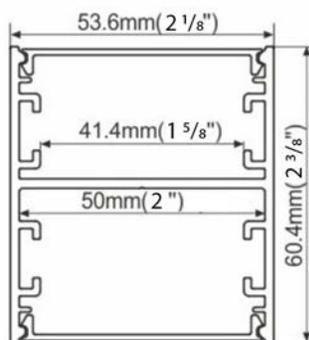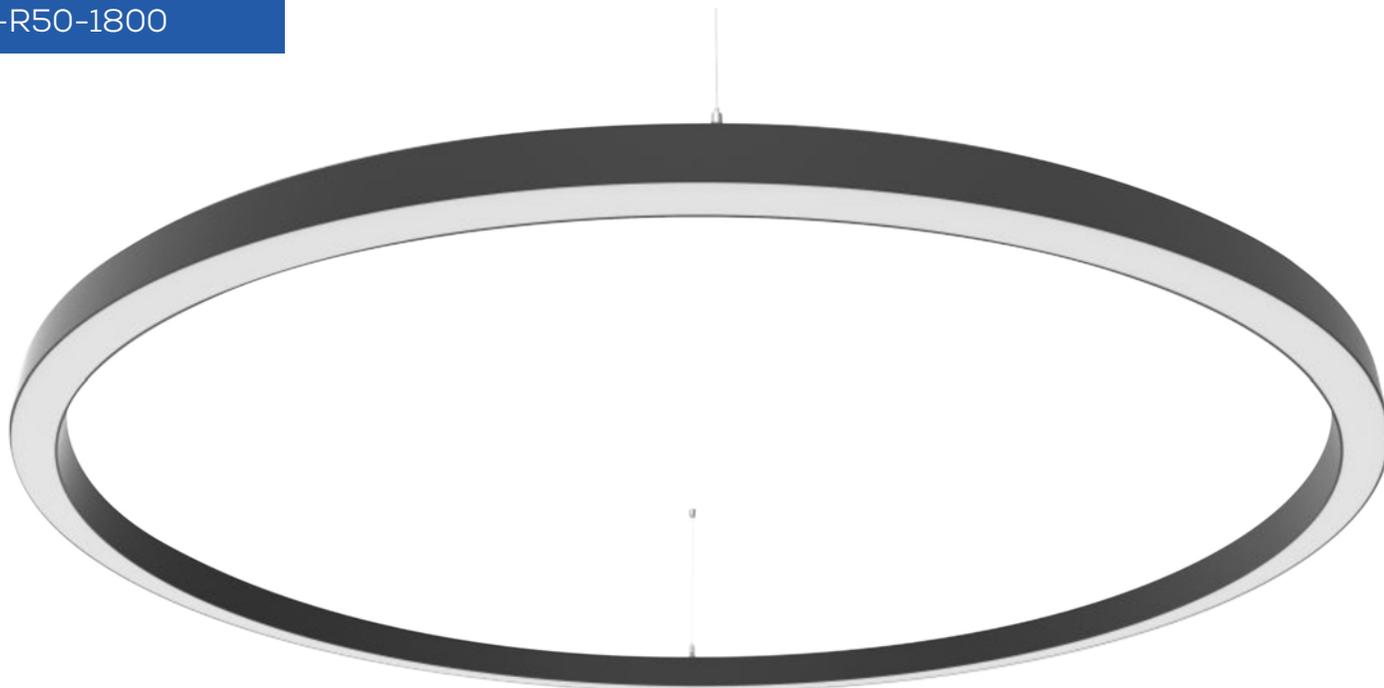

Size	53,6mm x 60,4mm x Ø 1800mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 70 ⁷ / ₈ "
Diameter	Ø 1800mm 70 ⁷ / ₈ "
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included





PRODUCT CODE

TT	-	MODEL	-	DIAMÈTRE (mm)
TT	-	R50	-	1800

TITANIUM

TECHNOLOGY

TT-CANOPY-01

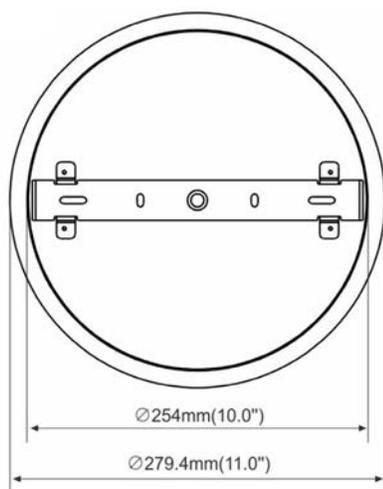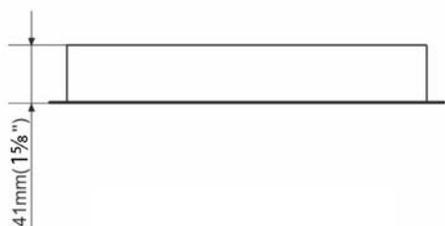

Size	41mm x Ø 279,4mm 1 ⁵ / ₈ " x 11"
Diameter	Ø 279,4mm 11"
Internal width	254mm 10"



PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	CANOPY	-	01

TITANIUM

TECHNOLOGY

TT-CANOPY-02

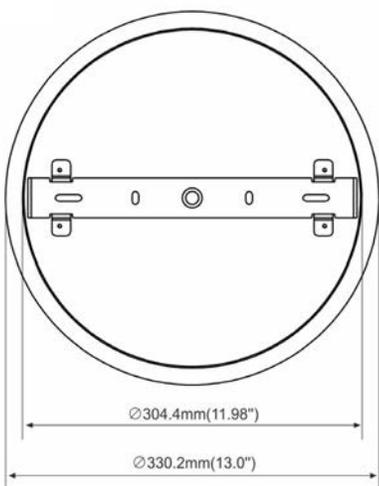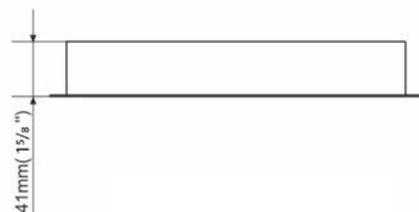

Size 41mm x Ø 330,2mm
1⁵/₈" x 13"

Diameter Ø 330,2mm
13"

Internal width Ø 304,4mm
12"

PRODUCT CODE

TT - TYPE - MODEL

TT - CANOPY - 02

TITANIUM



TECHNOLOGY

TT-CANOPY-03



Size 60mm x 150mm x 380mm
2 3/8" x 5 7/8" x 1'-3"

Internal width 120mm x 350mm
4 3/4" x 1'-1 3/4"

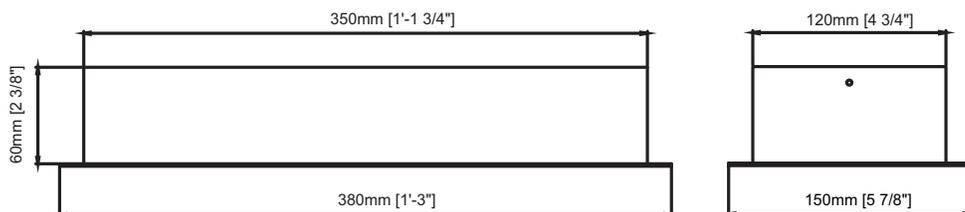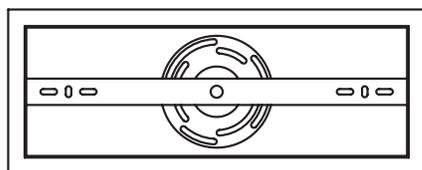

PRODUCT CODE

TT - TYPE - MODEL

TT - CANOPY - 03

TITANIUM



TECHNOLOGY

TT-CANOPY-04



Size 60mm x 150mm x 730mm
2 3/8" x 5 7/8" x 2'-4 3/4"


Internal width 120mm x 700mm
4 3/4" x 2'-3 1/2"

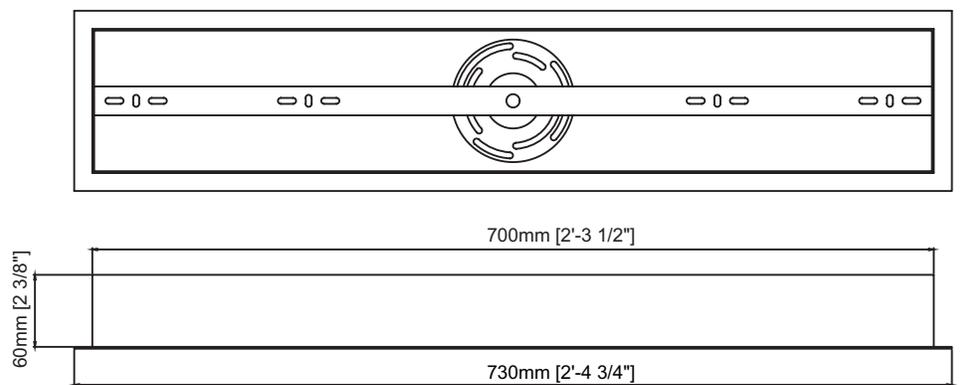

PRODUCT CODE

TT - TYPE - MODEL
TT - CANOPY - 04

BLACK SHADOW SERIES

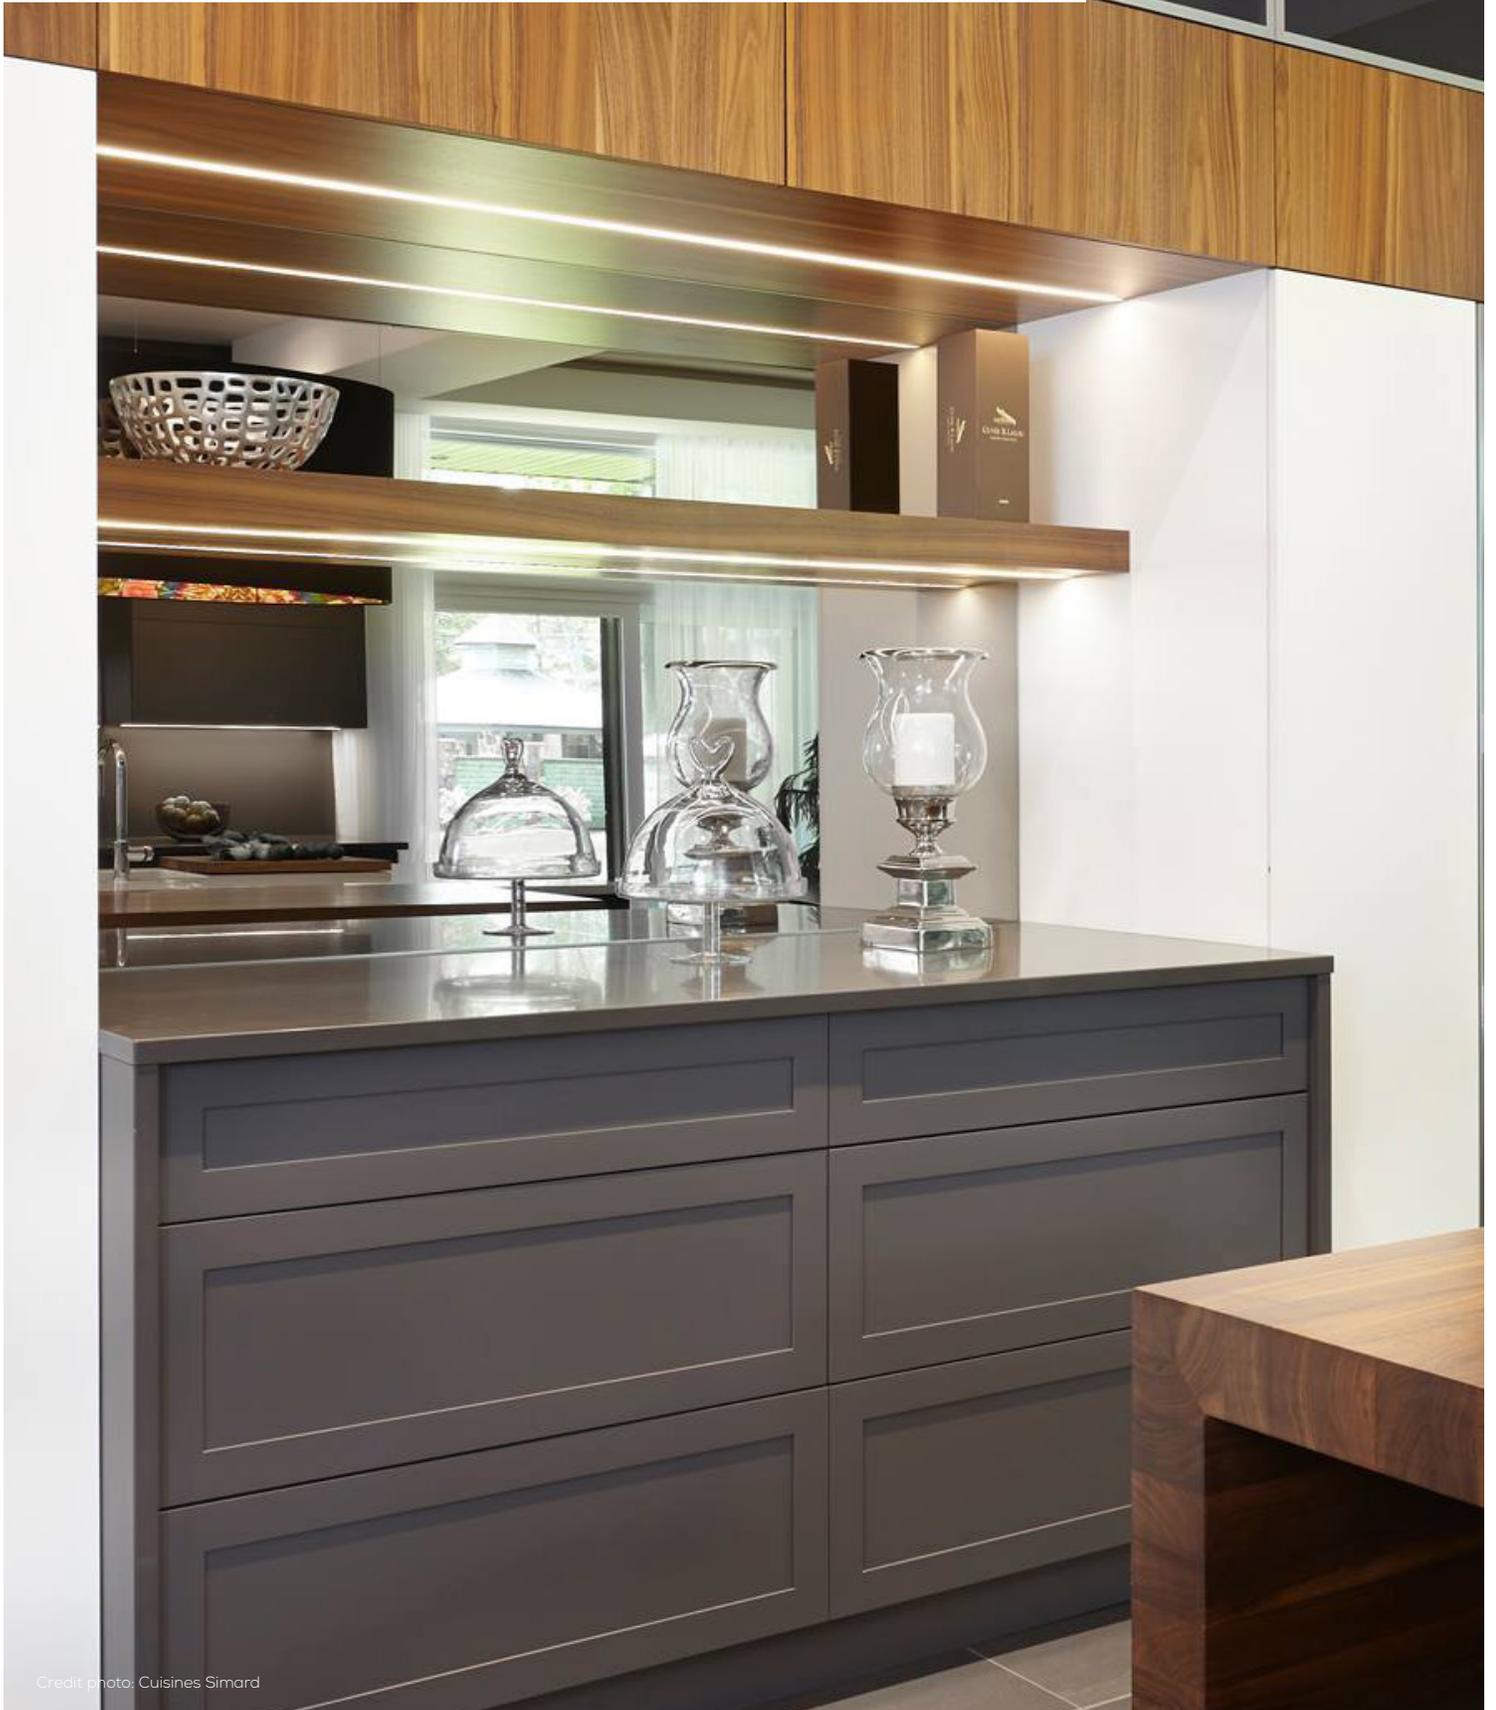

Credit photo: Cuisines Simard



TT-55-3000-BK Page 115

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-56-3000-BK Page 116

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-57-3000-BK Page 117

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-58-3000-BK Page 118

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-59-3000-BK Page 119

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-60-3000-BK Page 120

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-61-3000-BK Page 121

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-62-3000-BK Page 122

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-63-3000-BK Page 123

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TITANIUM

TECHNOLOGY

TT-55-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

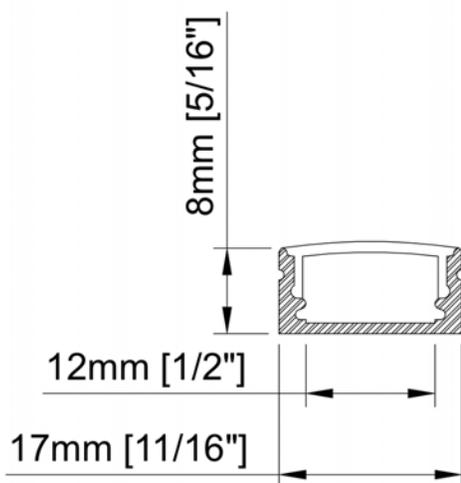

Size	17mm x 8mm x 3000mm $11/16" \times 5/16" \times 118^{1/8}"$
Lenght	3000mm $118^{1/8}"$
Internal width	12mm $1/2"$
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-55-CLIP



TT-55-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER - FINISH

TT - 55 - 3000 - O - BK


TITANIUM

TECHNOLOGY

TT-56-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

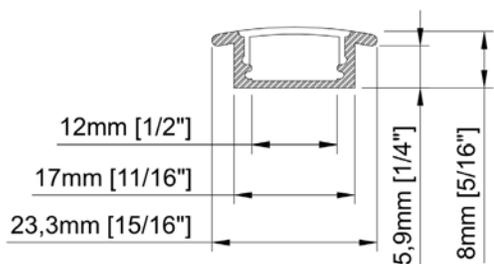

Size	23,3mm x 8mm x 3000mm 1 ⁵ / ₁₆ " x 5/ ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-56-END

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	56	3000	O	BK


TITANIUM

TECHNOLOGY

TT-57-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

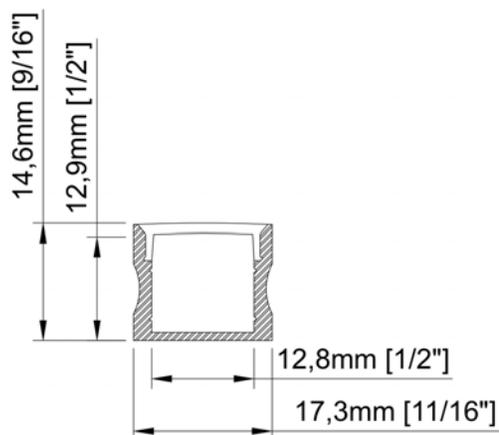

Size	17mm x 14,6mm x 3000mm 1 ¹ / ₁₆ " x 9/ ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-57-CLIP



TT-57-END

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	57	3000	O	BK


TITANIUM

TECHNOLOGY

TT-58-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

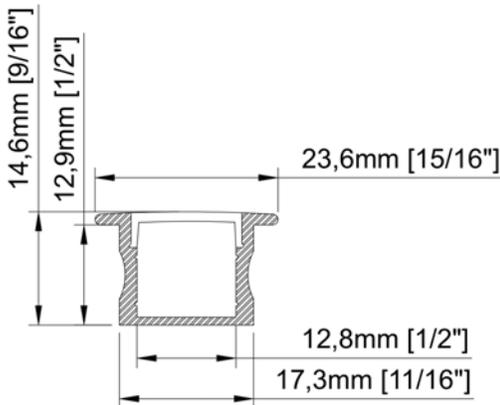

Size	23,6mm x 14,6mm x 3000mm $15/16$ " x $9/16$ " x $118 1/8$ "
Lenght	3000mm $118 1/8$ "
Internal width	12,8mm $1/2$ "
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-58-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	58	-	3000	-	O	-	BK


TITANIUM

TECHNOLOGY

TT-59-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

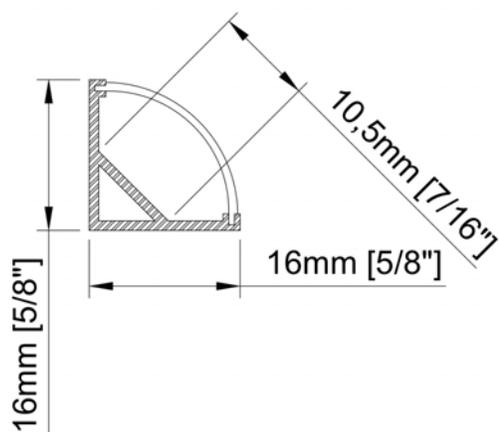

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-59-CLIP



TT-59-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	59	-	3000	-	O	-	BK


TITANIUM

TECHNOLOGY

TT-60-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

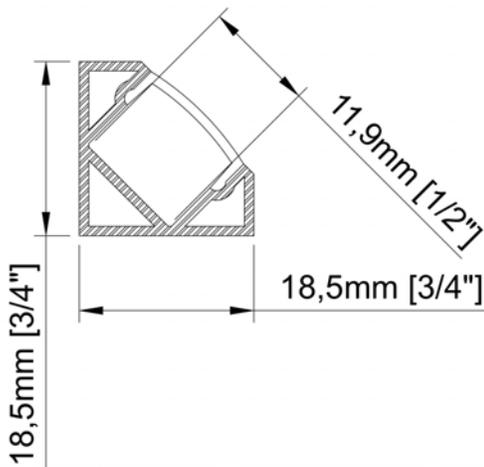

Size	18,5mm x 18,5mm x 3000mm $\frac{3}{4}'' \times \frac{3}{4}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	11,9mm $\frac{1}{2}''$
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-60-CLIP



TT-60-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	60	-	3000	-	O	-	BK


TITANIUM

TECHNOLOGY

TT-61-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

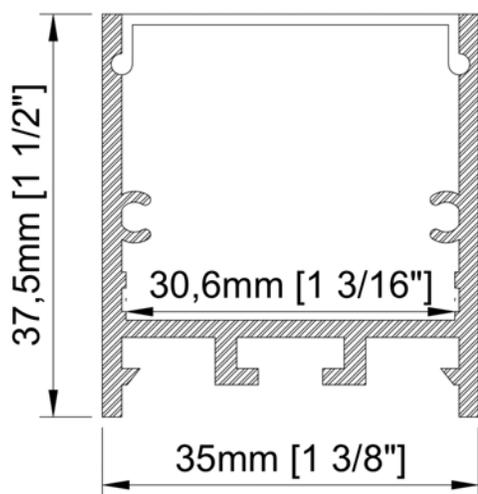

Size	35mm x 37,5mm x 3000mm 1 ³ / ₈ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black


Accessories



TT-61-CLIP



TT-61-SUSP



TT-61-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	61	-	3000	-	O	-	BK


TITANIUM

TECHNOLOGY

TT-62-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

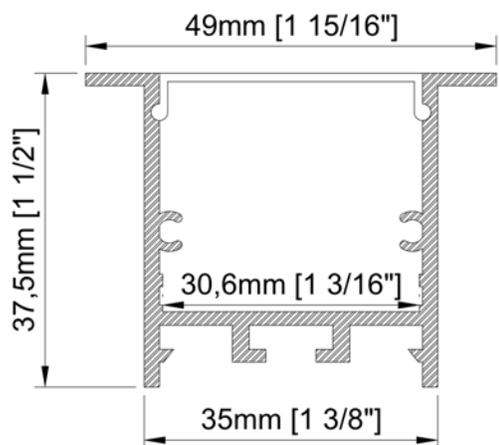

Size	49mm x 37,5mm x 3000mm 1 ¹⁵ / ₁₆ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black

Accessories



TT-62-SNAP



TT-62-END

PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	62	-	3000	-	O	-	BK

TITANIUM

TECHNOLOGY

TT-63-3000-O-BK

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

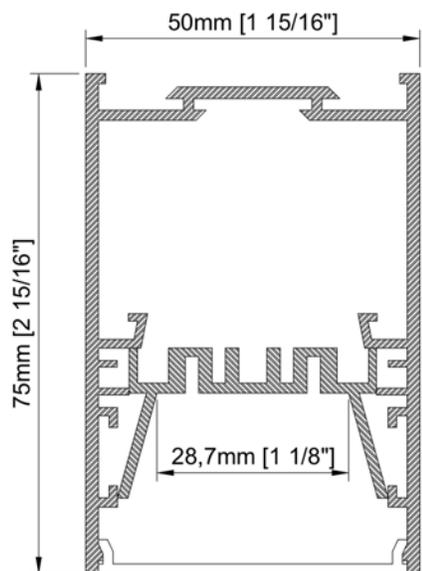

Size	50mm x 75mm x 3000mm 1 ¹⁵ / ₁₆ " x 2 ¹⁵ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	28,7mm 1 ¹ / ₈ "
Cover	Smoked PC diffused
Finish	BK-Black

Accessories

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	63	3000	O	BK



TT-63-CLIP



TT-63-SUSP



TT-63-SNAP



TT-63-CABLE




TT-63-END

TITANIUM

TECHNOLOGY

TT-74-3000-O-BK

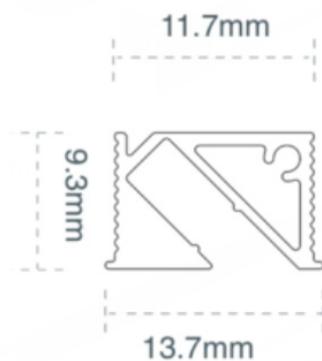

Size	13,7mm x 9,3mm x 3000mm $\frac{9}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	11,7mm $\frac{7}{16}''$
Cover	Silicone

Accessories



TT-74-END-BK


PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	74	3000	O	BK

TITANIUM

TECHNOLOGY

TT-75-3000-O-BK

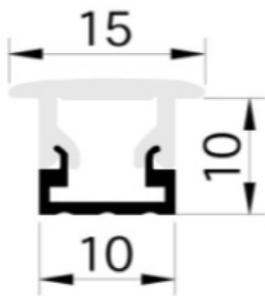

Size 15mm x 10mm x 3000mm
 $\frac{5}{8}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$

Length 3000mm
 $118\frac{1}{8}''$

Internal width 10mm
 $\frac{3}{8}''$

Cover PMMA

Accessories



TT-75-END-BK


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	75	3000	O	BK

TITANIUM

TECHNOLOGY

TT-73-3000-O-BK

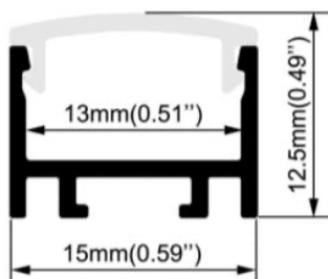

Size	15mm x 12,5mm x 3000mm $\frac{5}{8}'' \times \frac{1}{2}'' \times 78\frac{3}{4}''$
Lenght	3000mm 118 $\frac{1}{8}''$
Internal width	13mm $\frac{1}{2}''$
Cover	PMMA

Accessories



TT-73-END-BK



TT-73-MAG

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	73	3000	O	BK

TRIM-LESS MUD-IN




Credit photo: Godomo



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-26-3000 Page 131

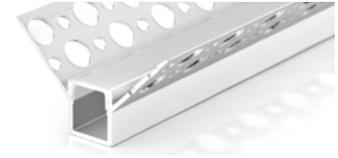

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-27-3000 Page 132



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-28-3000 Page 133



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-29-3000 Page 134



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-33-2000 Page 135



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-34-2000 Page 136



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-36-2000 Page 137



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-41-2000 Page 138



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


TT-72-2000 Page 139




TITANIUM

TECHNOLOGY


TT-26-3000-O

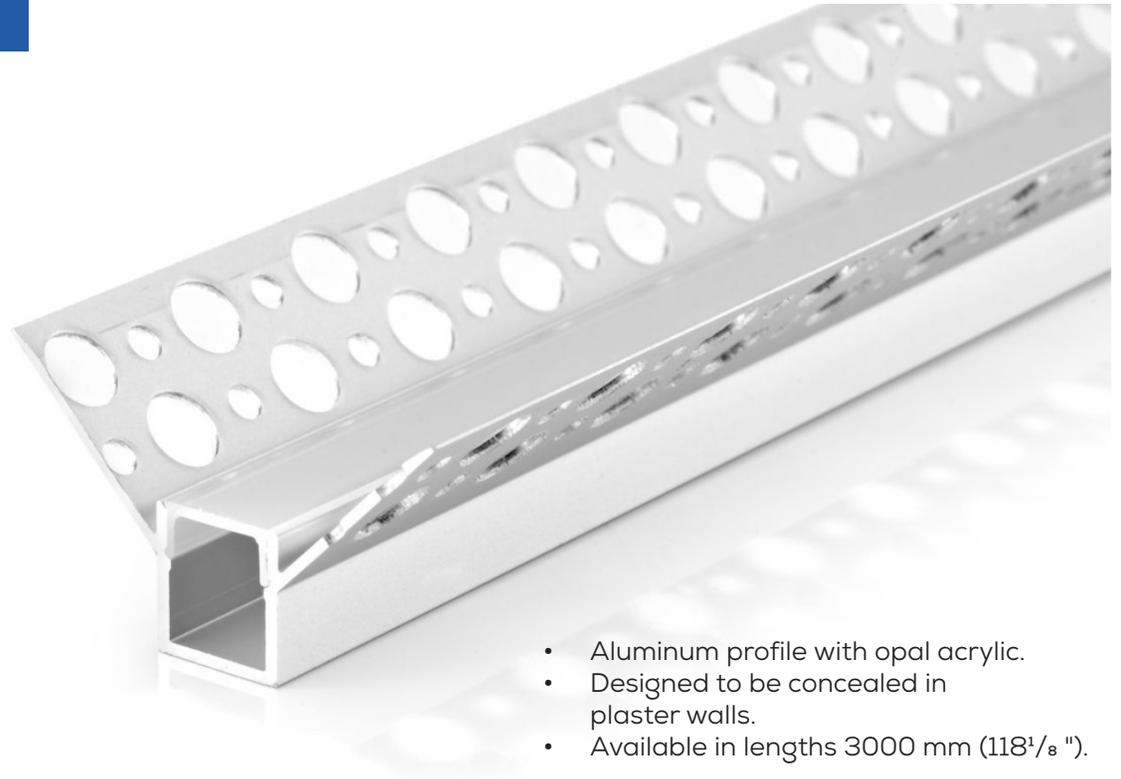

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

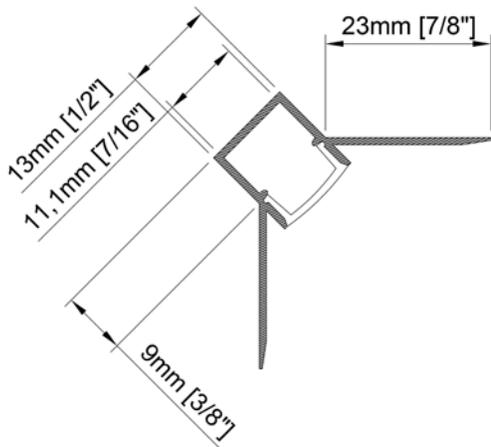

Size	13mm x 14mm x 3000mm ³ / ₈ " x ⁹ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm ⁷ / ₁₆ "
Cover	PC diffused

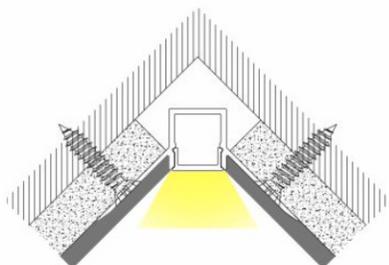

Accessories



TT-26-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	26	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-27-3000-O

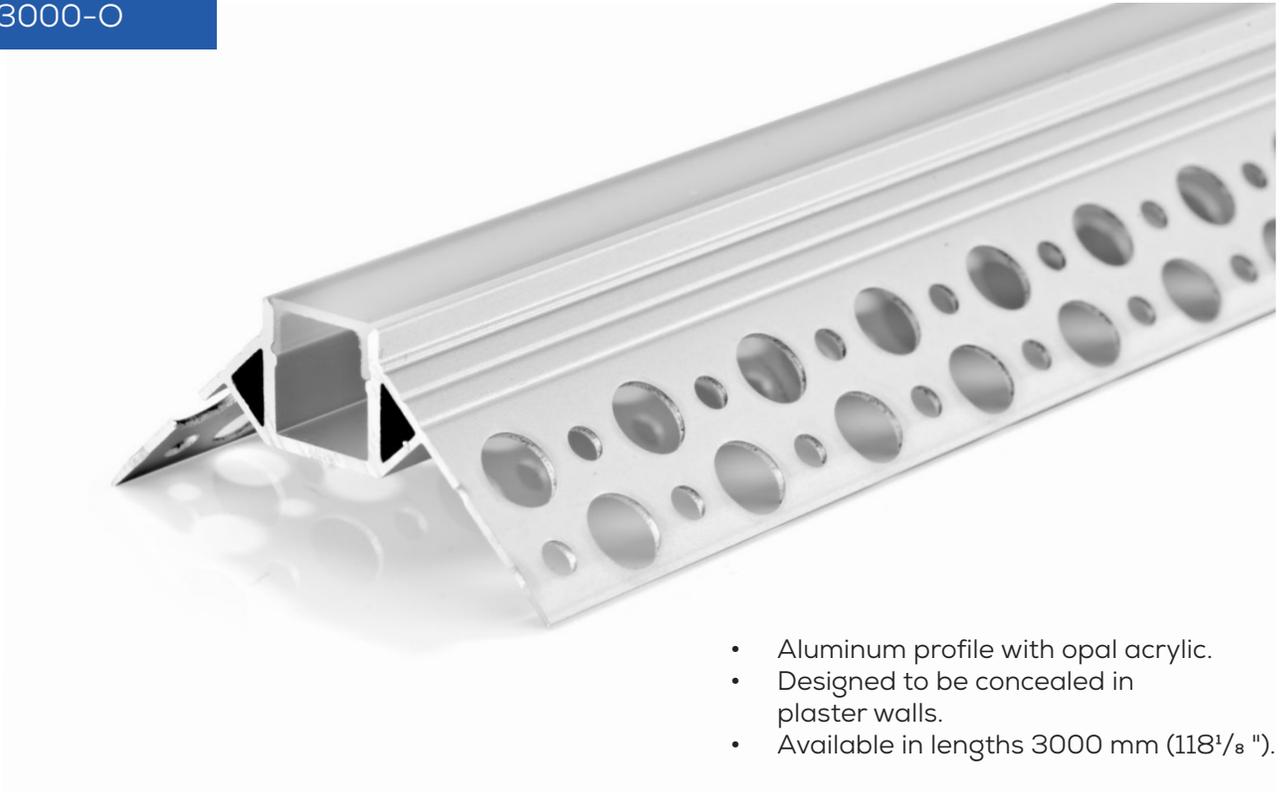

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

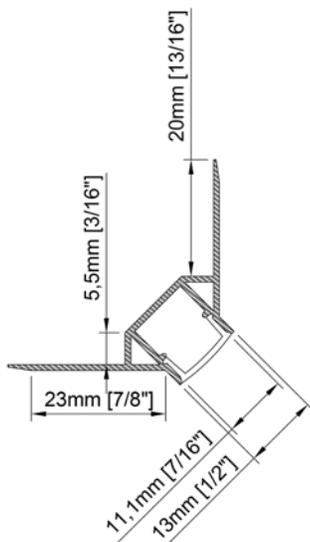

Size	13mm x 14mm x 3000mm $\frac{3}{8}$ " x $\frac{9}{16}$ " x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm $\frac{7}{16}$ "
Cover	PC diffused

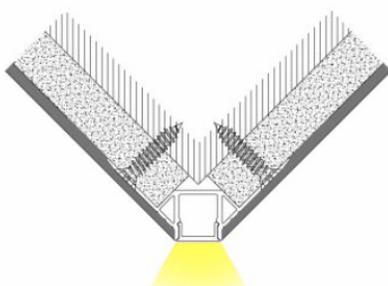

Accessories



TT-27-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	27	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-28-3000-O

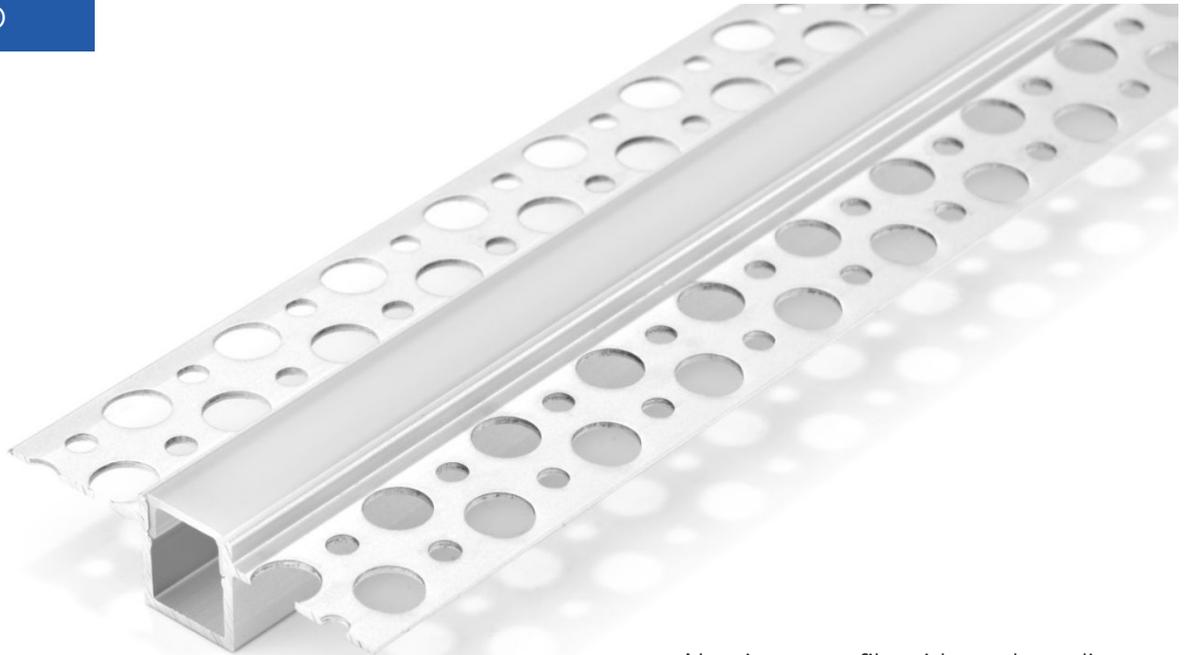

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

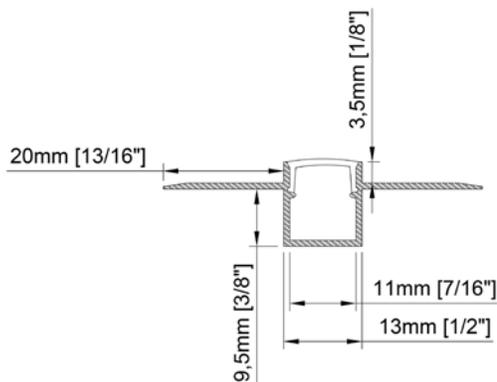

Size	13mm x 14mm x 3000mm ³ / ₈ " x ⁹ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm ⁷ / ₁₆ "
Cover	PC diffused

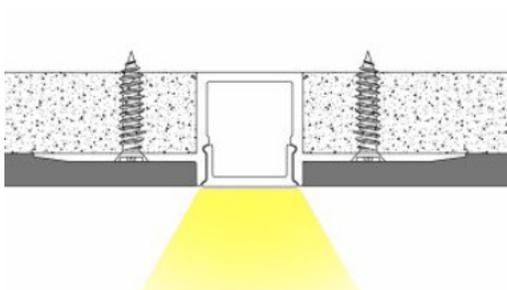

Accessories



TT-28-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	28	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-29-3000-O

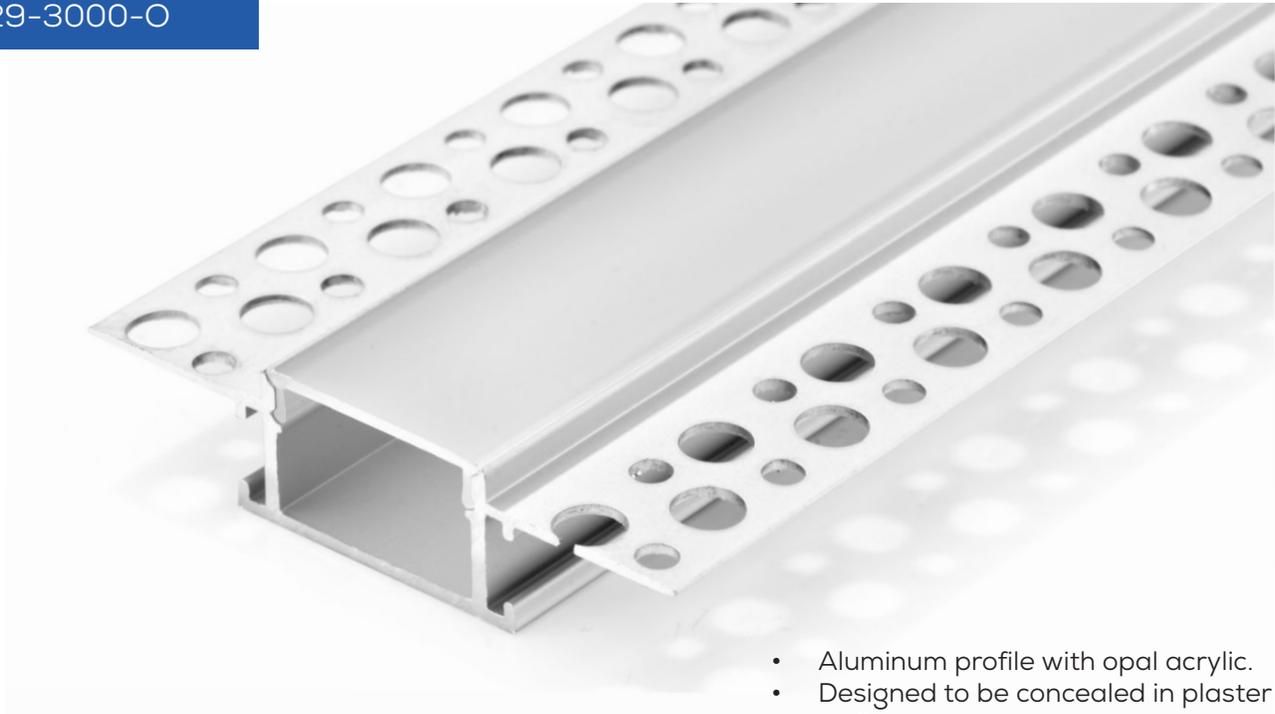

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

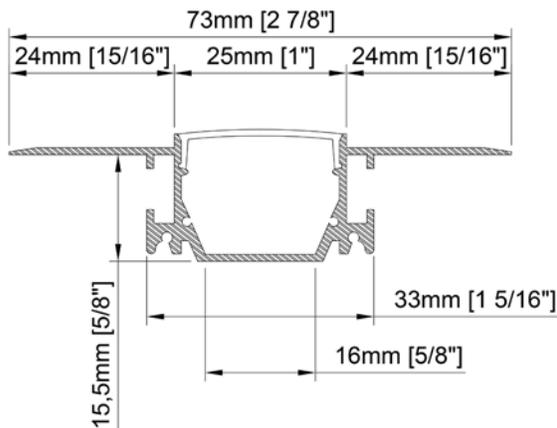

Size	25mm x 18,5mm x 3000mm ³ / ₈ " x ³ / ₄ " x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	16mm ⁵ / ₈ "
Cover	PC diffused

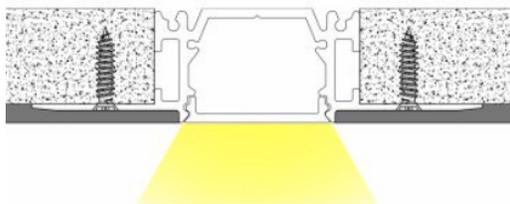

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	29	-	3000	-	O


TITANIUM

TECHNOLOGY


TT-33-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

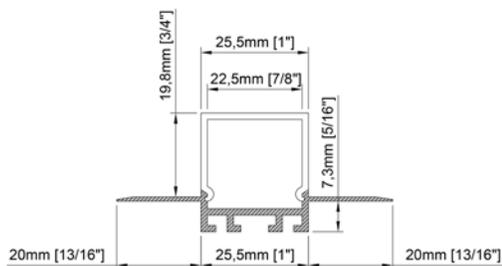

Size	25,5mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	22,5mm 7/8"
Cover	PC diffused

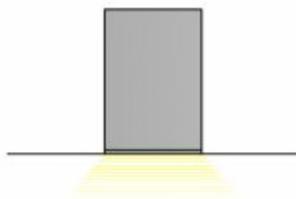

Accessories



TT-33-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 33 - 2000 - O


TITANIUM

TECHNOLOGY


TT-34-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

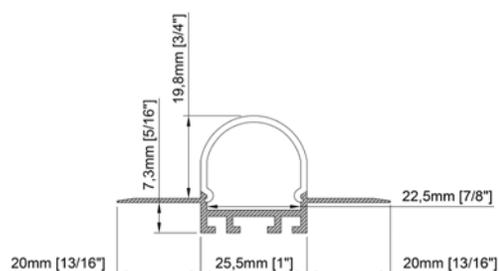

Size	25,5mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	22,5mm 7/ ₈ "
Cover	PC diffused

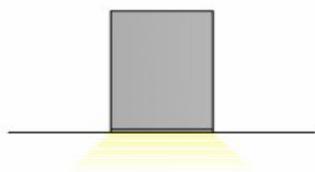

Accessories



TT-34-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	34	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-36-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

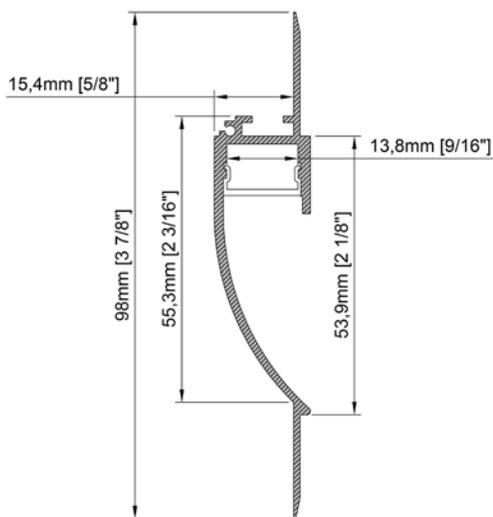

Size	98mm x 15mm x 2000mm 3 ⁷ / ₈ " x 5 ⁵ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,8mm 9 ⁹ / ₁₆ "
Cover	PC diffused
Finish	White

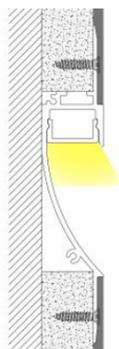

Accessories



TT-36-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 36 - 2000 - O


TITANIUM

TECHNOLOGY

TT-41-2000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat the LED strips.
- Available in lengths 2000 mm (78³/₄").

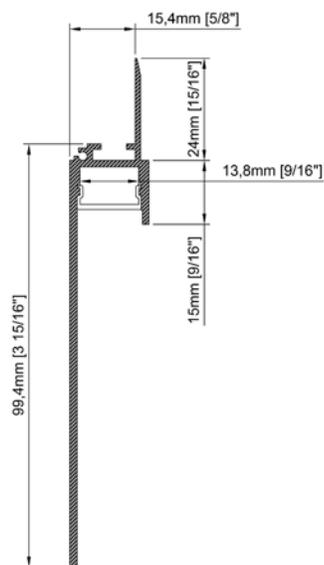

Size	99,4mm x 15,4mm x 2000mm 3 ¹⁵ / ₁₆ " x 5 ⁵ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,8mm 9 ⁹ / ₁₆ "
Cover	PC diffused
Finish	White



Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	41	-	2000	-	O


TITANIUM

TECHNOLOGY


TT-72-2000-0

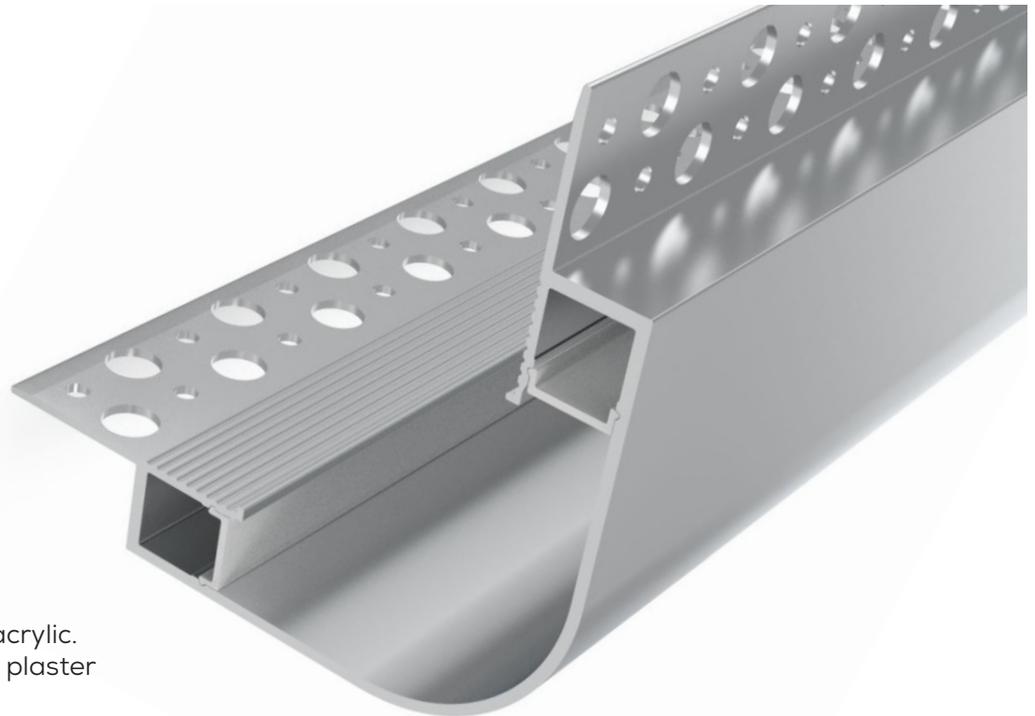

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

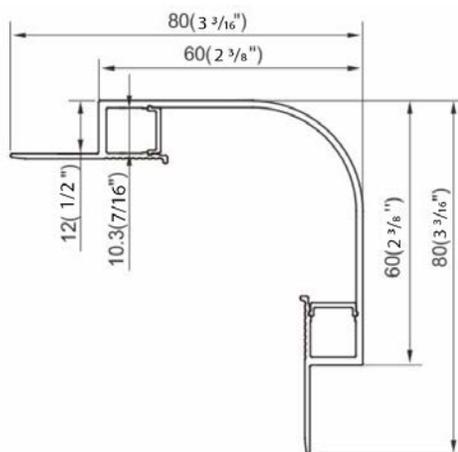

Size	80mm x 80mm x 2000mm 3 ³ / ₁₆ " x 3 ³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,3mm X 2 7/ ₁₆ "
Cover	PC diffused
Finish	White

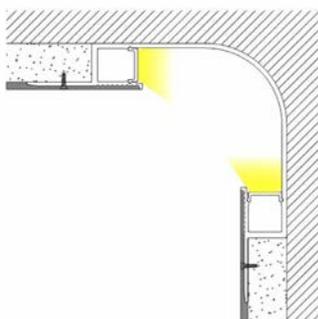

Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	72	-	2000	-	0

TRIM-LESS TILES



Credit photo: Godomo


TITANIUM

TECHNOLOGY



TT-11-2000 Page 142

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

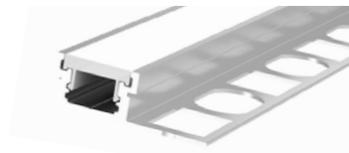

TT-43-2000 Page 143

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-44-2000 Page 144

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-45-2000 Page 145

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet	27 2700K	20	12	Hxxxx 12 inches minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
			30 3000K	30 3000K	65	24	DCxxxx 12 inches minimum	Hxxxx 12 inches minimum	EC With end cap	xC x-QTE	P Plug-in
			28/6 H 527 lm/feet 6,25W/feet *24v only	35 3500K				DCxxxx 12 inches minimum			CV Dimmable
			40 4000K	40 4000K							CV-BOX Dimmable with box
			28/12 456 lm/feet 9W/feet *24v only	60 6000K							CV67 IP67 psu
			35/3 45 lm/feet 1,5W/feet	RE RED							120V No dimmable 120v psu
			35/6 120 lm/feet 3W/feet	GR GREEN							347V No dimmable 347V PSU
			22/15 425 lm/feet 9W/feet *24v only	BL BLUE							010 0-10v PSU
			50/3 4,5W/feet	AM AMBER							
			DX/24 DIGITAL DMX *24V only	PK PINK *28/6 only							
				CB CYAN *28/6 only							
				OR ORANGE *28/6 only							
				UV *28/6 only							
				RGB *50/3, 28/6 or 35/6 only							
				RGBWW *50/3 only							
				RGBNW *50/3 only							
				RGBCW *50/3 only							
				RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TITANIUM

TECHNOLOGY

TT-11-2000-O

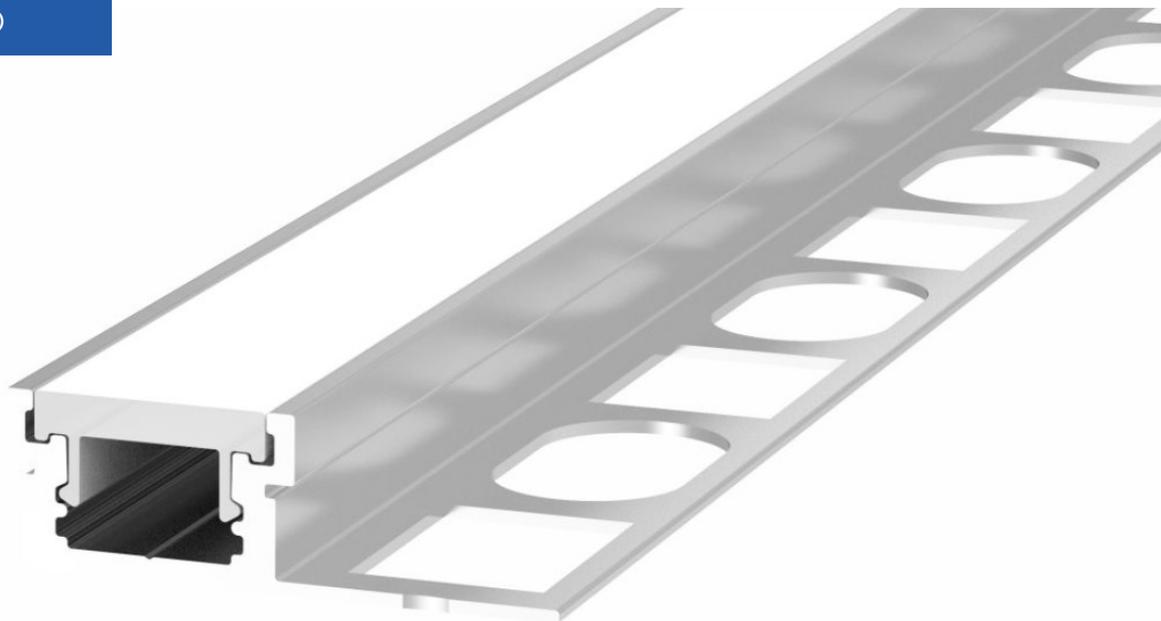

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

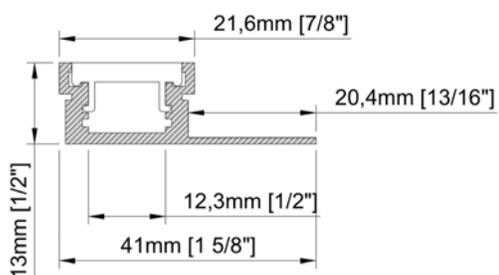


Size 41mm x 13mm x 2000mm
1⁵/₈" x 1/2" x 78³/₄"

Lenght 2000mm
78³/₄"

Internal width 12,3mm
1/2"

Cover PC diffused

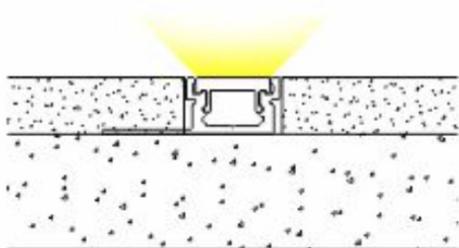

Accessories



TT-11-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 11 - 2000 - O


TITANIUM

TECHNOLOGY


TT-43-2000-O



- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄").

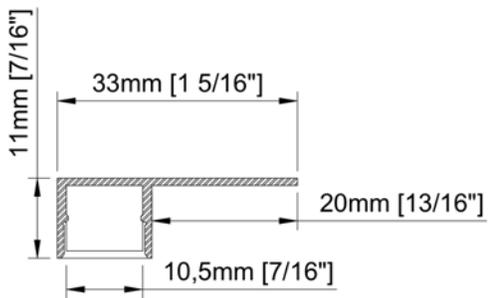

Size	33mm x 11mm x 2000mm 1 ⁵ / ₁₆ " x 7/ ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

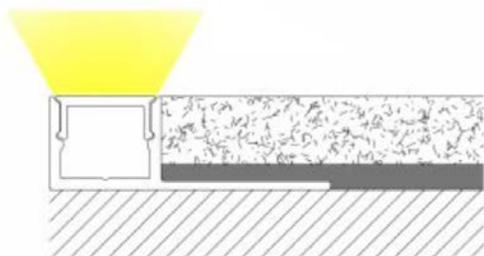

Accessories



TT-43-END

PRODUCT CODE


TT - MODEL - LENGHT (mm) - COVER

TT - 43 - 2000 - O


TITANIUM

TECHNOLOGY


TT-44-2000-O

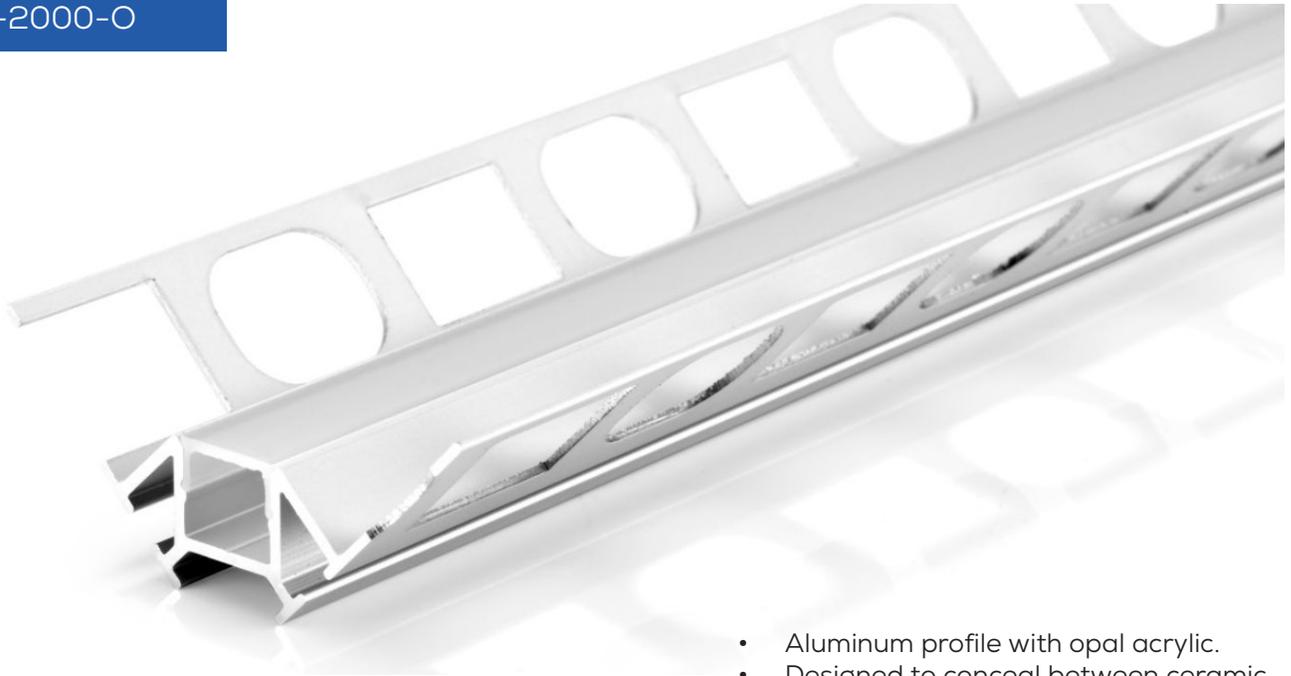

- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

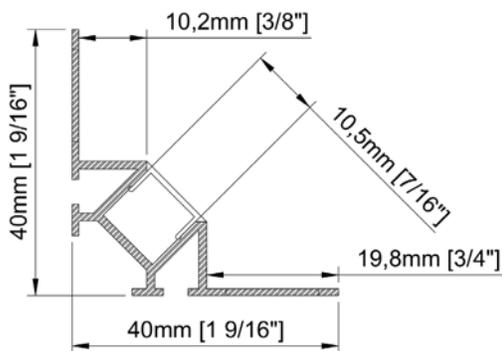

Size	40mm x 40mm x 2000mm 1 ⁹ / ₁₆ " x 1 ⁹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

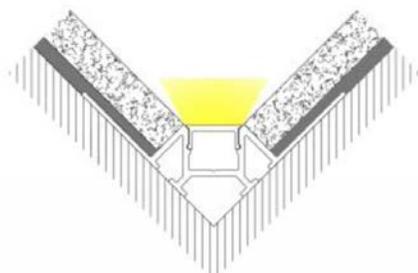

Accessories



TT-44-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	44	-	2000	-	O


TITANIUM

TECHNOLOGY

TT-45-2000-O



- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄").

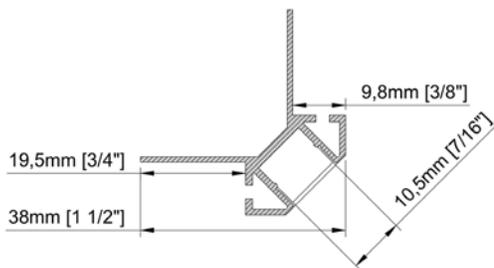


Size 38mm x 38mm x 2000mm
1¹/₂" x 1¹/₂" x 78³/₄"

Length 2000mm
78³/₄"

Internal width 10,5mm
7/₁₆"

Cover PC diffused

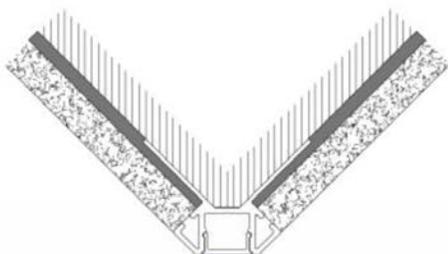

Accessories



TT-45-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 45 - 2000 - O

BOTTOM WALL



Credit photo: Cuisines Simard


TITANIUM

TECHNOLOGY

TT-30-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

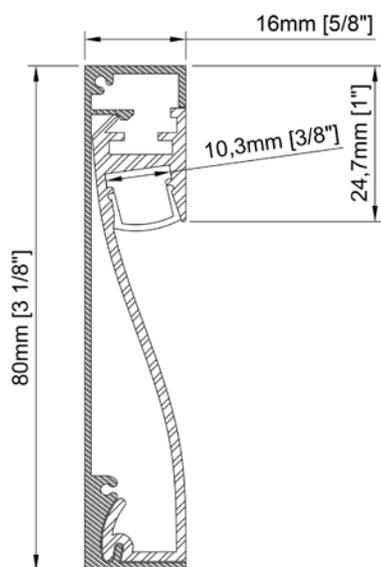


Size 80mm x 16mm x 2000mm
3¹/₈" x 5⁵/₈" x 78³/₄"

Lenght 2000mm
78³/₄"

Internal width 10,3mm
3³/₈"

Cover PC diffused

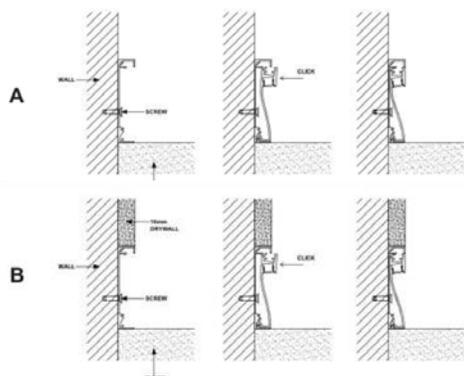

Accessories



TT-30-END

PRODUCT CODE



TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	30	-	2000	-	O

TITANIUM

TECHNOLOGY


TT-51-2000-O

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

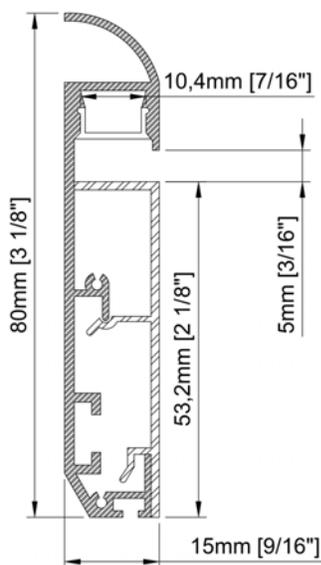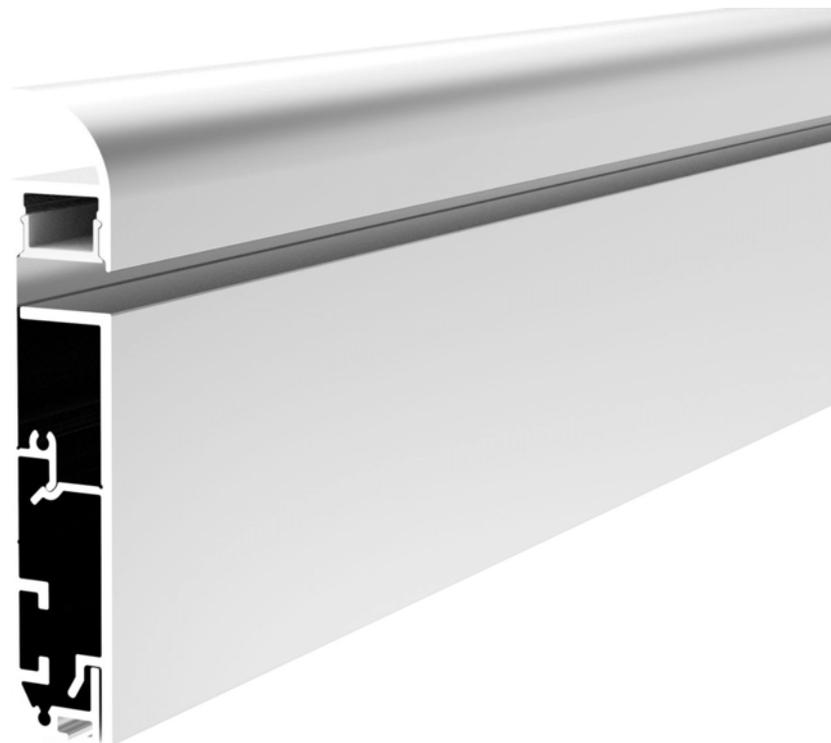

Size	80mm x 15mm x 2000mm 3 ¹ / ₈ " x 9/16" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,4mm 7/16"
Cover	PC diffused

Accessories

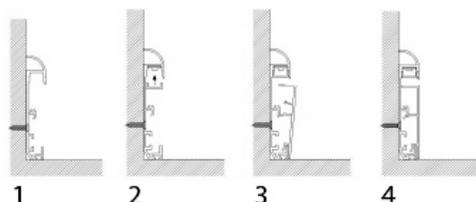

TT-51-END




TT-51-EXT

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 51 - 2000 - O

CLOSET

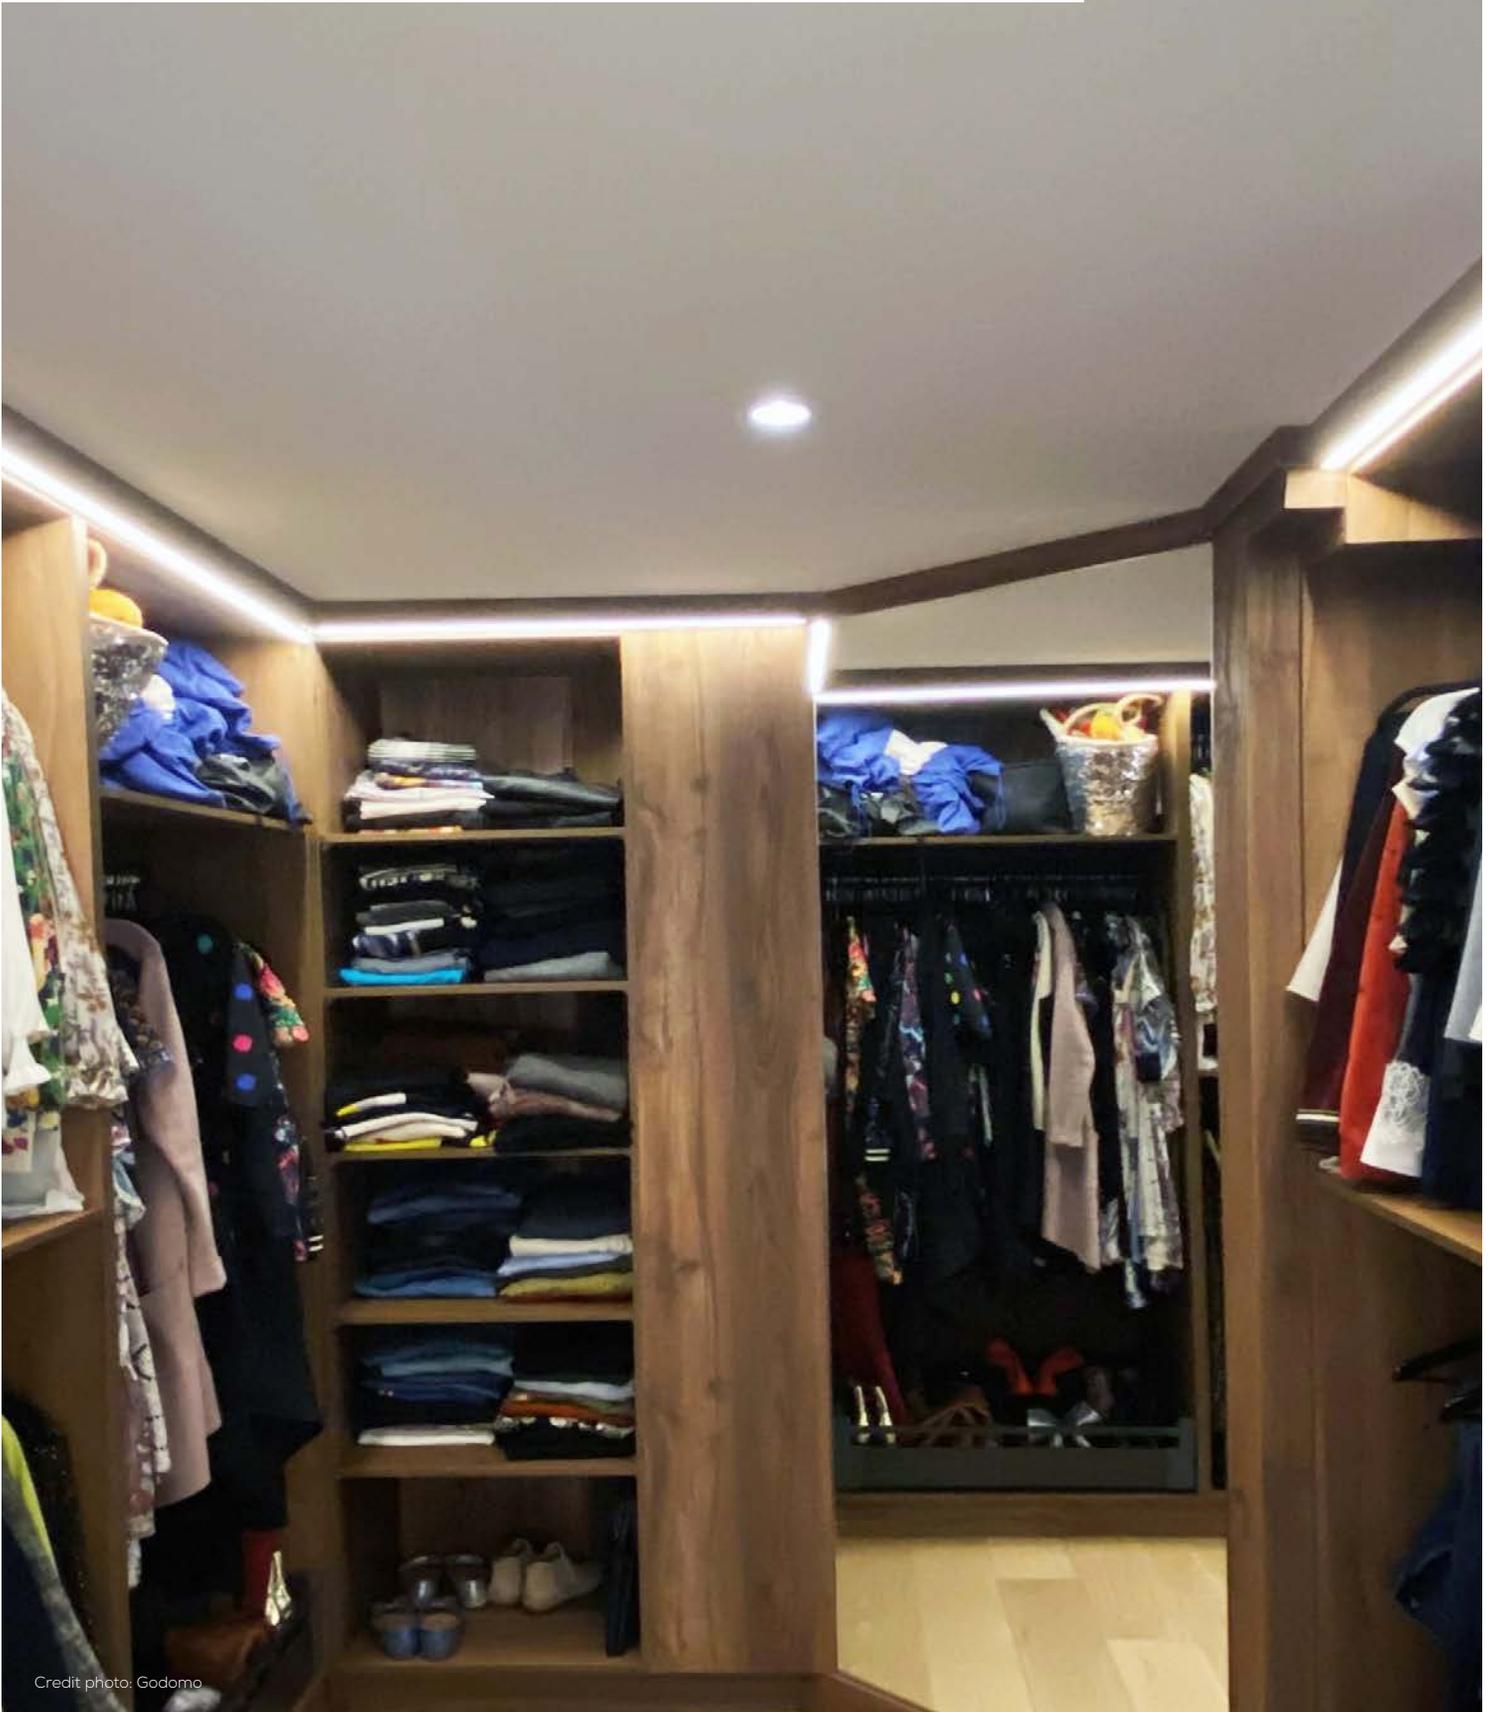

Credit photo: Godomo


TITANIUM

TECHNOLOGY


TT-35-2000-O



- Aluminum profile with opal acrylic.
- Designed for wardrobes.
- Available in lengths 2000 mm (78³/₄ ").

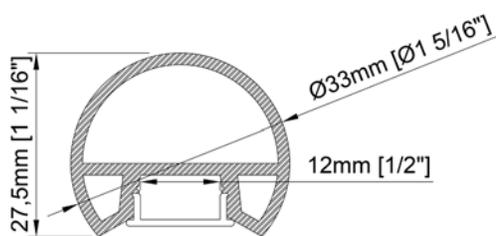

Size	27,5mm x 33mm x 2000mm 1 ¹ / ₁₆ " x 1 ⁵ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

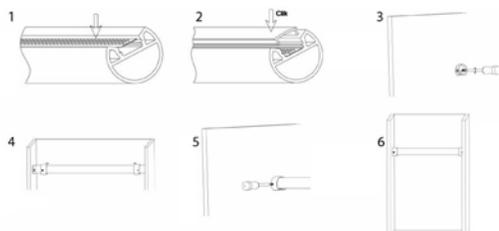

Accessories



PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 35 - 2000 - O



STAIRS




TITANIUM

TECHNOLOGY

TT-42-2000-O



- Aluminum profile with opal acrylic.
- Designed for stairs with non-slip rubber band.
- Available in lengths 2000 mm (78³/₄ ").

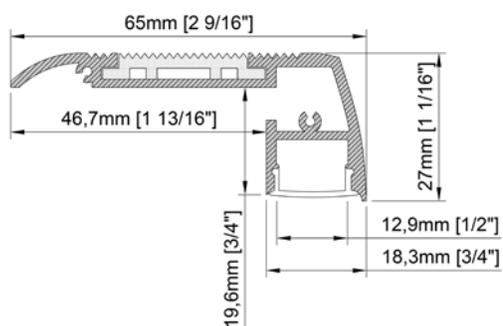


Size 65mm x 27mm x 2000mm
2⁹/₁₆" x 1¹/₁₆" x 78³/₄"

Lenght 2000mm
78³/₄"

Internal width 12,9mm
1/2"

Cover PC diffused

Finish Black

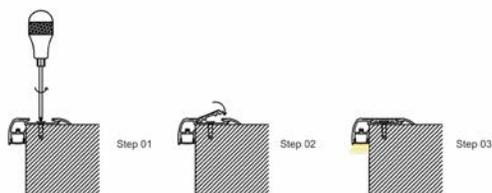

Accessories




PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 42 - 2000 - O

TRIM-LESS CONCRETE

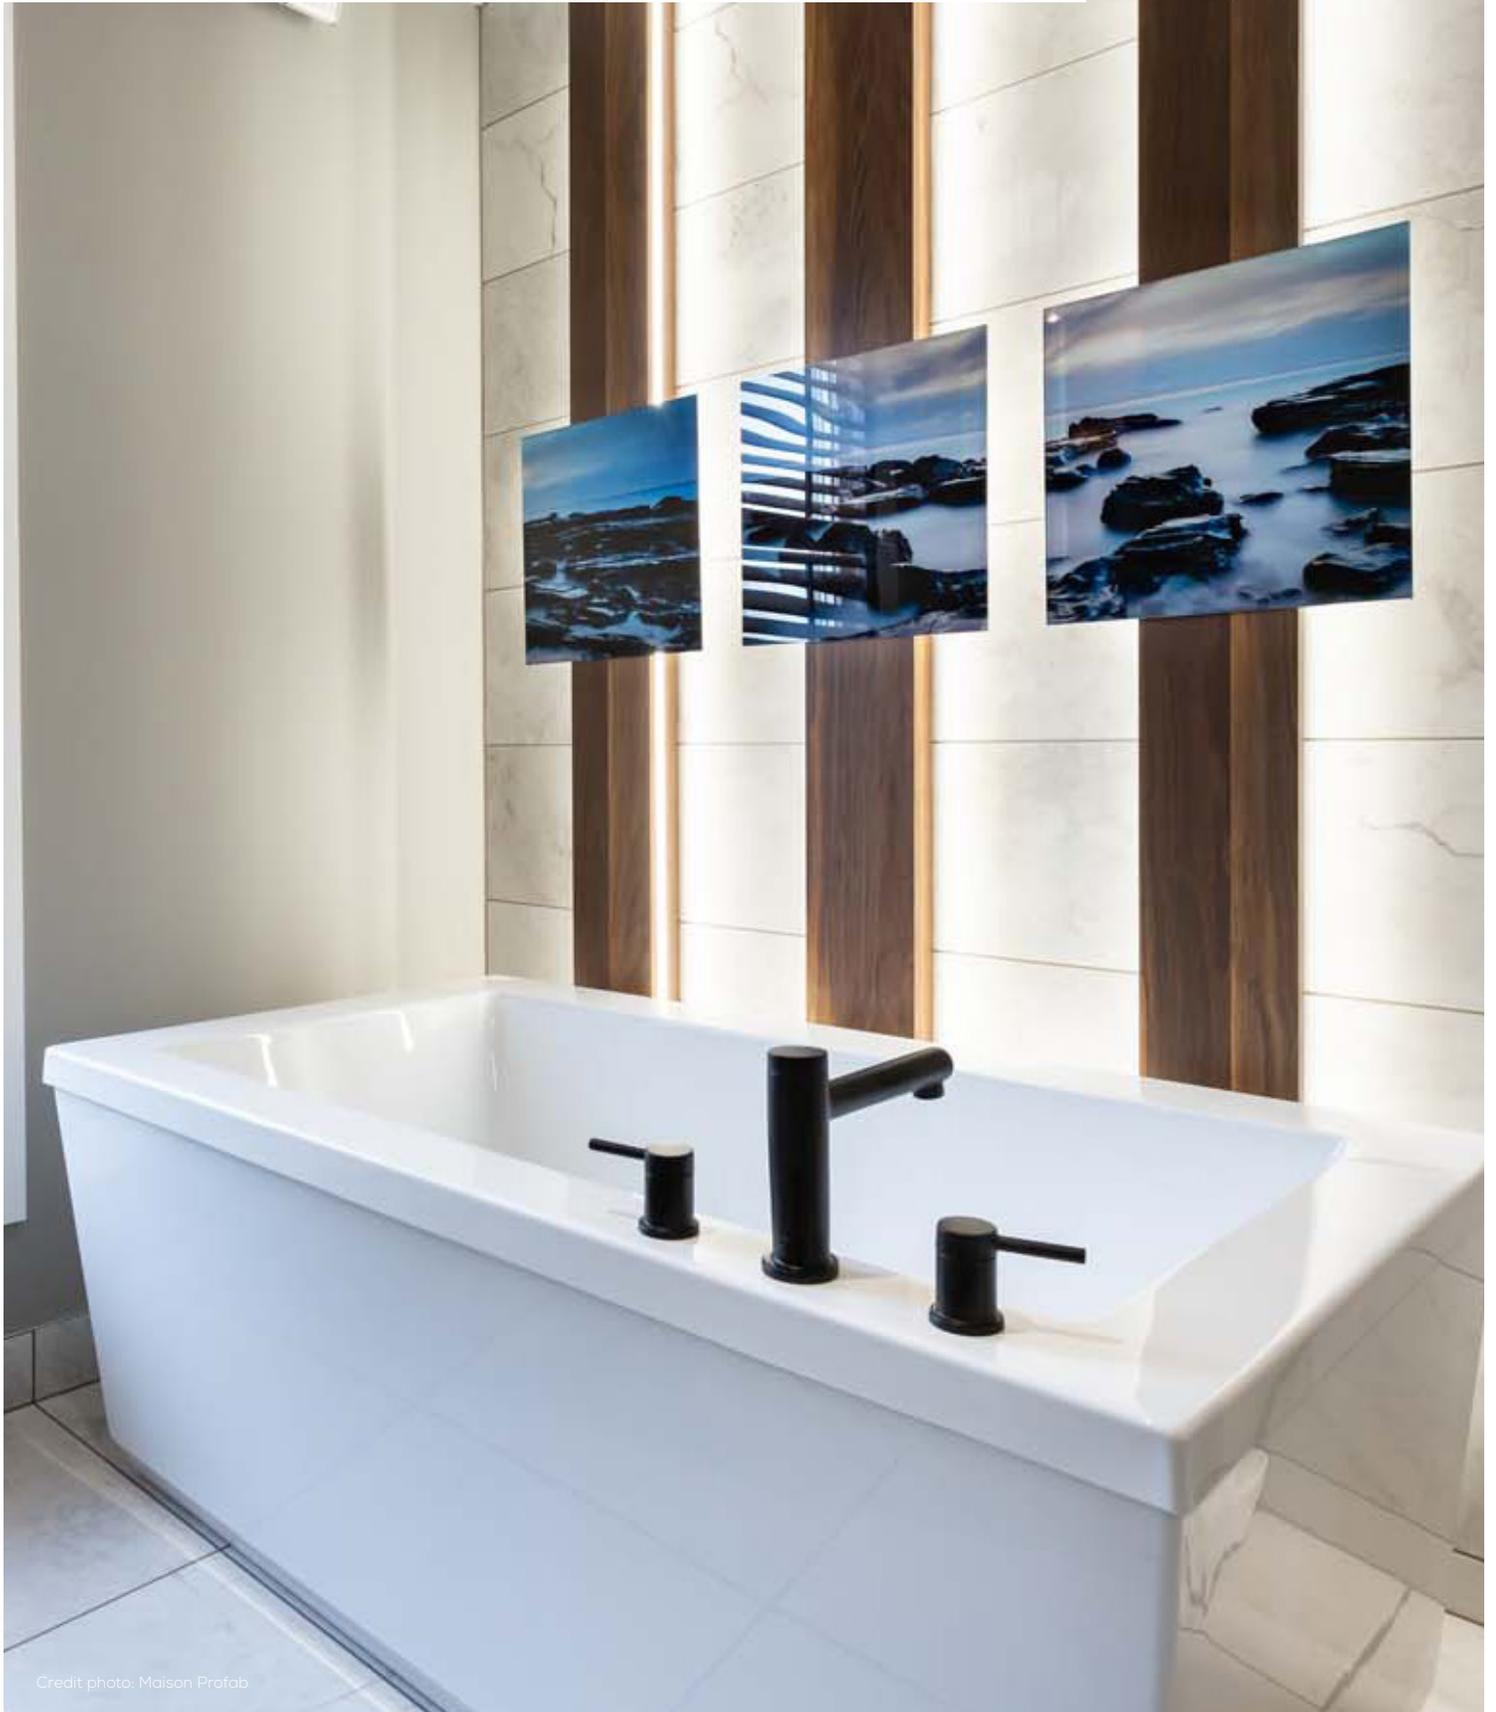


Credit photo: Maison Profab


TITANIUM

TECHNOLOGY

TT-12-3000-O

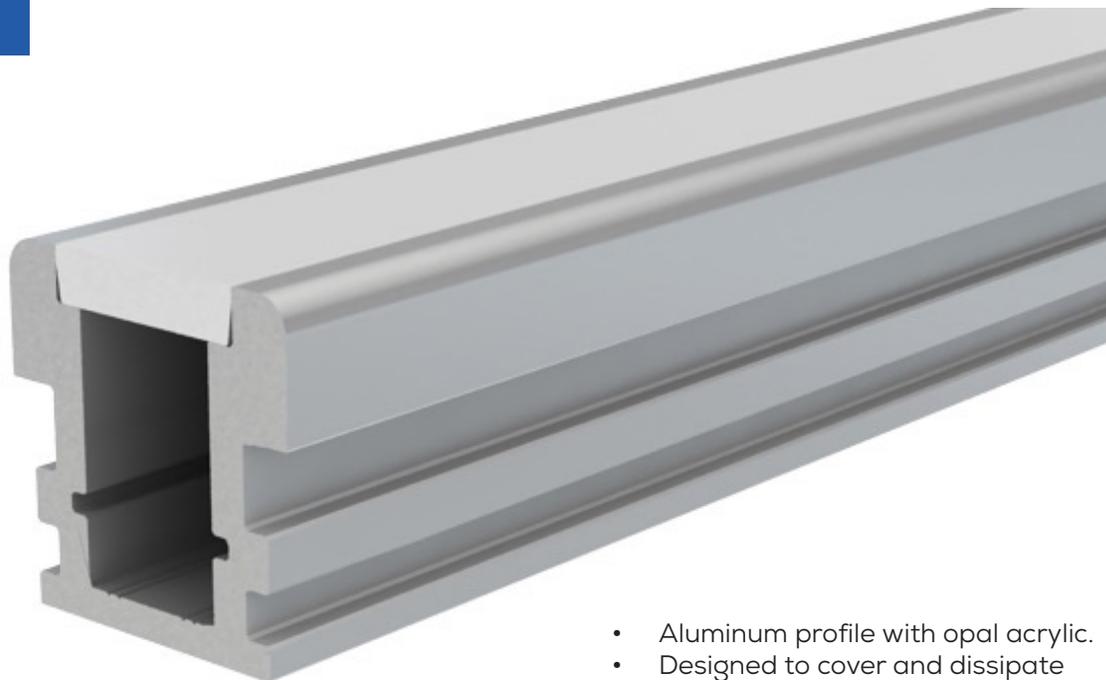

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈"").

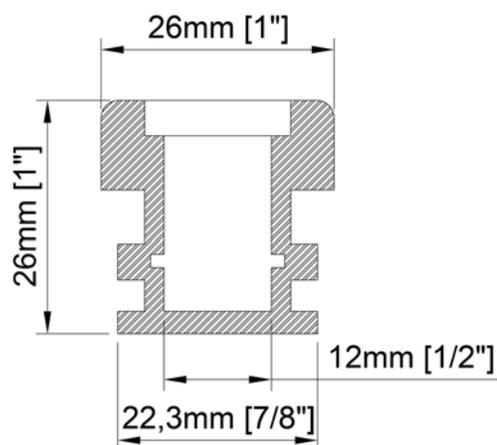

Size	26mm x 26mm x 3000mm 1" x 1" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	PC diffused

Accessories



TT-12-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 12 - 3000 - O

SUSPENDED CEILING



Credit photo: Godomo


TITANIUM

TECHNOLOGY

TT-67-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

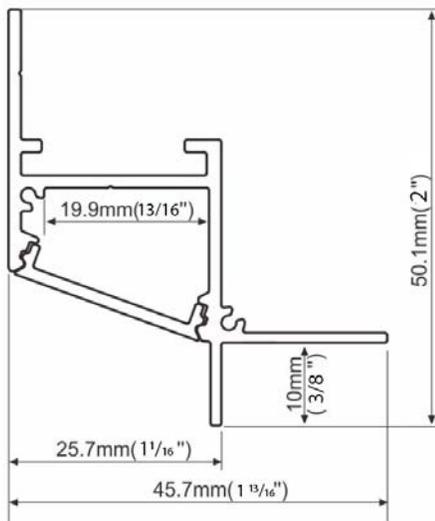


Size	45,7mm x 50,1mm x 2000mm 1 ¹³ / ₁₆ " x 2" x 78 ³ / ₄ "
------	---

Length	2000mm 78 ³ / ₄ "
--------	--

Internal width	19,9mm 1 ¹³ / ₁₆ "
----------------	---

Cover	PC diffused
-------	-------------

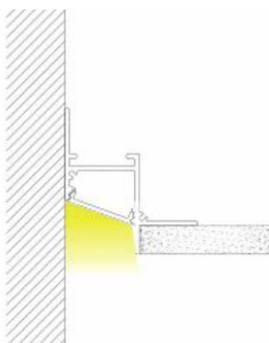

Accessories



TT-67-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 67 - 2000 - O

EDGE





Credit photo: Groupe Dallaire

TITANIUM

TECHNOLOGY

TT-70-2000-O

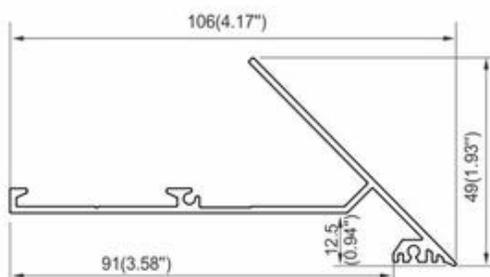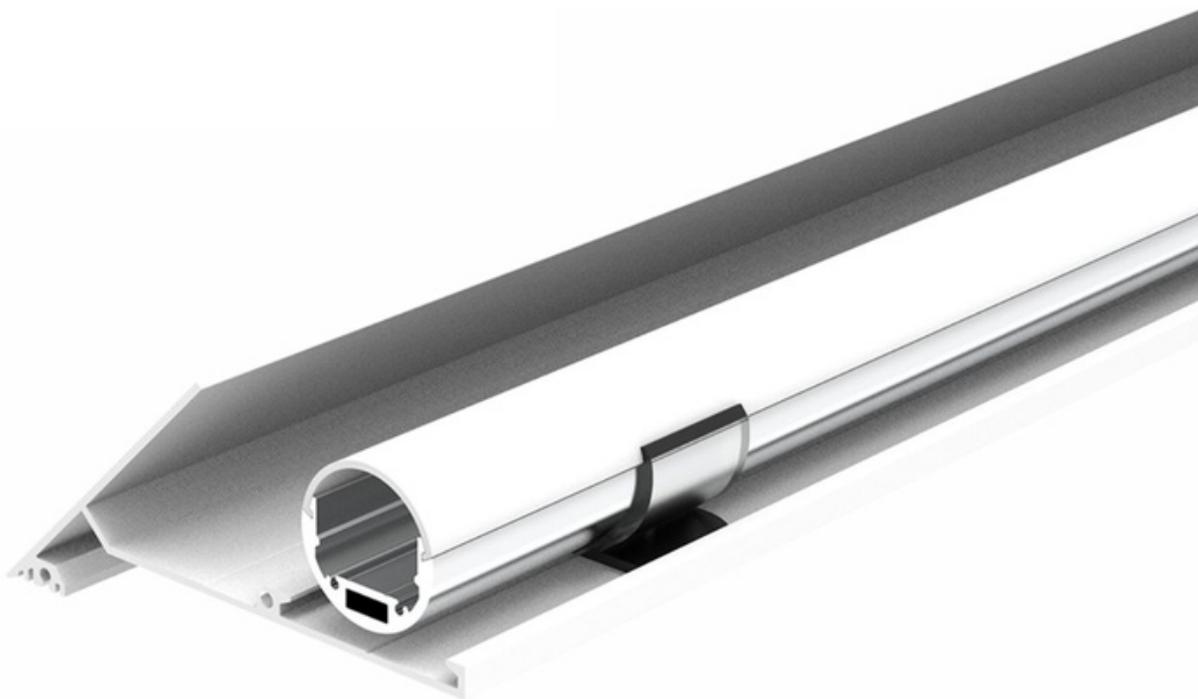


Size 2000 mm x 91 mm x 49 mm
78³/₄" x 3¹/₂" x 1⁷/₈"

Lenght 2000 mm
78³/₄"

Internal width 13 mm
1/2"

Cover PC diffused

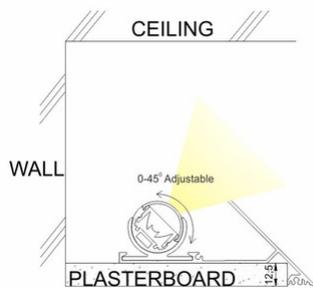

Accessories




TT-70-CLIP



TT-70-EXT



TT-70-EXT-90



TT-70-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	70	-	2000	-	O

TITANIUM

TECHNOLOGY

TT-71-2000-O

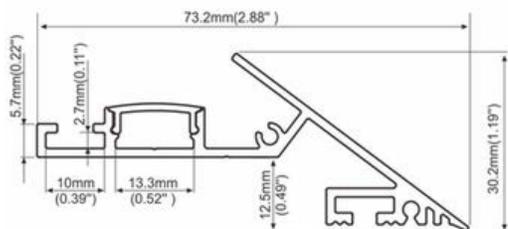

Size	73,2mm x 30,2mm x 2000mm 2 ⁷ / ₈ " x 1 ³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,3mm 9/ ₁₆ "
Cover	Semi-clear PMMA



Accessories




TT-71-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 71 - 2000 - O

FLEX

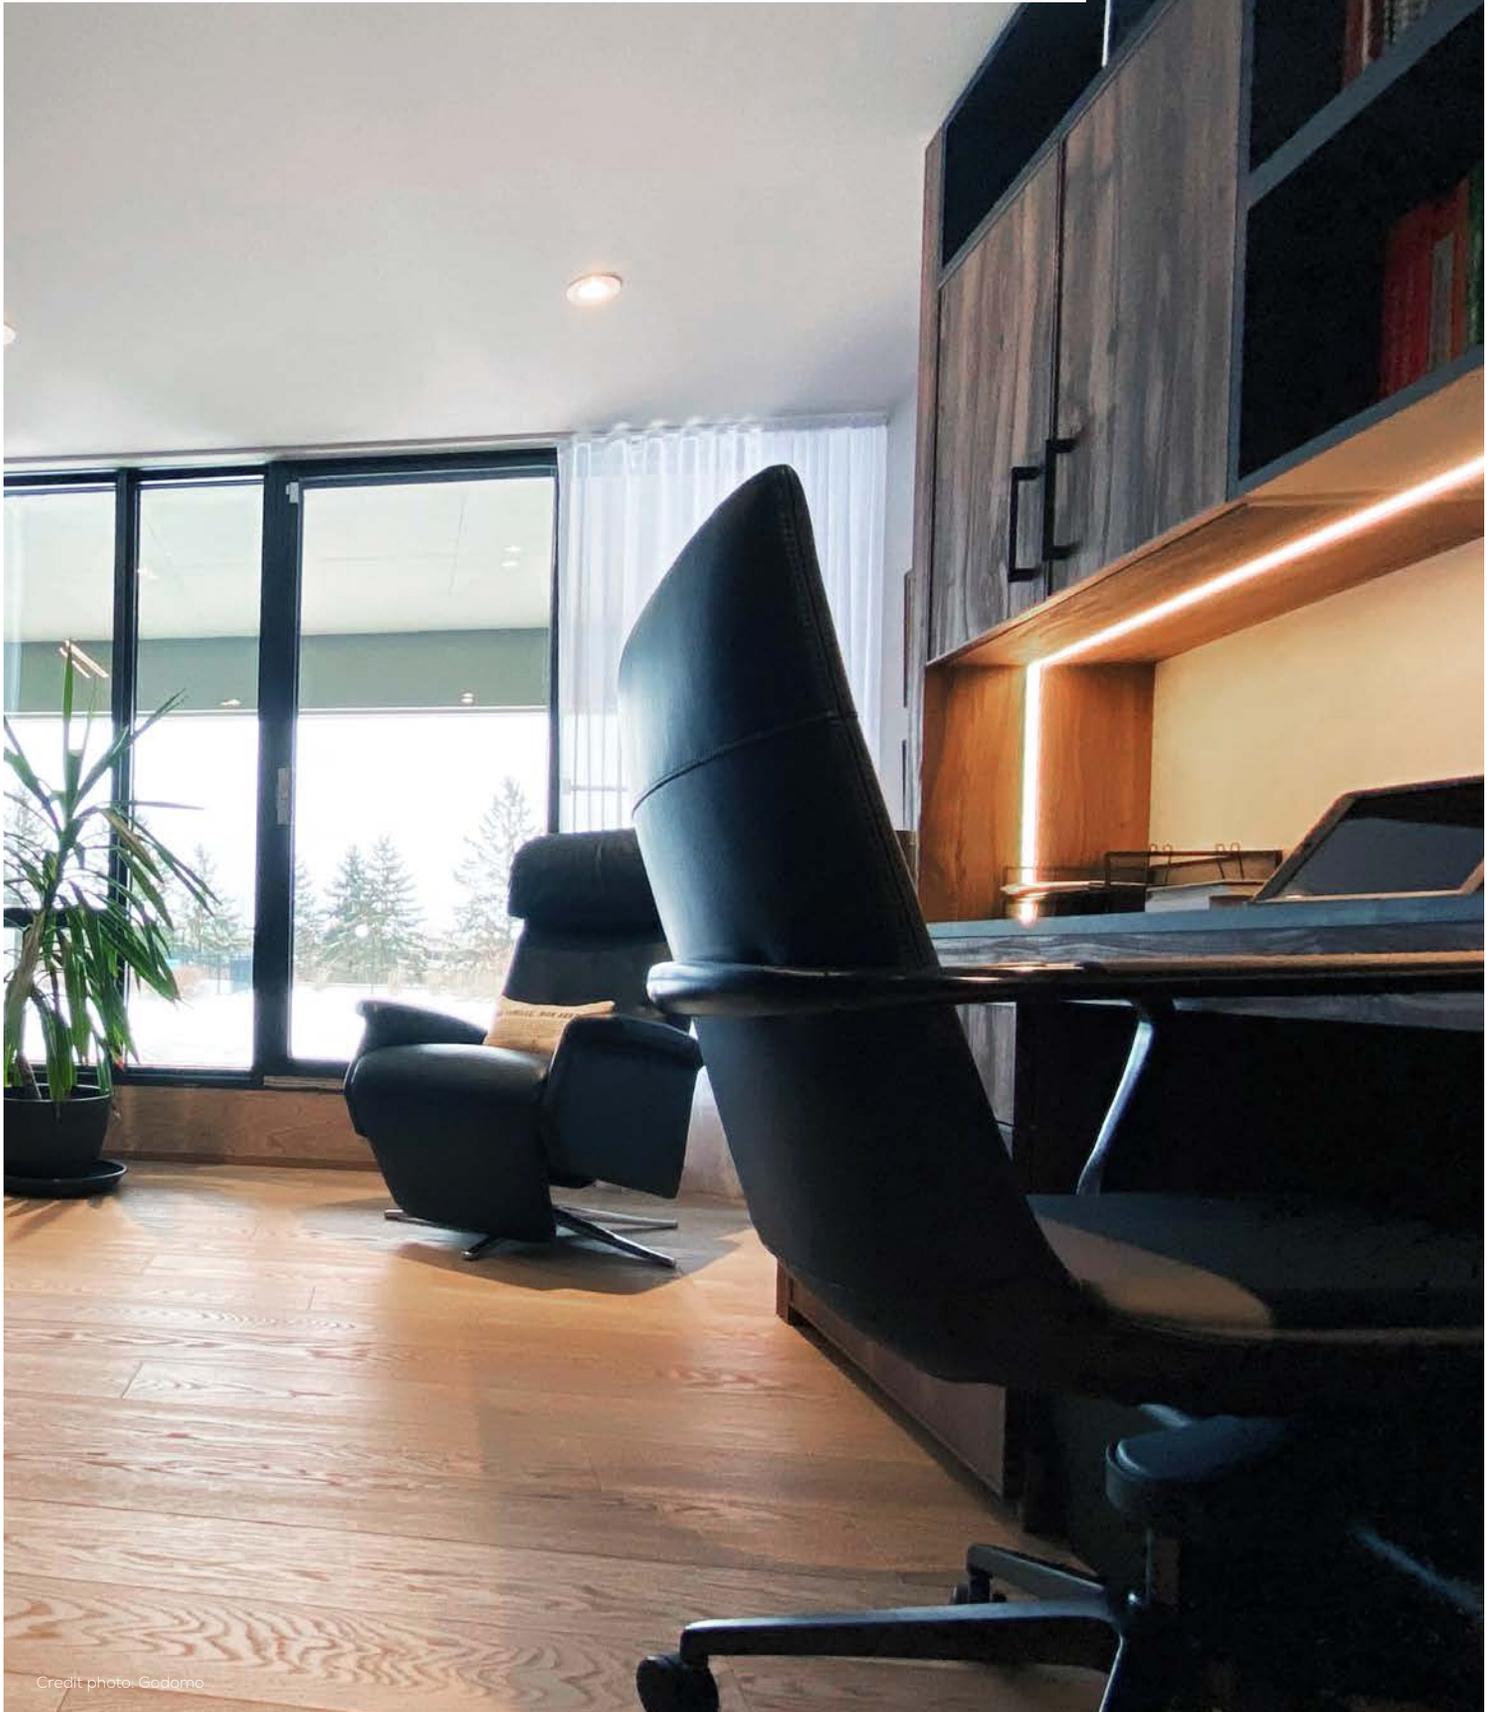


Credit photo: Godomo


TITANIUM

TECHNOLOGY

TT-FLEX-01

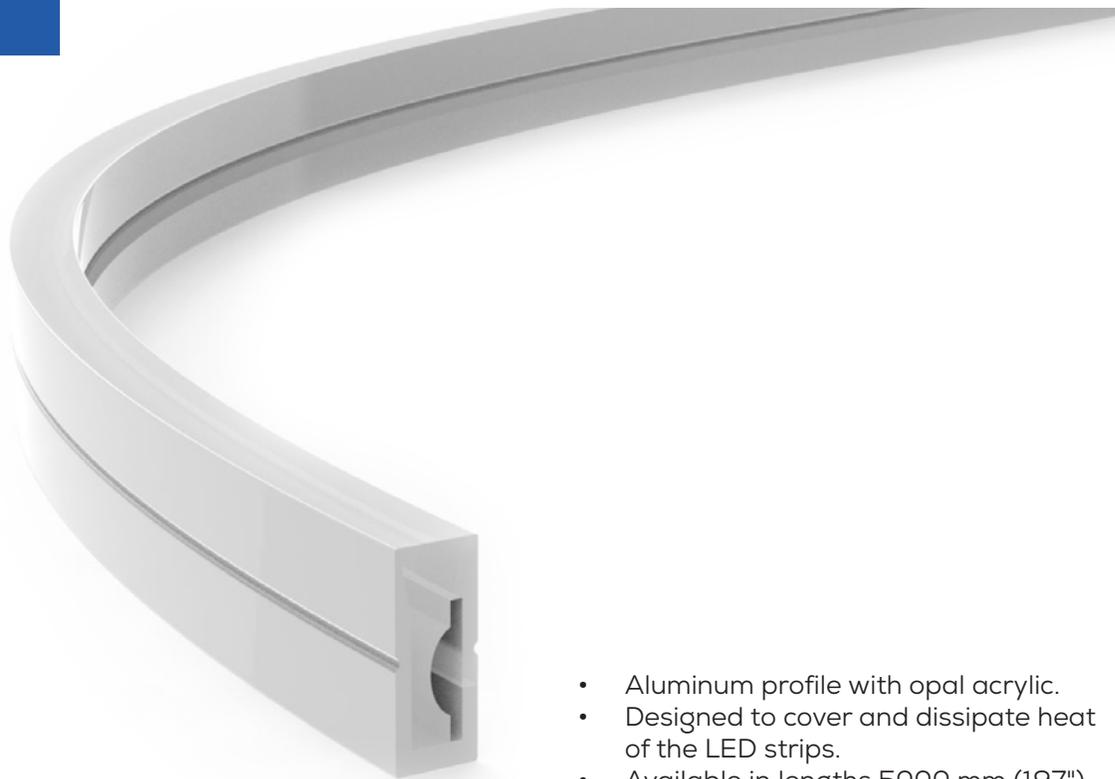

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

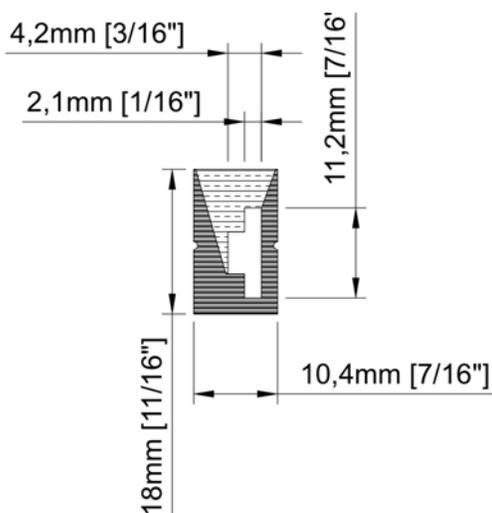


Size	10,4mm x 18mm x 5000mm 7/16" x 11/16" x 197"
------	---

Lenght	5000mm 197"
--------	----------------

Internal width	11,2mm 7/16"
----------------	-----------------

Cover	White silicone
-------	----------------

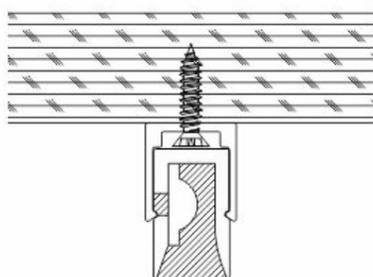

Accessories



TT-FLEX-01-CLIP



TT-FLEX-01-AC



TT-FLEX-01-END

PRODUCT CODE

TT - TYPE - MODEL

TT - FLEX - 01


TITANIUM

TECHNOLOGY


TT-FLEX-02



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

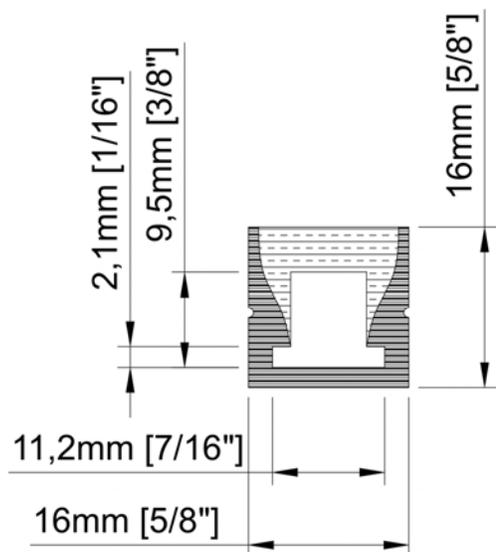

Size	16 mm x 16 mm x 5000 mm 5/8" x 5/8" x 197"
Lenght	5000mm 197"
Internal width	11,2mm 7/16"
Cover	White silicone

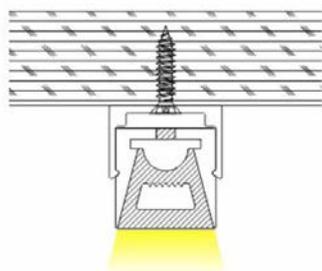

Accessories



TT-FLEX-02-CLIP



TT-FLEX-02-AC



TT-FLEX-02-END

PRODUCT CODE

TT - TYPE - MODEL

TT - FLEX - 02

LED ENGINES







Credit photo: Sommet V3



TT-2216-L1500 Page 171

Voltage	Luminous flux (lm/m)					Power		
24vDC	27K 1399	30K 1403	35K 1438	40K 1502	60K 1649	34,12w / m	10,40w / feet	170,56w / roll



TT-2835-L600 Page 172

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	27K 800	30K 808	35K 810	40K 815	60K 817	16,4w / m	5w / feet	82w / roll



TT-2835-L600-CCT Page 173

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	CCT 20K-40K					15,6w / m	-	65,4w / roll



TT-2835-L600-RGB Page 174

Tension	Flux lumineux (lm/m)					Puissance		
12vDC 24vDC	-					40w / roll 62,4w / roll		



TT-2835-L1200 Page 175

Voltage	Luminous flux (lm/m)					Power		
24vDC	27K 1493	30K 1500	35K 1507	40K 1510	60K 1512	30,4w / m	9,26w / feet	152w / roll



TT-3528-L300 Page 176

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	27K 125	30K 147	35K 148	40K 149	60K 154	5,8w / m	1,77w / feet	29w / roll



TT-3528-L600 Page 177

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	27K 383	30K 391	35K 399	40K 402	60K 405	9,84w / m	3w / feet	49,2w / roll



TT-3528-L600-5MM Page 178

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	27K 117	30K 119	35K 91	40K 104	50K -	9,84w / m	3w / feet	49,2w / roll



TT-5050-L300-RGBW-4:1 Page 179

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	-					18,27w / m	5,57w / feet	91,35w / roll



TT-5050-L300-RGBCCT-5:1 Page 180

Voltage	Luminous flux (lm/m)					Power				
12vDC 24vDC	-					12vDC 24vDC	- -	10,32w / m 13,44w / m	3,24w / feet 4,08w / feet	51,36w / roll 66,24w / roll





TT-DIGITAL-DMX-05V Page 181

Voltage	Luminous flux (lm/m)	Power
5vDC	-	-



TT-DIGITAL-DMX-24V Page 182

Voltage	Luminous flux (lm/m)	Power
24vDC	-	-



TT-LLS-140-10 Page 183


Voltage	Luminous flux (lm/m)	Power
120vDC	2215	21w / m 7w / feet



TITANIUM

TECHNOLOGY

TT-2216-L1500

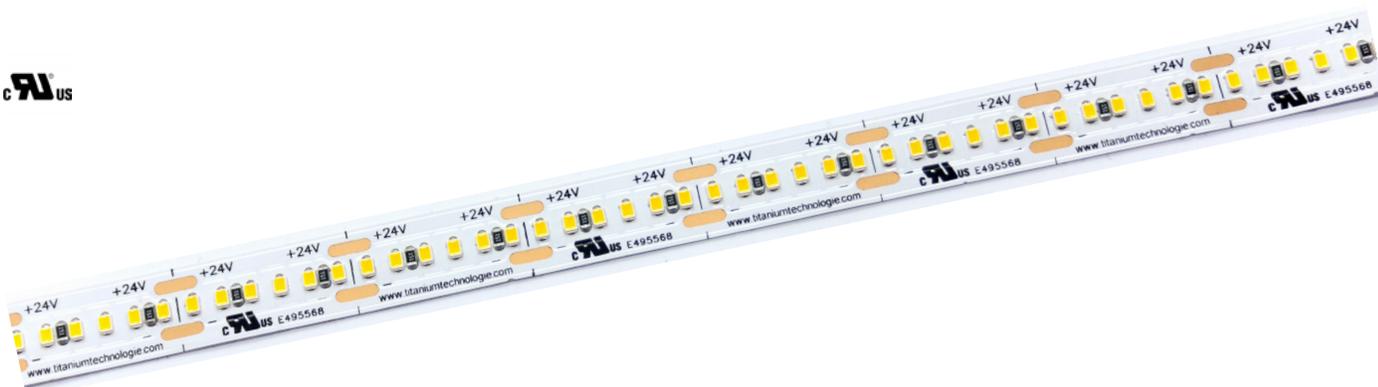

- Del SMD2216 tape in 5 meter roll.



Voltage	24vDC		
LED/m	300 /m		
Power	9,84w/m	16,40w/m	22,85w/m
	3w /feet 49,21w/roll	5w /feet 82,02w/roll.	6w /feet 114,25w/roll.
Amperage	0,39 / m	0,66 / m	0,82 / m
	0,12 / feet 1,95 / roll	0,2 / feet 3,3 / roll	0,25 / feet 4,1 / roll
Lumens	27K - 193 lm/feet	341 lm/feet	483 lm/feet
	30K - 243 lm/feet	391 lm/feet	433 lm/feet
	35K - 293 lm/feet	441 lm/feet	583 lm/feet
	40K - 343 lm/feet	491 lm/feet	633 lm/feet
	60K - 393 lm/feet	541 lm/feet	683 lm/feet
CRI	90		
Angle	120°		
Size	IP20	10mm x 1,1mm x 5000mm	
		³ / ₈ " x ¹ / ₁₆ " x 196 ⁷ / ₈ "	
Cut line	20 mm ³ / ₄ "		
Finish	White		
Dimmable	Yes		
LED Colour	27K - Warm white 2700K		
	30K - Warm white 3000K		
	35K - Neutral white 3500K		
	40K - Neutral white 4000K		
	50K - Cold white 6000K		
	R - Red G - Green B - Blue A - Amber		
Working temp.	-40°C ~ 70°C		
IP	20		



PRODUCT CODE

TT	- SMD	- LED PER ROLL	- IP	- POWER	- LED COLOR	- VOLTAGE
TT	- 2216	- L1500	- 20	- 3W	- 27K	- 24V
TT	- 2216	- L1500	- 20	-	-	- 24V

TITANIUM

TECHNOLOGY

TT-2835-L600

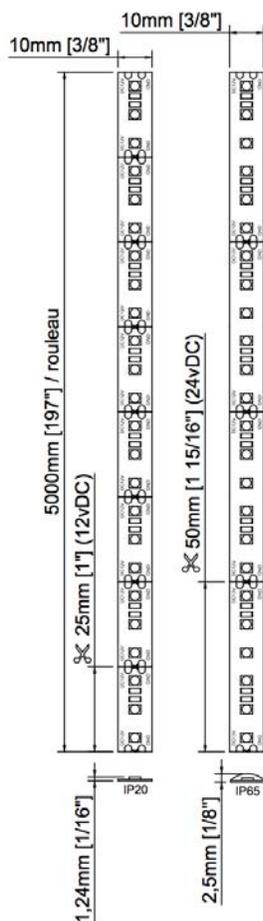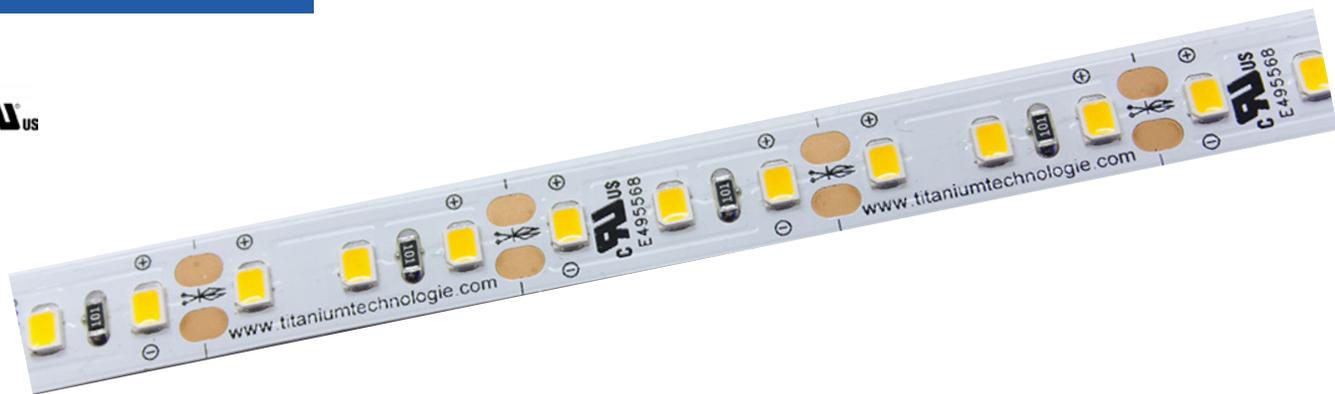

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	16,4w / m 5w / feet 82w / roll	
Amperage	1,37A / m 0,42A / feet 6,84A / roll	0,69A / m 0,21A / feet 3,42A / roll
Lumen	27K - 243 lm/ feet 30K - 221 lm/ feet 35K - 246 lm/ feet 40K - 218 lm/ feet 60K - 245 lm/ feet	61 lm/ w 49 lm/ w 57 lm/ w 51 lm/ w -
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm 3/8" x 1/16" x 1967/8"
	IP65	10mm x 2,5mm x 5000mm 3/8" x 1/8" x 1967/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 1967/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue CB - Crystal Blue A - Amber O - Orange P - Pink UV - UV 395~400nm	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	


PRODUCT CODE

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	2835	L600	20	27K	24V
TT	2835	L600			

TITANIUM

TECHNOLOGY

TT-2835-L600-CCT

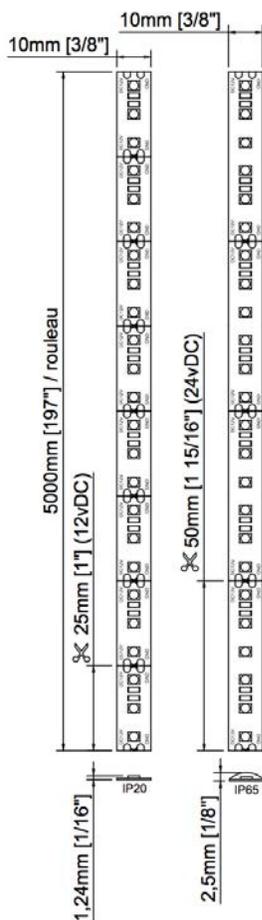

Voltage	24vDC	
LED/m	120 / m	
Power	15,6w / m 65,4w / roll	
Amperage	0,65A / m 2,7A / roll	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{16}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 2,5mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
Cut line	50 mm 2"	
Finish	White	
Dimmable	Yes	
LED Colour	CCT - 2000K-4000K	
Working temp.	-40°C ~ 70°C	
IP	20, 65	



PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2835	-	L600	-	20	-	CCT	-	24V
TT	-	2835	-	L600	-		-	CCT	-	24V

TITANIUM

TECHNOLOGY

TT-2835-L600-RGB

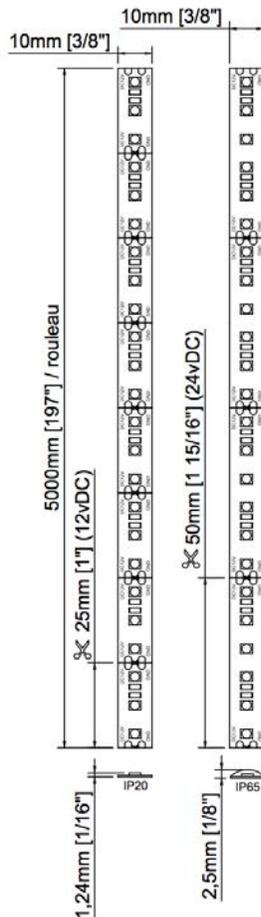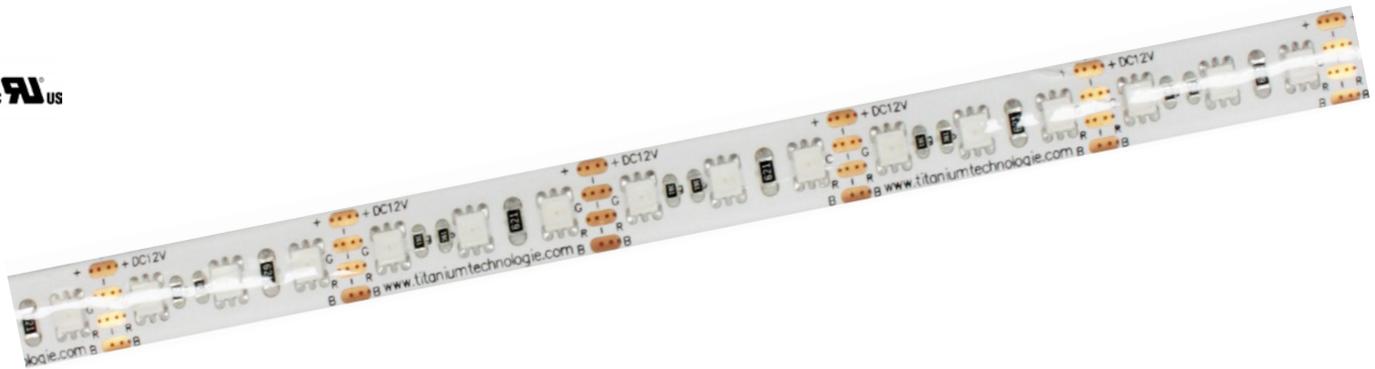

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	Red: 17,62 w / roll Green: 17,63 w /roll Blue: 16,4 w / roll All: 40 w / roll	Red: 20 w / roll Green: 24,7 w / roll Blue: 23,8 w / roll All: 62,4 w / roll
Amperage	Red: 1,47 A/roll Green: 1,47 A/roll Blue: 1,38 A/roll All: 3,34 A /roll	Red: 0,84 A/roll Green: 1 A/roll Blue: 0,98 A/roll All: 2,6 A /roll
Lumen	-	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm $\frac{3}{8}'' \times \frac{1}{16}'' \times 196\frac{7}{8}''$
	IP65	10mm x 2,5mm x 5000mm $\frac{3}{8}'' \times \frac{1}{8}'' \times 196\frac{7}{8}''$
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}'' \times \frac{3}{16}'' \times 196\frac{7}{8}''$
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	RGB - Color mixing	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2835	-	L600	-	20	-	RGB	-	24V
TT	-	2835	-	L600	-		-		-	24V


TITANIUM

TECHNOLOGY

TT-2835-L1200



- 5m roll of SMD2835 LED Strip in 5 meter roll.

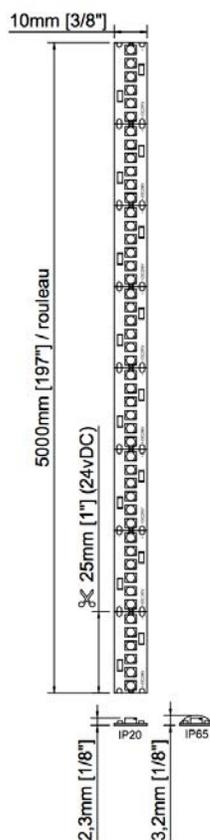

PRODUCT COLOR

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	2835	L1200	20	27K	24V
TT	2835	L1200	20		24V

Voltage	24vDC	
LED/m	240 / m	
Power	30,4 w / m 9,26 w / feet 152 w / roll	
Amperage	1,27 A / m 0,39 A / feet 6,34 A / roll	
Lumen	27K - 448 lm / feet 30K - 456 lm / feet 35K - 452 lm / feet 40K - 422 lm / feet 60K - 384 lm / feet	- 55 lm / w - 64 lm / w 57 lm / w
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP65	10mm x 3,2mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	25 mm 1"	
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20	


TITANIUM

TECHNOLOGY

TT-3528-L300



- 5m roll of SMD3528 LED Strip in 5 meter roll.

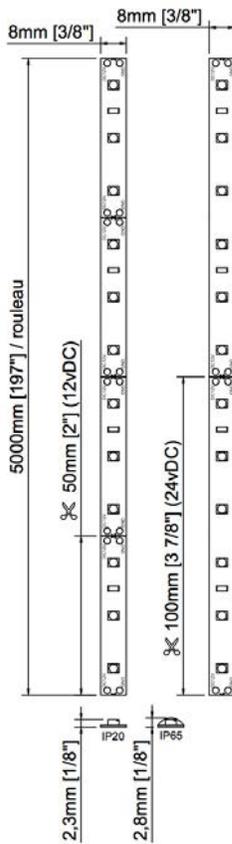

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	5,8w / m 1,77w / feet 29w / roll	
Amperage	0,49A / m 0,15A / feet 2,42A / roll	0,25A / m 0,07A / feet 1,21A / roll
Lumen	27K - 38 lm / feet 30K - 45 lm / feet 35K - 51 lm / feet 40K - 37 lm / feet 60K - 35 lm / feet	28 lm / w 32 lm / w 35 lm / w 28 lm / w 25 lm / w
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP65	10mm x 2,8mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	50 mm 2"	100 mm 4"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	3528	-	L300	-	20	-	27K	-	24V
TT	-	3528	-	L300	-		-		-	


TITANIUM

TECHNOLOGY

TT-3528-L600



- 5m roll of SMD3528 LED Strip in 5 meter roll.

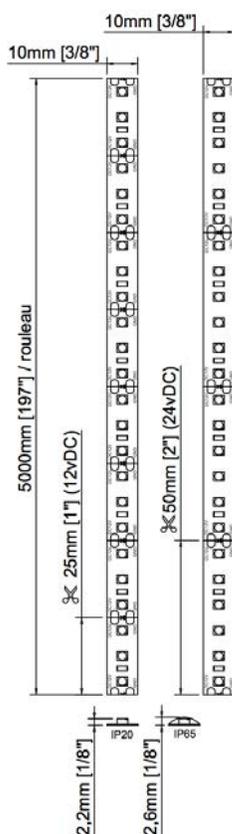

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	9,84w / m 3w / feet 49,2w / roll	
Amperage	0,82A / m 0,25A / feet 4,1A / roll	0,41A / m 0,13A / feet 2,05A / roll
Lumen	27K - 117 lm / feet 30K - 119 lm / feet 35K - 91 lm / feet 40K - 104 lm / feet 60K - 88 lm / feet	45 lm / w 44 lm / w 35 lm / w 39 lm / w 33 lm / w
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,2mm x 5000mm 3/8" x 1/8" x 1967/8"
	IP65	10mm x 2,6mm x 5000mm 3/8" x 1/8" x 1967/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 1967/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	3528	L600	20	27K	24V
TT	3528	L600			

TITANIUM

TECHNOLOGY

TT-3528-L600-5MM



- 5 meters roll

Voltage	24vDC	
LED/m	120 / m	
Power	9,84w / m 3w / feet 49,2w / roll	
Amperage	0,82A / m 0,25A / feet 4,1A / roll	
Lumen	27K - 117 lm / feet 30K - 119 lm / feet 35K - 91 lm / feet 40K - 104 lm / feet	
CRI (RA)	90	
Angle	120°	
Size	IP20	5mm x 2,2mm x 5000mm ³ / ₁₆ " x ¹ / ₈ " x 196 ⁷ / ₈ "
Cut line	50 mm 2"	
Finish	White	
Dimmable	Yes	
LED Colour	22K - Warm white 2200K 27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 50K - Cold white 5000K	
Working temp.	-40°C ~ 70°C	
IP	20	

PRODUCT CODE

TT	SMD	LED PER ROLL	IP	WIDTH	LED COLOUR	VOLTAGE
TT	3528	L600	20	5MM	27K	24V
TT	3528	L600	20	5MM		24V


TITANIUM

TECHNOLOGY

TT-5050-L300-RGBW 4:1



- 4 in 1 SMD5050 LED Strip.

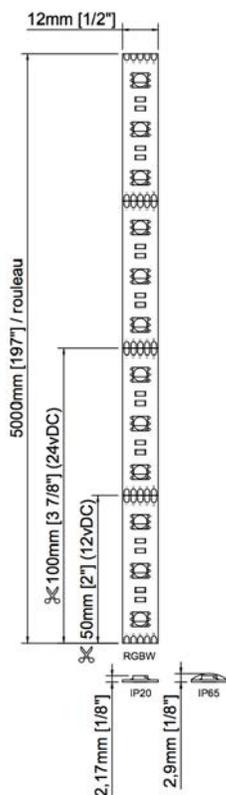

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	18,27w / m 5,57w / feet 91,35w / roll	
Amperage	1,53A / m 0,47A / feet 7,62A / roll	0,77A / m 0,23A / feet 3,81A / roll
Angle	120°	
Size	IP20	12mm x 2,17mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12mm x 2,9mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	50 mm 2"	100 mm 4"
Finish	White	
Dimmable	Yes	
LED Colour	RGBA - RGB + Amber 4:1 RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	5050	L300	20	RGB27K	24V
TT	5050	L300			


TITANIUM

TECHNOLOGY

TT-5050-L300-RGCCT 5:1



- 5m roll of SMD3535 LED Strip in 5 meter roll.

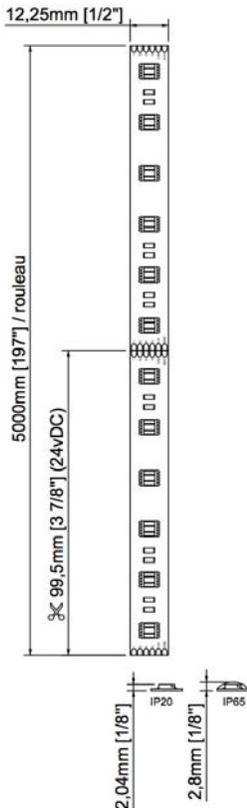

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	10,32w / m	13,44w / m
	3,24w / feet	4,08w / feet
	51,36 / roll	66,24 / roll
Amperage	0,86A / m	0,56A / m
	0,27A / feet	0,17A / feet
	4,28A / roll	2,76A / roll
Angle	120°	
Size	IP20	12mm x 2,04mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12mm x 2,8mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	99,5 mm 3 7/8"	
Finish	White	
Dimmable	Yes	
LED Colour	RGCCT - RGB + Warm white 3000K + Cold white 6000K	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	- SMD	- LED PER ROLL	- IP	- LED COLOR	- VOLTAGE
TT	- 5050	- L300	- 20	- RGCCT	- 24V
TT	- 5050	- L300	-	- RGCCT	-


TITANIUM

TECHNOLOGY

TT-DIGITAL-DMX-05V



- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

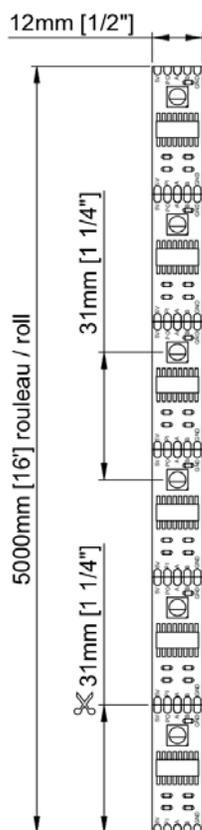

Voltage	5vDC	
LED/m	32 / m	
Power	w / m	
	w / feet	
	w / roll	
Amperage	A / m	
	A / feet	
	A / roll	
LED / pixel	1 LED / pixel	
Pixel / m	32 pixels / m	
Length / DMX universe	4 m (158") / DMX (RGBW)	
	5,3 m (209") / DMX (RGB)	
Angle	120°	
Size	IP20	12mm x 2,3mm x 5000mm 1/2" x 1/8" x 1967/8"
	IP67	16mm x 5mm x 5000mm 5/8" x 3/16" x 1967/8"
Cut line	31 mm 1 1/4"	
Finish	Black	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



PRODUCT CODE

TT	-	TYPE	-	SIGNAL	-	VOLTAGE	-	IP	-	LED COLOR
TT	-	DIGITAL	-	DMX	-	05V	-	20	-	RGB30K
TT	-	DIGITAL	-	DMX	-	05V	-		-	


TITANIUM

TECHNOLOGY

TT-DIGITAL-DMX-24V



- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

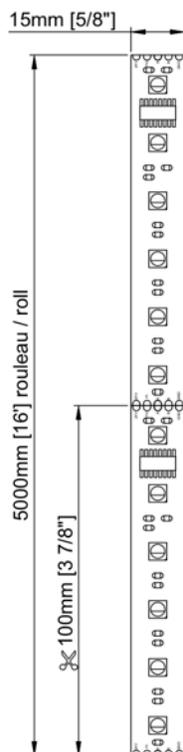

Voltage	24vDC	
LED/m	60 / m	
Power	w / m w / pied feet w / roll	
Amperage	A / m A / feet A / roll	
LED / pixel	6 LED / pixel	
Pixel / m	10 pixels / m	
Length / DMX universe	12,8 m (504") / DMX (RGBW) 17 m (670") / DMX (RGB)	
Angle	120°	
Size	IP20	15mm x 2,3mm x 5000mm $\frac{5}{8}'' \times \frac{1}{8}'' \times 196\frac{7}{8}''$
	IP67	16mm x 5mm x 5000mm $\frac{5}{8}'' \times \frac{3}{16}'' \times 196\frac{7}{8}''$
Cut line	100 mm 4"	
Finish	Black	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



TT-DIGITAL-DMX-WRITER

PRODUCT CODE

TT	-	TYPE	-	SIGNAL	-	VOLTAGE	-	IP	-	LED COLOR
TT	-	DIGITAL	-	DMX	-	24V	-	20	-	RGB30K
TT	-	DIGITAL	-	DMX	-	24V	-		-	

TITANIUM

TECHNOLOGY

TT-LLS-120-14



Accessories



TT-LLS-ACC-1M-AC



TT-LLS-ACC-GLU



TT-LLS-ACC-JNR



TT-LLS-ACC-PIN



TT-LLS-ACC-END



TT-LLS-ACC-PLG




TT-LLS-ACC-JMP-10

Voltage	100~130 vAC
LED/m	120 / m
Power	10w / m
Amperage	0.19A / m
Lumens	900lm / m
CRI	90
Size	14mm x 7mm x 50 000mm 9/16" x 5/16" x 1968 1/2"
Cut line	at each LED (see details)
Finish	White PCB, clear wrap
Dimmable	Yes 3%~100%
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
IP	67
Limited warranty	3 years

PRODUCT CODE

TT	-	TYPE	-	LED PER METER	-	WIDTH (mm)	-	LED COLOR	-	VOLTAGE
TT	-	LLS	-	120	-	14	-	30K	-	120V
TT	-	LLS	-	120	-	14	-		-	120V

CABINETS AND MILLWORK

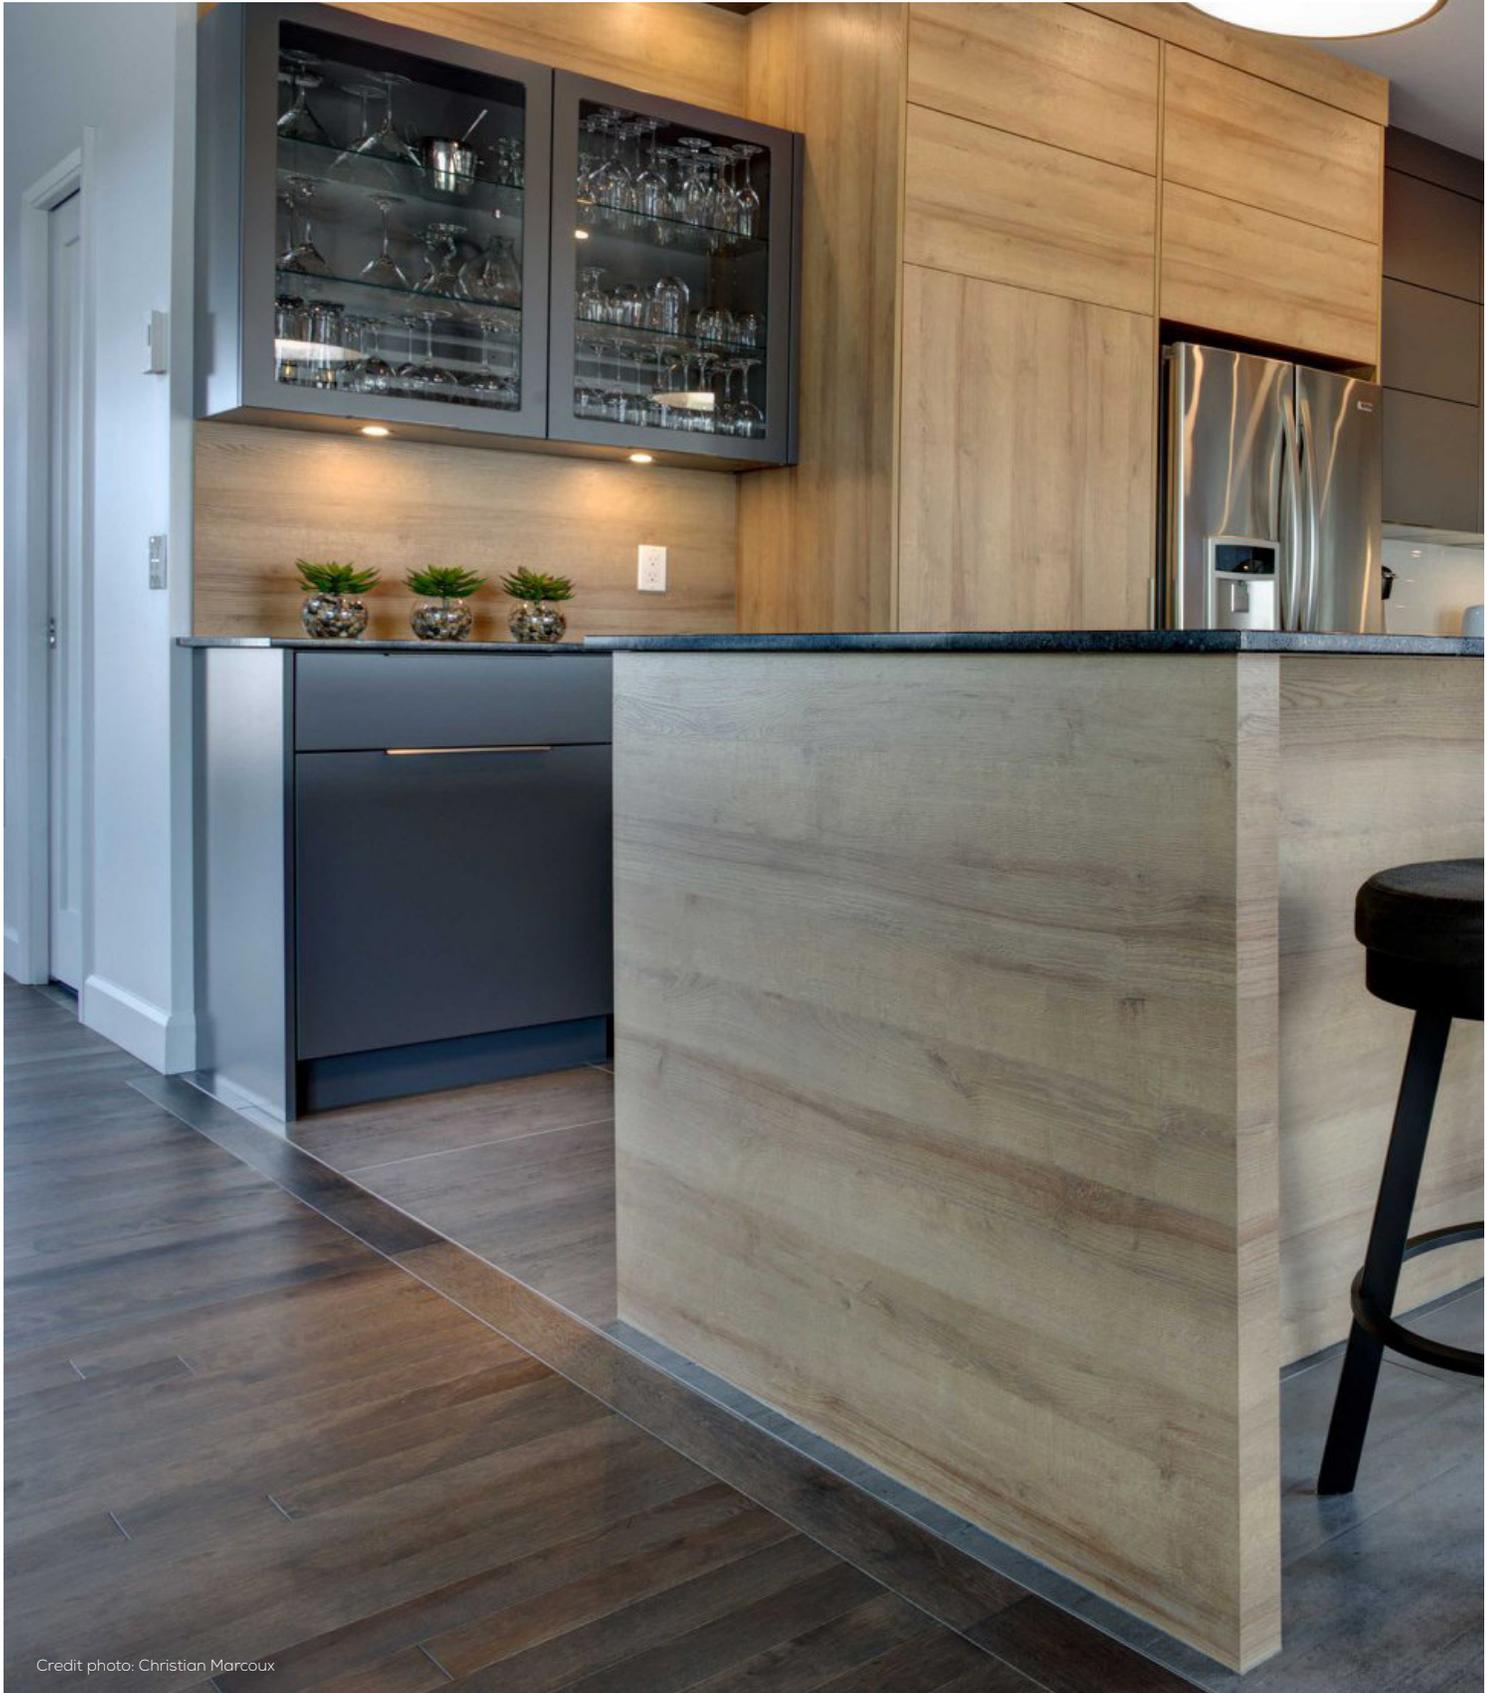

Credit photo: Christian Marcoux





Credit photo: Christian Marcoux



TT-PUCK-3W Page 188

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K 230	40K 240	60K 260	63



TT-PUCK-400-V4 Page 189

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K 330	40K 350	60K 360	63



TT-PUCK-2.2W Page 190

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Cut hole (mm)
12	2.2	175	56





TT-PUCK-3W



- Puck for kitchen cabinets.



Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	120°
CRI	90
Lumen	230 (30K) 240 (40K) 260 (60K)
Size	Ø70mm x 13mm Ø2 3/4" x 1/2"
Cut hole	63 mm 2 1/2"
Finish	W - White BK - Black C - Silver BR - Nickel Brush
Dimmable	Yes
Couleur DEL / LED Colour	27K - Warm white 2700K CCT - Warm white 3000K (W and BK finition) Neutral white 4000K
IP	20

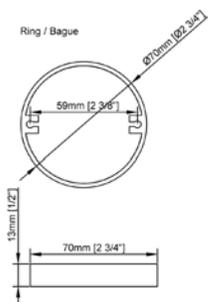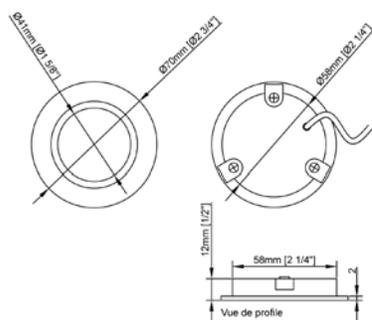

PRODUCT CODE

TT	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	PUCK	-	3W	-	BK	-	27K
TT	-	PUCK	-	3W	-		-	


TITANIUM

TECHNOLOGY

TT-PUCK-400-V4



- Puck for kitchen cabinets.

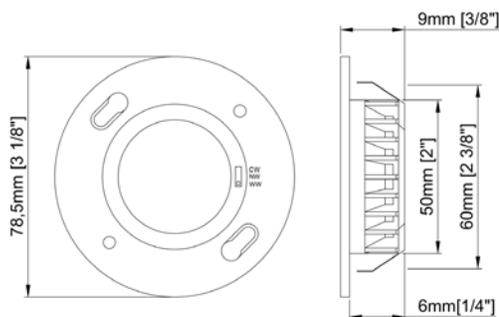

Voltage	12vDC	24vDC
Power	3w	
Amperage	0,25A	0.125A
Angle	120°	
Lumen	330 (30K) 350 (40K) 360 (60K)	
CRI	90	
Size	Ø78,5mm x 9mm Ø3 1/8" x 3/8"	
Cut hole	63 mm 2 1/2"	
Finish	W - White BK - Black C - Silver BR - Nickel Brush OR - Gold GM - Matte gold	
Dimmable	Yes	
LED Colour	CCT - Warm white 3000K Neutral white 4000K Cold white 5000K	
IP	20	

Accessories



PRODUCT CODE

TT	-	MODEL	-	TYPE	-	VOLTAGE	-	FINISH
TT	-	PUCK	-	400-V3	-	12V	-	BK
TT	-	PUCK	-	400-V3	-		-	

TITANIUM


TECHNOLOGY

TT-PUCK-2.2W



- Thin puck for kitchen cabinets.
- Three choice of finishing rings.

Voltage	12vDC
Power	2,2w
Amperage	0,183A
Angle	110°
Lumen	175 lm
CRI	90
Size	Ø75mm x 6mm Ø3" x 1/4"
Cut hole	56 mm 2 1/4"
Dimmable	Yes
LED Colour	27K - Warm white 7000K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
IP	20

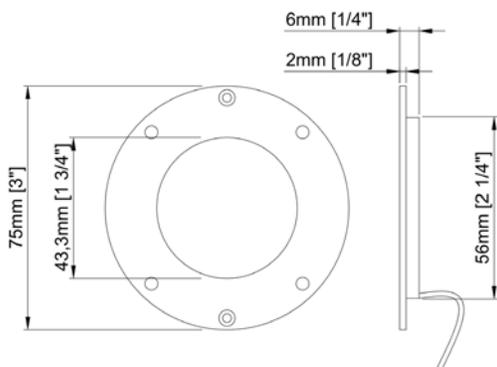

Accessories



TT-PUCK-2.2W-WH

TT-PUCK-2.2W-BN

TT-PUCK-2.2W-BK

TT-PUCK-2.2W-WH-A

TT-PUCK-2.2W-BN-A

TT-PUCK-2.2W-BK-A

PRODUCT CODE

TT	-	MODEL	-	POWER	-	LED COLOR
TT	-	PUCK	-	2.2W	-	27K
TT	-	PUCK	-	2.2W	-	


TITANIUM

TECHNOLOGY


TT-ACC-IR-01



- Recessed IR detector.

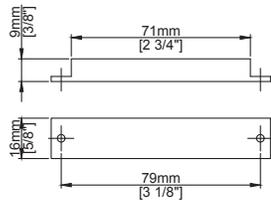


Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	10mm 3/8"

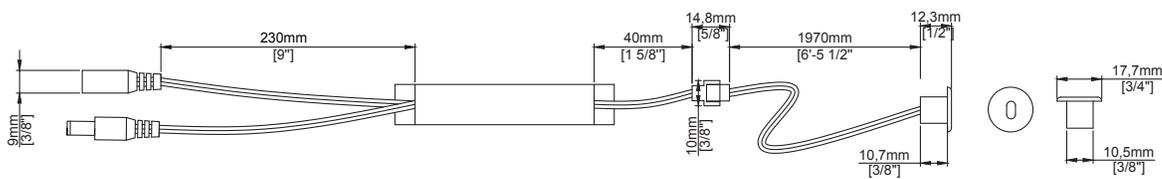


TT-ACC-IR-02



- Surface mount IR detector.

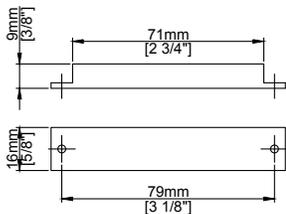

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm

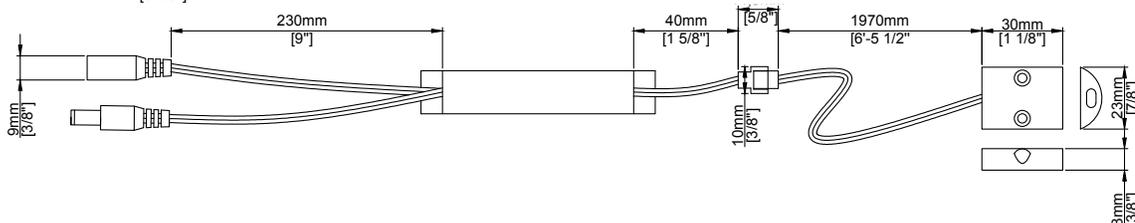


TITANIUM

TECHNOLOGY


TT-ACC-IR-05



- Double recessed IR detector.

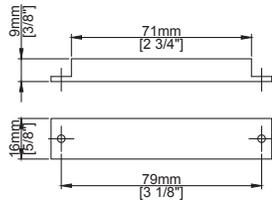


Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	10mm 3/8"

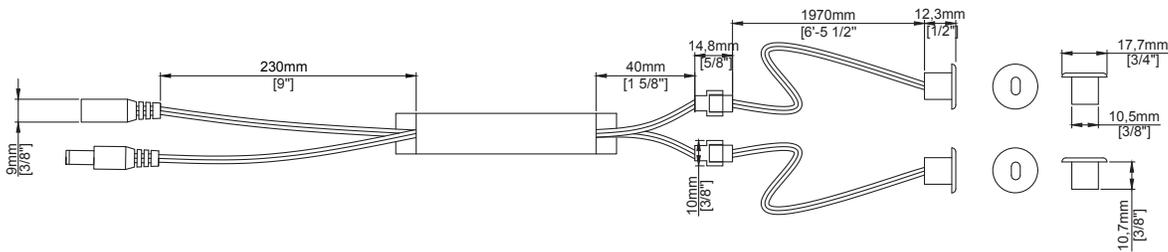


TT-ACC-IR-06



- Double surface mount IR detector.

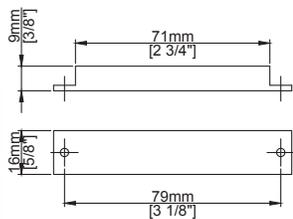

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm

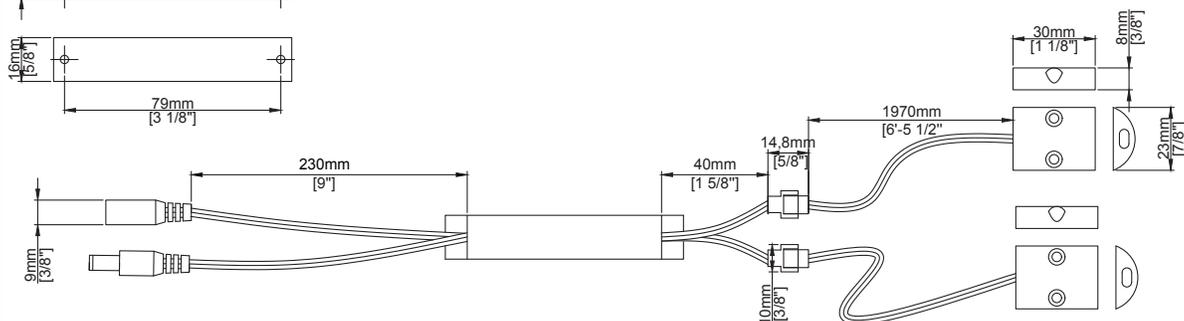

TITANIUM

TECHNOLOGY

TT-ACC-IR-11



- Recessed IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-12



- Surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC 3
----------	--------------

Power	6w-72w
-------	--------

Output input connector	2,1mm
------------------------	-------

TT-ACC-IR-15



- Double recessed IR detector.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	8mm 3/8"

TT-ACC-IR-16



- Double surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm

TT-U-13



- Touch dimmer.

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	14mm 1/2"

TT-U-14



- Touch switch.
- Pass on the surface of wood board

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	32mm 15/16"




- Recessed motion detector.

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	16mm 5/8"

ARCHITECTURAL



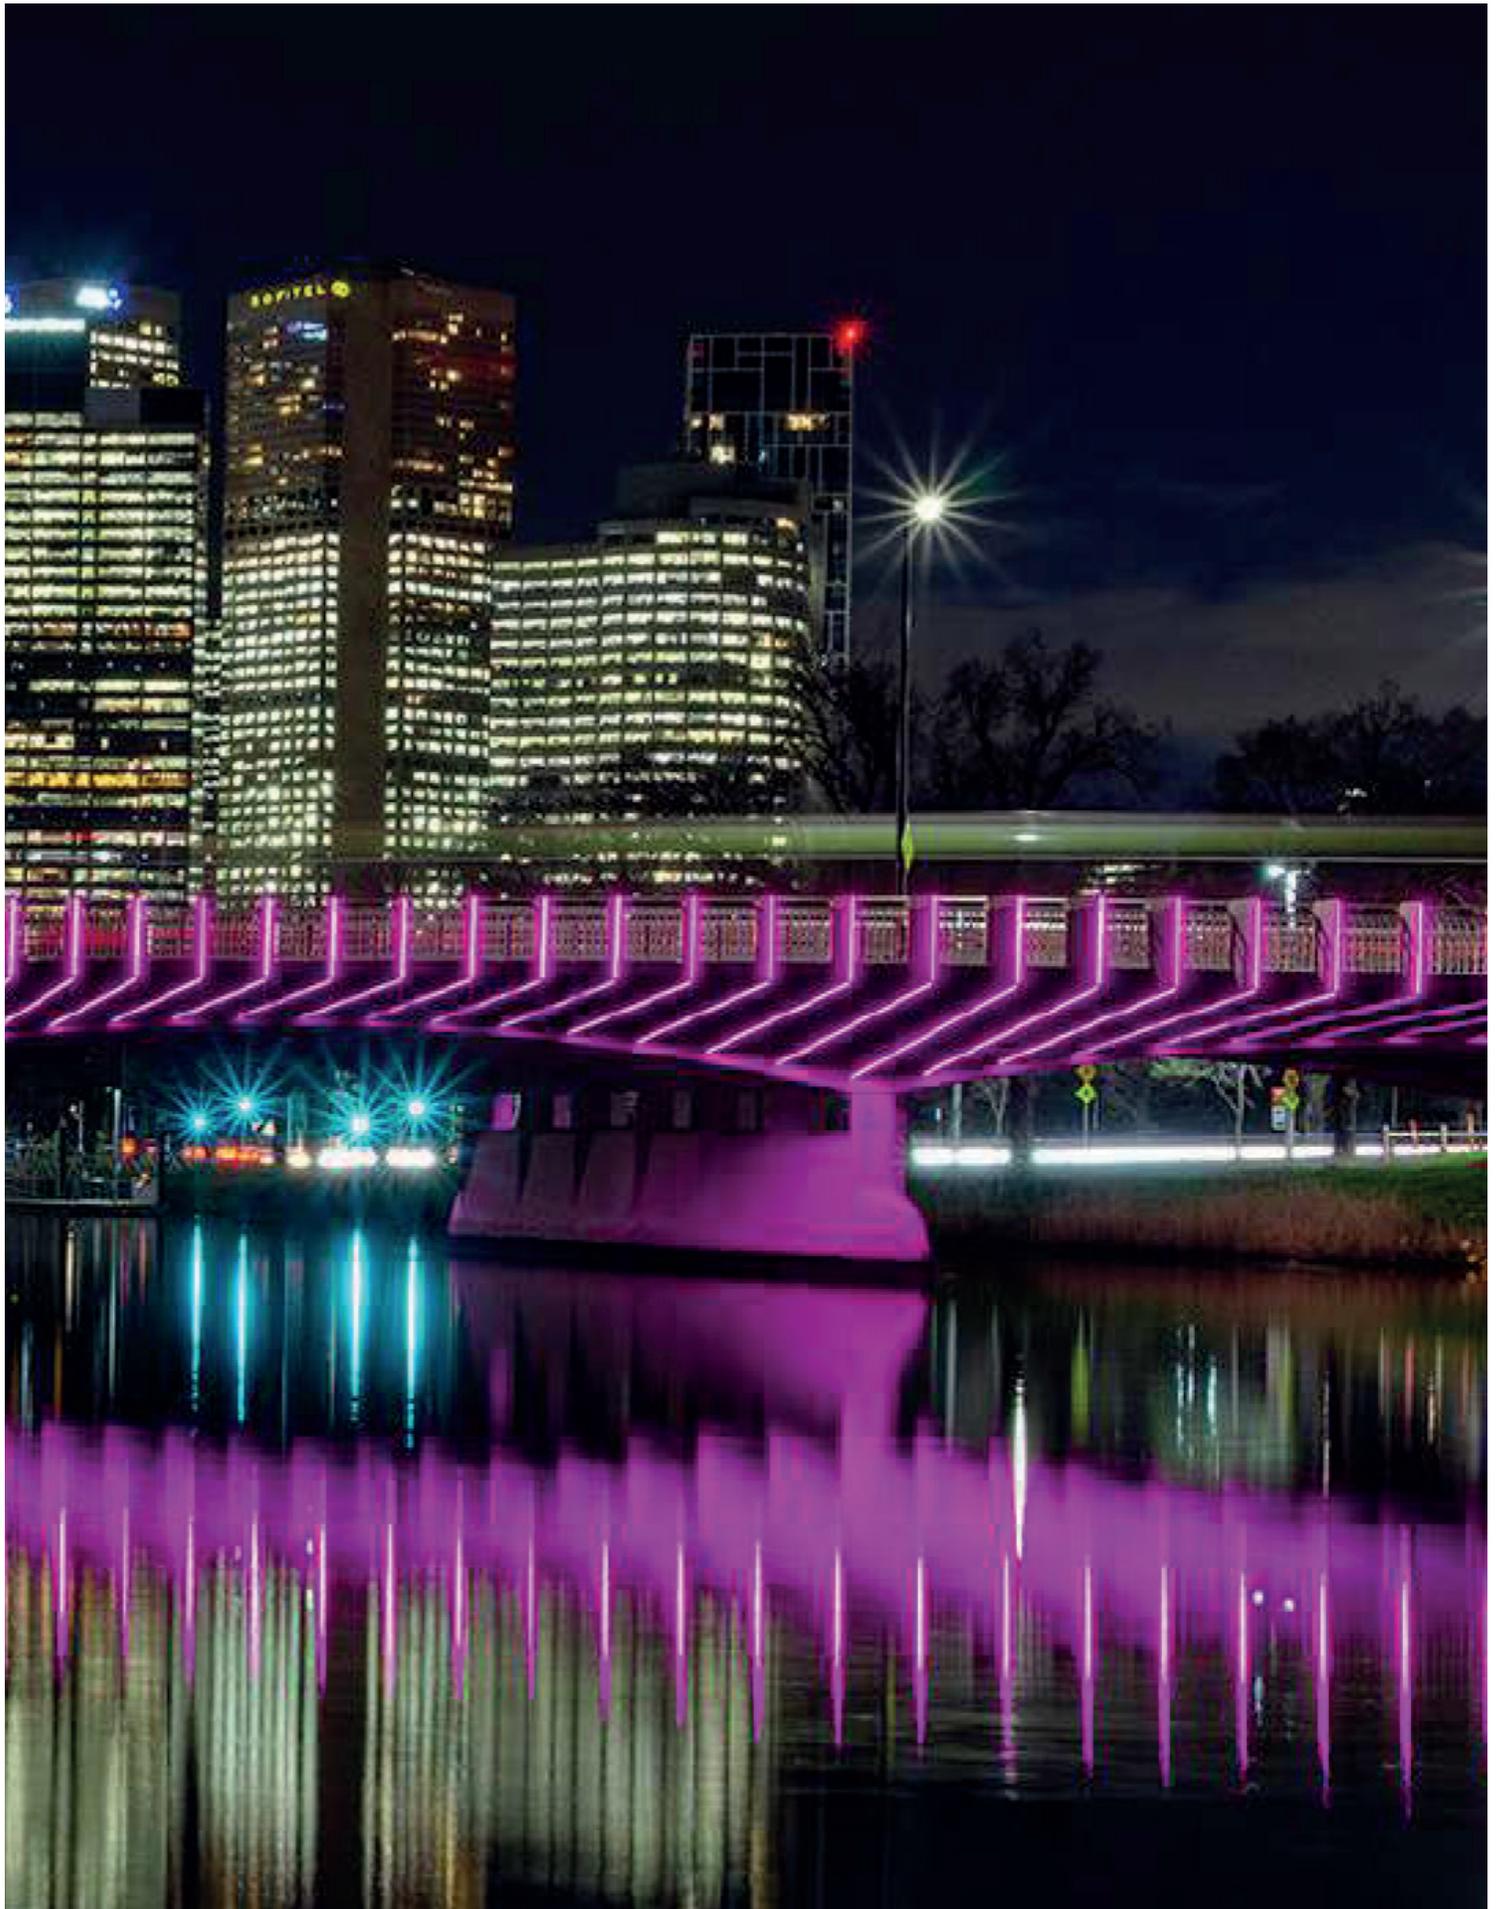



Credit photo: Salle Dussault



TT-FL02-6W Page 203

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	6	15	Whites - Triac RGBW - DMX



TT-FL02-18W Page 204

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	18	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-24W Page 205

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	24	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-36W Page 206

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
120	36	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL05-60W Page 207

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
120	60	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-65W Page 208

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
120	65	8, 15, 25, 45, 60, 10 x 30°	Whites - Triac RGBW - DMX



TT-FL07-100W Page 209

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
120	100	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-192W Page 210

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
120	192	One color - 8 RGBW - 15, 10 x 30°	Whites - Triac RGBW - DMX



TT-FL04-24W-RGBW Page 211

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	24	15, 30	DMX





TT-FL04-24W Page 212

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	24	15, 30	DMX



TT-FL04-12W Page 213

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	12	15, 30	DMX



TT-FL10-150W Page 214

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
100 ~ 277	150	One color - 8, 30, 40, 60 RGBW - 25	Whites - Triac RGBW - DMX



TT-UGD-001-2W Page 215

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
-	-	-	-



TT-UGD-001-3W Page 216

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	3	15	Triac



TT-UGD-001-6W Page 217

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
24	6	15	Triac



TT-STEP Page 218

Voltage (vDC)	Power (W/m)	Angle beam (°)	Control
12	0,7 0,8 RGB	-	Whites - Triac RGBW - PMW






TITANIUM

TECHNOLOGY

TT-FL02-6W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

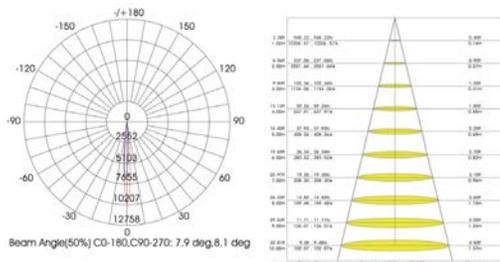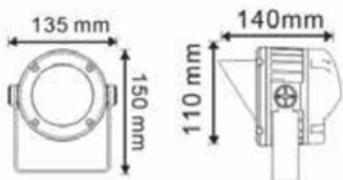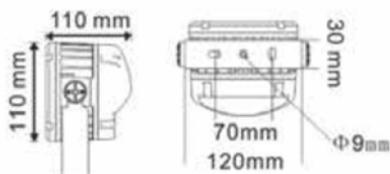

Voltage	24vDc
Power	6w
Amperage	0,25A
Angle	15°
Size	100 x 110 x 150mm 3 ¹⁵ / ₁₆ " x 4 ⁵ / ₁₆ " x 5 ¹⁵ / ₁₆ "
Finish	BK - Black WH - White GR - Grey
Dimmable	Yes
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K
IP	66
Operating temperature	-30°C ~ 45°C

PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	6W	15	RGB30K	BK
TT	FL02	6W	15		


TITANIUM

TECHNOLOGY

TT-FL02-18W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

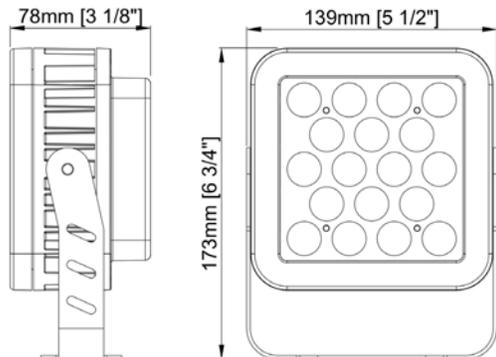

Voltage	24vDC	
Power	18w	
Amperage	0,75A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	173 x 139 x 78 mm 6 ³ / ₄ " x 5 ¹ / ₂ " x 3 ¹ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Weight	1,94 Kg	
Operating temperature	-40°C ~ 50°C	

PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	18W	8	RGB30K	BK
TT	FL02	18W			


TITANIUM

TECHNOLOGY

TT-FL02-24W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

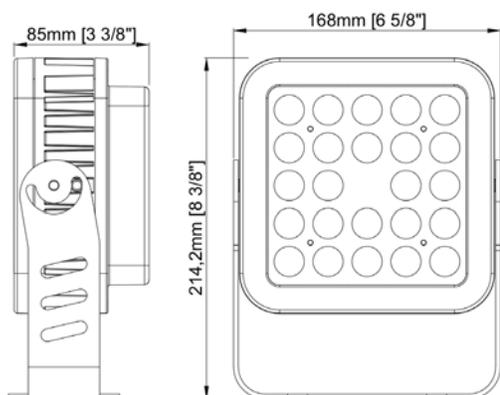

Voltage	24vDC	
Power	24w	
Amperage	1A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	214 x 168 x 85 mm 8 ³ / ₈ " x 6 ⁵ / ₈ " x 3 ³ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	

PRODUCT CODE

TT	- MODEL	- POWER	- ANGLE	- LED COLOR	- FINISH
TT	- FL02	- 24W	- 8	- RGB30K	- BK
TT	- FL02	- 24W	-	-	-


TITANIUM

TECHNOLOGY

TT-FL02-36W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

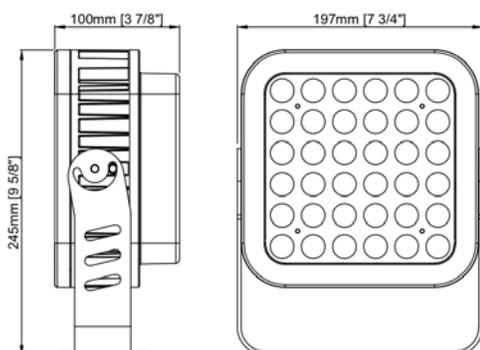

Voltage	120vAC	
Power	36w	
Amperage	0,3A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	245 x 197 x 100 mm 9 ⁵ / ₈ " x 7 ³ / ₄ " x 3 ⁷ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	

PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	36W	8	RGB30K	BK
TT	FL02	36W			



TITANIUM

TECHNOLOGY

TT-FL05-60W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

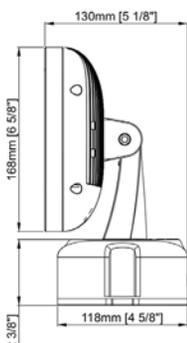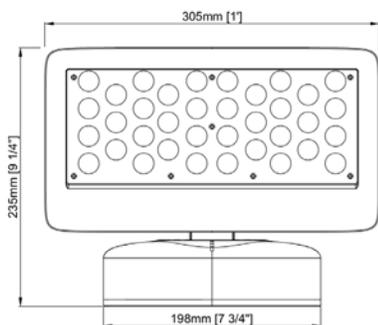

Voltage	120vAC	
Power	60w	
Amperage	0,5A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	235 x 305 x 130 mm 9 1/4" x 1" x 5 1/8"	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	

PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL05	-	60W	-	8	-	RGB30K	-	BK
TT	-	FL05	-	60W	-		-		-	


TITANIUM

TECHNOLOGY


TT-FL02-65W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

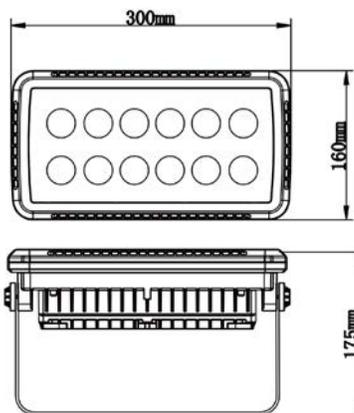

Voltage	120vAC
Power	65w
Amperage	0,83A
Angle	8°, 15°, 25°, 45°, 60°, 10 x 30°
Size	300 x 160 x 175 mm 15" x 9 ¹ / ₈ " x 4 ³ / ₄ "
Finish	BK - Black WH - White GR - Grey
Dimmable	Yes
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K
IP	66
Operating temperature	-30°C ~ 45°C

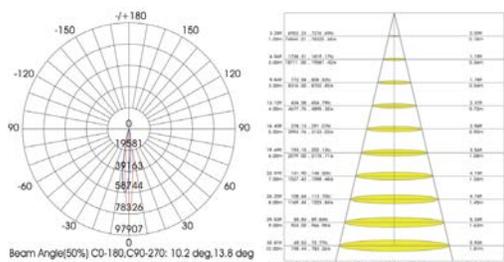

PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	65W	8	RGB30K	BK
TT	FL02	65W			



TITANIUM

TECHNOLOGY

TT-FL07-100W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

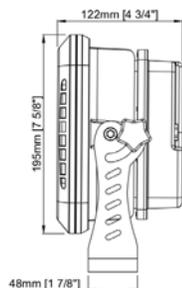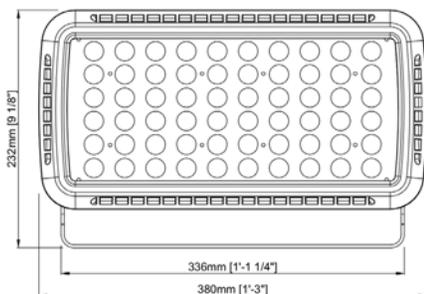

Voltage	120vAC	
Power	100w	
Amperage	0,83A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	380x 232 x 122 mm 15" x 9 ¹ / ₈ " x 4 ³ / ₄ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	

PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL07	-	100W	-	8	-	RGB30K	-	BK
TT	-	FL07	-	100W	-		-		-	



TITANIUM

TECHNOLOGY

TT-FL02-192W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

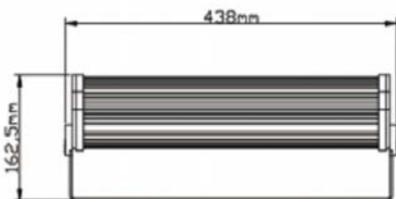

Voltage	120vAC	
Power	192w	
Amperage	1,6A	
Angle	one colour	8°
	RGBW	15°, 10 x 30°
Size	438 x 182 x 163mm 17 ¹ / ₄ " x 7 ⁵ / ₁₆ " x 6 ⁷ / ₁₆ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	30K, 40K, 60K	Yes via Triac
	RGBW	Yes via DMX
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-30°C ~ 45°C	

PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	192W	8	RGB30K	BK
TT	FL02	192W			



TITANIUM

TECHNOLOGY


TT-FL04-36W-RGBW



- RGBW quad bar.
- Twelve channels DMX.
- Waterproof connector

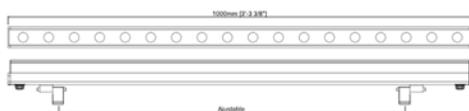

Voltage	24vDC
Power	24w
Amperage	1A
Angle	15°, 30°
Size	1000mm x 45mm x 75mm 39 ³ / ₈ " x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (12 channels)
LED Colour	RGB30K - RGB + Warm white 3000K RGB40K - RGB + Neutral white 4000K RGB50K - RGB + Cold white 5000K
IP	65

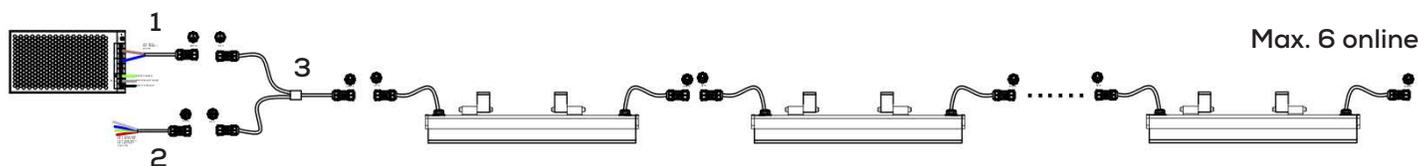

Accessories



PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR
TT	FL04	24W	15	RGB30K
TT	FL04	24W		



TITANIUM

TECHNOLOGY

TT-FL04-36W



- Whites quad bar.
- Twelve channels DMX.
- Waterproof connector

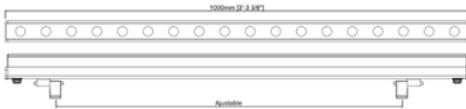

Voltage	24vDC
Power	24w
Amperage	1A
Angle	15°, 30°
Size	1000mm x 45mm x 75mm 39 ³ / ₈ " x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (12 channels)
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 50K - Neutral white 5000K
IP	65



Accessories



PRODUCT COLOR

TT	MODEL	POWER	ANGLE	LED COLOR
TT	FL04	24W	15	30K
TT	FL04	24W		



TITANIUM

TECHNOLOGY

TT-FL04-15W



- RGBW quad bar.
- Four channels DMX.
- Waterproof connector

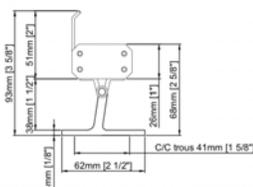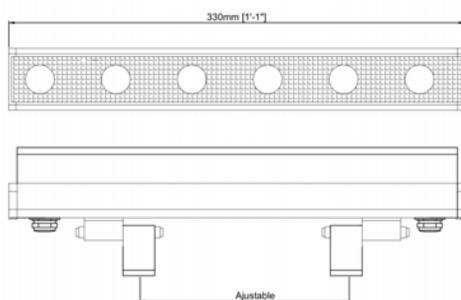

Voltage	24vDC
Power	12w
Amperage	0,5A
Angle	15°, 30°
Size	330mm x 45mm x 75mm 13" x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (4 channels)
LED Colour	RGB30K - RGB + Warm white 3000K
	RGB40K - RGB + Neutral white 4000K
	RGB50K - RGB + Cold white 5000K
	30K - Warm white 3000K
	40K - Neutral white 4000K
50K - Neutral white 5000K	
IP	65

PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR
TT	-	FL04	-	12W	-	15	-	RGB30K
TT	-	FL04	-	12W	-		-	



TITANIUM

TECHNOLOGY

TT-FL10-150W



- Tough strong design, IP66 wallwasher light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of led fixtures. The light body adopts #6063 aluminium alloy molding, surface with anodizing treatment, lampshade adopts imported tempered glass, has excellent rainwater clean ability.

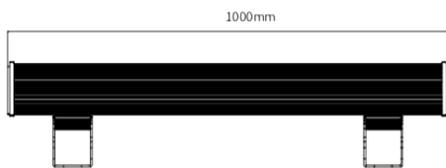

Voltage	100~277vAC	
Power	150w	
Amperage	1,25A	
Angle	one colour	8°, 30°, 40°, 60°
	RGBW	25°
Size	1000x 236 x 136 mm	
	39" x 9 ¹ / ₄ " x 5 ³ / ₈ "	
Finish	BK - Black	
	WH - White	
	GR - Grey	
Dimmable	30K, 40K, 60K	No
	RGBW	Yes via DMX
LED Colour	RGB50K - RGB + Cold white 5000K 4:1	
	50K - Cold white 5000K	
IP	66	
Operating temperature	-40°C ~ 50°C	


PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL10	150W	8	RGB30K	BK
TT	FL10	150W			



TITANIUM

TECHNOLOGY

TT-UGD-001-2W

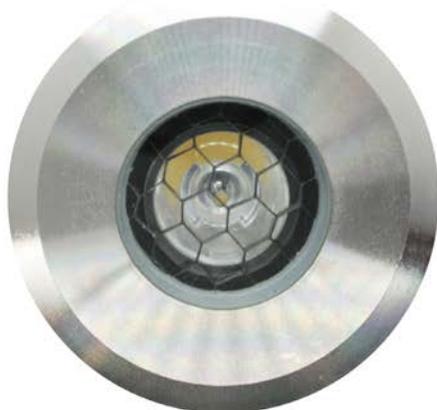

- IP67 light, water resistant, for indoor use, outdoor and humid place.

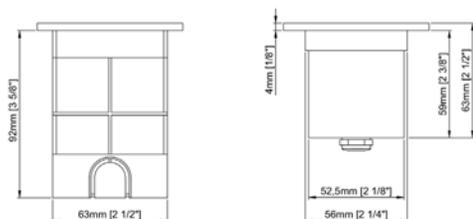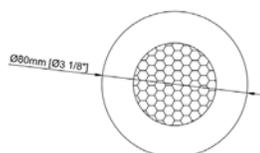

Voltage	24vDC
Power	6w
Amperage	0,25A
Angle	15°
Size	Ø80 mm x 63 mm Ø3 1/8" x 2 1/2"
Cut hole	56 mm 2 1/4"
Finish	Nickel brush
Dimmable	Yes
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 5 0000K
IP	67
Operating temperature	-40°C ~ 50°C


PRODUCT CODE

TT	MODEL	TYPE	POWER	ANGLE	LED COLOR
TT	UGD	001	2W	15	30K
TT	UGD	001	2W	15	


TITANIUM

TECHNOLOGY

TT-UGD-001-3W

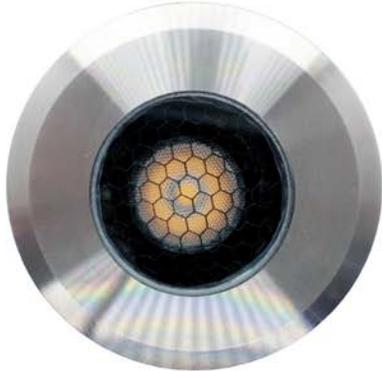

- IP67 light, water resistant, for indoor use, outdoor and humid place.

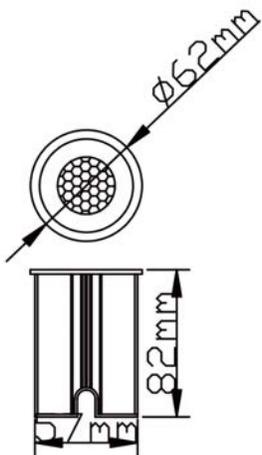

Voltage	24vDC
Power	3w
Amperage	0,125A
Angle	15°
Size	Ø62 X 82mm Ø2 ⁷ / ₁₆ " x 3 ¹ / ₄ "
Cut hole	56 mm 2 ¹ / ₄ "
Finish	Nickel brush
Dimmable	Yes
LED Colour	27K - Warm white 2700K
	30K - Warm white 3000K
	40K - Neutral white 4000K
	60K - Cold white 5 0000K
IP	67
Operating temperature	-30°C ~ 45°C

PRODUCT CODE

TT	MODEL	TYPE	POWER	ANGLE	LED COLOR
TT	UGD	001	3W	15	30K
TT	UGD	001	3W	15	


TITANIUM

TECHNOLOGY

TT-UGD-001-6W



- IP67 light, water resistant, for indoor use, outdoor and humid place.

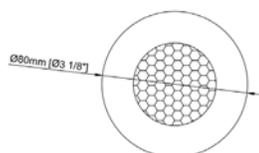

Voltage	24vDC
Power	6w
Amperage	0,25A
Angle	15°
Size	Ø80 mm x 63 mm Ø3 1/8" x 2 1/2"
Cut hole	56 mm 2 1/4"
Finish	Nickel brush
Dimmable	Yes
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 5 0000K
IP	67
Operating temperature	-40°C ~ 50°C

PRODUCT CODE

TT	MODEL	TYPE	POWER	ANGLE	LED COLOR
TT	UGD	001	6W	15	30K
TT	UGD	001	6W	15	


TITANIUM

TECHNOLOGY

TT-STEP



- IP65 light, water resistant, for indoor use, outdoor and humid place.
- Ideal for stairs.

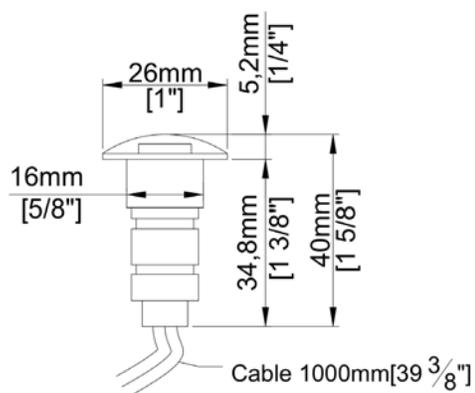

Voltage	12vDC
Power	0,7W RGB 0.8W
Amperage	0,06A
Lumen	17 lm (30K) 20 lm (40K) 22 lm (50K)
Size	Ø26mm x 40mm Ø1" x 1 5/8"
Cut hole	16mm 5/8"
Finish	SA - Silver
Dimmable	Yes
LED Colour	30K - Warm white 3000K
IP	65

PRODUCT CODE

TT	-	MODEL	-	FINISH	-	LED COLOR
TT	-	STEP	-	SA	-	30K
TT	-	STEP	-	SA	-	

RECESSED SPOTLIGHT



Credit photo: Dualtech





Credit photo: Armoire Passion



TT-DOWN-007-3W Page 224

Voltage (vDC)	Power (W/m)	Luminous flux			Cut hole (mm)	Dimmable
		30K	40K	60K		
12	3	150	165	180	45	Yes



TT-DOWN-008-3W Page 225

Voltage (vDC)	Power (W/m)	Luminous flux			Cut hole (mm)	Dimmable
		30K	40K	60K		
12	3	150	165	180	50	Yes



TT-DOWN-016 Page 226

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)	Cut hole (mm)	Dimmable



TT-P120D-9W-120V Page 227

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)	Cut hole (mm)	Dimmable



TT-P120D-9W-12V Page 228

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)	Cut hole (mm)	Dimmable



TT-P120S Page 229

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)	Cut hole (mm)	Dimmable



TT-P120 Page 230

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)	Cut hole (mm)	Dimmable




TITANIUM

TECHNOLOGY

TT-DOWN-007-3W



- Recessed spotlight with adjustable beam.

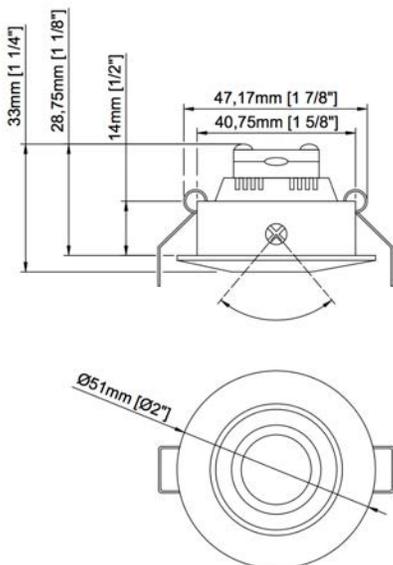

Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	15°, 30°, 45°, 60°
Lumen	150 (30K) 165 (40K) 180 (60K)
Size	Ø51 mm x 32 mm Ø2" x 1 1/4"
Cut hole	45 mm 1 3/4"
Finish	WH - White C - Silver BK - Black
Dimmable	Yes
LED Colour	30K - Warm white 2800~3200K 40K - Neutral white 4000~4500K 60K - Cold white 6000~6500K
IP	44

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	DOWN	-	007	-	3W	-	BK	-	30K
TT	-	DOWN	-	007	-	3W	-		-	




TITANIUM

TECHNOLOGY

TT-DOWN-008-3W



- Recessed spotlight with adjustable beam.

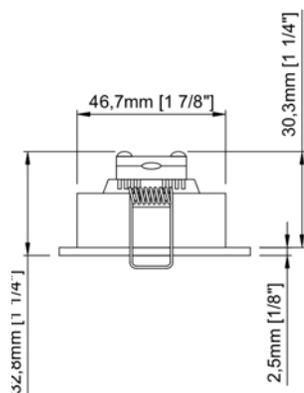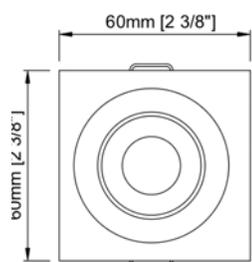

Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	15°, 30°, 45°, 60°
Lumen	150 (30K) 165 (40K) 180 (60K)
Size	60 mm x 60 mm x 32 mm 2 ³ / ₈ " x 2 ³ / ₈ " x 1 ¹ / ₄ "
Cut hole	50 mm 2"
Finish	WH - White C - Silver BK - Black
Dimmable	Yes
LED Colour	30K - Warm white 2800~3200K 40K - Neutral white 4000~4500K 60K - Cold white 6000~6500K
IP	44

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	DOWN	-	008	-	3W	-	BK	-	30K
TT	-	DOWN	-	008	-	3W	-		-	


TITANIUM

TECHNOLOGY


TT-DOWN-016



- This light fixture features a RGB +Tunable white COB that communicated through Hue/ Echo Plus hub
- Suitable for damp location.
- 120vAC junction box include.

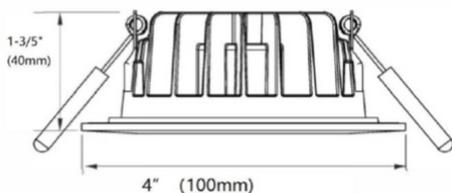

Voltage	120vAC, 12vDC
Power	12W
Amperage	1A
Angle	60°
Lumen	72lm/w
Size	Ø100mm x 40mm Ø4" x 1 ⁵ / ₈ "
Cut hole	86mm 3 ³ / ₈ "
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes with app
LED Colour	RGBCCT - RGB + Warm white 2700K + Cold white 5000K
IP	44

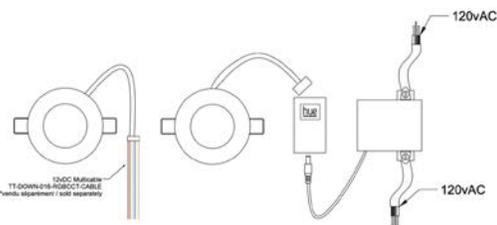

Accessories



PHILIPS HUE BRIDGE V2



TT-DOWN-016-RGCCT-CABLE

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	LED COLOR	-	FINISH
TT	-	DOWN	-	016	-	RGBCCT	-	BK
TT	-	DOWN	-	016	-	RGBCCT	-	

TITANIUM


TECHNOLOGY

TT-P120D-9W-120V



- Recessed with 120vAC junction box.
- Ideal for suspended ceilings and restricted place in clearance.
- Adjustable beam.
- Color temperature selector for the CCT version.
- Color temperature dimmable according to intensity for DW version (100% -3000K to 10% -2000K)

Voltage	120vAC
Power	9W
Amperage	0,06A
Angle	40°
Lumen	800~850
CRI	90
Size	Ø121 mm x 30mm Ø 4 ³ / ₄ " x 1 ¹ / ₈ "
Cut hole	102mm 4"
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes 27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K CCT - White 3000K-4000K-5000K DIM - Dim to warm 3000K~2000K
LED Colour	
IP	44

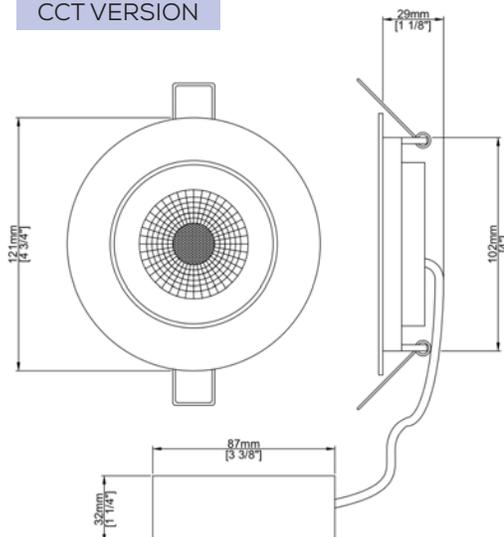

PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOR	VOLTAGE
TT	P120D	9W	BK	27K	120V
TT	P120D	9W			120V


TITANIUM

TECHNOLOGY

TT-P120D-9W-12V



- Ideal for suspended ceilings and restricted place in clearance..
- Adjustable beam.

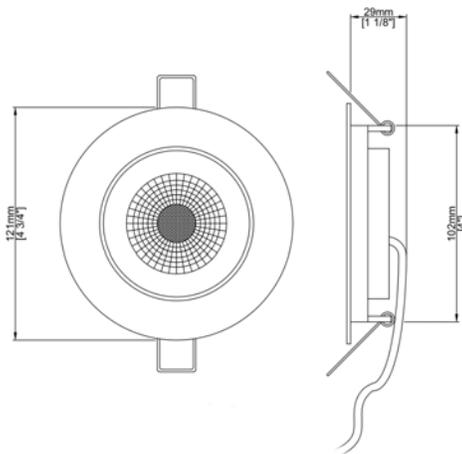

Voltage	12vDC
Power	9W
Amperage	0,75A
Angle	40°
Lumen	800~850
Size	Ø121 mm x 30mm Ø 4 ³ / ₄ " x 1 ¹ / ₈ "
Cut hole	102mm 4"
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K -Cold white 5000K
IP	44

PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOR	VOLTAGE
TT	P120D	9W	BK	27K	12V
TT	P120D	9W			12V


TITANIUM

TECHNOLOGY


TT-P120S



- Slim recessed.
- Ideal for suspended ceilings and places with limited clearance.
- Adjustable beam.
- 360° rotation module and 90° tilt

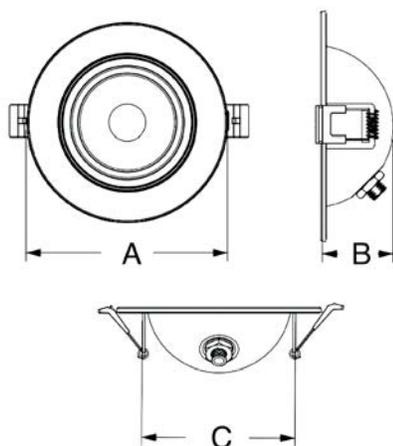

Voltage	120vAC		
Power	7W	9W	12W
Amperage	0,07A	0,08A	0,11A
Angle	40°		
Lumen	690lm	850lm	-
CRI	90		
Size	Ø111mm x 35mm Ø 4 ³ / ₆ " x 1 ³ / ₈ "	Ø125 mm x 39.5mm Ø 4 ¹⁵ / ₁₆ " x 1 ¹ / ₂ "	Ø191 mm x 51mm Ø 7 ¹ / ₂ " x 2"
Cut hole	85mm 3 ¹ / ₂ "	95mm 3 ³ / ₄ "	153mm 6"
Finish	WH - White BR - Brush nickel BK - Black		
Dimmable	Yes		
LED Colour	CCT - Blanc 2700K-3000K-3500K- 4000K-5000K		
Operating temperature	-40°C~40°C		
IP	44 (damp location)		

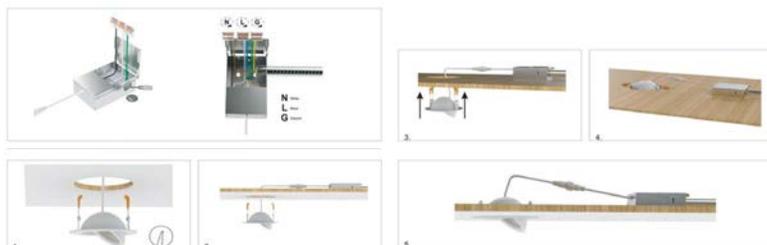

PRODUCT CODE

TT	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	P120S	-	9W	-	BK	-	CCT
TT	-	P120S	-		-		-	CCT


TITANIUM

TECHNOLOGY


TT-P120



- Ideal for suspended ceilings and restricted place in clearance.

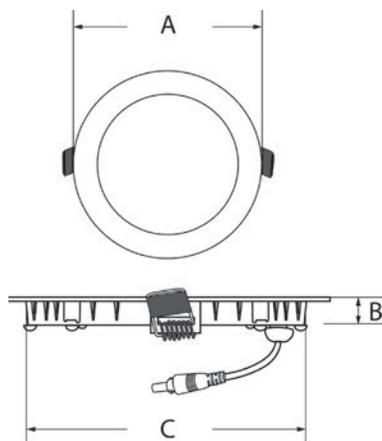

Voltage	120vAC		
Power	7W	9W	12W
Amperage	0,05A	0,08A	0,11A
Angle	120°		
Lumen	680lm	800lm	1000lm
CRI	80		
Cut hole	70mm 2 ³ / ₄ "	105mm 4 ¹ / ₈ "	156mm 6 ¹ / ₈ "
Finish	WH - White BK - Black		
Dimmable	Yes		
LED Colour	CCT - Blanc 2700K-3000K-3500K- 4000K-5000K		
Operating temperature	-40°C~40°C		
IP	65 (wet location)		

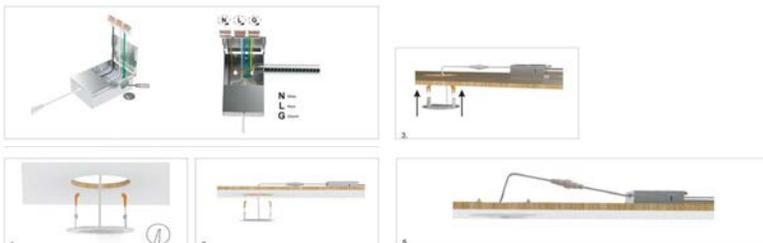

PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOUR
TT	P120	9W	BK	CCT
TT	P120			CCT

TRACK LIGHTING SYSTEM







TT-TRK-TRACK Page 241

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	-	-	-



TT-TRK-TRACK-PL Page 242

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	-	-	-



TT-TRK-1X1 Page 243

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	2	120	34



TT-TRK-3X1 Page 244

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	380	34



TT-TRK-6X1 Page 245

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-12X1 Page 246

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	1550	34



TT-TRK-3X1D Page 247

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	380	34



TT-TRK-6X1D Page 248

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-12X1D Page 249

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	1550	34





TT-TRK-322 Page 250

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	13	980	120



TT-TRK-640 Page 251

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	26	1900	120



TT-TRK-958 Page 252

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	39	2850	120



TT-TRK-84D Page 253

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	280	120



TT-TRK-164D Page 254

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	500	120



TT-TRK-323D Page 255

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	980	120



TT-TRK-BALL Page 256

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	360



TT-TRK-15 Page 257

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	380	120



TT-TRK-30 Page 258

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	880	120



TITANIUM

TECHNOLOGY



TT-TRK-5W-1 Page 259

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	440	40



TT-TRK-5W-2 Page 260

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	2 x 5W	880	40



TT-TRK-8W-1 Page 261

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	20



TT-TRK-10W-1 Page 262

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	24



TT-TRK-15W-1 Page 263

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	15	905	30



TT-TRK-20W-1 Page 264

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	20	1450	24



TT-TRK-10W-1Z Page 265

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	200



TT-TRK-120C Page 266

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	650	Diffuse



TT-TRK-164C Page 267

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	650	Diffuse





TT-TRK-12X1W-C Page 268

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	1150	34



TT-TRK-18X1W-C Page 269

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	18	1750	34



TT-TRK-SUSP-BALL Page 270

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	-



TT-TRK-SUSP-8W Page 271

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	24



TT-TRK-SUSP-5W Page 272

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	450	30



TT-TRK-SUSP-5W-10 Page 273

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	450	30





TT-TRK-SUSP-10W Page 274

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	36



TT-TRK-SUSP-CONE Page 275

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	480	Diffuse



TT-TRK-TRACK-R Page 276

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/2 Page 277

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/4 Page 278

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/8 Page 279

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-8W-1R Page 280

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	30





TT-TRK-SUSP-10W-R Page 281

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	36



TT-TRK-15W-1R Page 282

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	15	905	30



TT-TRK-6X1R Page 283

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-163R Page 284

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	500	Diffuse



TT-TRK-5W-1R Page 285

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	440	90



TT-TRK-10W-1R Page 286

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	24



TT-TRK-BALL-R Page 287

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	220



TITANIUM

TECHNOLOGY


TT-TRK-TRACK



Voltage	24vDC	
Size	1000mm x 40mm x 76mm 39 ³ / ₈ " x 1 ⁹ / ₁₆ " x 3"	3000mm x 40mm x 76mm 118 ¹ / ₄ " x 1 ⁹ / ₁₆ " x 3"
Cut hole	40mm 1 ⁹ / ₁₆ "	
Finish	BK - Black WH - White WOOD - Wood	
IP	20	

PRODUCT CODE



TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	TRACK	-	BK
TT	-	TRK	-	TRACK	-	



TITANIUM

TECHNOLOGY

TT-TRK-TRACK-PL

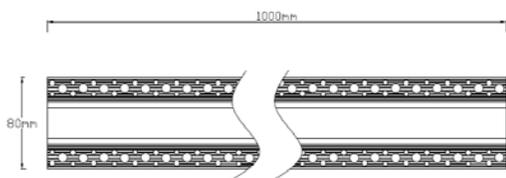

Voltage	24vDC
Size	1000mm x 40mm x 76mm 39 ³ / ₈ " x 1 ⁹ / ₁₆ " x 3"
Cut hole	40mm 1 ⁹ / ₁₆ "
Finish	WH - White BK - Black
IP	20




PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	PL	-	BK
TT	-	TRK	-	TRACK	-	PL	-	

TITANIUM

TECHNOLOGY

TT-TRK-1X1

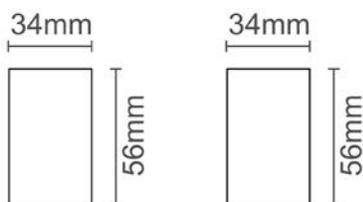

h(m)	E(lx)	Φ(m)
1	429	Φ0.71
2	107	Φ1.43
3	47	Φ2.15
4	26	Φ2.87
5	17	Φ3.59

PRODUCT CODE




TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	1X1	-	BK	-	27K
TT	-	TRK	-	1X1	-		-	

Voltage	24vDC
Amperage	0,09A
Power LED	2,16W
Lumens	120 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	34 x 34 x 56 mm 1 ⁵ / ₁₆ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-3X1

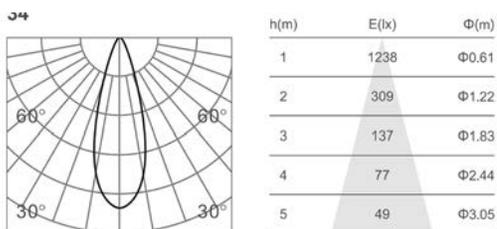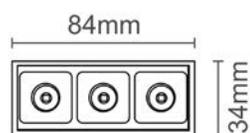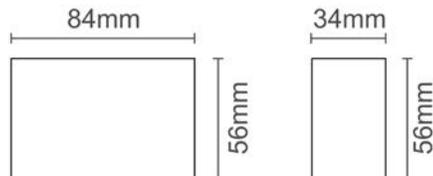

Voltage	24vDC
Amperage	0,19A
Power LED	4,56W
Lumens	380 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	84 x 34 x 56 mm 3 ¹ / ₄ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20




PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	3X1	-	BK	-	27K
TT	-	TRK	-	3X1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-6X1

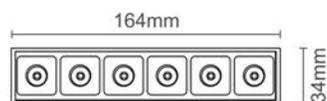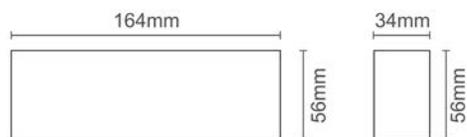

h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	6X1	-	BK	-	27K
TT	-	TRK	-	6X1	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 790 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 164 x 34 x 56 mm
 6⁷/₁₆ x 1⁵/₁₆ x 2³/₁₆"



Finish **BK** - Black
WH - White

IP 20

TITANIUM

TECHNOLOGY

TT-TRK-12X1

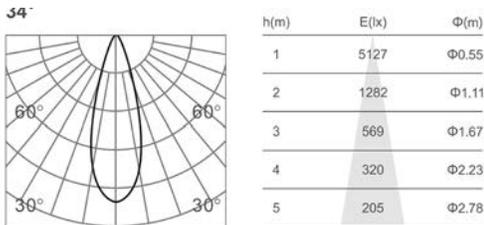

Voltage	24vDC
Amperage	0,72A
Power LED	17,28W
Lumens	1550 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	320 x 34 x 56 mm 12 ¹ / ₂ x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1	-	BK	-	27K
TT	-	TRK	-	12X1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-3X1D

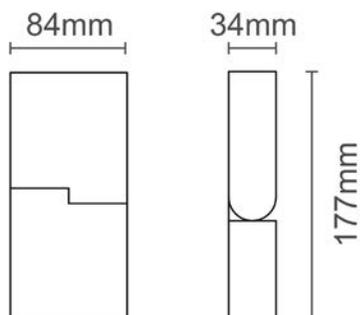

h(m)	E(lx)	Φ(m)
1	1238	Φ0.61
2	309	Φ1.22
3	137	Φ1.83
4	77	Φ2.44
5	49	Φ3.05

Voltage	24vDC
Amperage	0,19A
Power LED	4,56W
Lumens	380 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	84 x 34 x 177 mm 3 ¹ / ₄ " x 1 ⁵ / ₁₆ " x 7"
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	3X1D	-	BK	-	27K
TT	-	TRK	-	3X1D	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-6X1D

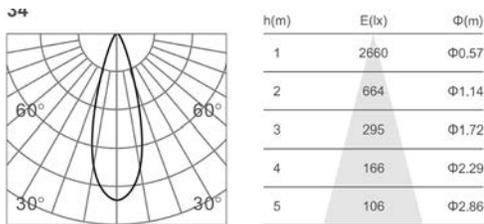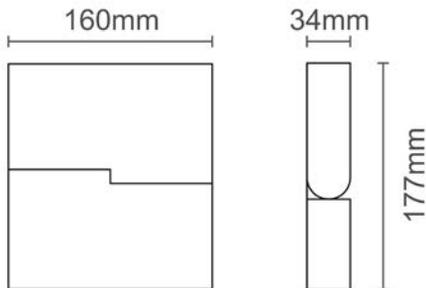

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	790 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	160 x 34 x 177 mm 6 ¹ / ₄ " x 1 ³ / ₈ " x 7"
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	6X1D	-	BK	-	27K
TT	-	TRK	-	6X1D	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-12X1D

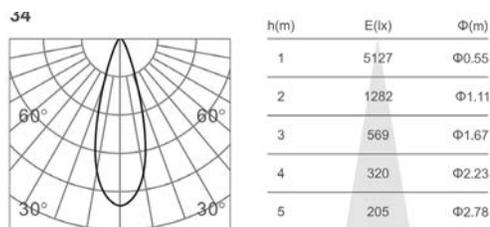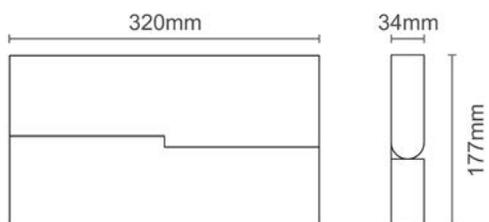

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1D	-	BK	-	27K
TT	-	TRK	-	12X1D	-		-	

Voltage	24vDC
Amperage	0,72A
Power LED	17,28W
Lumens	1550 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	320 x 34 x 177 mm 12 ¹ / ₂ " x 1 ⁵ / ₁₆ " x 7"
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-322



Diffuse



h(m)	E(lx)	Φ(m)
1	426	Φ2.51
2	106	Φ5.02
3	47	Φ7.53
4	26	Φ10.04
5	17	Φ12.55

Voltage	24vDC
Amperage	0,7A
Power LED	16,8W
Lumens	980 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	320 x 34 x 56 mm 12 ⁵ / ₈ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	322	-	BK	-	27K
TT	-	TRK	-	322	-		-	


TITANIUM

TECHNOLOGY

TT-TRK-640

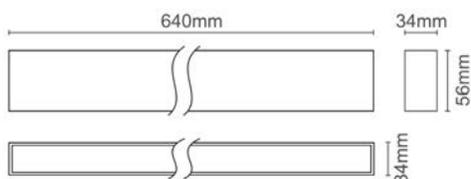

Diffuse



h(m)	E(lx)	Φ(m)
1	479	Φ2.65
2	119	Φ5.30
3	53	Φ7.95
4	29	Φ10.60
5	19	Φ13.25

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	640	-	BK	-	27K
TT	-	TRK	-	640	-		-	

Voltage 24vDC

Amperage 1,08A

Power LED 26W

Lumens 1900 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 640 x 34 x 56 mm
 25¹/₄" x 1⁵/₁₆" x 2³/₁₆"



Finish **BK** - Black
WH - White

IP 20


TITANIUM

TECHNOLOGY

TT-TRK-958

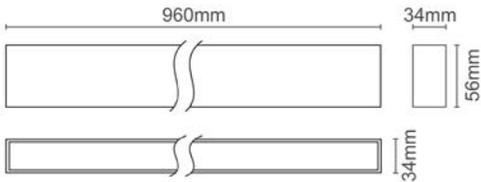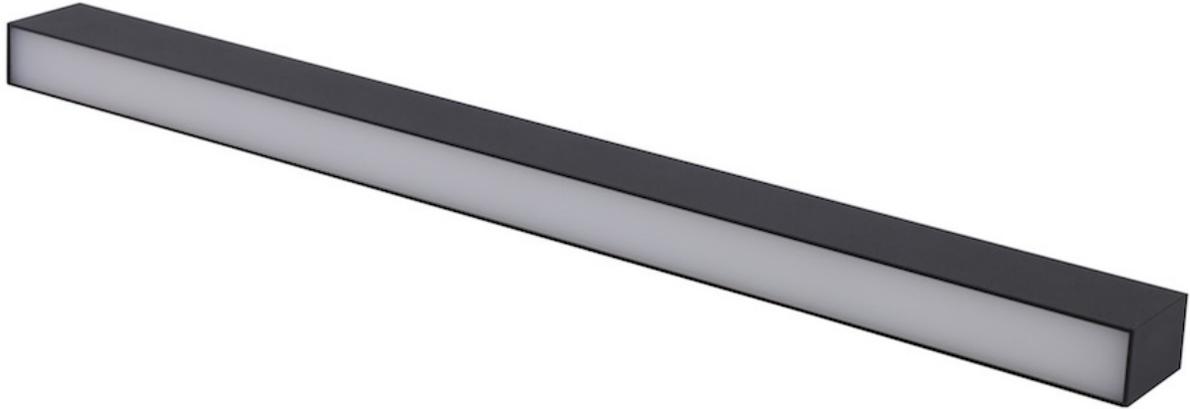

Diffuse



h(m)	E(lx)	Φ(m)
1	889	Φ2.23
2	222	Φ4.46
3	98	Φ6.69
4	55	Φ8.92
5	35	Φ11.15

Voltage 24vDC

Amperage 1,625A

Power LED 39W

Lumens 2850 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 960 x 34 x 56 mm
 37¹³/₁₆" x 1⁵/₁₆" x 2³/₁₆"

Finish **BK** - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	958	-	BK	-	27K
TT	-	TRK	-	958	-		-	


TITANIUM

TECHNOLOGY

TT-TRK-84D

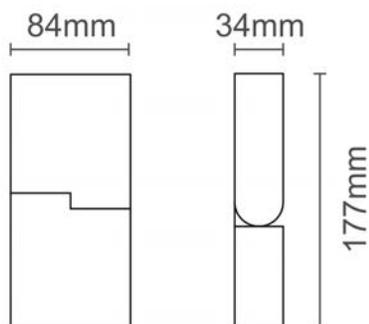

Diffuse



h(m)	E(x)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	84D	-	BK	-	27K
TT	-	TRK	-	84D	-		-	

Voltage	24vDC
Amperage	0,18A
Power LED	4,32W
Lumens	280 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	84 x 34 x 177 mm 3 ¹ / ₄ " x 1 ⁵ / ₁₆ " x 6 ¹⁵ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-164D

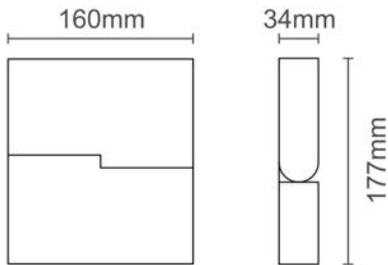

Diffuse



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	500 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	160 x 34 x 177 mm 6 ⁵ / ₁₆ " x 1 ⁵ / ₁₆ " x 6 ¹⁵ / ₁₆ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	164D	-	BK	-	27K
TT	-	TRK	-	164D	-		-	


TITANIUM

TECHNOLOGY

TT-TRK-323D

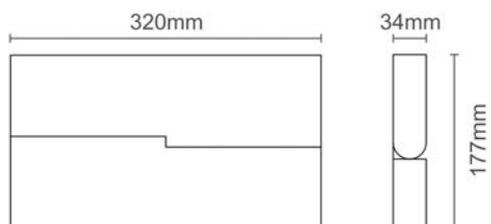

Diffuse



h(m)	E(lx)	Φ(m)
1	234	Φ2.47
2	58	Φ4.95
3	26	Φ7.43
4	14	Φ9.90
5	9	Φ12.38

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	323D	-	BK	-	27K
TT	-	TRK	-	323D	-		-	

Voltage	24vDC
Amperage	0,7A
Power LED	16,8W
Lumens	980 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	320 x 34 x 177 mm 12 ⁵ / ₈ " x 1 ⁵ / ₁₆ " x 6 ¹⁵ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-BALL

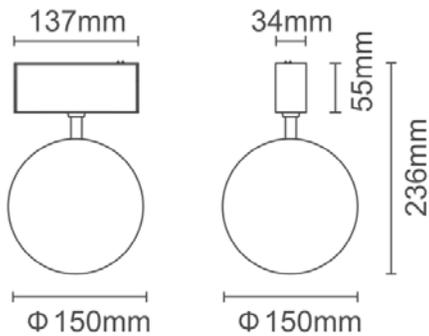

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

Voltage	24vDC
Amperage	0,30A
Power LED	7,2W
Lumens	290 lm
CRI	90
Angle	360°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	137 x 34 x 55 mm Ø140mm 5 ³ / ₈ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ " Ø5 ¹ / ₂ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	-	TYPE	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	BALL	-	BK	-	27K
TT	-	TRK	-	BALL	-		-	


TITANIUM

TECHNOLOGY

TT-TRK-15

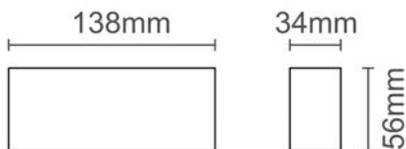

Wallwasher



h(m)	E(lx)	Φ(m)
1	137	Φ0.97
2	34	Φ1.94
3	15	Φ2.91
4	8	Φ3.88
5	5	Φ4.85

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	15	-	BK	-	27K
TT	-	TRK	-	15	-		-	

Voltage	24vDC
Amperage	0,29A
Power LED	6,96W
Lumens	380 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	138 x 34 x 56 mm 5 ⁷ / ₁₆ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-30

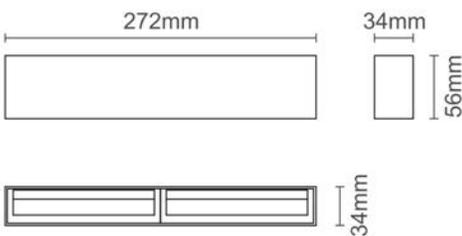

Wallwasher



h(m)	E(lx)	Φ(m)
1	344	Φ0.90
2	86	Φ1.80
3	38	Φ2.70
4	21	Φ3.59
5	13	Φ4.49

Voltage	24vDC
Amperage	0,58A
Power LED	13,92W
Lumens	880 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	272 x 34 x 56 mm 10 ¹¹ / ₁₆ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	30	-	BK	-	27K
TT	-	TRK	-	3XL	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-5W-1

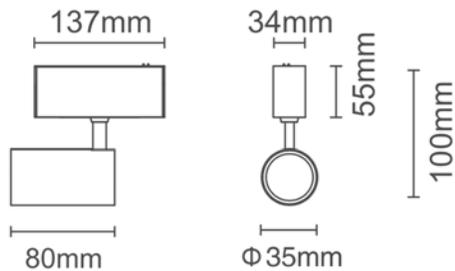

h(m)	E(lx)	Φ(m)
2	278	Φ0.96
3	124	Φ1.44
3.5	91	Φ1.68
4	69	Φ1.92
5	44	Φ2.40

PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	1	-	BK	-	27K
TT	-	TRK	-	5W	-	1	-		-	

Voltage 24vDC

Amperage 0,24A

Power LED 5,76W

Lumens 440 lm

CRI 90

Angle 40°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size Ø35 x 80 mm
 Ø1³/₈" x 3¹/₈"



Finish **BK** - Black
WH - White

IP 20

TITANIUM

TECHNOLOGY

TT-TRK-5W-2

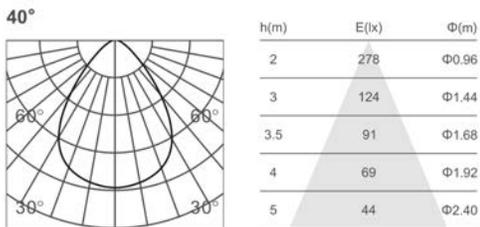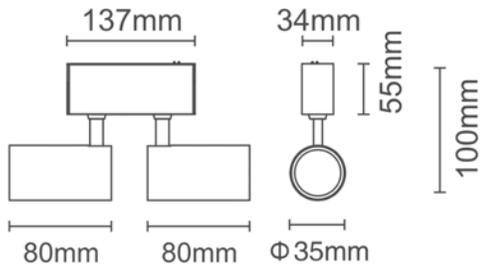

Voltage	24vDC
Amperage	0,48A
Power LED	11,52W
Lumens	880 lm
CRI	90
Angle	40°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	2 x Ø35 x 80 mm 2 x Ø1 ³ / ₈ " x 3 ¹ / ₈ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	2	-	BK	-	27K
TT	-	TRK	-	5W	-	2	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-8W-1

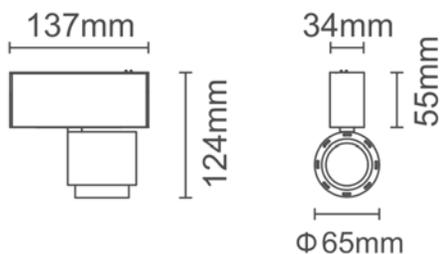

h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	405 lm
CRI	90
Angle	20°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø65 mm Ø2 1/2"
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	8W	-	1	-	BK	-	27K
TT	-	TRK	-	8W	-	1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-10W-1

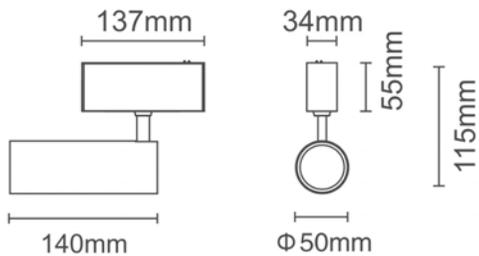

h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03

Voltage	24vDC
Amperage	0,44A
Power LED	10,56W
Lumens	780 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø50 x 140 mm Ø2" x 5½"
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	10W	-	1	-	BK	-	27K
TT	-	TRK	-	10W	-	1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-15W-1

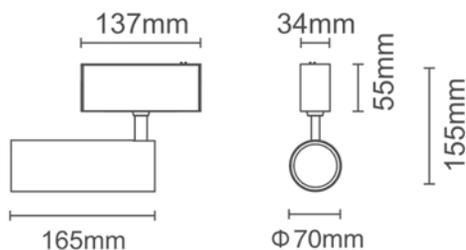

h(m)	E(lx)	Φ(m)
1	4847	Φ0.30
2	1212	Φ0.60
3	538	Φ0.90
4	302	Φ1.20
5	193	Φ1.51

Voltage 24vDC

Amperage 0,68A

Power LED 16,32W

Lumens 905 lm

CRI 90

Angle 30°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size
 Ø92 mm
 Ø3⁵/₈"

Finish
BK - Black
WH - White

IP 20



PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	15W	-	1	-	BK	-	27K
TT	-	TRK	-	15W	-	1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-20W-1

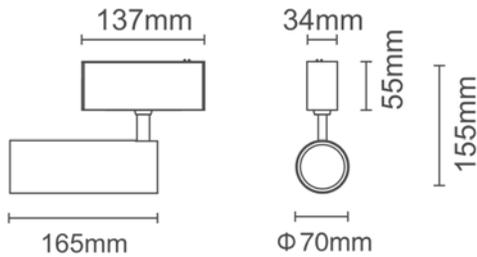

h(m)	E(lx)	Φ(m)
1	5787	Φ0.47
2	1447	Φ0.95
3	643	Φ1.42
4	361	Φ1.90
5	231	Φ2.37

Voltage	24vDC
Amperage	0,9A
Power LED	21,6W
Lumens	1450 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø70 x 165 mm Ø2 ³ / ₄ " x 6 ¹ / ₂ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	20W	-	1	-	BK	-	27K
TT	-	TRK	-	20W	-	1	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-10W-1Z

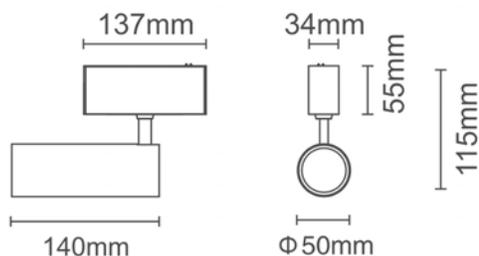

Voltage	24vDC
Amperage	0,43A
Power LED	10,32W
Lumens	780 lm
CRI	90
Angle	10° to 50°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø50 x 140 mm Ø2" x 5½"
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	10W	-	1Z	-	BK	-	27K
TT	-	TRK	-	10W	-	1Z	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-120-C

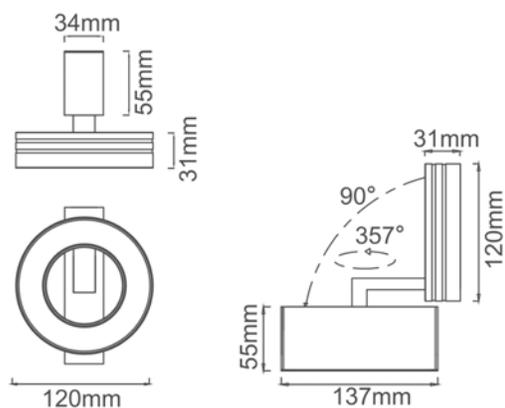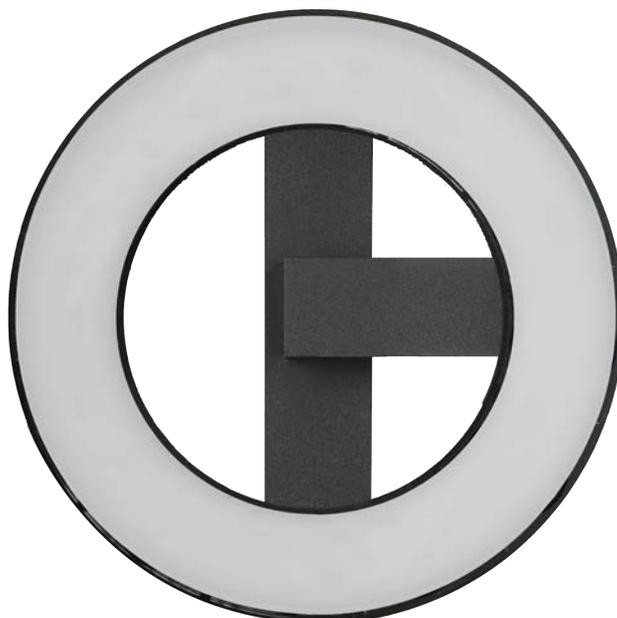

Voltage	24vDC
Amperage	0,5A
Power LED	12W
Lumens	650 lm
CRI	90
Angle	Diffuse
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	137 mm x 34 mm x 56 mm x Ø120 mm 5 ³ / ₈ " x 1 ³ / ₈ " x 2 ³ / ₁₆ " x Ø4 ³ / ₄ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	- TYPE -	MODEL	- CURVE -	FINISH	- LED COLOR
TT	- TRK -	120	- C -	BK	27K
TT	- TRK -	120	- C -		

TITANIUM

TECHNOLOGY

TT-TRK-164-C

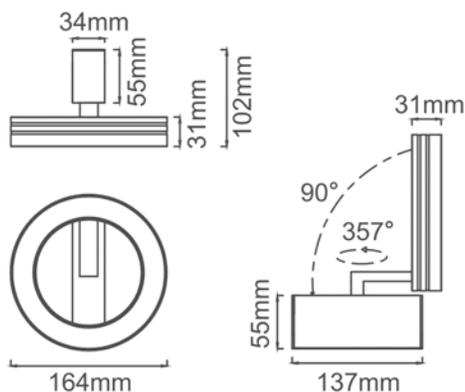

Voltage 24vDC

Amperage 0,75A

Power LED 18W

Lumens 650 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 137 mm x 34 mm x 55 mm x Ø164 mm
 5³/₈" x 1³/₈" x 2³/₁₆" x Ø6⁷/₁₆"

Finish **BK** - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	CURVE	-	FINISH	-	LED COLOR
TT	-	TRK	-	164	-	C	-	BK	-	27K
TT	-	TRK	-	164	-	C	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-12X1W-C

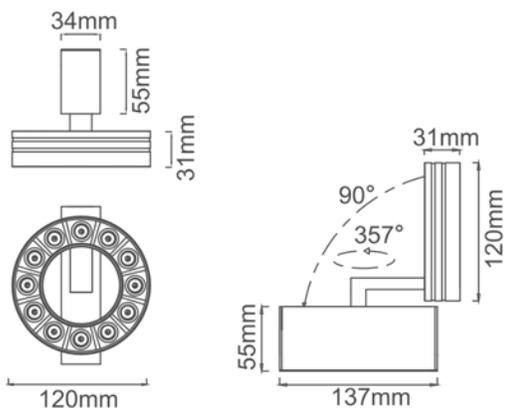

Voltage	24vDC
Amperage	0,52A
Power LED	12,48W
Lumens	1150 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	137 mm x 34 mm x 55 mm x Ø120 mm 5 ³ / ₈ " x 1 ³ / ₈ " x 2 ³ / ₁₆ " x Ø4 ³ / ₄ "
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	-	TYPE	-	POWER	-	CURVE	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1W	-	C	-	BK	-	27K
TT	-	TRK	-	12X1W	-	C	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-18X1W-C

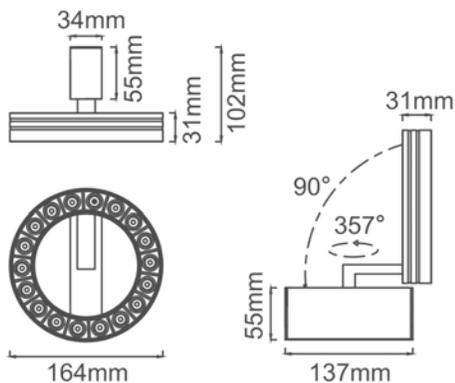

Voltage 24vDC

Amperage 0,75A

Power LED 18W

Lumens 1750 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 137 mm x 34 mm x 55 mm x Ø164 mm
 5³/₈" x 1³/₈" x 2³/₁₆" x Ø6⁷/₁₆"

Finish **BK** - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	POWER	-	CURVE	-	FINISH	-	LED COLOR
TT	-	TRK	-	18X1W	-	C	-	BK	-	27K
TT	-	TRK	-	18X1W	-	C	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-BALL

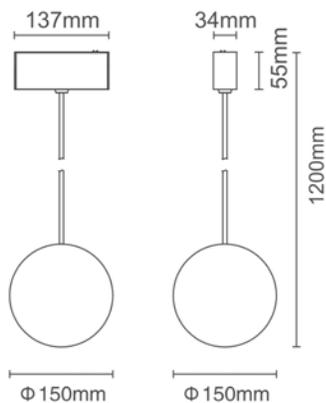

Voltage 24vDC

Amperage 0,30A

Power LED 7,2W

Lumens 290 lm

CRI 90

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 137 x 34 x 55 mm Ø1200mm
 5³/₈ " x 1⁵/₁₆ " x 2³/₁₆ " x Ø47¹/₄ "

Finish **BK** - Black
WH - White

IP 20

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PRODUCT CODE

TT - TYPE - MODEL FORM - FINISH - LED COLOR


TT - TRK - SUSP - BALL - BK - 27K

TT - TRK - SUSP - BALL - - -

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-8W

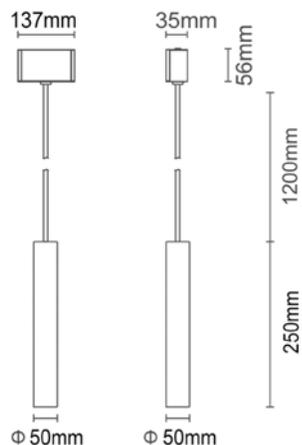

Voltage	24vDC
Amperage	0,33A
Power LED	8W
Lumens	405 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K -Cold white 5000K
Dimmable	Yes
Size	Ø50 x 250 mm Ø2" x 9 ⁷ / ₈ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	8W	-	BK	-	27K
TT	-	TRK	-	SUSP	-	8W	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-5W

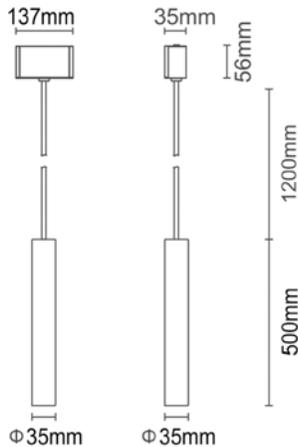

h(m)	E(lx)	Φ(m)
1	2519	Φ0.32
2	629	Φ0.65
3	279	Φ0.98
4	157	Φ1.31
5	100	Φ1.64

Voltage 24vDC

Amperage 0,29A

Power LED 6,96W

Lumens 450 lm

CRI 90

Angle 30°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size
 Ø35 mm x 500mm
 Ø3⁵/₈" x 19¹¹/₁₆"

Finish
BK - Black
WH - White

IP 20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	5W	-	BK	-	27K
TT	-	TRK	-	SUSP	-	5W	-		-	

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-5W-10



Voltage	24vDC
Amperage	0,29A
Power LED	6,96W
Lumens	450 lm
CRI	90
Angle	30°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Acrylic length (cm)	10 20 30 40
Dimmable	Yes
Size	Ø35 mm x 500mm Ø3 ⁵ / ₈ " x 19 ¹¹ / ₁₆ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	TYPE	MODEL	POWER	ACRYLIC LENGTH (CM)	FINISH	LED COLOR
TT	TRK	SUSP	5W	10	BK	27K
TT	TRK	SUSP	5W			

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-10W

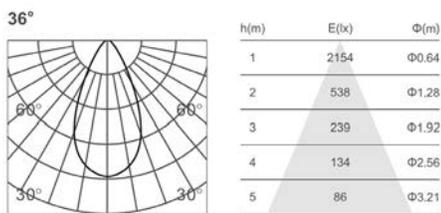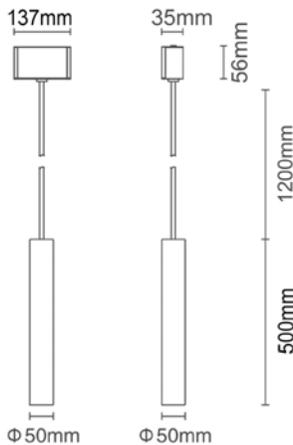

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	10W	-	BK	-	27K
TT	-	TRK	-	SUSP	-	10W	-		-	

Voltage	24vDC
Amperage	0,46A
Power LED	11,04W
Lumens	780 lm
CRI	90
Angle	36°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø50 x 500 mm Ø2" x 19 ¹¹ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-SUSP-CONE

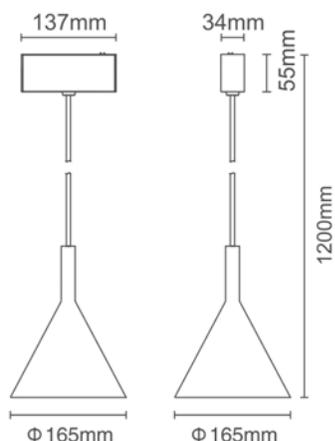

Diffuse



h(m)	E lx	Φ(m)
1	500	Φ1.20
2	125	Φ2.40
3	55.6	Φ3.60
4	31.2	Φ4.80
5	20	Φ6.00

PRODUCT CODE

TT - TYPE - MODEL - FORM - FINISH - LED COLOR


TT	-	TRK	-	SUSP	-	CONE	-	BK	-	27K
TT	-	TRK	-	SUSP	-	CONE	-		-	

Voltage	24vDC
Amperage	0,43A
Power LED	10,32W
Lumens	480 lm
CRI	90
Angle	Diffuse
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	137 x 34 x 55 x 1200mm 5 ³ / ₈ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ " x 47 ¹ / ₄ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R

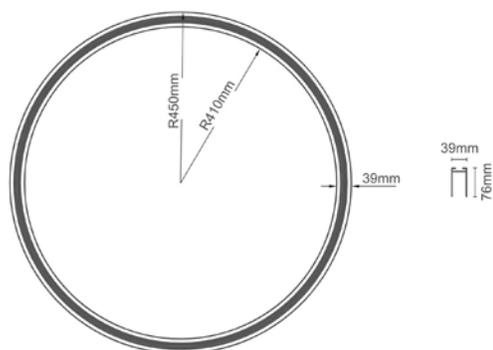


Voltage	24vDC
Size	900mm x 39mm x 76mm 35 ³ / ₈ " x 1 ¹ / ₂ " x 3"
Power	200w max.
Finish	BK - Black WH - White
IP	20

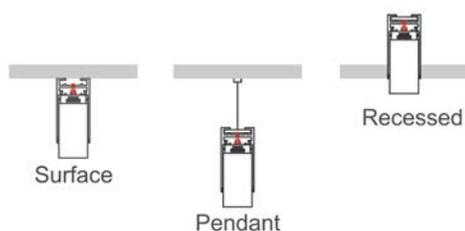

Accessories



TT-TRACK-SUSP



TT-TRK-R-PL



CODE PRODUIT

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R	-	BK
TT	-	TRK	-	TRACK	-	R	-	

TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R1/2

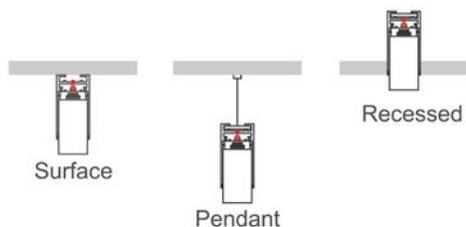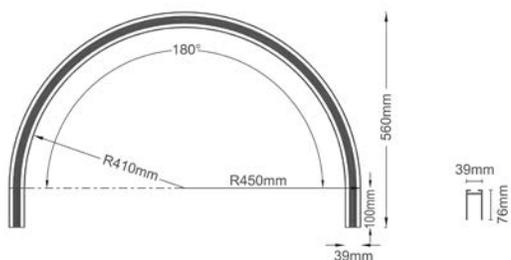

Voltage	24vDC
Size	906mm x 39mm x 76mm 35 ⁵ / ₈ " x 1 ¹ / ₂ " x 3"
Power	200w max.
Cut hole	40mm 1 ⁹ / ₁₆ "
Finish	BK - Black WH - White
IP	20


CODE PRODUIT

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/2	-	BK
TT	-	TRK	-	TRACK	-	R1/2	-	

Accessories



TT-TRACK-SUSP




TT-TRK-R-PL


TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R1/4

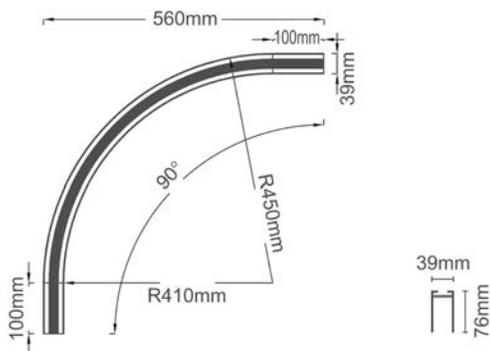


Voltage	24vDC
Size	560mm x 39mm x 76mm 22" x 1 1/2" x 3"
Power	200w max.
Finish	BK - Black WH - White
IP	20

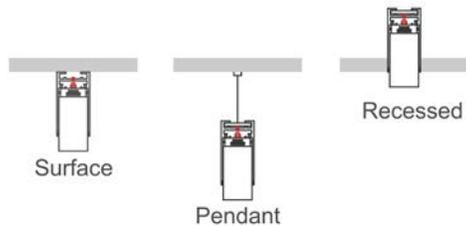

Accessories



TT-TRACK-SUSP



TT-TRK-R-PL



CODE PRODUIT

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/4	-	BK
TT	-	TRK	-	TRACK	-	R1/4	-	

TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R1/8

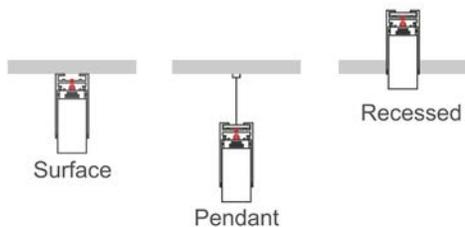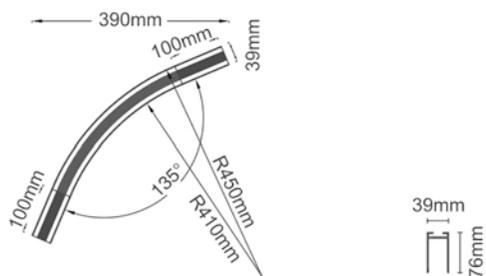

Voltage	24vDC
Size	390mm x 39mm x 76mm 15 ³ / ₈ " x 1 ¹ / ₂ " x 3"
Power	200w max.
Finish	BK - Black WH - White
IP	20


CODE PRODUIT

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/8	-	BK
TT	-	TRK	-	TRACK	-	R1/8	-	

Accessories



TT-TRACK-SUSP





TT-TRK-R-PL

TITANIUM

TECHNOLOGY

TT-TRK-8W-1R

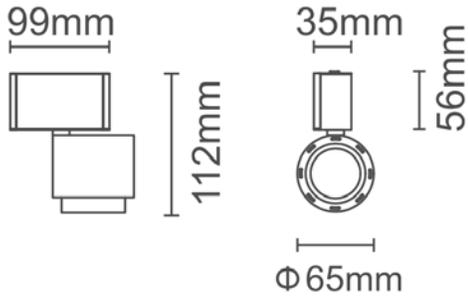

h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33

PRODUCT CODE



TT	- TYPE -	PWOER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	- TRK -	8W	-	1R	-	BK	-	27K
TT	- TRK -	8W	-	1R	-		-	

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	405 lm
CRI	90
Angle	30°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Size	137 x 125 x 34 mm 5 ³ / ₈ " x 4 ⁷ / ₈ " x 1 ³ / ₈ "
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-10W-R

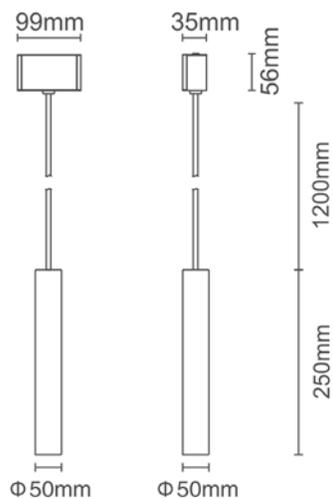

h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	10W	-	R	-	BK	-	27K
TT	-	TRK	-	SUSP	-	10W	-	R	-		-	

Voltage 24vDC

Amperage 0,46A

Power LED 11,04W

Lumens 780 lm

CRI 90

Angle 36°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size 99 x 38 x 1450 mm
 3⁷/₈" x 1³/₈" x 57¹/₈"



Finish **BK** - Black
WH - White

IP 20

TITANIUM

TECHNOLOGY

TT-TRK-15W-1R

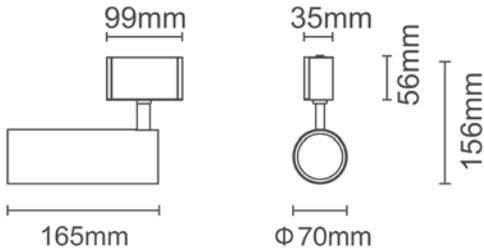

h(m)	E(x)	Φ(m)
1	4947	Φ 0.30
2	1212	Φ 0.60
3	538	Φ 0.90
4	302	Φ 1.20
5	193	Φ 1.51

Voltage 24vDC

Amperage 0,68A

Power LED 16,32W

Lumens 905 lm

CRI 90

Angle 30°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size 99 x 35 x 156 mm
 3⁷/₈" x 1³/₈" x 6¹/₈"

Finish **BK** - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	15W	-	1R	-	BK	-	27K
TT	-	TRK	-	15W	-	1R	-		-	


TITANIUM

TECHNOLOGY

TT-TRK-6X1R

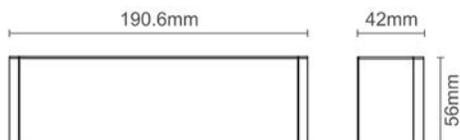

34°



h(m)	E(lx)	Φ(m)
1	2800	Φ 0.53
2	700	Φ 1.07
3	311	Φ 1.60
4	175	Φ 2.14
5	112	Φ 2.67

PRODUCT CODE

TT - TYPE - MODEL - FINISH - LED COLOR

TT - TRK - 6X1R - BK - 27K

TT - TRK - 6X1R - - -

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	790 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	190 mm x 42 mm x 56 mm 7 ¹ / ₂ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-163R



Diffuse



h(m)	E(lx)	Φ(m)
1	119	Φ2.56
2	29	Φ5.12
3	13	Φ7.68
4	7	Φ10.24
5	4	Φ12.81

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	163R	-	BK	-	27K
TT	-	TRK	-	163R	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 500 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Dimmable Yes

Size 190 mm x 42 mm x 56 mm
 7¹/₂" x 1⁵/₁₆" x 2³/₁₆"



Finish **BK** - Black
WH - White

IP 20

TITANIUM

TECHNOLOGY

TT-TRK-5W-1R

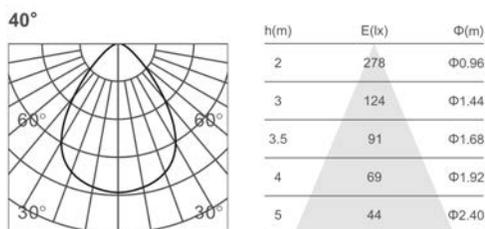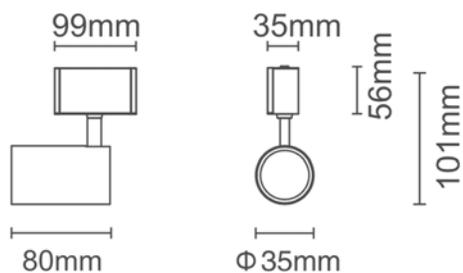

PRODUCT CODE



TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	1R	-	BK	-	27K
TT	-	TRK	-	5W	-	1R	-		-	

Voltage	24vDC
Amperage	0,24A
Power LED	5,76W
Lumens	440 lm
CRI	90
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	99 mm x 35 mm x 101 37/8" x 1 ³ / ₈ " x 4"
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-10W-1R

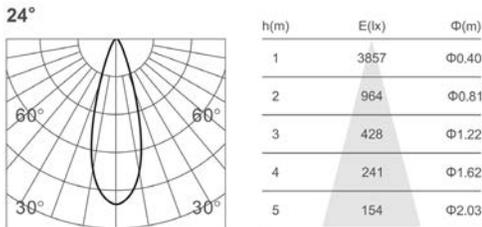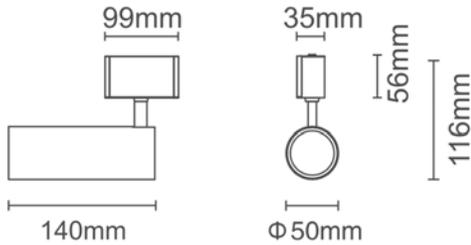

PRODUCT CODE


TT	TYPE	POWER	PROJECTOR	FINISH	LED COLOR
TT	TRK	10W	1R	BK	27K
TT	TRK	10W	1R		

Voltage	24vDC
Amperage	0,44A
Power LED	10,56W
Lumens	780 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	99 mm x 35 mm x 116 3 ⁷ / ₈ " x 1 ³ / ₈ " x 3 ⁹ / ₁₆ "
Finish	BK - Black WH - White
IP	20


TITANIUM

TECHNOLOGY

TT-TRK-BALL-R

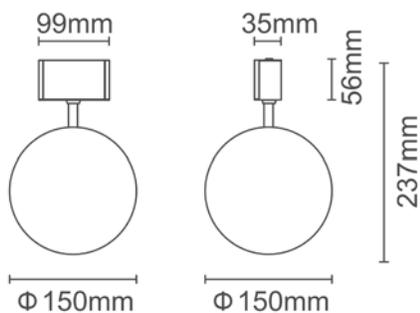

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PRODUCT CODE

TT	-	TYPE	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	BALL-R	-	BK	-	27K
TT	-	TRK	-	BALL-R	-		-	

Voltage	24vDC
Amperage	0,30A
Power LED	7,2W
Lumens	290 lm
CRI	90
Angle	220°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Size	99 x 35 x 237 mm 3 ⁷ / ₈ " x 1 ³ / ₈ " x 9 ³ / ₈ "
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-L




- Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	L	-	BK
TT	-	TRK	-	L	-	

Dimension	39 x 76 x 90 mm 1 9/16" x 3" x 3 9/16"
Finish	BK - Black WH - White WOOD - Wood

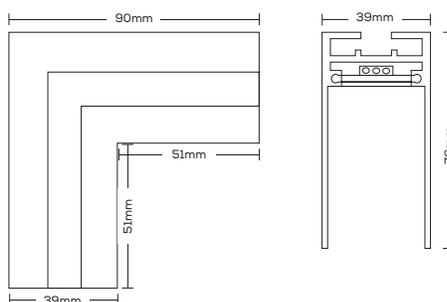

TT-TRK-Lo




- Outside corner union

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Lo	-	BK
TT	-	TRK	-	Lo	-	

Dimension	39 x 76 x 123 mm 1 9/16" x 3" x 4 7/8"
Finish	BK - Black WH - White

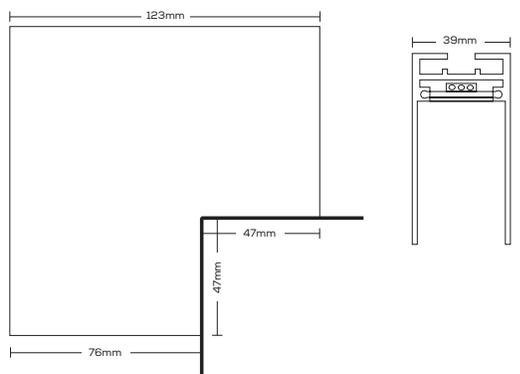

TITANIUM

TECHNOLOGY

TT-TRK-Li




- Union interior corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Li	-	BK
TT	-	TRK	-	Li	-	

Dimension	39 x 76 x 123 mm 1 9/16" x 3" x 4 7/8"
Finish	BK - Black WH - White

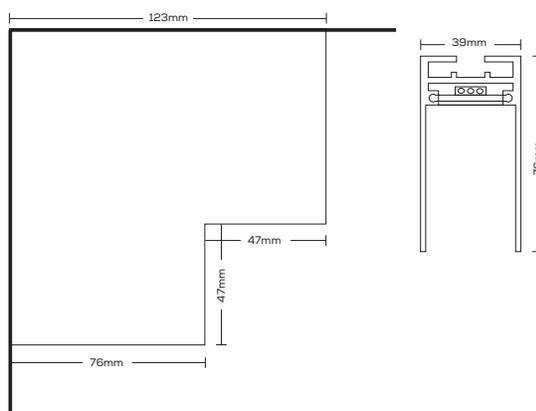

TT-TRK-T




- T Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	T	-	BK
TT	-	TRK	-	T	-	

Dimension	39 x 76 x 141 mm 1 9/16" x 3" x 5 9/16"
Finish	BK - Black WH - White

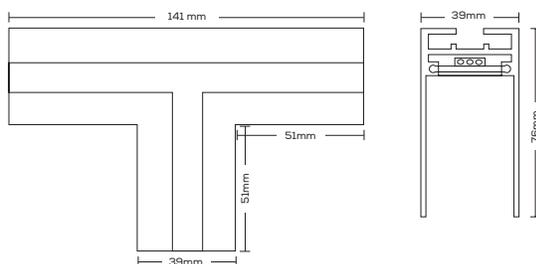

TITANIUM

TECHNOLOGY

TT-TRK-X




- X Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	X	-	BK
TT	-	TRK	-	X	-	

Dimension	39 x 76 x 141 mm
	1 9/16" x 3" x 5 9/16"
Finish	BK - Black
	WH - White

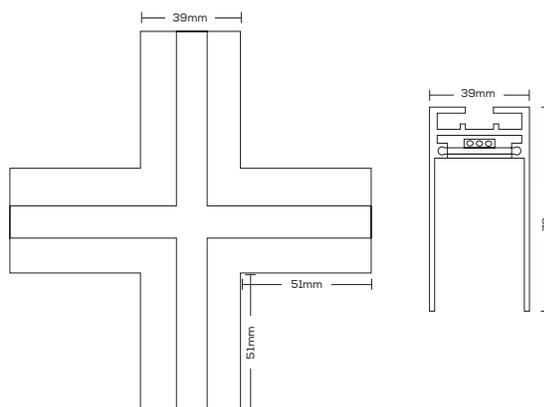

TT-TRK-V




- V Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	V	-	BK
TT	-	TRK	-	V	-	

Dimension	39 x 76 x 110 mm
	1 9/16" x 3" x 5 9/16"
Finish	BK - Black
	WH - White

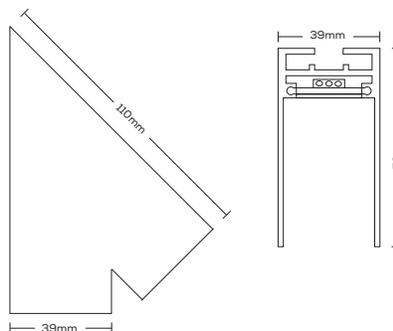

TITANIUM

TECHNOLOGY

TT-TRK-L-PL




- Corner


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	L-PL	-	BK
TT	-	TRK	-	L-PL	-	

Dimension	39 x 76 x 90 mm 1 9/16" x 3" x 3 9/16"
Finish	BK - Black WH - White

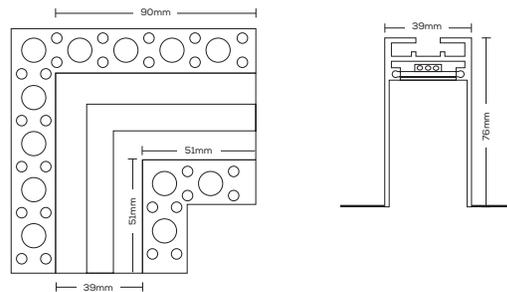

TT-TRK-Lo-PL

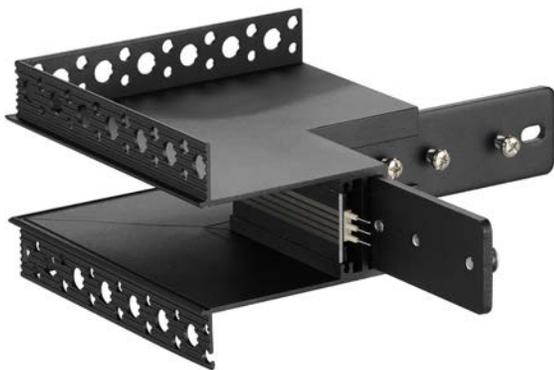


- Outside corner union

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Lo-PL	-	BK
TT	-	TRK	-	Lo-PL	-	

Dimension	39 x 76 x 90 mm 1 9/16" x 3" x 3 9/16"
Finish	BK - Black WH - White

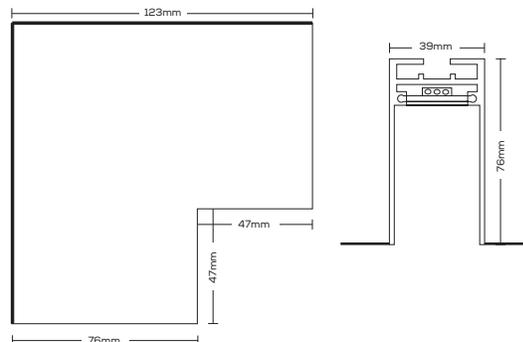

TITANIUM

TECHNOLOGY

TT-TRK-Li-PL




- Union interior corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Li-PL	-	BK
TT	-	TRK	-	Li-PL	-	

Dimension	39 x 76 x 90 mm
	1 9/16" x 3" x 3 9/16"
Finish	BK - Black
	WH - White

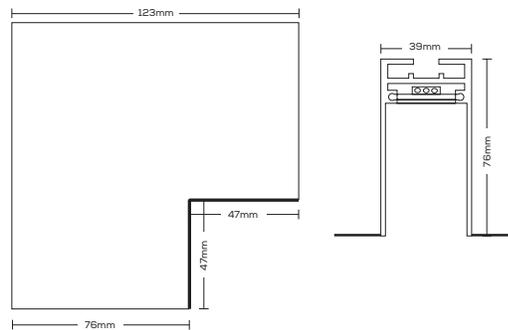

TT-TRK-T-PL




- T Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	T-PL	-	BK
TT	-	TRK	-	T-PL	-	

Dimension	39 x 76 x 141 mm
	1 9/16" x 3" x 5 9/16"
Finish	BK - Black
	WH - White

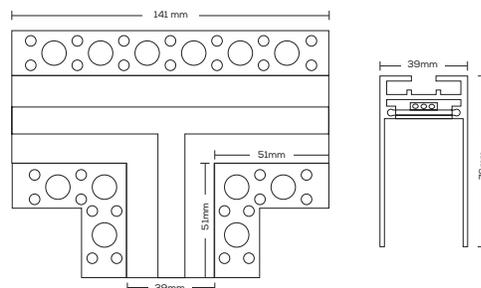

TITANIUM

TECHNOLOGY

TT-TRK-END




- End cap.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	END	-	BK
TT	-	TRK	-	END	-	

Dimension	39 x 76 x 2.5mm 1 ⁹ / ₁₆ " x 3" x 1 ¹ / ₈ "
Finish	BK - Black WH - White WOOD - Wood

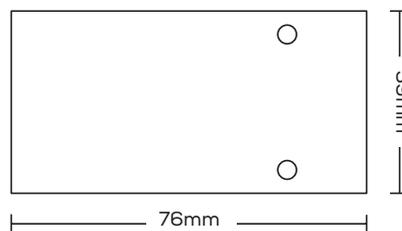

TT-TRK-CLIP




- Clip

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CLIP	-	BK
TT	-	TRK	-	CLIP	-	

Dimension	43 x 67 x 39 mm 1 ¹¹ / ₁₆ " x 2 ⁵ / ₈ " x 1 ⁹ / ₁₆ "
Finish	BK - Black WH - White

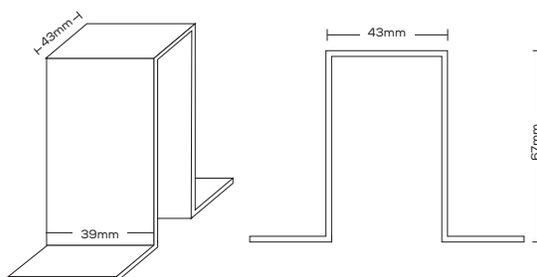

TITANIUM

TECHNOLOGY

TT-TRK-COVER



Dimension	36 x 1000 mm x 2.5mm 1 7/16" x 39 3/8" x 1/8"
Finish	BK - Black WH - White WOOD - Wood

- Blank cover



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	COVER	-	BK
TT	-	TRK	-	COVER	-	

TT-TRK-EXT




Dimension	130 x 33 x 4 mm 5 1/8" x 1 5/16" x 3/16"
Finish	BK - Black WH - White WOOD - Wood

- Junction bar

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	EXT	-	BK
TT	-	TRK	-	EXT	-	

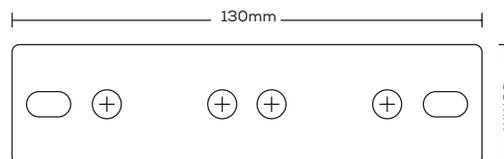

TITANIUM


TECHNOLOGY

TT-TRK-O

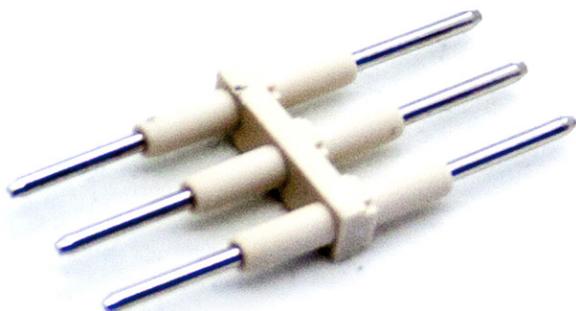

- Pin for electrical conductor

Dimension	26 x 11 x 3 mm
	1" x $\frac{7}{16}$ " x $\frac{1}{8}$ "

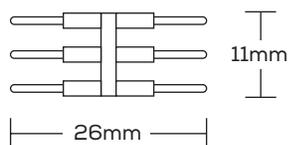

PRODUCT CODE


TT	-	TYPE	-	MODEL
TT	-	TRK	-	O
TT	-	TRK	-	O

TT-TRK-I



- Electrical conductor

Dimension	65 x 31 x 3 mm
	2 $\frac{9}{16}$ " x 1 $\frac{1}{4}$ " x $\frac{1}{8}$ "
Finish	BK - Black

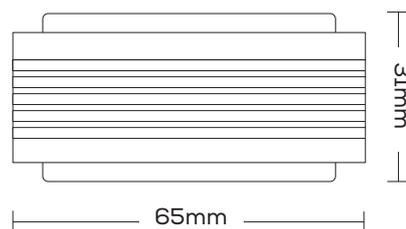

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	I	-	BK
TT	-	TRK	-	I	-	

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-A




- Suspension kit with power cord.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-A	-	BK
TT	-	TRK	-	SUSP-A	-	

Dimension	Ø80 x 30 mm Ø3 3/16" x 1 3/16"
Finish	BK - Black WH - White

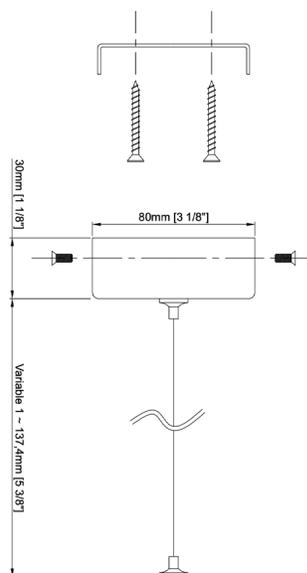

TT-TRK-SUSP-B




- Suspension kit

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-B	-	BK
TT	-	TRK	-	SUSP-B	-	

Dimension	Ø80 x 30 mm Ø3 3/16" x 1 3/16"
Finish	BK - Black WH - White

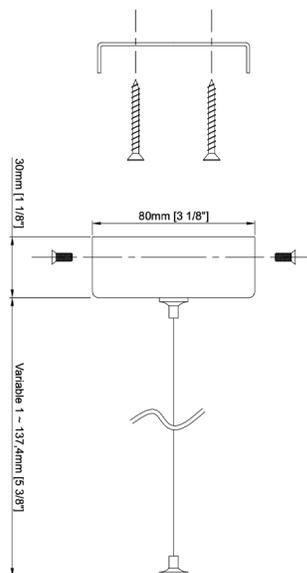

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-C




- Suspension kit with power cord.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-C	-	BK
TT	-	TRK	-	SUSP-C	-	

Dimension	Ø110 x 25 mm
	Ø4 5/8" x 1"
Finish	BK - Black
	WH - White

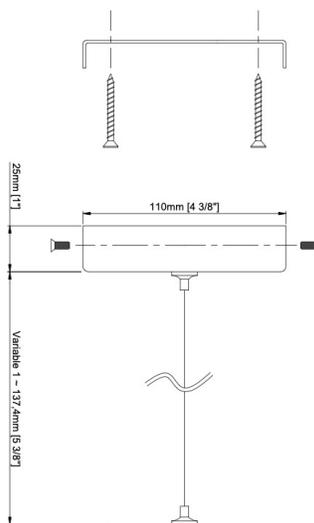

TT-TRK-SUSP-D




- Suspension kit

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-D	-	BK
TT	-	TRK	-	SUSP-D	-	

Dimension	Ø100 x 25 mm
	Ø4 5/8" x 1"
Finish	BK - Black
	WH - White

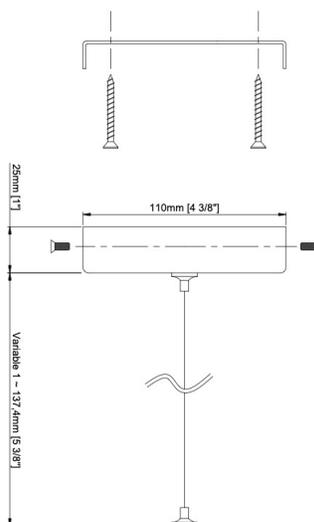

TITANIUM

TECHNOLOGY

TT-TRK-CONNECT-PL




- Power junction.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CONNECT-PL	-	BK
TT	-	TRK	-	CONNECT-PL	-	

Dimension	39 x 76 x 47 mm
	1 9/16" x 3" x 1 7/8"
Finish	BK - Black
	WH - White

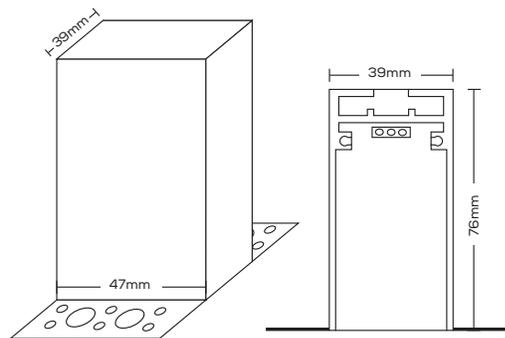

TT-TRK-CONNECT




- Power junction.


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CONNECT	-	BK
TT	-	TRK	-	CONNECT	-	


Dimension	39 x 76 x 47 mm
	1 9/16" x 3" x 1 7/8"
Finish	BK - Black
	WH - White
	WOOD - Wood

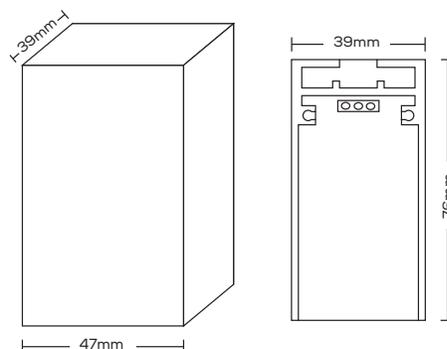

POWER SUPPLY

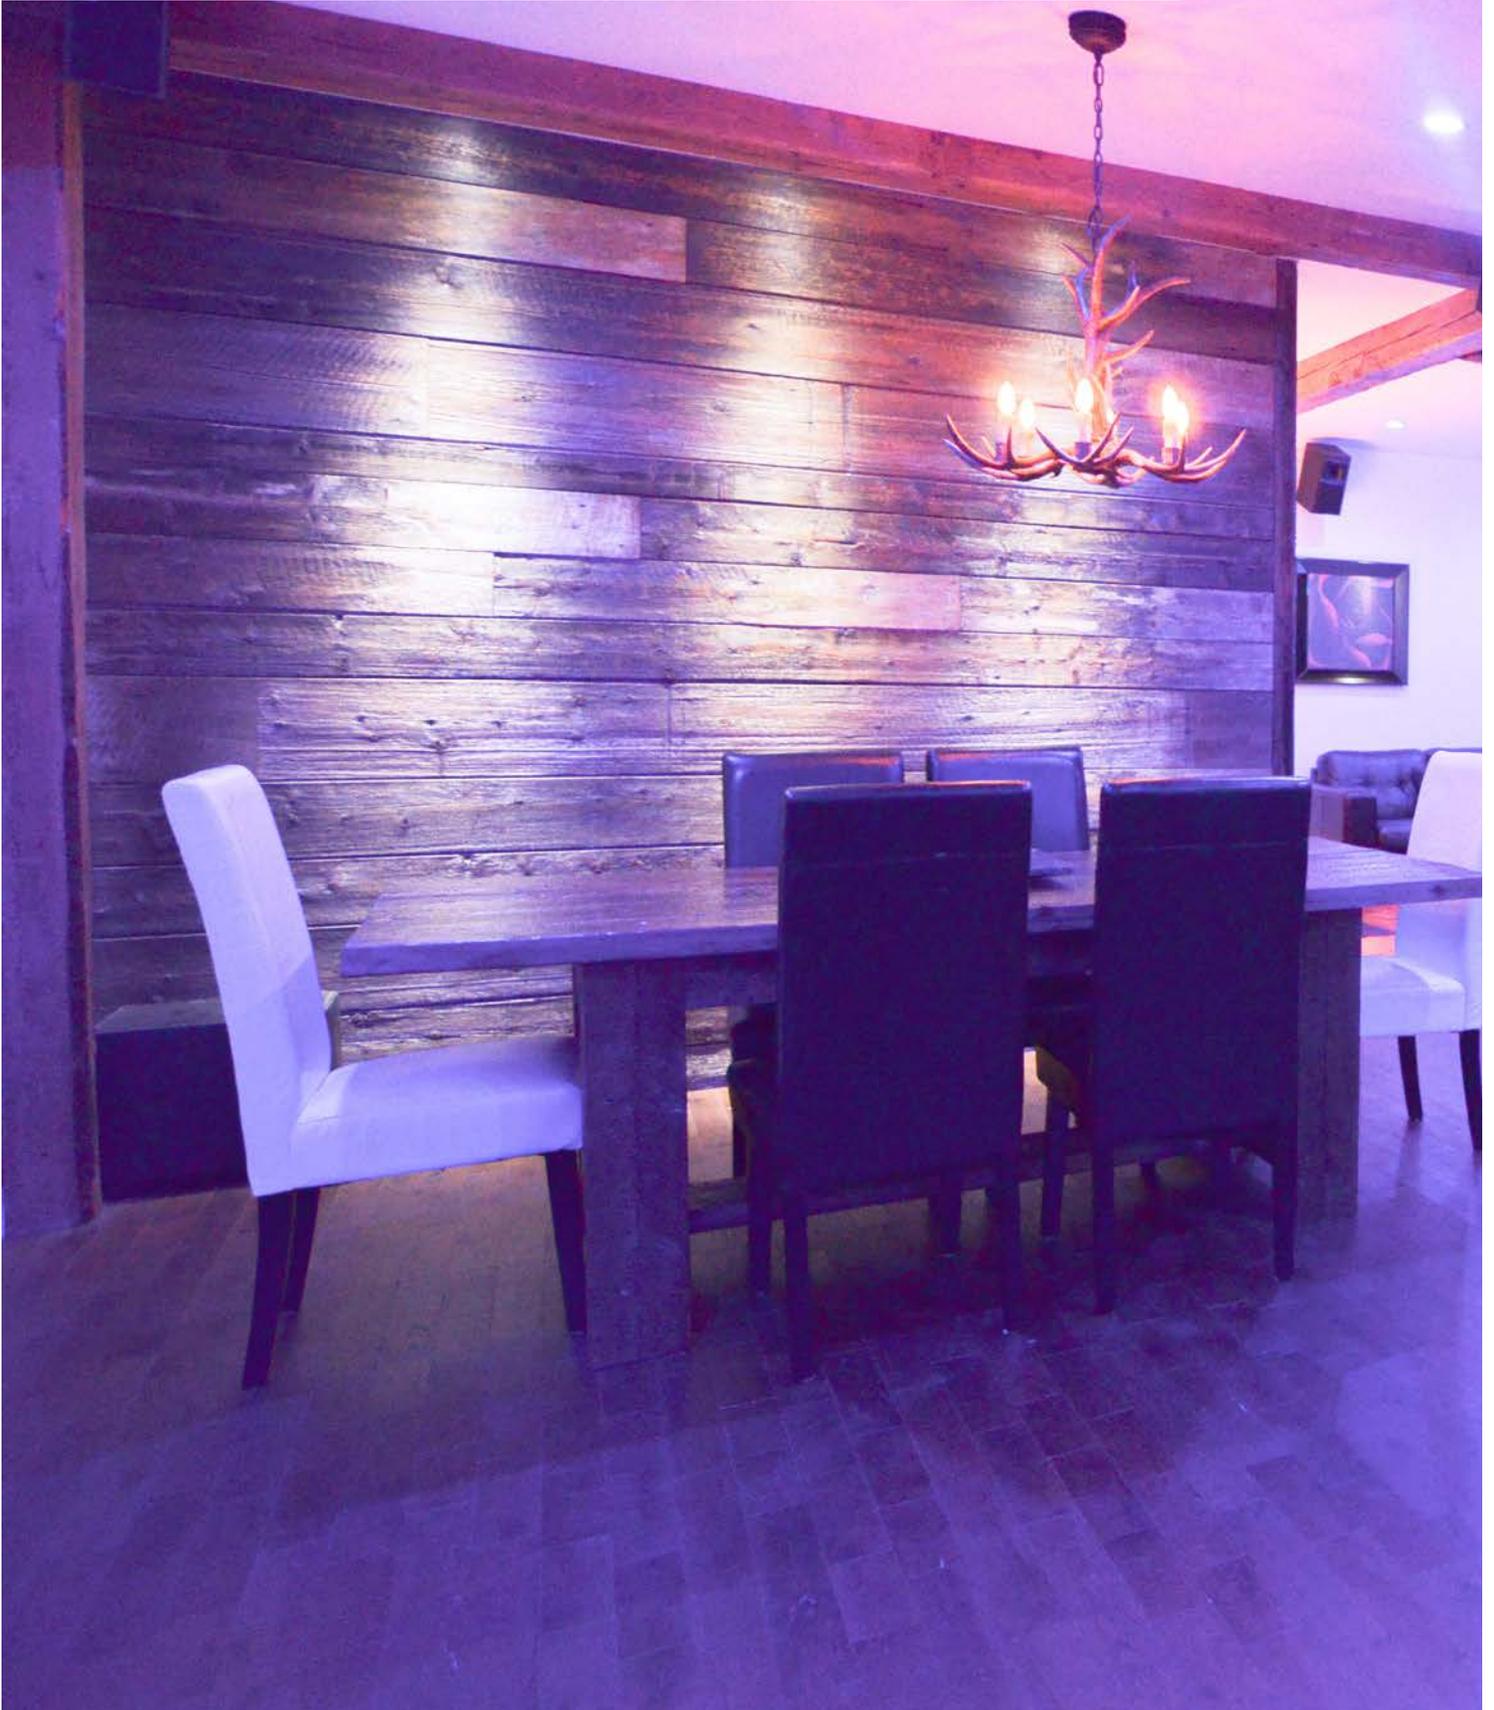



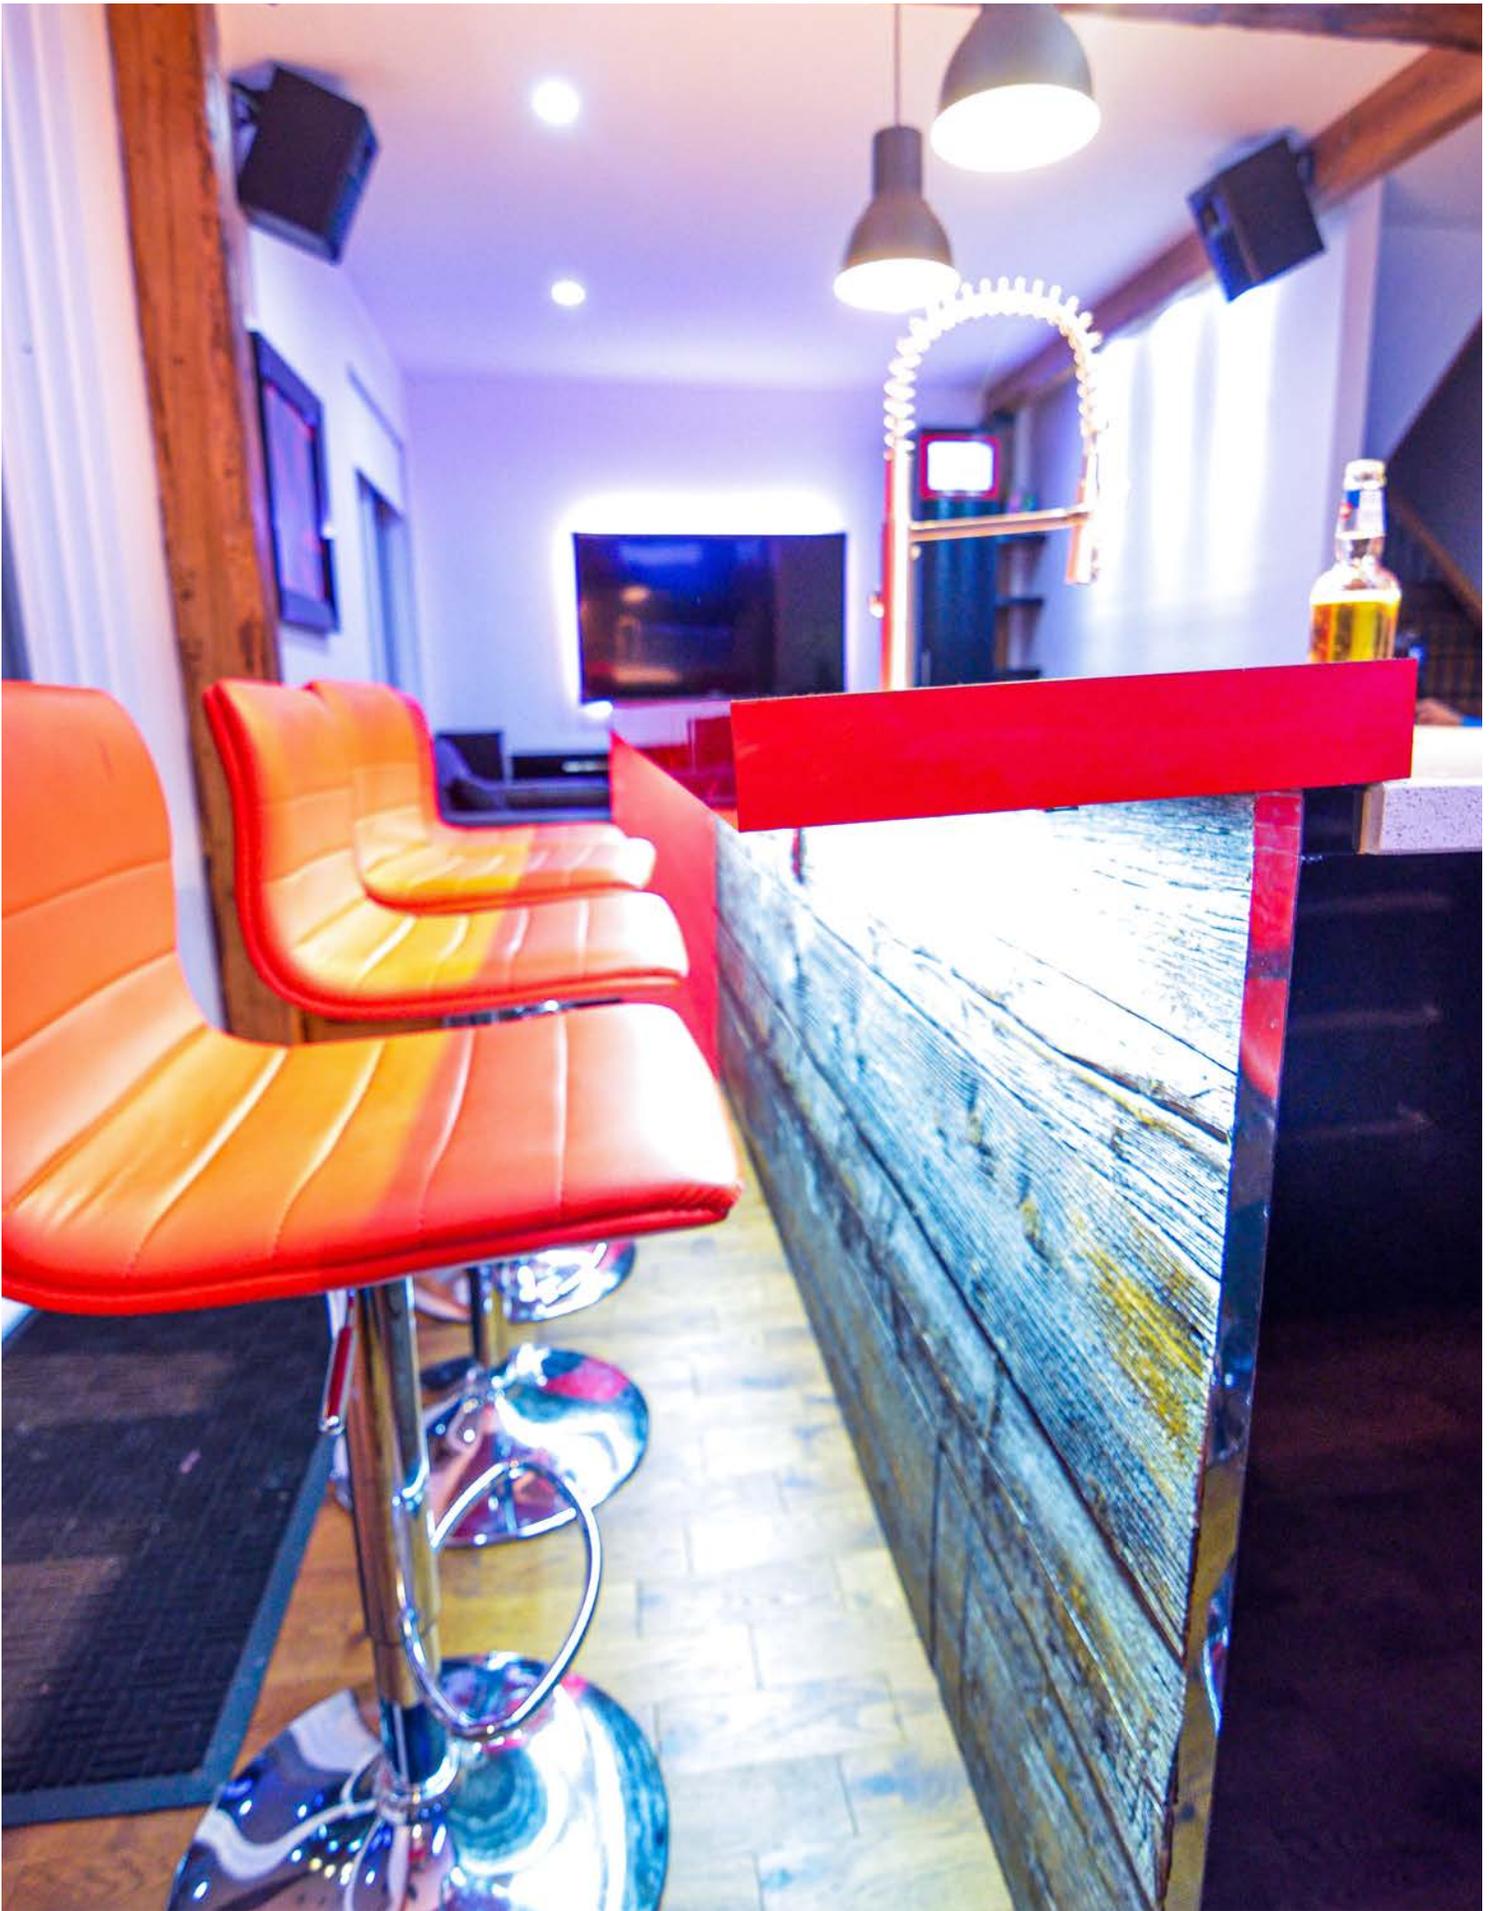

TT-DR-CV-020 Page 307

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,24A	1600mA	19,2	Yes 5% ~ 100% Triac
	24	0,22A	830mA		



TT-DR-CV-030 Page 308

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CV-040 Page 309

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CV-060 Page 310

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CV-080 Page 311

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3300mA		



TT-DR-CV-025-BOX Page 312

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,9A	2,1A	25	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	0,9A	1,05A		



TT-DR-CV-050-BOX Page 313

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,6A	4,16A	50	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	1,6A	2,1A		



TT-DR-CV-096-BOX Page 314

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	10,4 mm	Dimmable
120	12	1,7A	8,33A	96	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase
	24 Class 2	1,6A	4A		



TT-DR-CV-200-BOX Page 315

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	3,2A	16,6A	200	Yes 5% ~ 100% Triac Foward phase, Magnetic low voltage
	24	3,2A	8,3A		



TT-DR-CV-384-24V-BOX-5IN1 Page 316

Voltage in (vDC)	Voltage out (vDC)	Amperage in	17,538 mm	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - 0-10V - Potentiometer - 10V PWM



TT-DR-CV-384-24V-BOX Page 317

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - ELV - MLV Foward and reverse phase



TT-DR-CV-096-24V-BOX-TRK Page 318

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	1,6A	4A	96	Yes 5% ~ 100% Triac - ELV - MLV Foward and reverse phase



TT-DR-CV-200-24V-BOX-TRK Page 319

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	3,2A	8,3A	200	Yes 5% ~ 100% Triac Foward phase, Magnetic low voltage



TT-DR-CVB-030 Page 320

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CVB-040 Page 321

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CVB-060 Page 322

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CVB-080 Page 323

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3400mA		



TT-DR-CVB-100 Page 324

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,2A	8A	96	Yes 5% ~ 100% Triac
	24 Class 2	1,2A	4A		



TT-PSU-IP20-015W Page 325

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,35A	1,3A	15	No
	24	0,35A	0,7A		



TT-PSU-IP20-025W Page 326

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,55A	2,1A	25	No
	24	0,55A	1,1A		



TT-PSU-IP20-050W Page 327

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,95A	4,2A	50	No
	24	0,95A	2,2A		



TT-PSU-IP20-075W Page 328

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	1,4A	6A	75	No
	24	1,4A	3,2A		



TT-PSU-IP20-100W Page 329

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	1,4A	8,5A	100	No
	24	1,4A	4,5A		



TT-PSU-IP20-200W Page 330

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	4A	17A	200	No
	24	4A	8,8A		



TT-PSU-IP20-500W Page 331

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	4,85A	41,7A	500	No
	24	4,85A	20,9A		



TT-PSU-IP65-150W Page 332

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
347	24	0,5A	6,25A	150	No



TT-PSU-IP67-150W Page 333

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
90 ~ 132	12	3A	10A	120	No
	24	6,3A	10A	150	



TT-PSU-IP67-240W-120V/24V-B Page 334

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	24	4A	10A	240	0 - 10V




TITANIUM

TECHNOLOGY

TT-DR-CV-020



- Transformers dimmable to the primary 120vAC.
- 16 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

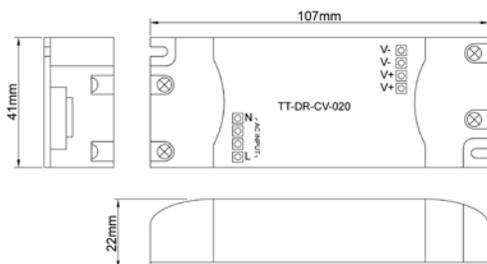

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,24A	0,22A
Amperage out	1600mA	830mA
Power	19,2w	
Size	107mm x 41mm x 22mm 4 1/4" x 1 5/8" x 7/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	020	-	12V
TT	-	DR	-	CV	-	020	-	


TITANIUM

TECHNOLOGY

TT-DR-CV-030



- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

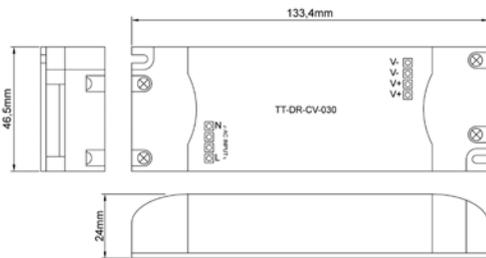

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2000mA	1250mA
Power	30w	
Size	133mm x 46,5mm x 24mm 5 1/4" x 1 7/8" x 1"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	030	-	12V
TT	-	DR	-	CV	-	030	-	


TITANIUM

TECHNOLOGY

TT-DR-CV-040



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

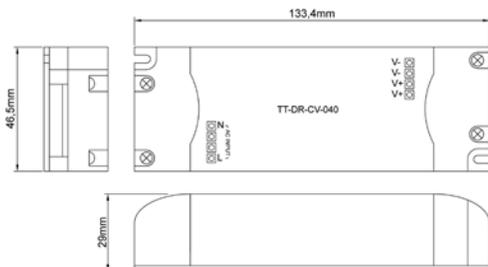

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	
Size	133mm x 46,5mm x 29mm 5 1/4" x 1 7/8" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	040	-	12V
TT	-	DR	-	CV	-	040	-	


TITANIUM

TECHNOLOGY

TT-DR-CV-060



- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

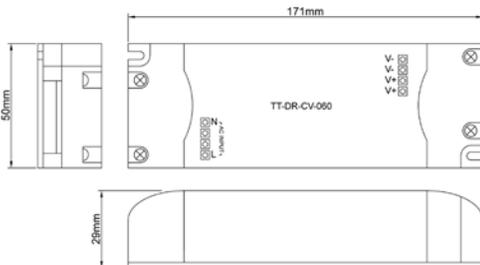

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	4000mA	2500mA
Power	60w	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	060	-	12V
TT	-	DR	-	CV	-	060	-	


TITANIUM

TECHNOLOGY

TT-DR-CV-080



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

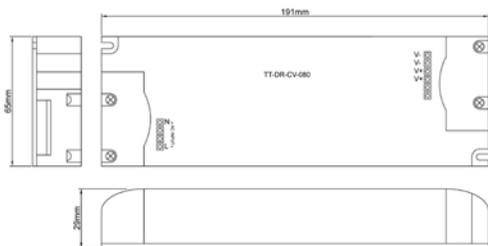

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,1A	1A
Amperage out	6000mA	3300mA
Power	72w	
Size	191mm x 65mm x 29mm 7 1/2" x 2 1/2" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	080	-	12V
TT	-	DR	-	CV	-	080	-	


TITANIUM

TECHNOLOGY

TT-DR-CV-025-BOX



- Transformers dimmable to the primary 120vAC.
- 20 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

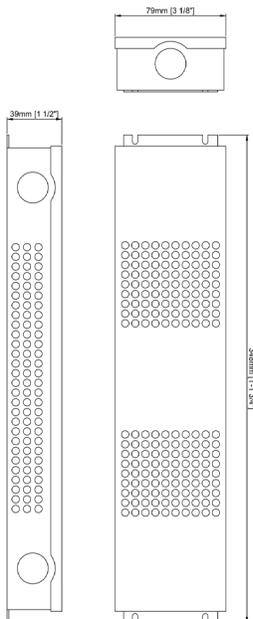

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,9 A	0,9 A
Amperage out	2,1A	1,05A
Power	25w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	025	-	12v	-	BOX
TT	-	DR	-	CV	-	025	-		-	BOX


TITANIUM

TECHNOLOGY

TT-DR-CV-050-BOX



- Transformers dimmable to the primary 120vAC.
- 40 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

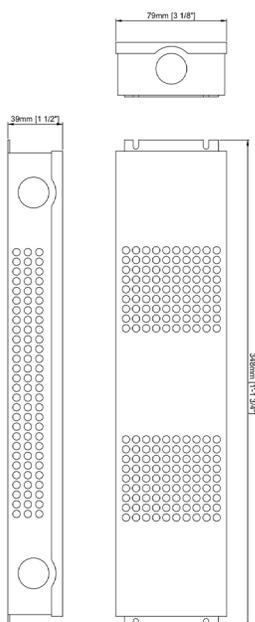

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,6 A	1,6 A
Amperage out	4,16 A	2,1 A
Power	50w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	050	-	12V	-	BOX
TT	-	DR	-	CV	-	050	-		-	BOX


TITANIUM

TECHNOLOGY

TT-DR-CV-096-BOX



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

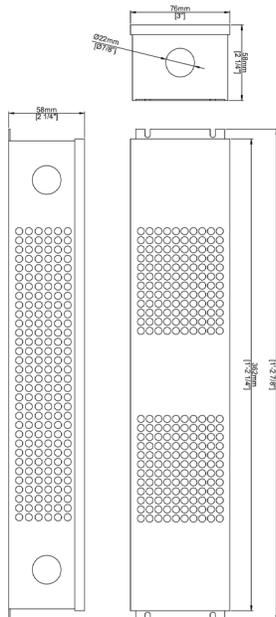

Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,7A	1,6A
Amperage out	8,33A	4A
Power	100w	96w
Minimum load	1w	
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "	
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV	
IP	66	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	096	-	12V	-	BOX
TT	-	DR	-	CV	-	096	-		-	BOX


TITANIUM

TECHNOLOGY

TT-DR-CV-200-BOX



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%

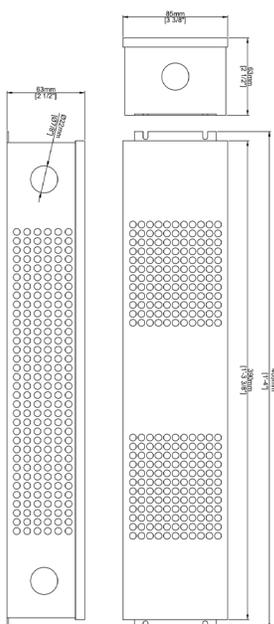

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	3,2A	3,2A
Amperage out	16,6A	8,3A
Power	200w	
Minimum Load	1w	
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"	
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac	
IP	66	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	200	-	12V	-	BOX
TT	-	DR	-	CV	-	200	-		-	BOX


TITANIUM

TECHNOLOGY

TT-DR-CV-096-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100% Class 2
- Frequency of 2000Hz
- Optimized for TT-TRK serie

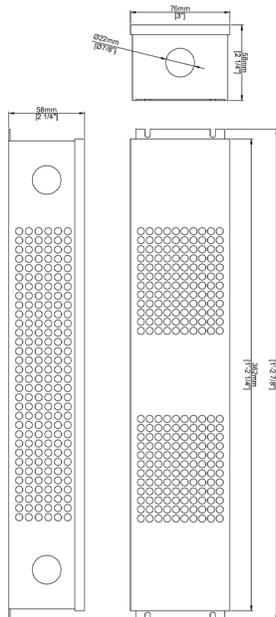

Voltage in	120vAC
Voltage out	24vDC Classe 2
Amperage in	1,6A
Amperage out	4A
Power	96w
Minimum load	1w
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	096	-	24V	-	BOX	-	TRK


TITANIUM

TECHNOLOGY

TT-DR-CV-200-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Frequency of 2000Hz
- Optimized for TT-TRK serie

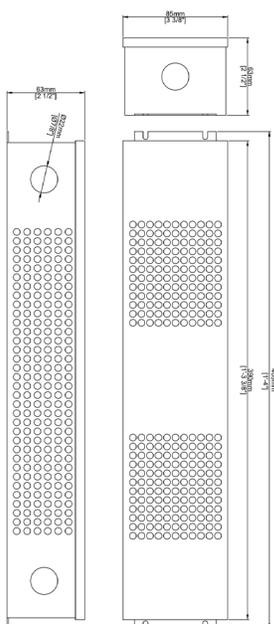

Voltage in	120vAC
Voltage out	24vDC
Amperage in	3,2A
Amperage out	8,3A
Power	200w
Minimum Load	1w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac
IP	66

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	200	-	24V	-	BOX	-	TRK


TITANIUM

TECHNOLOGY

TT-DR-CV-384-
24V-BOX- 5 IN 1



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- 5 in 1
- Class 2

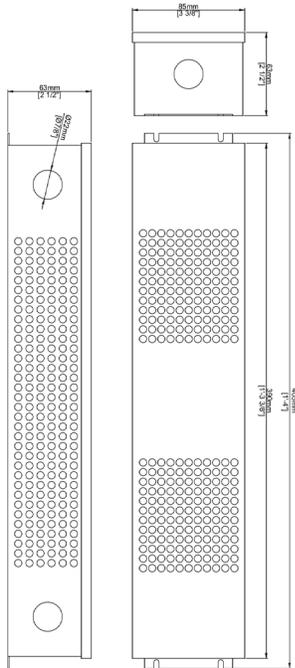

Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes 5% ~100% Triac - 0-10V - Potentiometer - 10V PWM
IP	66
Dimming	Triac 0-10V Potentiometer 10V pwm Phase

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-5IN1


TITANIUM

TECHNOLOGY

TT-DR-CV-384-
24V-BOX



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- ELV dimming
- Class 2

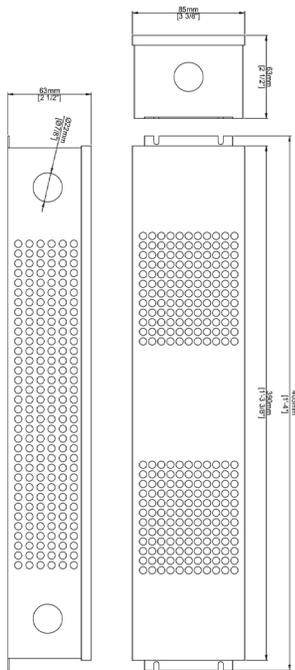

Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66
Dimming	Foward phase Reverse phase ELV MLV Triac

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-ELV


TITANIUM

TECHNOLOGY

TT-DR-CVB-030



- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

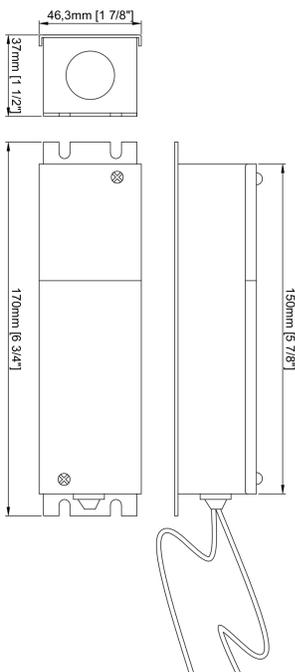

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2000mA	1250mA
Power	30w	
Size	170mm x 46,3mm x 37mm 6 ³ / ₄ " x 1 ⁷ / ₈ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	030	-	12V
TT	-	DR	-	CVB	-	030	-	


TITANIUM

TECHNOLOGY

TT-DR-CVB-040



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

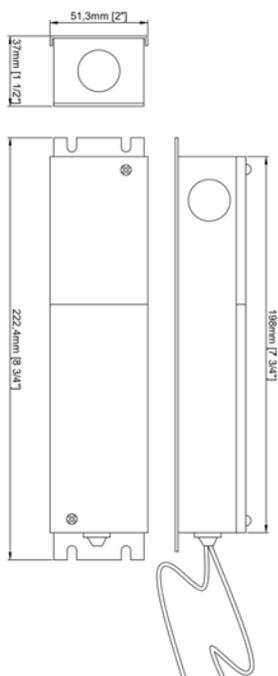

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	
Size	222,3mm x 51,3mm x 37mm 8 3/4" x 2" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	040	-	12V
TT	-	DR	-	CVB	-	040	-	


TITANIUM

TECHNOLOGY

TT-DR-CVB-060



- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

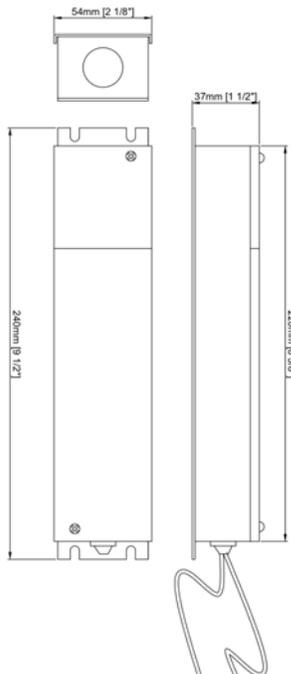

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	4000mA	2500mA
Power	60w	
Size	240mm x 54mm x 37mm 9 1/2" x 2 1/8" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	060	-	12V
TT	-	DR	-	CVB	-	060	-	


TITANIUM

TECHNOLOGY

TT-DR-CVB-080



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

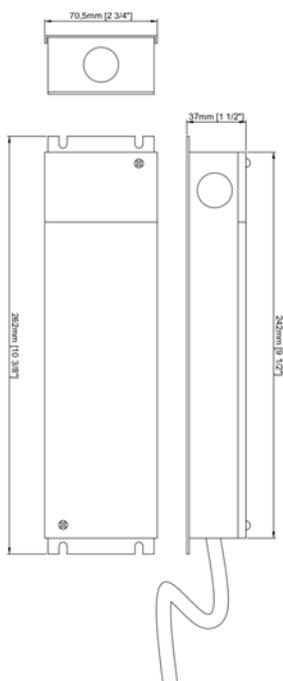

Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,1A	1A
Amperage out	6000mA	3400mA
Power	72w	
Size	262mm x 70,5mm x 37mm 10 3/8" x 2 3/4" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	080	-	12V
TT	-	DR	-	CVB	-	080	-	


TITANIUM

TECHNOLOGY

TT-DR-CVB-100



- Transformers dimmable to the primary 120vAC.
- 77 watts maximum load.
- Triac dimmable from 5% to 100% Class 2

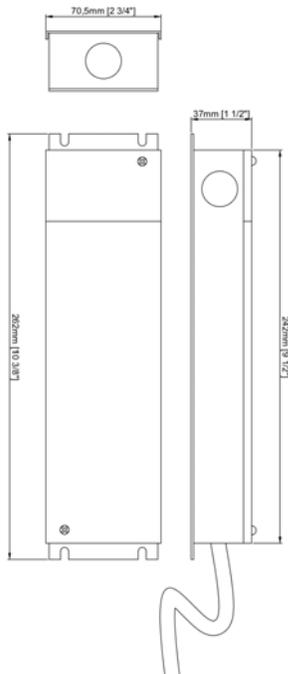

Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,2A	1,2A
Amperage out	8A	4A
Power	96w	
Size	262mm x 70,5mm x 37mm 10 ³ / ₈ " x 2 ³ / ₄ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	100	-	12V
TT	-	DR	-	CVB	-	100	-	

TITANIUM



TECHNOLOGY

TT-PSU-IP20-015W



- 120 vAC transformer 15 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,35A	0,35A
Amperage out	1,3A	0,7A
Power	15w	
Size	63mm x 51mm x 28mm 2 1/2" x 2" x 1 1/8"	
Dimmable	No	
IP	20	

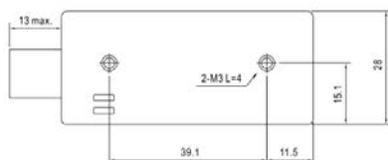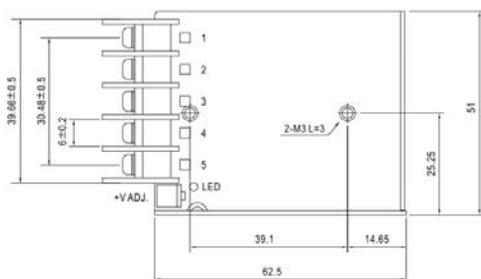

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	015W	-	12V
TT	-	PSU	-	IP20	-	015W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-025W



- 120 VAC transformer 25 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,55A	0,55A
Amperage out	2,1A	1,1A
Power	25w	
Size	67mm x 51mm x 28mm 2 ⁵ / ₈ " x 2" x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

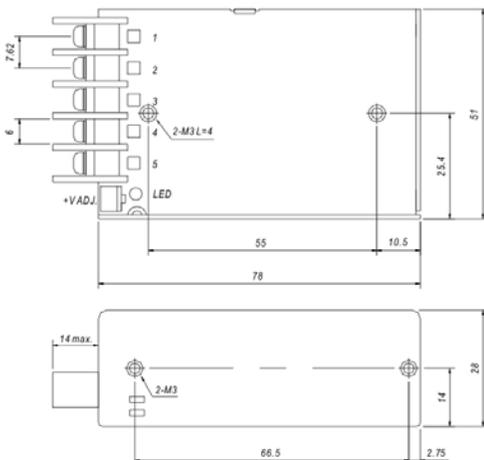

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	025W	-	12V
TT	-	PSU	-	IP20	-	025W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-050W



- 120 VAC transformer 50 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,95A	0,95A
Amperage out	4,2A	2,2A
Power	50w	
Size	99mm x 82mm x 30mm 3 ⁷ / ₈ " x 3 ¹ / ₄ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

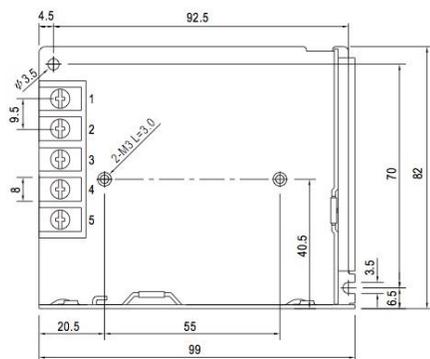

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	050W	-	12V
TT	-	PSU	-	IP20	-	050W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-075W



- 120 VAC transformer 75 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	1,4A	1,4A
Amperage out	6A	3,2A
Power	75w	
Size	99mm x 97mm x 30mm 37/8" x 37/8" x 11/8"	
Dimmable	No	
IP	20	

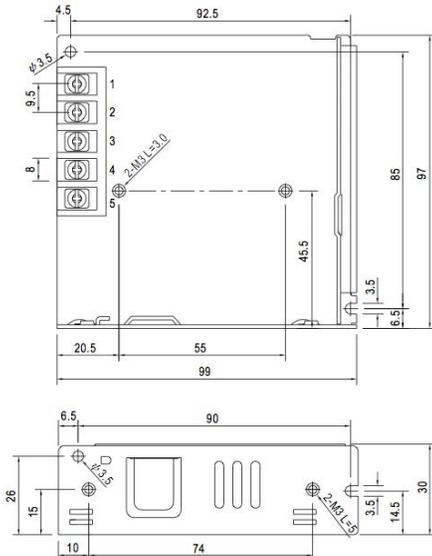

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	075W	-	12V
TT	-	PSU	-	IP20	-	075W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-100W



- 120 VAC transformer 100w.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	1,4A	1,4A
Amperage out	8,5A	4,5A
Power	100w	
Size	129mm x 97mm x 30mm 5 1/8" x 3 7/8" x 1 1/8"	
Dimmable	No	
IP	20	

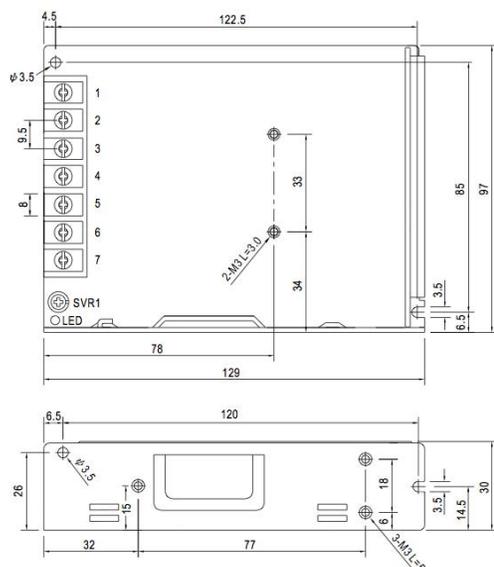

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	100W	-	12V
TT	-	PSU	-	IP20	-	100W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-200W



- 120 VAC transformer 200 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	4A	4A
Amperage out	17A	8,8A
Power	200w	
Size	215mm x 115mm x 30mm 8 ¹ / ₂ " x 4 ¹ / ₂ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

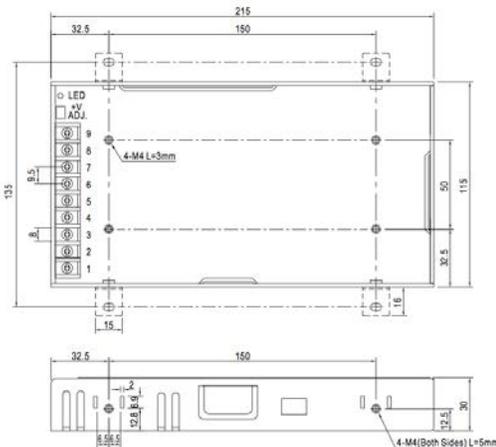

Accessories



TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	200W	-	12V
TT	-	PSU	-	IP20	-	200W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP20-500W



- 120 VAC transformer 500 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by fan.

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	4,85A	4,85A
Amperage out	41,7A	20,9A
Power	500w	
Size	232mm x 81mm x 31mm 9 ¹ / ₈ " x 3 ¹ / ₄ " x 1 ¹ / ₄ "	
Dimmable	No	
IP	20	
Weight	0,905 Kg	

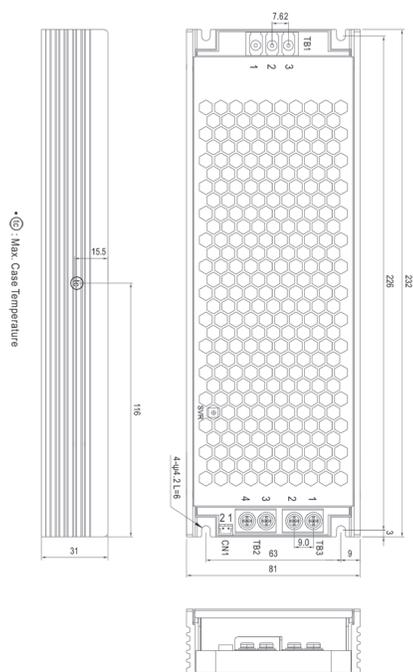

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	500W	-	12V
TT	-	PSU	-	IP20	-	500W	-	

TITANIUM


TECHNOLOGY

TT-PSU-IP65-150W



- 347 VAC transformer 150w.
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP65.
- Cooling by free air convection.

Voltage in	347vAC
Voltage out	24vDC
Amperage in	0.5A
Amperage out	6.25A
Power	150w
Size	245mm x 68mm x 39mm 9 ⁵ / ₈ " x 2 ⁵ / ₈ " x 1 ¹ / ₂ "
Dimmable	No
IP	65

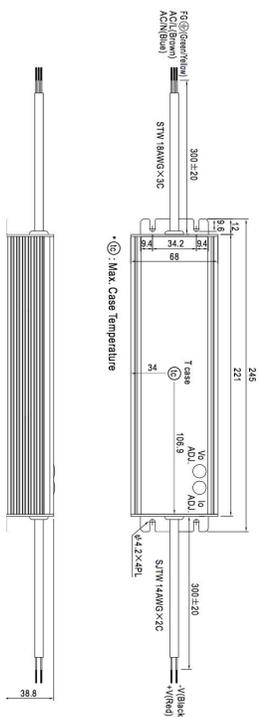

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP65	-	150W	-	24V

TITANIUM


TECHNOLOGY

TT-PSU-IP67



- 120 VAC transformer 150w for 24 VDC.
- 120 VAC transformer 120w for 12 VDC.
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP67.
- Cooling by free air convection.

Voltage in	90~132vAC	
Voltage out	12vDC	24vDC
Amperage in	3A	6,3A
Amperage out	10A	10A
Power	120w	150w
Size	191mm x 63mm x 38mm 7 ¹ / ₂ " x 2 ¹ / ₂ " x 1 ¹ / ₂ "	
Dimmable	No	
IP	67	

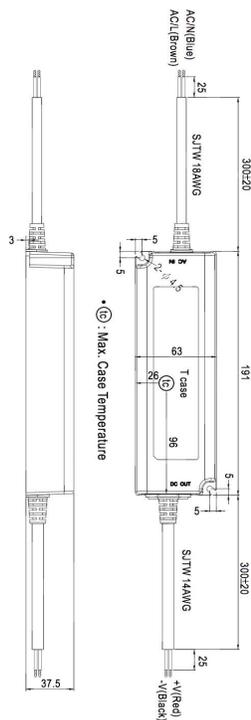

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP67	-	150W	-	12V
TT	-	PSU	-	IP67	-		-	

TITANIUM


TECHNOLOGY

TT-PSU-IP67-
240W-120V/24V-B



- 120 VAC transformer 240w.
- 0-10V dimming
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP67.
- Cooling by free air convection.


Voltage in	100~240vAC
Voltage out	24vDC
Amperage in	4A
Amperage out	10A
Power	240w
Size	244,2mm x 68mm x 38,8mm 9 ⁵ / ₈ " x 2 ⁵ / ₈ " x 1 ¹ / ₂ "
Dimmable	0 - 10V
IP	67

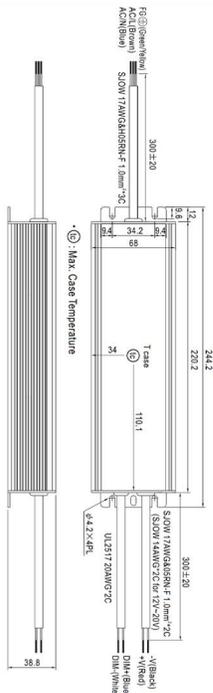


PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER / VOLTAGE	/	VOLTAGE OUT
TT	-	PSU	-	IP67	-	240W-120V	/	24V-B

CONTROLS

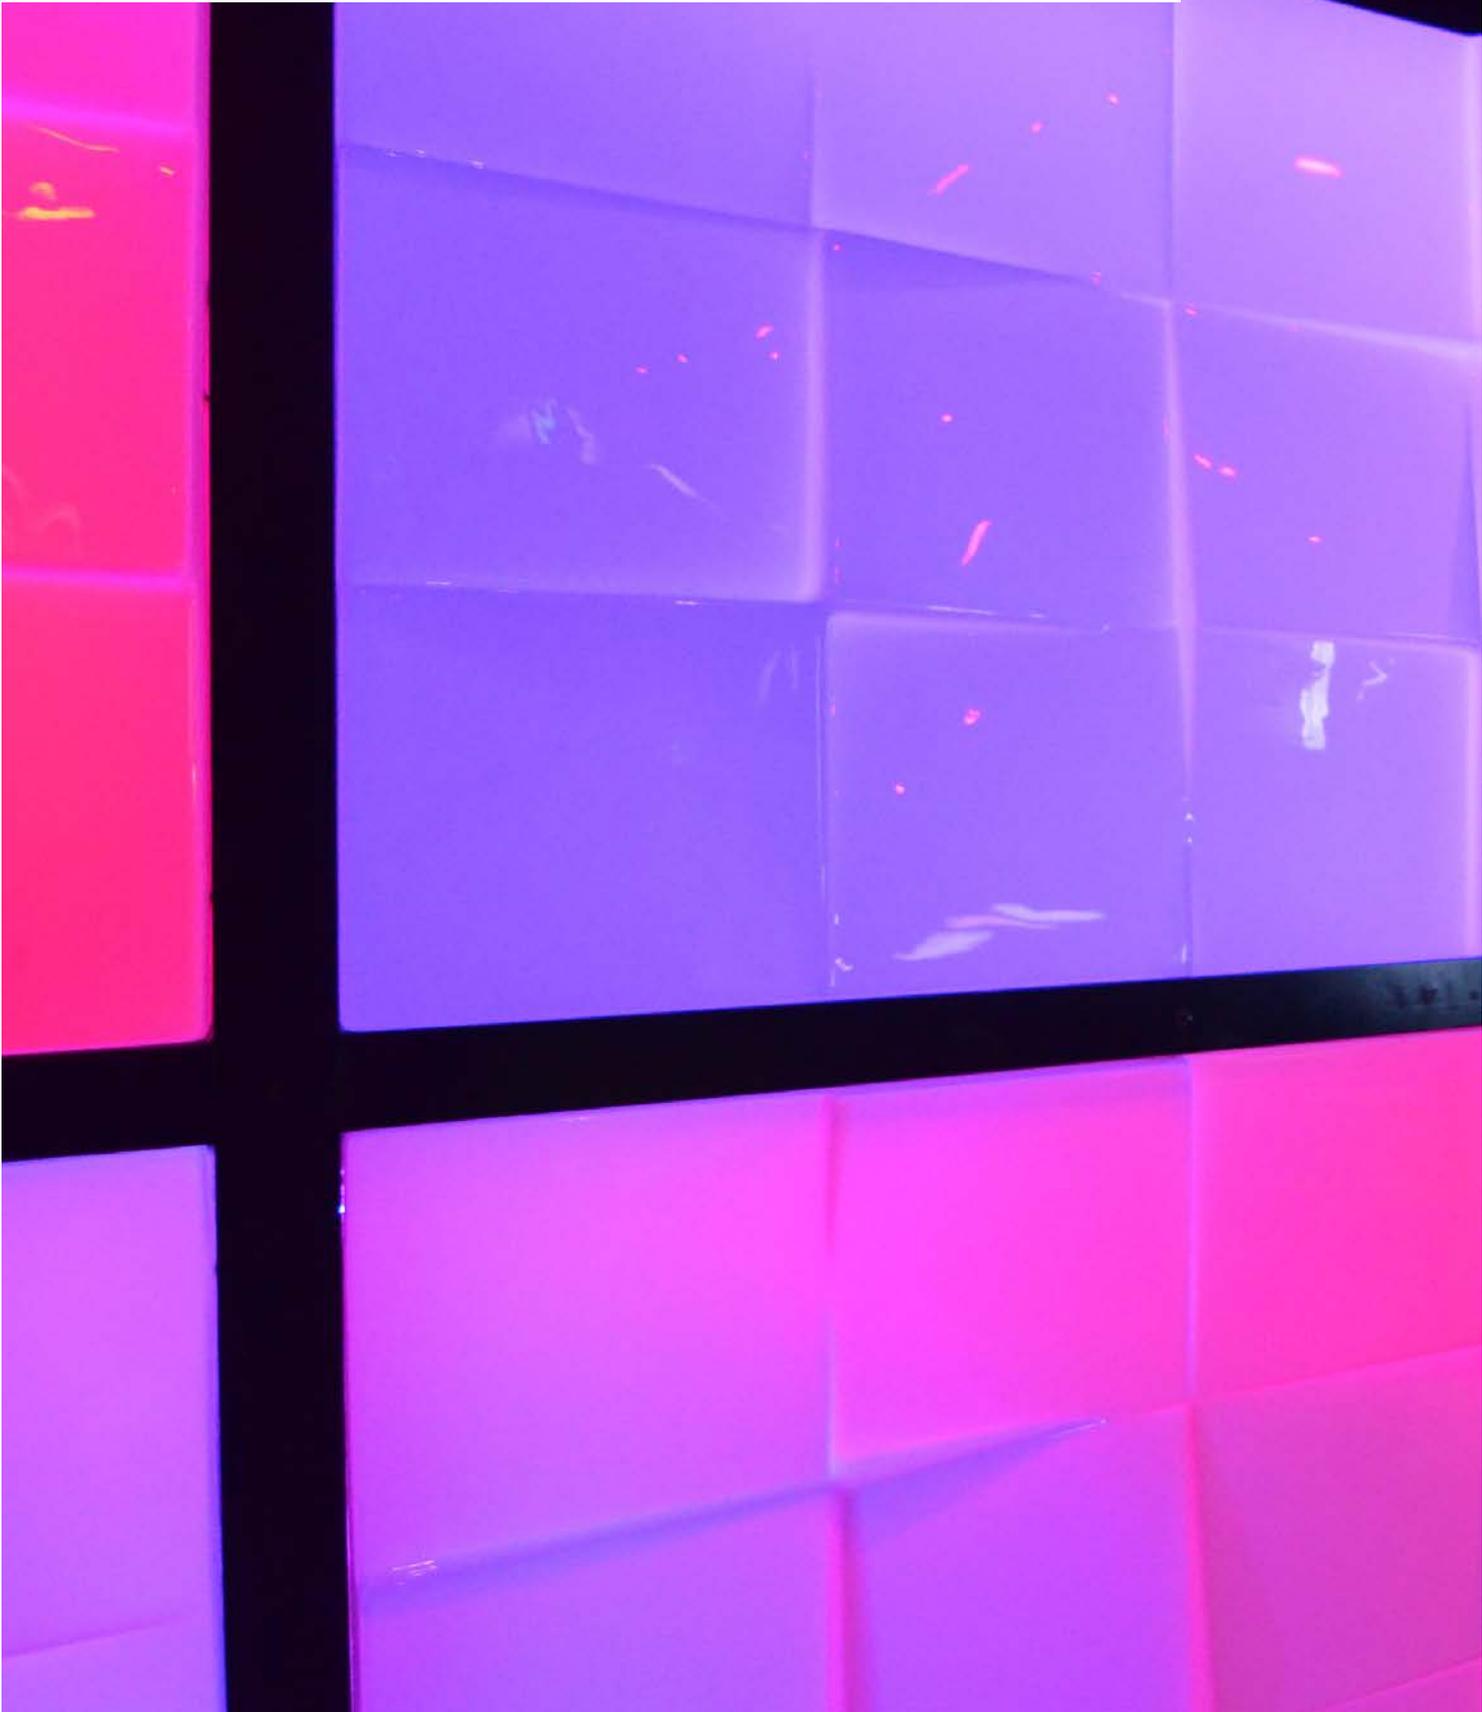



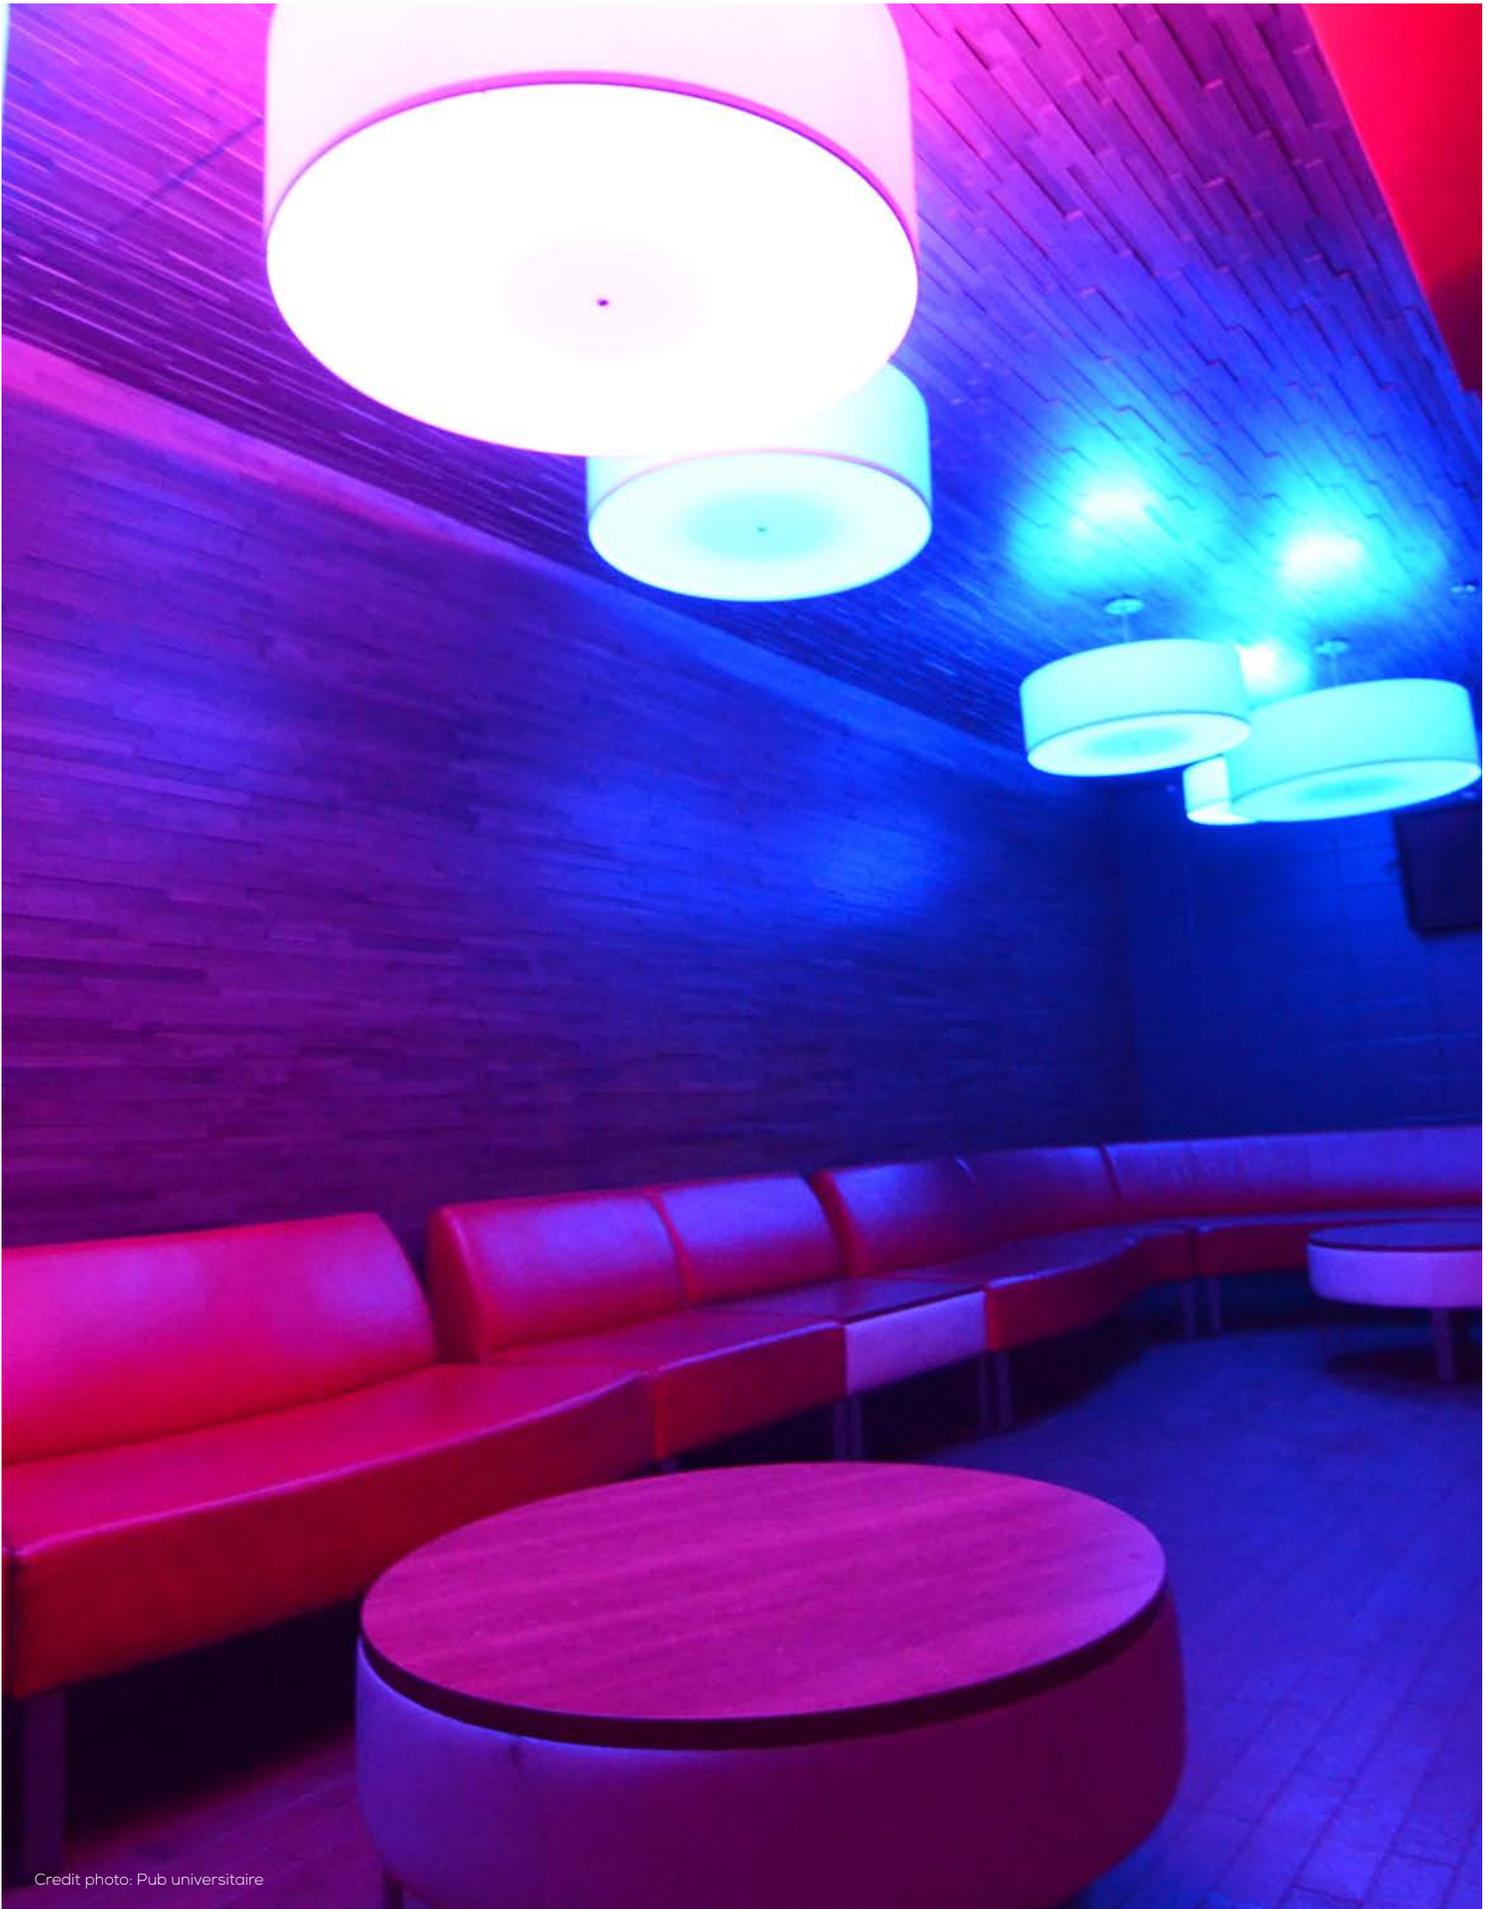

Credit photo: Pub universitaire

TT-U-E4S Page 344

Voltage (vDC)	Power (W)	Description
12	36	Touch panel
24	72	



TT-U-E5S Page 345

Voltage (vDC)	Power (W)	Description
12	36	Touch panel
24	72	



TT-UB1 Page 346

Voltage (vDC)	Power (W)	Description
12, 24	-	Touch panel



TT-UB4 Page 347

Voltage (vDC)	Power (W)	Description
12, 24	-	Touch panel



TT-UB5 Page 348

Voltage (vDC)	Power (W)	Description
12, 24	-	Touch panel



TT-Q4 Page 349

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Q5 Page 349

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-RC4 Page 350

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-U-M1 Page 351

Voltage (vDC)	Power (W)	Description
12	60	Remote
24	120	



TT-U-M1-MINI Page 352

Voltage (vDC)	Power (W)	Description
12	36	Remote
24	72	



TT-U-M3-MINI Page 353

Voltage (vDC)	Power (W)	Description
12	36	Remote
24	72	



TT-U-M4 Page 354

Voltage (vDC)	Power (W)	Description
12	60	Remote
24	120	



TT-U-M5-MINI Page 355

Voltage (vDC)	Power (W)	Description
12	36	Remote
24	72	



TT-U-M6 Page 356

Voltage (vDC)	Power (W)	Description
12	60	Remote
24	120	



TT-Y-5C-4A Page 357

Voltage (vDC)	Power (W)	Description
12	48	Receiver
24	96	



TT-Y-5C-6A Page 358

Voltage (vDC)	Power (W)	Description
12	96	Receiver
48	192	



TT-Y-R-CCT Page 359

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Y-R-M Page 360

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Y-R-RGBCCT Page 361

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Y-R-RGBW Page 362

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Y-W1-CCT Page 363

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote



TT-Y-W1-M Page 364

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote



TT-Y-W1-RGBW Page 365

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote



TT-STICK-GU2 Page 366

Voltage (vDC)	Power (W)	Description
5 - 12	-	Touch panel



TT-STICK-GA2 Page 366

Voltage (vDC)	Power (W)	Description
5 - 12	-	Touch panel



TT-STICK-CW4 Page 366

Voltage (vDC)	Power (W)	Description
5 ~ 15	-	Touch panel



TT-STICK-DE3 Page 366

Voltage (vDC)	Power (W)	Description
5 ~ 6	-	Touch panel



TT-STICK-KE2 Page 366

Voltage (vDC)	Power (W)	Description
5 ~ 6	-	Touch panel



TT-SUITE3-BC Page 367

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SUITE3-EC Page 367

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U11 Page 368

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U10 Page 368

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U9 Page 368

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-DMX-4C Page 369

Voltage (vDC)	Power (W)	Description
5	30	DMX
12	72	
24	144	



TT-DMX-5C Page 370

Voltage (vDC)	Power (W)	Description
12	60	DMX
24	120	



TT-DMX-32C Page 371

Voltage (vDC)	Power (W)	Description
12	36	DMX
24	72	



TT-AMP-4-32 Page 372

Voltage (vDC)	Power (W)	Description
5	40	Amplifier
12	96	
24	192	



TT-AMP-5-50 Page 373

Voltage (vDC)	Power (W)	Description
5	50	Amplifier
12	120	
24	240	



TT-DMX-OPTO Page 374

Voltage (vDC)	Power (W)	Description
12	8	DMX
24		




TITANIUM

TECHNOLOGY

TT-U-E4S



- One RGBW zone touch panel Controller.
- Connects directly to 12vDC or 24vDC.
- 4A per channel, 16A maximum.
- Install to the wall with a European-style connection box T-T-BOX-03.

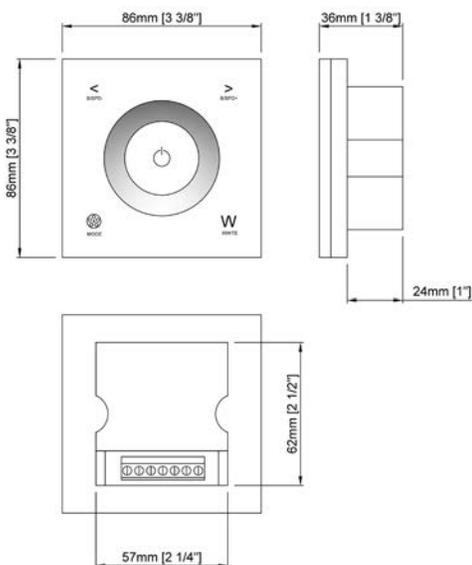

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	86mm x 86mm x 36mm 3 ³ / ₈ " x 3 ³ / ₈ " x 1 ³ / ₈ "	
IP	20	

Accessories



TT-BOX-03



TT-Q4

PRODUCT CODE

TT - TYPE - MODEL

TT - U - E4S



TITANIUM

TECHNOLOGY

TT-U-E5S



- One RGB+CCT zone touch panel Controller.
- Connects directly to 12vDC or 24vDC.
- 3A per channel, 12A maximum.
- Install to the wall with a Euro-
pean-style connection box
TT-BOX-03.

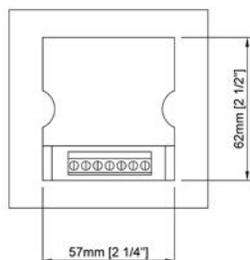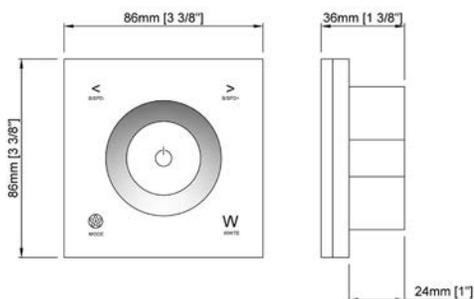

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	5	
Finish	White	
Dimmable	Yes	
Size	86mm x 86mm x 36mm 3 ³ / ₈ " x 3 ³ / ₈ " x 1 ³ / ₈ "	
IP	20	

Accessories



TT-BOX-03



TT-Q5

PRODUCT CODE

TT - TYPE - MODEL

TT - U - E5S

TITANIUM


TECHNOLOGY

TT-UB1



- Touch panel
- Control 1 color
- 4 Zones
- 4 Scene keys
- Control by app

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "

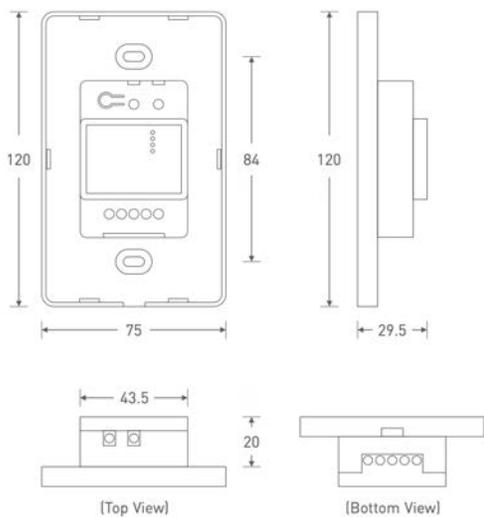

PRODUCT CODE

TT	-	MODEL
TT	-	UB1

TITANIUM



TECHNOLOGY

TT-UB4



- Touch panel
- Control RGBW
- 4 Zones
- 4 Scene keys
- Control by app

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "

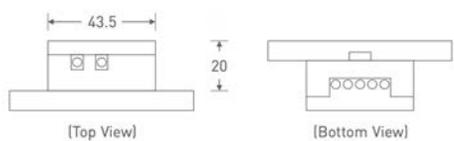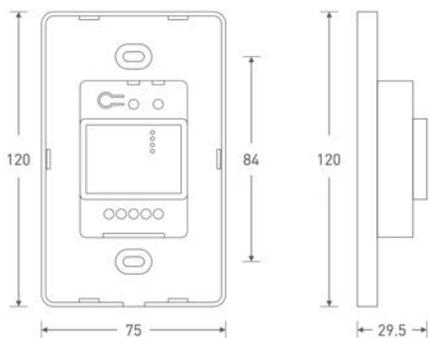

Accessories



TT-RC4

PRODUCT CODE

TT - MODEL

TT - UB4

TITANIUM


TECHNOLOGY

TT-UB5



- Touch panel
- Control RGB CCT
- 4 Zones
- 4 Scene keys
- Control by app

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "

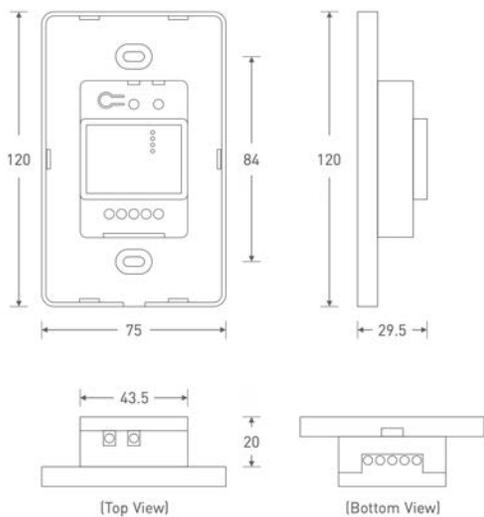

PRODUCT CODE

TT	-	MODEL
TT	-	UB5


TITANIUM

TECHNOLOGY

TT-Q4



- 4 zones control RGBW
- RF 2,4 GHz
- Work with TT-U-E4S

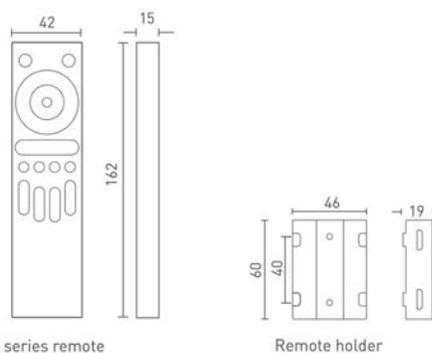

Accessories



TT-U-E4S


PRODUCT CODE

TT	-	MODEL
TT	-	Q4

TT-Q5



- 4 zones control RGB CCT
- RF 2,4 GHz
- Work with TT-U-E5S

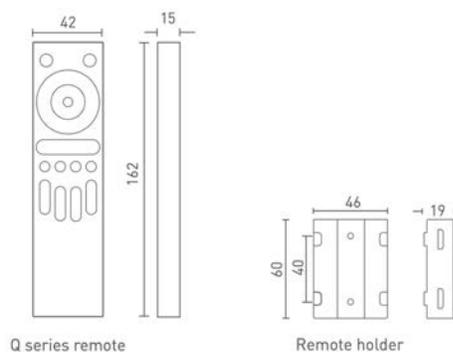

Accessories



TT-U-E5S

PRODUCT CODE

TT	-	MODEL
TT	-	Q5

TITANIUM

TECHNOLOGY

TT-RC4



- Control TT-UB4
- 4 zones
- Bluetooth led remote

Accessories



TT-UB4

PRODUCT CODE

TT	-	MODEL
TT	-	RC4

TITANIUM


TECHNOLOGY

TT-U-M1



- The M series is a remote receiver set all-in-one.
- The remote can control four outputs channel of the receiver simultaneously.
- The set includes a wall bracket for remote control.

Voltage	12vDC	24vDC
Power per channel	60w	120w
Amperage per channel	5A	5A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ " Receiver 175mm X 44mm X 30mm 6 ⁷ / ₈ " x 1 ³ / ₄ " x 1 ¹ / ₈ "	
IP	20	

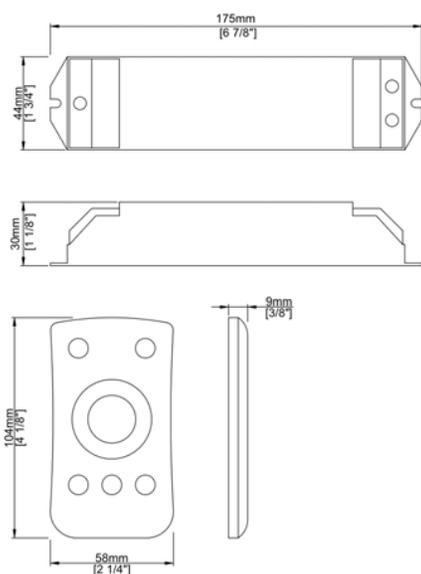

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M1


TITANIUM

TECHNOLOGY

TT-U-M1-MINI



- The M series is a remote receiver set all-in-one.
- The remote can control four outputs channel of the receiver simultaneously.
- The set includes a wall bracket for remote control.

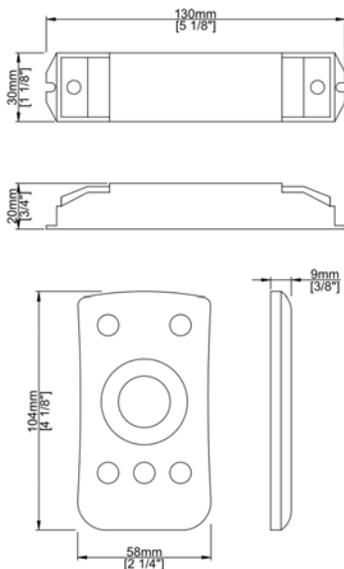

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	3	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ " Receiver 130mm X 30mm X 20mm 5 ¹ / ₈ " x 1 ¹ / ₈ " x 3 ³ / ₄ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M1-MINI


TITANIUM

TECHNOLOGY

TT-U-M3-MINI



- The M series is a remote receiver set all-in-one.
- The three-channel remote can control each receiver outputs independently in mode RGB.
- The set includes a wall bracket for remote control.

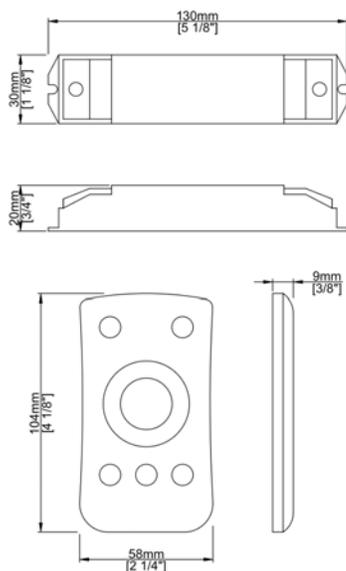

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	3	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ " Receiver 130mm X 30mm X 20mm 5 ¹ / ₈ " x 1 ¹ / ₈ " x 3 ³ / ₄ "	
IP	20	

PRODUCT CODE


TT - TYPE - MODEL

TT - U - M3-MINI

TT-U-M4



- The M series is a remote receiver set all-in-one.
- The four-channel remote can controls each receiver outputs independently in mode RGBW.
- The set includes a wall bracket for remote control.

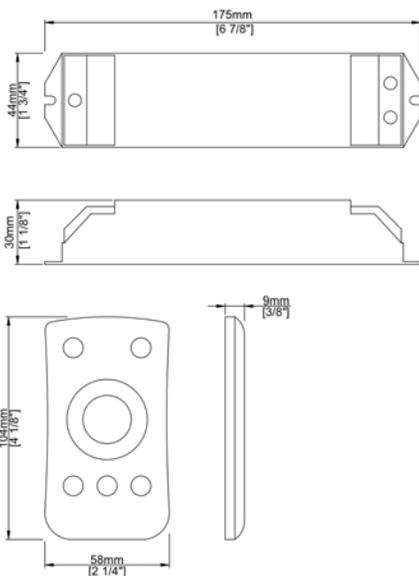

Voltage	12vDC	24vDC
Power per channel	60w	120w
Amperage per channel	5A	5A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ " Receiver 175mm X 44mm X 30mm 6 ⁷ / ₈ " x 1 ³ / ₄ " x 1 ¹ / ₈ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M4

TITANIUM


TECHNOLOGY

TT-U-M5-MINI



- The M series is a remote receiver set all-in-one.
- The three-channel remote can controls each receiver outputs independently in mode CCT.
- The set includes a wall bracket for remote control.

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	2	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x ³ / ₈ " Receiver 130mm X 30mm X 20mm 5 ¹ / ₈ " x 1 ¹ / ₈ " x ³ / ₄ "	
IP	20	

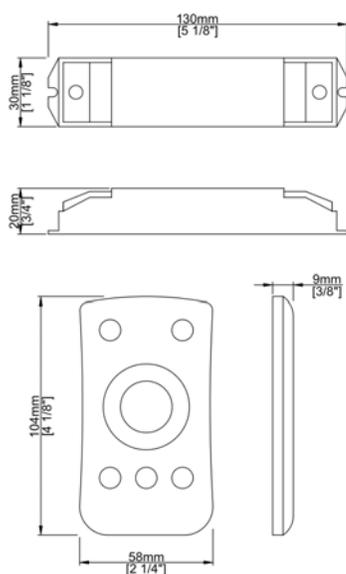

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M5-MINI


TITANIUM

TECHNOLOGY

TT-U-M6



- The M series is a remote receiver set all-in-one.
- The four-channel remote can control each receiver outputs independently in mode RGBW.
- The set includes a wall bracket for remote control.

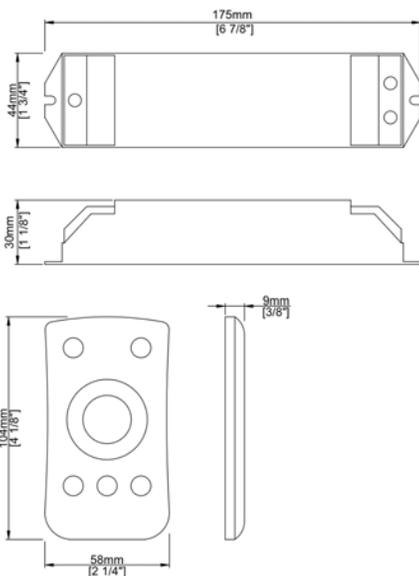

Voltage	12vDC	24vDC
Power per channel	60w	120w
Amperage per channel	5A	5A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ⁸ / ₈ " Receiver 175mm X 44mm X 30mm 6 ⁷ / ₈ " x 1 ³ / ₄ " x 1 ¹ / ₈ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M6

TITANIUM

TECHNOLOGY

TT-Y-5C-4A



- Multi mode WiFi RF receiver for the TT-Y series.

Voltage	12vDC	24vDC
Power per channel	48w	96w
Amperage per channel	4A	4A
Channel	5	
Finish	White	
Size	145mm x 46.5mm x 16mm 5 ¹¹ / ₁₆ " x 1 ¹³ / ₁₆ " x 5 ⁵ / ₈ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	Y	-	5C-4A


TITANIUM

TECHNOLOGY

TT-Y-5C-6A



- Multi mode WiFi RF receiver for the TT-Y series.

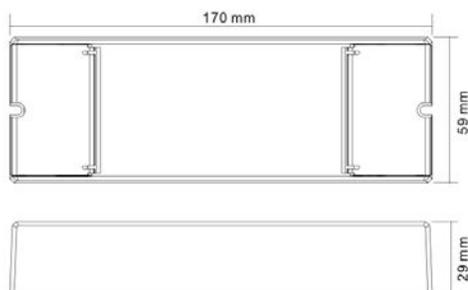

Voltage	12vDC	48vDC
Power per channel	96w	192w
Amperage per channel	8A	8A
Channel	5	
Finish	White	
Size	170mm x 59mm x 29mm 6 ¹¹ / ₁₆ " x 2 ⁵ / ₁₆ " x 1 ¹ / ₈ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	Y	-	5C-6A

TITANIUM

TECHNOLOGY

TT-Y-R-CCT



- RF remote control for TT-Y series.

Channel	2
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " X 2 ³ / ₁₆ " X 1 ¹ / ₁₆ "
CCT	CCT 2 whites
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - R - CCT

TITANIUM

TECHNOLOGY

TT-Y-R-M



- RF remote control for TT-Y series.

Channel	1
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " X 2 ³ / ₁₆ " X 1 ¹ / ₁₆ "
CCT	Mono 1 white
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	R	-	M

TT-Y-R-RGBCCT



- RF remote control for TT-Y series.


Channel	5
Finish	Black
Size	153mm X 52mm X 19mm 6 ¹ / ₃₂ " X 2 ¹ / ₁₆ " X ³ / ₄ "
CCT	RGBCCT
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - R - RGBCCT

TT-Y-R-RGBW

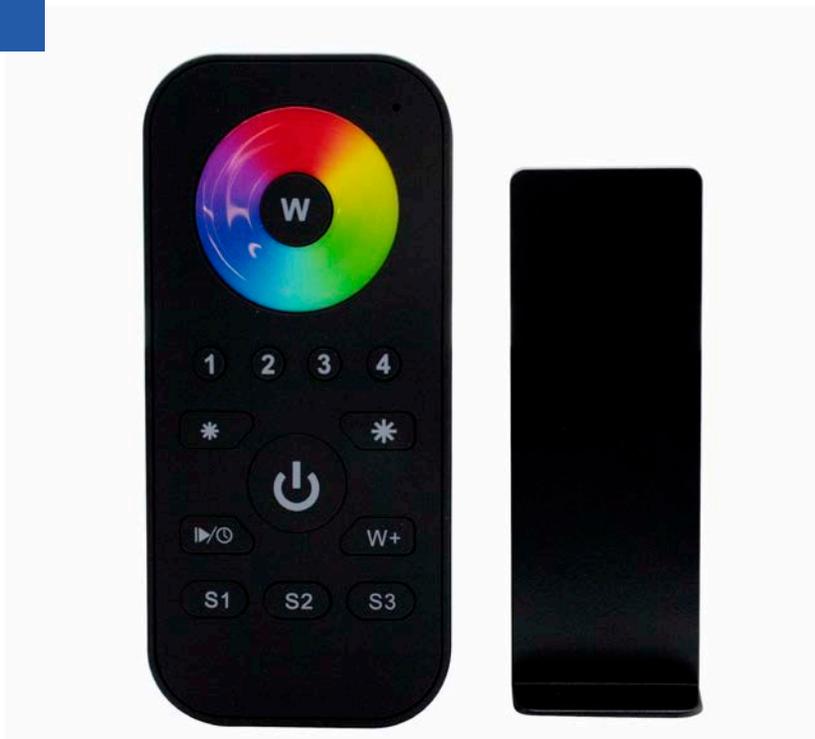

- RF remote control for TT-Y series.

Channel	4
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " X 2 ³ / ₁₆ " X 1 ¹ / ₁₆ "
CCT	RGBW
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - R - RGBW

TT-Y-W1-CCT



- Decora style RF wall remote control for the TT-Y series.

Channel	2
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " X 1 ⁵ / ₁₆ " X 3/ ₈ "
CCT	CCT 2 whites
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - W1 - CCT

TT-Y-W1-M



- Decora style RF wall remote control for the TT-Y series.

Channel	1
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " X 1 ⁵ / ₁₆ " X ³ / ₈ "
CCT	Mono 1 white
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - W1 - M

TT-Y-W1-RGBW



- Decora style RF wall remote control for the TT-Y series.

Channel	4
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " X 1 ⁵ / ₁₆ " X 3 ³ / ₈ "
CCT	RGBW
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT - Y - W1 - RGBW

TITANIUM

TECHNOLOGY

STICK CONTROLLER SERIES

- Wall touch lighting controller.
- Computer programming and operates in standalone mode thereafter.
- Can be controlled by mobile application.



Product code	TT-STICK-GU2	TT-STICK-GA2	TT-STICK-CW4	TT-STICK-DE3	TT-STICK-KE2
USB connection	•	•	•	•	•
Ethernet connection		•	•	•	•
DMX channels	128	512	1024	1024	1024
Easy Stand Alone 2 (PC/MAC)	•	•	•	•	•
Easy Stand Alone Pro	•	•	•	•	•
Stick Remote App			•	•	•
Arcolis app			•	•	•
Number of scenes	24	99	36	500	200
Number of zone	1	1	1	10	5
Stand alone memory	12K	79K	76K	microSD	microSD
Live control	Color and dimmer	Color and dimmer	Color and dimmer	Color, dimmer, speed	Color, dimmer, speed
Touch-sensitive buttons	3	4	12 + wheel	10 + wheel	12 + cursor
Port triggering	1	8	8	8	8
Clock triggering			100	100	40
RS232 triggering				•	•
Size	86 x 86 x 11 mm 3 ³ / ₈ " x 3 ³ / ₈ " x 3 ³ / ₈ "	86 x 110 x 11 mm 3 ³ / ₈ " x 3 ³ / ₈ " x 3 ³ / ₈ "	106 x 146 x 11 mm 4 ¹ / ₈ " x 5 ³ / ₄ " x 3 ³ / ₈ "	106 x 146 x 11 mm 4 ¹ / ₈ " x 5 ³ / ₄ " x 3 ³ / ₈ "	130 x 170 x 11 mm 5 ¹ / ₈ " x 6 ³ / ₄ " x 3 ³ / ₈ "
Power	5~12vDC 300mA	5~12vDC 300mA	5~15vDC 300mA	5~6vDC 300mA	5~6vDC 300mA

TITANIUM

TECHNOLOGY

SUNLITE SUITE 3 SERIES

- Computer lighting control module.
- Can be controlled remotely by mobile application.



Product code	TT-SUITE3-BC	TT-SUITE3-EC
USB connection	•	•
Ethernet connection		
ArtNet connection	*option	*option
DMX channels	256	1024
Easy Stand Alone		
Easy Stand Alone 2	*option	
Sunlite Suite 3	Express	Full
Sunlite Suite 2	Express	Full
Easy Remote App		
Number of zone		
Stand alone memory	64K	100K
Buttons		3
Port triggering		8
Clock triggering		
MIDI triggering		
RDM	*option	*option
Size	88 x 50 x 38 mm 3 ¹ / ₂ " x 2" x 1 ¹ / ₂ "	79 x 92 x 43 mm 3 ¹ / ₈ " x 3 ⁵ / ₈ " x 1 ³ / ₄ "
Power	5vDC via USB-C	5vDC via USB-C

TITANIUM

TECHNOLOGY

SLESA CONTROLLER SERIES

- Full range of standalone DMX interfaces.
- For architectural applications or installations
- Each DMX interface corresponds to a well-identified use and its association with one of the software of the range allows to control the lighting of places as diverse as houses, hotels, restaurants, offices, monuments, fountains, gardens ...



Product code	TT-SLESA-U11	TT-SLESA-U10	TT-SLESA-U9
USB connection	•	•	•
Ethernet connection	•		
WiFi connection		•	
DMX channels	1024	512	256
Easy Stand Alone		•	•
Easy Stand Alone 2	•	•	•
Easy Stand Alone Pro			
Easy Stand Alone Pro 2	•	•	•
Arcolis	•		
Number of scenes	99	99	20
Number of zone	5	1	1
Stand alone memory	microSD	100K	20K
Buttons		3	3
Port triggering	16	8	8
Clock triggering			
Infrared triggering			
Size	160 x 90 x 45 mm 6 ⁵ / ₁₆ " x 3 ⁹ / ₁₆ " x 1 ³ / ₄ "	79 x 92 x 43 mm 3 ¹ / ₈ " x 3 ⁵ / ₈ " x 1 ³ / ₄ "	79 x 92 x 43 mm 3 ¹ / ₈ " x 3 ⁵ / ₈ " x 1 ³ / ₄ "
Power	5vDC 300mA USB-C	5vDC 300mA USB-C	5vDC 300mA mini USB

TITANIUM



TECHNOLOGY

TT-DMX-4C



- LT-840-6A communication, achieves remote management of reading and writing DMX address (DMX master controller must recognize the RDM protocol). Equipped with DMX standard 3-pin XLR, RJ45, green terminal interface.
- Realize 0-100% dimming or different lighting effect; workable with single color, bi-color, RGB or RGBW LED lamps. With the standard RDM remote device management protocol, supports DMX512 signal bi-directional.

Voltage	5vDC	12vDC	24vDC
Power per channel	30w	72w	144w
Amperage per channel	6A	6A	6A
Channel	4		
Finish	Black		
Dimmable	Yes		
Size	156mm X 78mm X 40mm 6 ¹ / ₈ " x 3 ¹ / ₈ " x 1 ⁵ / ₈ "		
IP	20		

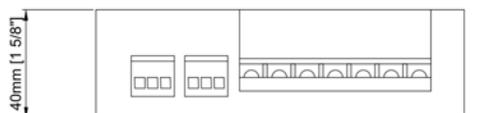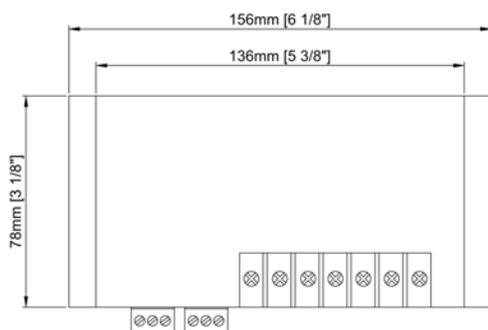

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DMX	-	4C

TITANIUM


TECHNOLOGY

TT-DMX-5C



- Designed for Hi-power multiple channels application, 5 channels output, and Max. 5A current per channel, up to 600W output power.
- Five kinds of mode optional: single color, color temperature, RGB, RGBW or RGB CCT
- Support 2 kinds of DMX ports with signal isolation function: XLR-5 or RJ45.
- With RDM remote management protocol the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting,

Voltage	12vDC	24vDC
Power per channel	60W	120w
Amperage per channel	5A	5A
Maximum amperage	25A	
Channel	5	
Finish	Black	
Dimmable	Yes	
Size	110mm X 122mm X 37mm 4 ³ / ₈ " x 4 ³ / ₄ " x 1 ¹ / ₂ "	
IP	20	

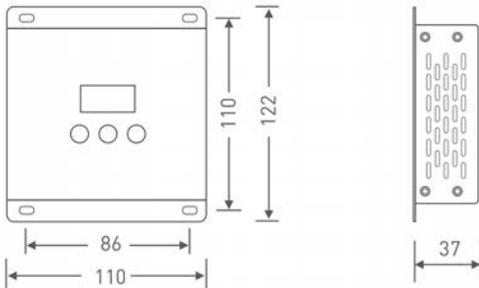

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DMX	-	5C

TITANIUM


TECHNOLOGY

TT-DMX-32C



- Designed for Hi-power multiple channels application, 32 channels output, and Max. 3A current per channel, up to 2304W output power.
- 4 kinds of mode optional: single color, color temperature, RGB, RGBW
- Support 4 kinds of DMX ports with signal isolation function: XLR-3, XLR-5, RJ45 and green terminal (with signal amplifier function).
- With RDM remote management protocol the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting,

Voltage	12vDC	24vDC
Power per channel	36W	72W
Amperage per channel	3A	3A
Maximum amperage	96A	
Channel	32	
Finish	Black	
Dimmable	Yes	
Size	300mm X 122mm X 38mm 11 ³ / ₄ " x 4 ³ / ₄ " x 1 ¹ / ₂ "	
IP	20	

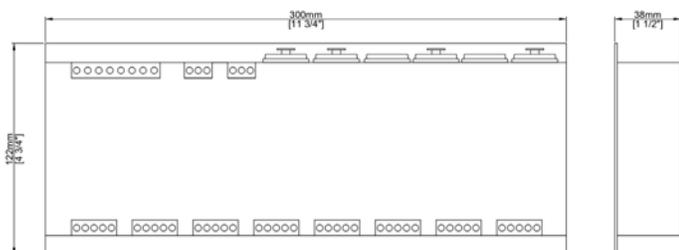


PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DMX	-	32C



- Amplifier four channels.
- Reproduces and amplifies an RGBW signal.
- 8A maximum each channel

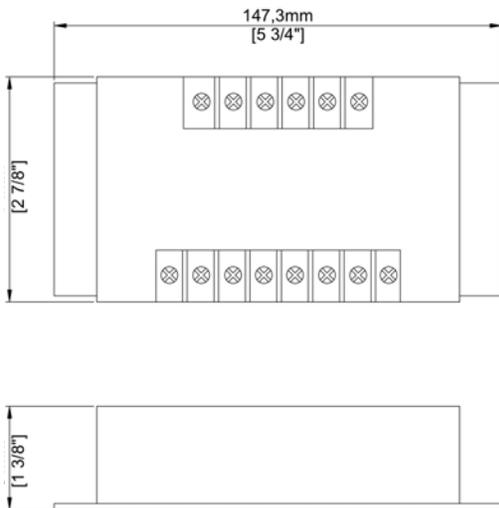

Voltage	5vDC	12vDC	24vDC
Power per channel	40w	96w	192w
Amperage per channel	8A	8A	8A
Channel	4		
Finish	Black		
Dimmable	Yes		
Size	147,3mm X 74mm X 34mm 5 ³ / ₄ " x 2 ⁷ / ₈ " x 1 ³ / ₈ "		
IP	20		


PRODUCT CODE

TT - TYPE - MODEL

TT - AMP - 4-32



- Amplifier five channels.
- Reproduces and amplifies an RGCCT signal.
- 10A mximum each channel

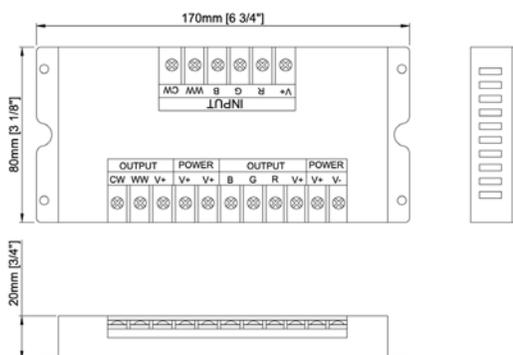

Voltage	5vDC	12vDC	24vDC
Power per channel	50w	120w	240w
Amperage per channel	10A	10A	10A
Channel	5		
Finish	Black		
Dimmable	Yes		
Size	170mm X 80mm X 20mm 6 ³ / ₄ " x 3 ¹ / ₈ " x ³ / ₄ "		
IP	20		

PRODUCT CODE

TT - TYPE - MODEL

TT - AMP - 5-50



- DMX signal distribution.
- Eight amplified and isolated outputs.
- Terminal block connector.

Voltage	12vDC / 24vDC
Consumption	4,5 w
DMX output	8
Finish	Black
Dimmable	No
Size	215mm X 109mm X 21mm 8 ¹ / ₂ " x 4 ⁵ / ₁₆ " x 7 ⁷ / ₈ "
IP	20


PRODUCT CODE


TT - TYPE - MODEL

TT - DMX - OPTO


ACCESSORIES



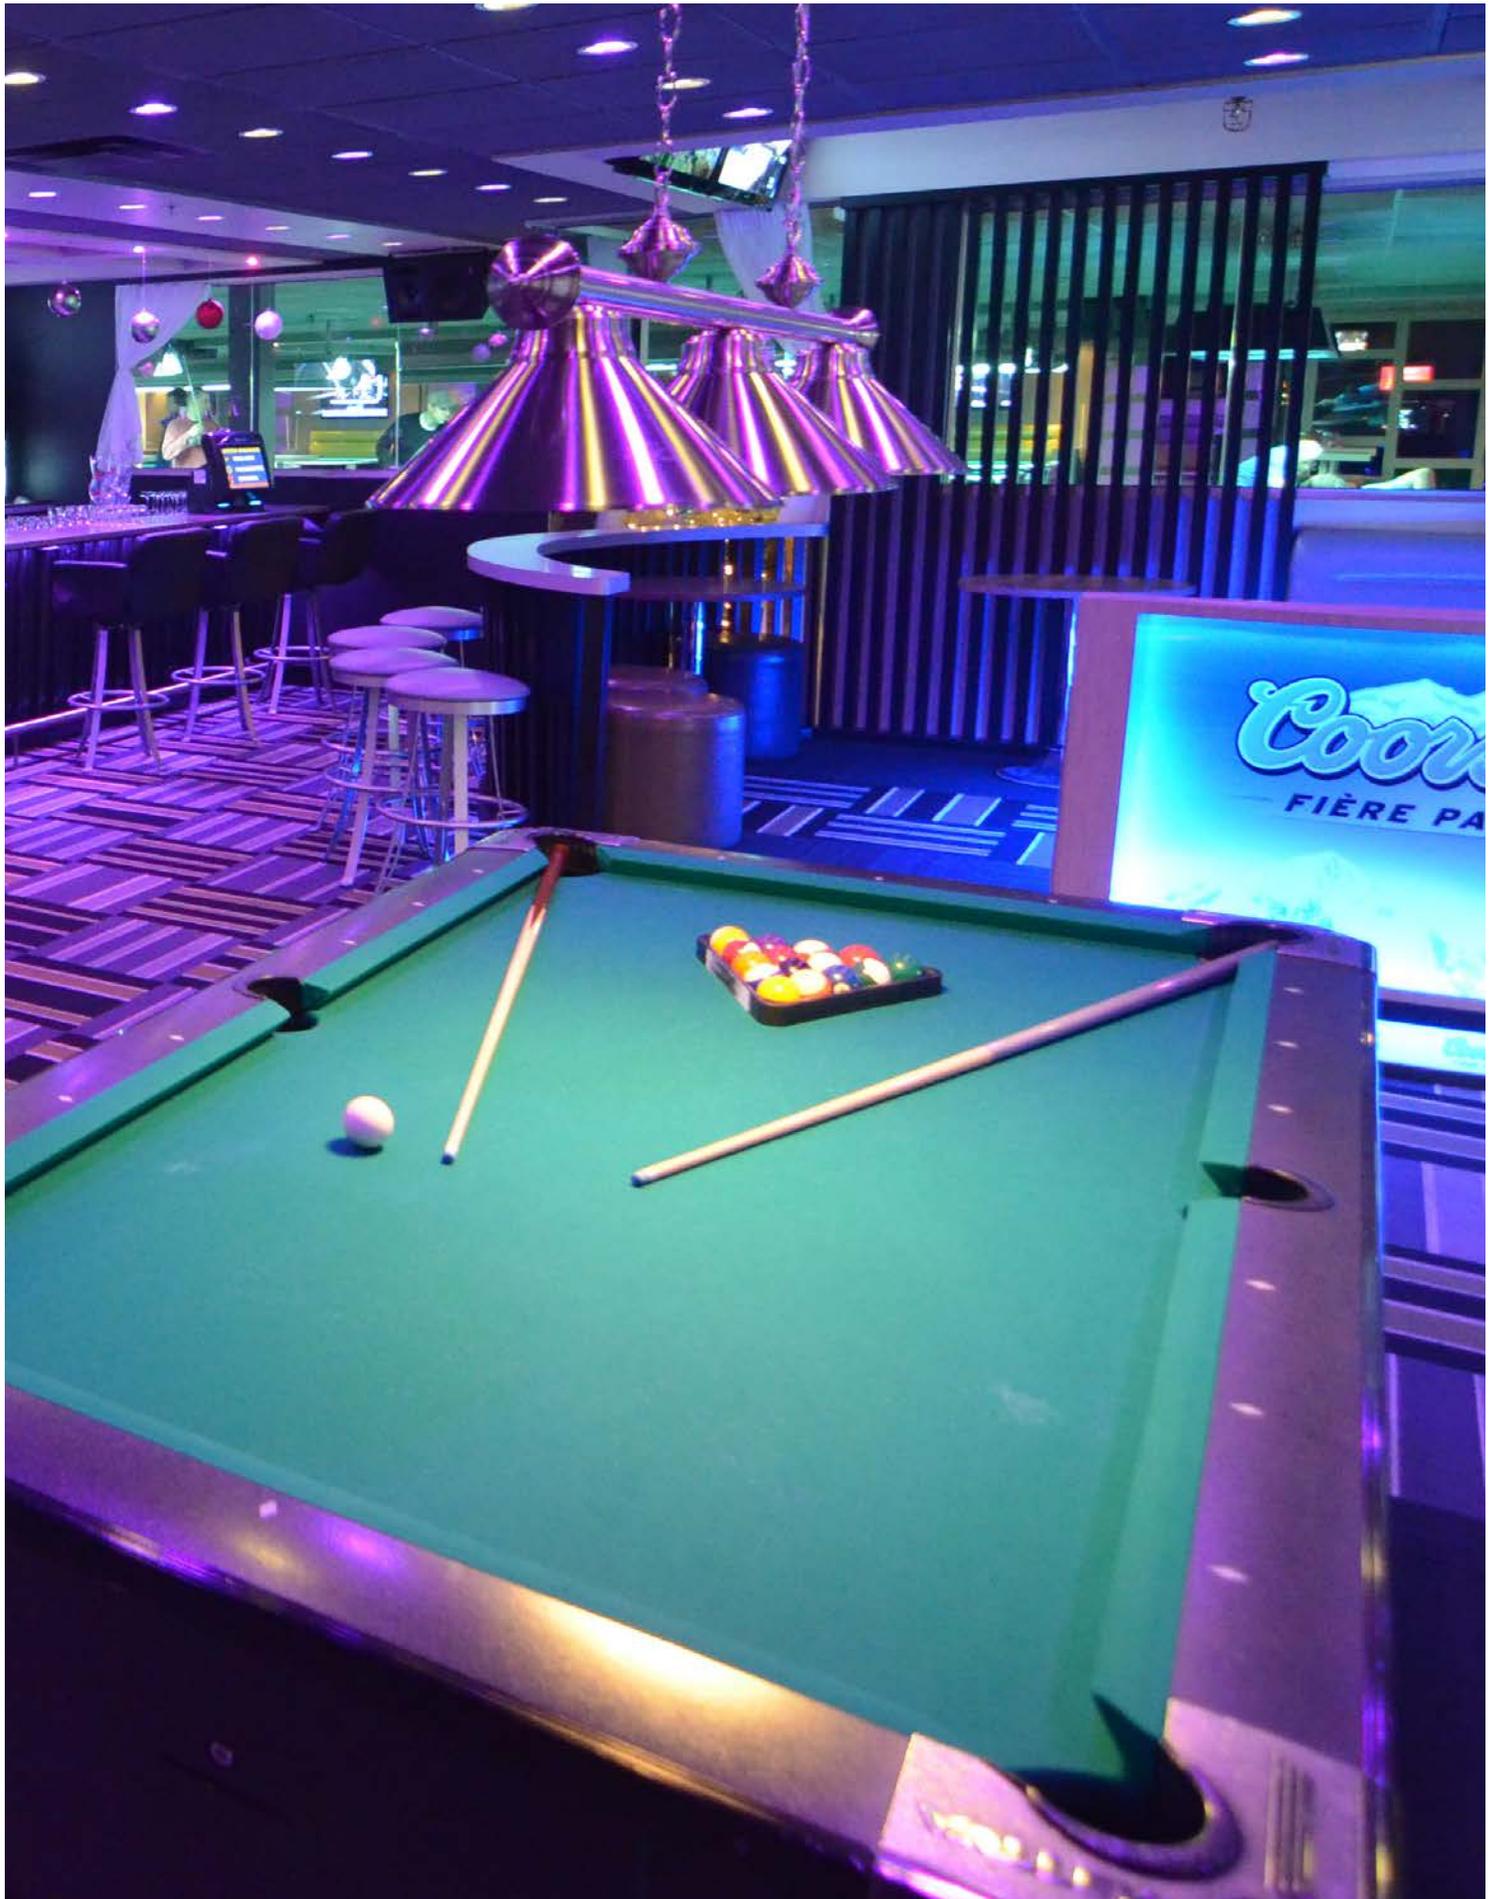

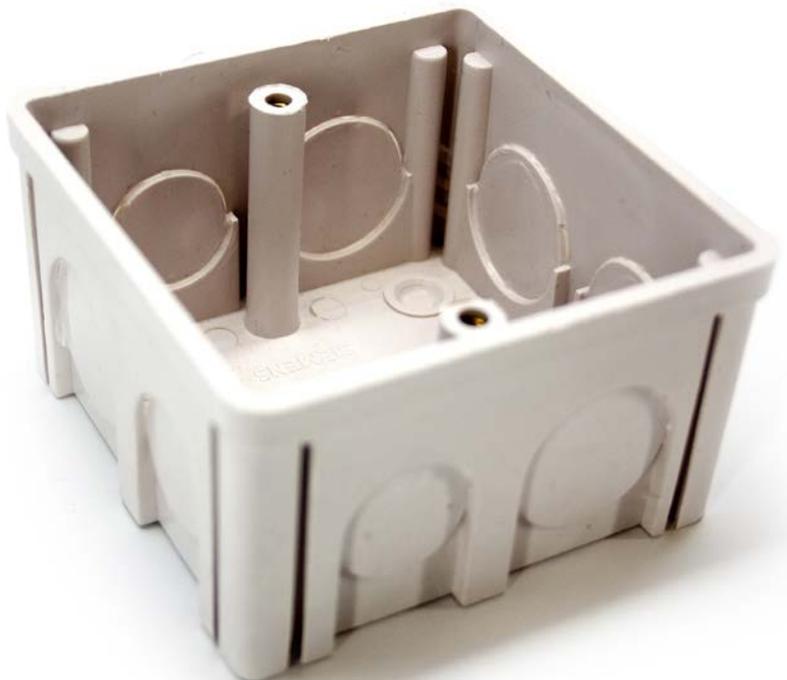

- PVC casing for controllers.
- Enables wall mounting for controllers:
TT-U-D4, TT-DX-1/4/5/8,
TT-U-E4S and TT-U-E5S.
- Requires two screws M4 x 50 format.

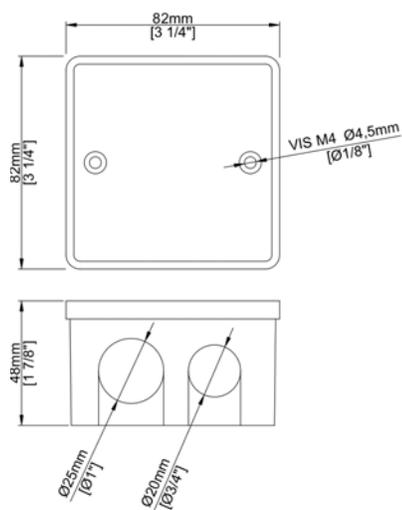

Material	Plastic
----------	---------

Finish	Beige
--------	-------

Size	82mm X 82mm X 48mm 3 1/4" x 3 1/4" x 1 7/8"
------	--

Screw	2 x M4x50mm
-------	-------------

PRODUCT CODE

TT - TYPE - MODEL

TT - BOX - 03

TITANIUM


TECHNOLOGY

TT-BOX-05



- Metal housing for transformer.
- Pre-punched for transformer mounting TT-PSU-IP20-025 / 050/075/100/200/350.
- Cut in the case to maximize ventilation.

Material	Steel
Finish	Black
Size	283mm X 125mm X 65mm 11 ¹ / ₈ " x 4 ⁷ / ₈ " x 2 ¹ / ₂ "
Screw	4 x M3x5mm

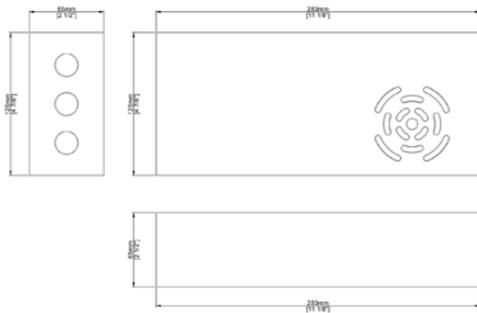

Accessories



TT-FIL-IEC

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	BOX	-	05


TITANIUM

TECHNOLOGY

TT-ACC-IR-01



- Recessed IR detector.

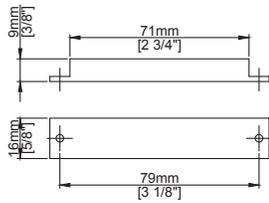


Amperage	12 ~ 24vCC
----------	------------

Power	30w-60w
-------	---------

Output input connector	2,1mm
------------------------	-------


Cut hole	10mm 3/8"
----------	--------------

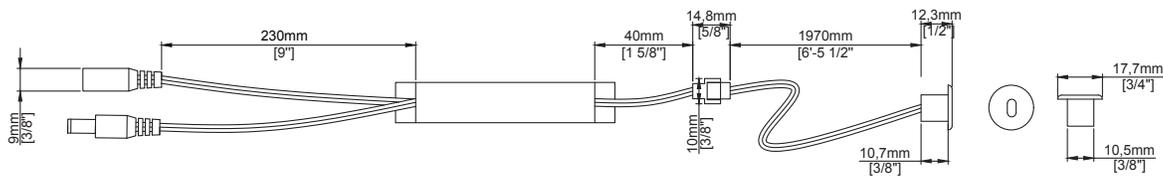

TT-ACC-IR-02




- Surface mount IR detector.

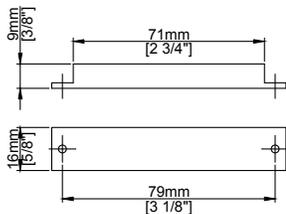

Amperage	12 ~ 24vCC
----------	------------

Power	30w-60w
-------	---------

Output input connector	2,1mm
------------------------	-------

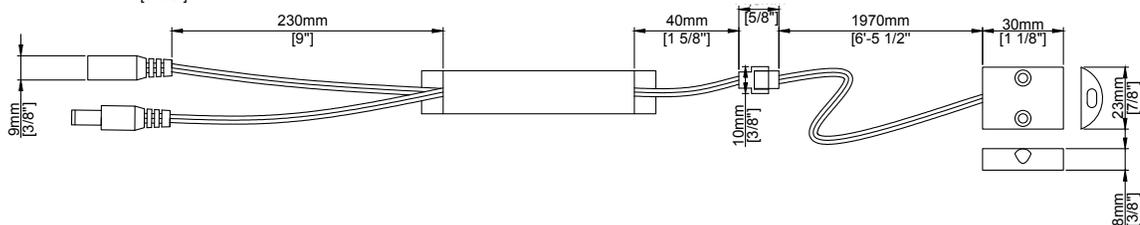

TITANIUM

TECHNOLOGY

TT-ACC-IR-05





- Double recessed IR detector.

Amperage 12 ~ 24vCC

Power 30w-60w

Output input connector 2,1mm

Cut hole 10mm
3/8"

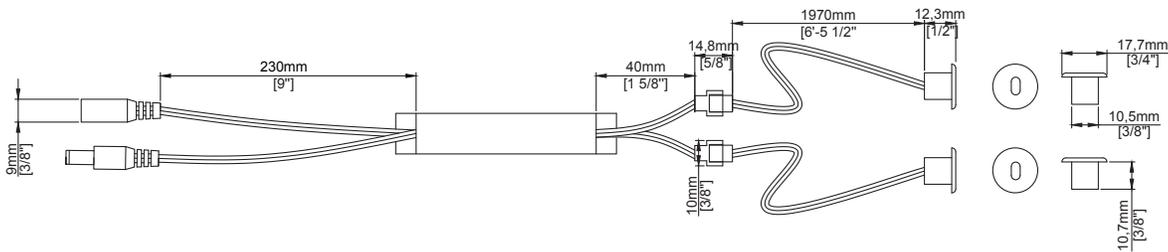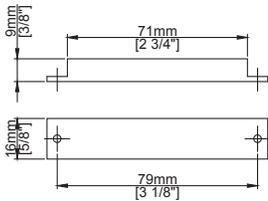

TT-ACC-IR-06





- Double surface mount IR detector.

Amperage 12 ~ 24vCC

Power 30w-60w

Output input connector 2,1mm

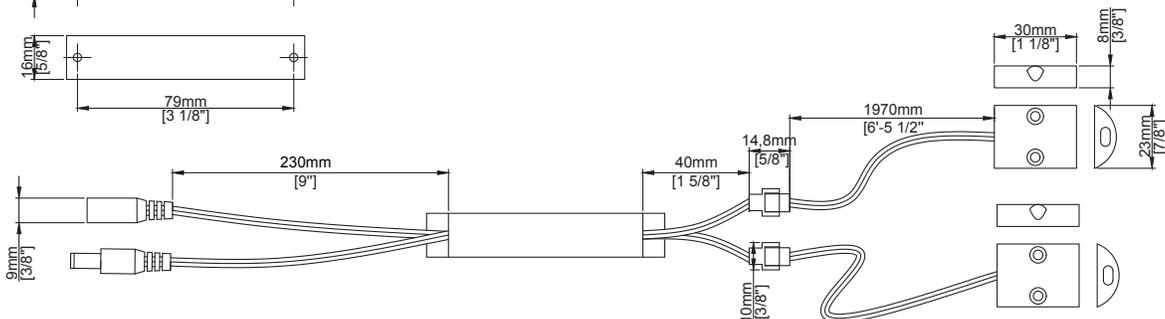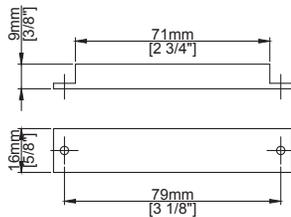

TITANIUM

TECHNOLOGY

TT-ACC-IR-11



- Recessed IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-12



- Surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC 3
----------	--------------

Power	6w-72w
-------	--------

Output input connector	2,1mm
------------------------	-------

TT-ACC-IR-15



- Double recessed IR detector.

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-16



- Double surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

TT-U-13



- Touch dimmer.

Amperage	12 ~ 24vCC
----------	------------

Power	30w-60w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	14mm 1/2"
----------	--------------

TT-U-14



- Touch switch.
- Pass on the surface of wood board

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	32mm 15/16"
----------	----------------

TT-ACC-MOV-01



- Recessed motion detector.

Amperage	12 ~ 24vCC
----------	------------

Power	30w-60w
-------	---------

Output input connector	2,1mm
---------------------------	-------

Cut hole	16mm 5/8"
----------	--------------

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT-SPLIT1X2



- Connecting one to two 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X3



- Connecting one to three 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X4



- Connecting one to four 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X8



- Connecting one to eight 2.1mm connectors AWG16

TT-ACC-CONNECT-
2.1-M



- Connect the terminal to 2.1mm male.

TT-ACC-CONNECT-
2.1-F



- Connect the terminal to 2.1mm female.

TT-ACC-CONNECT-
2.1-1M



- 1 meter cable with 2.1mm connect.. AWG16

TT-ACC-CONNECT-
2.1-M2



- Cable section to male 2.1mm connector.

TT-ACC-CONNECT-
2.1-F2




- Cable section to female 2.1mm connector.

TITANIUM

TECHNOLOGY

TT-FL00-2P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.

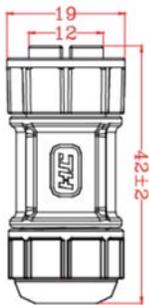


PIN 1 : DC +
PIN 2 : DC -



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.

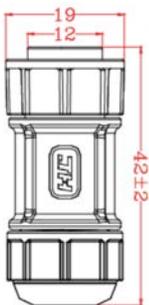

PIN 1 : DC +
PIN 2 : DC -



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-3P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-3P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.

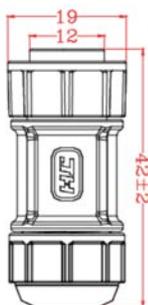

PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-4P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-2P4P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DC +
 PIN 2 : DC -
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM



Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DC +
 PIN 2 : DC -
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM




Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-2P-F

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

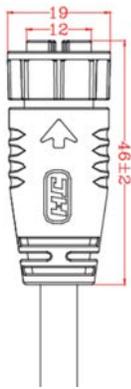


PIN 1 : BROWN (DC +)
PIN 2 : BLUE (DC -)



Amperage	15A
Voltage	500 vDC
Cable length	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-F

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

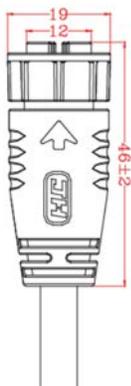

PIN 1 : BROWN (N/A)
PIN 2 : BLACK (N/A)
PIN 3 : RED (DATA +)
PIN 4 : GREEN (DATA -)
PIN 5 : WHITE (GND)
PIN 6 : BLUE (PGM)




Amperage	15A + 3A
Voltage	500 vDC
Cable length	500 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-4P-F

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

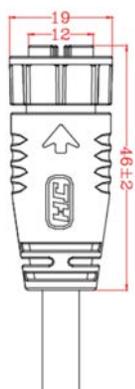


PIN 1 : RED (DATA +)
PIN 2 : BLACK (DATA -)
PIN 3 : YELLOW (GND)
PIN 4 : BLUE (PGM)



Amperage	15A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-M

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

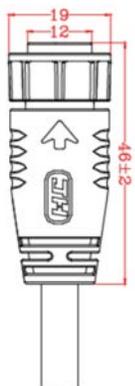

PIN 1 : RED (DATA +)
PIN 2 : BLACK (DATA -)
PIN 3 : YELLOW (GND)
PIN 4 : BLUE (PGM)




Amperage	15A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-2P4P-M

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

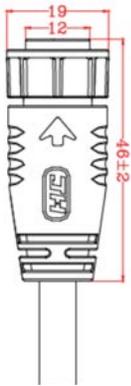


PIN 1 : BROWN (DC +)
 PIN 2 : BLACK (DC -)
 PIN 3 : RED (DATA +)
 PIN 4 : GREEN (DATA -)
 PIN 5 : WHITE (GND)
 PIN 6 : BLUE (PGM)



Amperage	15A + 3A
Voltage	500 vDC
Cable length	500 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-MF

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

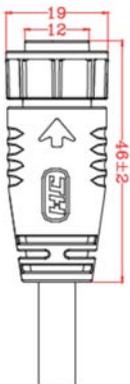

PIN 1 : N/A
 PIN 2 : N/A
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM



PIN 1 : DC +
 PIN 2 : DC -
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM




Amperage	15A + 3A
Voltage	500 vDC
Cable length	1000 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FL00-4P-MF

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

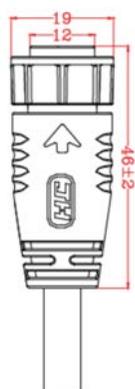

PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM




PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable lenght	1000 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-Y

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

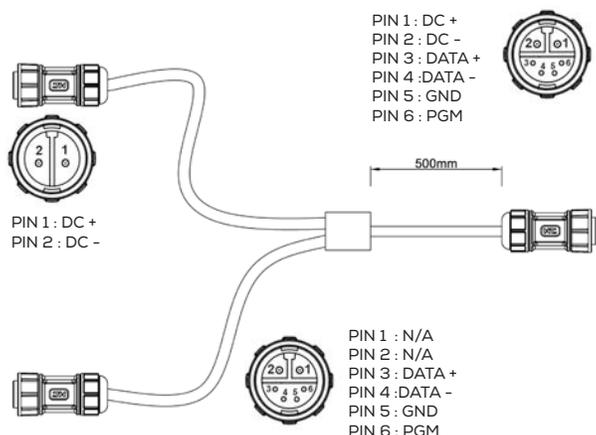

Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TITANIUM

TECHNOLOGY

TT-FIL-14/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	14
Conductors	2
Length	0.3m/1 ft 300m/982ft with code TT-FIL-14/2-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-16/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	16
Conductors	2
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-16/2-BOX
Operating temperature	-20 ° C + 75 ° C

TITANIUM

TECHNOLOGY

TT-FIL-18/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	18
Conductors	2
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/2-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-18/2C




- Twisted tinned copper conductors
- Insulation: Clear PVC

Voltage	300 vDC
Caliber	18
Conductors	2
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/2C-BOX
Operating temperature	-20 ° C + 105 ° C

TITANIUM

TECHNOLOGY


TT-FIL-20/2

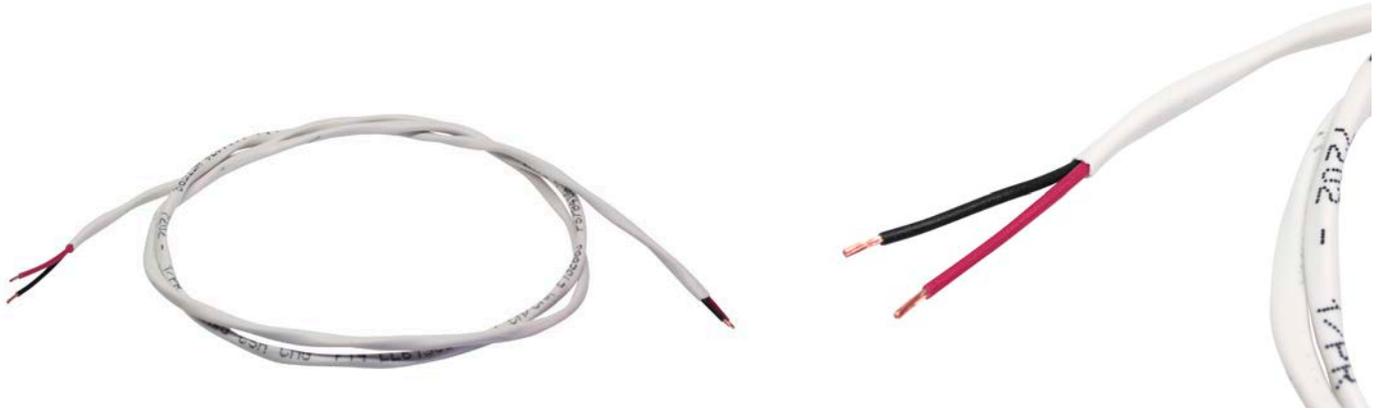

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: White PVC Riser FT4.

Voltage	300 vDC
Caliber	20
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/2-BOX

TT-FIL-22/2S

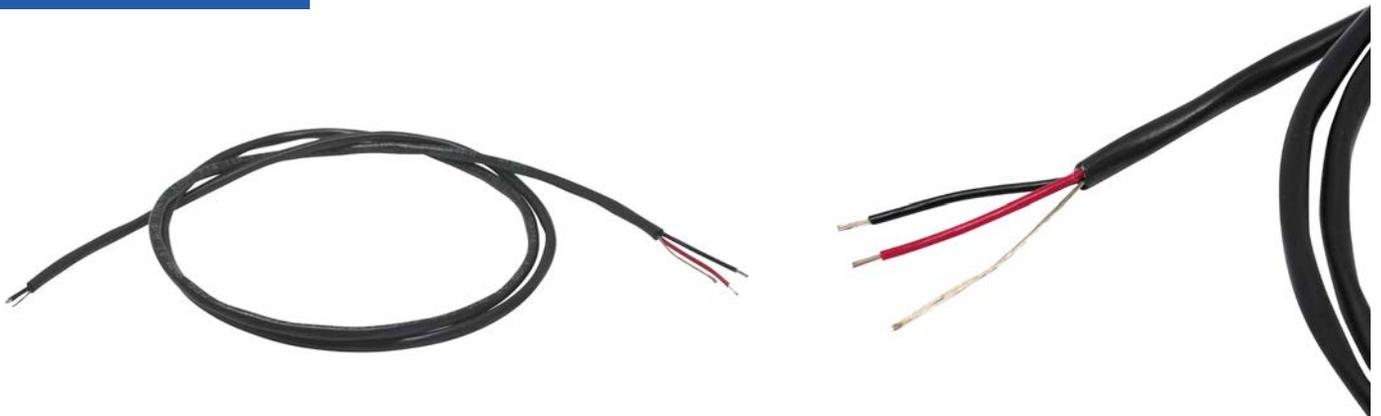

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid black PVC Riser FT4.
- 100% aluminum foil shielding.
- Tinned copper drain wire.

Voltage	300 vDC
Caliber	22
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/2S-BOX
Operating temperature	-20 °C + 75 °C

TITANIUM

TECHNOLOGY


TT-FIL-16/4



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	16
Conductors	4
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-16/4-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-18/4

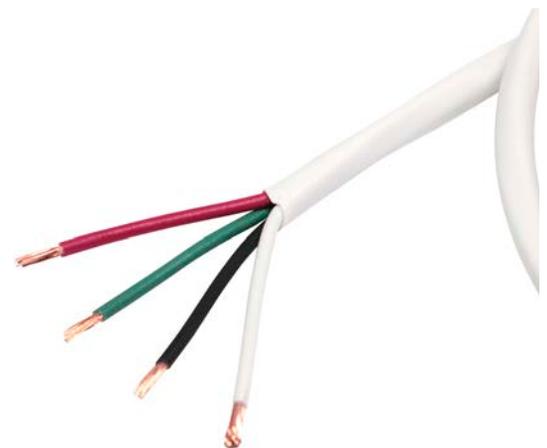


- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	18
Conductors	4
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/4-BOX
Operating temperature	-20 ° C + 75 ° C

TITANIUM

TECHNOLOGY


TT-FIL-20/4

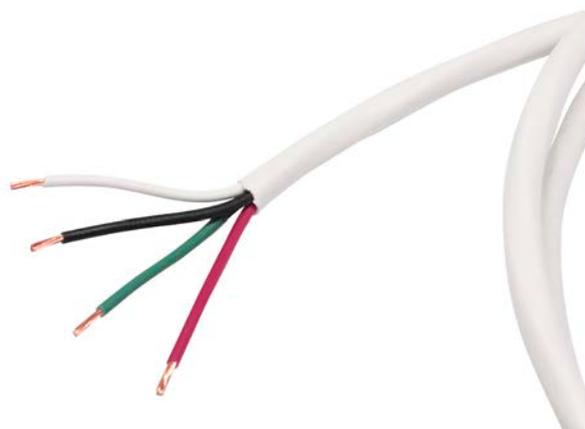

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: White PVC Riser FT4.

Voltage	300 vDC
Caliber	20
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/4-BOX

TT-FIL-22/4

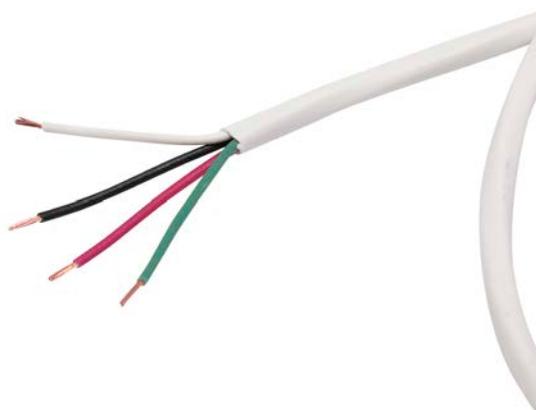

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.

Voltage	300 vDC
Caliber	22
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/4-BOX
Operating temperature	-20 ° C + 75 ° C

TITANIUM

TECHNOLOGY


TT-FIL-20/6



- Multi-conductor cable.
- Twisted tinned copper conductors.
- Insulation: FT4 semi-rigid gray PVC.

Voltage	600 vDC
Caliber	20
Conductors	7
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/7-BOX
Operating temperature	-20 ° C + 105° C

TT-FIL-22/6

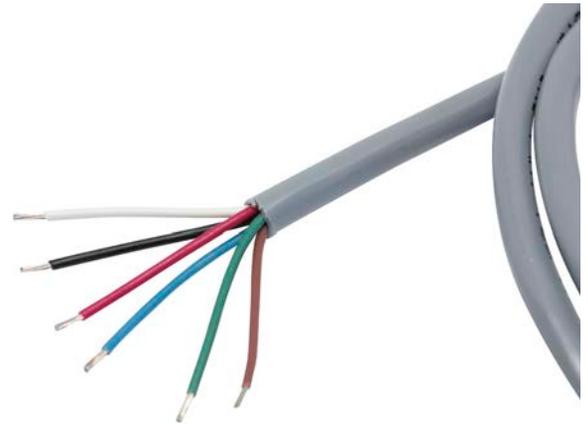

- Multi-conductor cable.
- Twisted tinned copper conductors.
- Insulation: FT4 semi-rigid gray PVC.

Voltage	600 vDC
Caliber	22
Conductors	6
Length	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/6-BOX
Operating temperature	-20 ° C + 105° C

TITANIUM

TECHNOLOGY

TT-FIL-IEC




- NEMA-5-15P Male to Bare Wire AC Cable.

Voltage	300 vDC
Caliber	16
Conductors	3
Length	1,78m 70"
Operating temperature	-40°C - 105°C

TT-ACC-ETOUPE



- Nylon cable glands.
- NBR seal and EPDM o-ring.

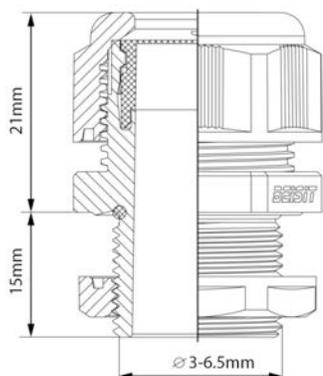

Size	36mm 1 7/16"
Cable diameter	3-6.5mm
Operating temperature	-40°C - 100°C

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT- STRIPE2



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	24 x 14mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE2A



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	19.6 x 14.6 mm $\frac{3}{4}$ x $\frac{9}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE2B



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pôle	3P

TT-ACC-CONNECT- STRIPE2C



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	19.6 x 14.6 mm $\frac{3}{4}$ x $\frac{9}{16}$ "
Pôle	3P

TT-ACC-CONNECT- STRIPE2D



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pôle	4P

TT-ACC-CONNECT- STRIPE2E



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pôle	4P

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT-STRIPE2F



Largeur du ruban	12mm
Dimension	24.3 x 17.7 mm $\frac{15}{16}$ x $\frac{11}{16}$ "
Pôle	5P

TT-ACC-CONNECT-STRIPE2G



Largeur du ruban	12mm
Dimension	19.6 x 17.7mm $\frac{3}{4}$ x $\frac{11}{16}$ "
Pôle	5P

TT-ACC-CONNECT-STRIPE2H



Largeur du ruban	12mm
Dimension	24.3 x 17.7mm $\frac{15}{16}$ x $\frac{11}{16}$ "
Pôle	6P

TT-ACC-CONNECT-STRIPE2I



Largeur du ruban	12mm
Dimension	19.6 x 17.7 mm $\frac{3}{4}$ x $\frac{11}{16}$ "
Pôle	6P

TT-ACC-CONNECT-STRIPE2L



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	26.9 x 14.6mm $1\frac{1}{16}$ x $\frac{9}{16}$ "
Pôle	4P

TT-ACC-CONNECT-STRIPE3



Largeur du ruban	10mm $\frac{3}{8}$ "
Pôle	2P

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT-
STRIPE3A



Largeur du ruban 10mm
 $\frac{3}{8}$ "

Pôle 2P

TT-ACC-CONNECT-
STRIPE3B



Largeur du ruban 10mm
 $\frac{3}{8}$ "

Pôle 3P

TT-ACC-CONNECT-
STRIPE3C



Largeur du ruban 10mm
 $\frac{3}{8}$ "

Pôle 3P

TT-ACC-CONNECT-
STRIPE3D



Largeur du ruban 10mm
 $\frac{3}{8}$ "

Pôle 4P

TT-ACC-CONNECT-
STRIPE3E



Largeur du ruban 10mm
 $\frac{3}{8}$ "

Pôle 4P

TT-ACC-CONNECT-
STRIPE3F



Largeur du ruban 12mm

Pôle 5P

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT-STRIFE3G



Largeur du ruban 12mm

Pôle 5P

TT-ACC-CONNECT-STRIFE3H



Largeur du ruban 12mm

Pôle 6P

TT-ACC-CONNECT-STRIFE3I



Largeur du ruban -

Pôle 6P

TT-ACC-CONNECT-STRIFE3J



Largeur du ruban 10mm $\frac{3}{8}$ "

Pôle 2P

TT-ACC-CONNECT-STRIFE3K



Largeur du ruban 10mm $\frac{3}{8}$ "

Pôle 3P

TT-ACC-CONNECT-STRIFE3L



Largeur du ruban 10mm $\frac{3}{8}$ "

Pôle 4P

TT-ACC-CONNECT- STRIPE3N



Largeur du ruban	-
Pôle	6P

TT-ACC-CONNECT- STRIPE4



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	15.4 x 11.5 mm $\frac{5}{8}$ x $\frac{7}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE4A



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	21.6 x 11.5 mm $\frac{7}{8}$ x $\frac{7}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE5



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	13.3 x 11.5 mm $\frac{9}{16}$ x $\frac{7}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE5A



Largeur du ruban	10mm $\frac{3}{8}$ "
Dimension	14.6 x 11.5mm $\frac{9}{16}$ x $\frac{7}{16}$ "
Pôle	2P

TT-ACC-CONNECT- STRIPE5J




Largeur du ruban	-
Dimension	-
Pôle	2P

TITANIUM

TECHNOLOGY

TT-ACC-FASTCLIP-2


- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation

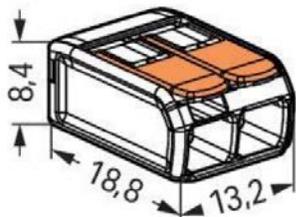

Amperage	20A
Voltage	300 vDC
Width	13,2mm 9/16"
Height	8,4mm 11/32"
Depth	18,8mm 3/4"
Type actuation	Lever
Operating temperature	85°C

TT-ACC-FASTCLIP-5

- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation

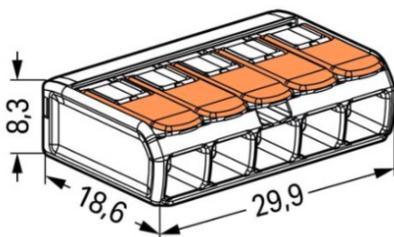

Amperage	20A
Voltage	300 vDC
Width	29,9mm 11 3/16"
Height	8,3mm 11/32"
Depth	18,6mm 3/4"
Type actuation	Lever
Operating temperature	85°C

TITANIUM

TECHNOLOGY

TT-ACC-CONNECT-STRIFE



- Connector for wire
- Very resistant, its shape will not change even when welded to the wires.

Amperage	9A
Voltage	250 vDC
Caliber	24-18
Pitch	4mm $\frac{3}{16}$ "
Pole	2P

TT-ACC-DOUBLEFACE



- 3M double-sided tape.

Width	10mm $\frac{3}{8}$ "
Lenght	50m 1968 $\frac{1}{2}$ "

TT-ACC-DOUBLFACE2



- 3M double-sided tape.

Width	10mm $\frac{3}{8}$ "
Lenght	30m 1181 $\frac{4}{32}$ "

ANNEXE



Credit photo: Godomo

LIMITED ONE (1) YEAR WARRANTY



Titanium Technology offers this limited warranty for one (1) year from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of one (1) year covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|--------------------------|--------------------------|-----------------------|
| 1) Nicolaudie Controller | 5) TT-CAB-XX | 9) TT-WiFi |
| 2) LTECH Controller | 6) TT-DMX-XX | 10) Aluminium profile |
| 3) TT-ACC-XX | 7) TT-PSU-IP20 / PLUG-IN | 11) TT-Y-XX |
| 4) TT-AMP-XX | 8) TT-U-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

LIMITED TWO (2) YEARS WARRANTY

Titanium Technology offers this limited warranty for two (2) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.



This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of two (2) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scratches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | |
|------------------------------|--------------|
| 1) TT-LUS-XX | 4)TT-STEP-XX |
| 2) TT-PSU-IP67-XX (MEANWELL) | 5)TT-UGD-XX |
| 3) TT-TRK-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

LIMITED THREE (3) YEARS WARRANTY



Titanium Technology offers this limited warranty for three (3) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part or parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part or parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of three (3) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|-----------------|-------------------|-------------------------------|
| 1) TT-2216-XX * | 6) TT-5630-XX * | 11) TT-FL-XX-XX |
| 2) TT-2835-XX * | 7) TT-DOWN-007-XX | 12) TT-PSU-IP20-XX (MEANWELL) |
| 3) TT-335-XX * | 8) TT-DOWN-008-XX | 13) TT-PUCK-2.2W-XX |
| 4) TT-3528-XX * | 9) TT-DOWN-016-XX | 14) TT-PUCK-3W-XX |
| 5) TT-5050-XX * | 10) TT-DR-CV-XX | 15) TT-PUCK-400-V3 |

* LED strips are only guaranteed if they are installed in our aluminum profiles and use our transformers.

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

LIMITED FIVE (5) YEARS WARRANTY

Titanium Technology offers this limited warranty for five (5) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.



This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of five (5) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- 1) TT-P120D-XX
- 2) TT-P120S-XX

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.



TITANIUM TECHNOLOGY

2323, boulevard Versant Nord #111

Québec, QC

G1N 4P4 CANADA

Toll free (866)-476-8115

www.titaniumtechnology.com

sales@titaniumtechnology.com

www.facebook.com/titaniumtechnologie

TITANIUM TECHNOLOGY USA

NEWARK DE 19713

Toll free (866)-476-8115 ext.203

www.titaniumtechnology.com

sales@titaniumtechnology.com

www.facebook.com/titaniumtechnologie