


TITANIUM

TECHNOLOGY

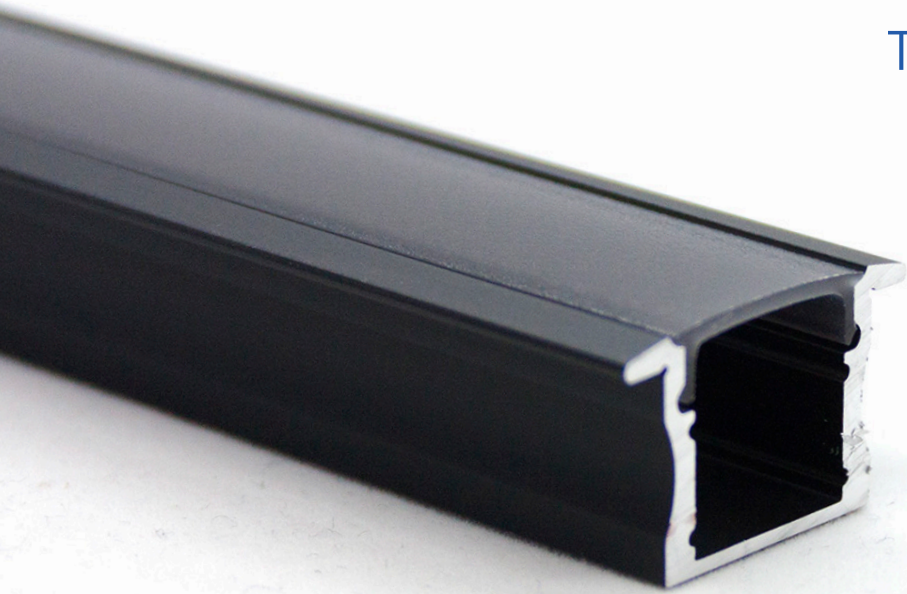

Aluminium Profile

2024

SURFACE



Credit photo: Cuisines Simard



TT-01-3000 Page 7

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-04-3000 Page 8

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-06-3000 Page 9

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-07-3000 Page 10

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-08-3000 Page 11

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-09-3000 Page 12

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-10-3000 Page 13

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-16-3000 Page 14

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-21-3000 Page 15

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-22-3000 Page 16



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-23-2000 Page 17



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-24-2000 Page 18



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-25-3000 Page 19



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-32-2000 Page 20



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-38-3000 Page 21



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-2000 Page 22



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-3000-BK Page 23



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-52-3000 Page 24





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-64-3000 Page 25




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-65-3000 Page 26



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-66-2000 Page 27

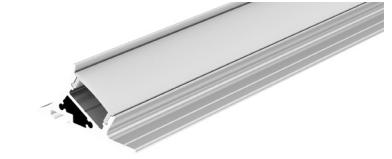

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-68-3000 Page 28



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-76-3000 Page 29



PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
			28/6 H 527 lm/feet 6,25W/feet <i>*24v only</i>	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=QTE	P Plug-in
			28/12 456 lm/feet 9W/feet <i>*24v only</i>	35 3500K			DCxxxx 12 inchs minimum				CV Dimmable
			35/3 45 lm/feet 1.5W/feet	40 4000K							CV-BOX Dimmable with box
			35/6 120 lm/feet 3W/feet	60 6000K							CV67 IP67 psu
			22/15 425 lm/feet 9W/feet <i>*24v only</i>	RE RED							120V No dimmable 120v psu
			50/3 4,5W/feet	GR GREEN							347V No dimmable 347V PSU
			DX/24 DIGITAL DMX <i>*24V only</i>	BL BLUE							010 0-10v PSU
				AM AMBER							
				PK PINK <i>*28/6 only</i>							
				CB CYAN <i>*28/6 only</i>							
				OR ORANGE <i>*28/6 only</i>							
				UV <i>*28/6 only</i>							
				RGB <i>*50/3, 28/6 or 35/6 only</i>							
				RGBWW <i>*50/3 only</i>							
				RGBNW <i>*50/3 only</i>							
				RGBCW <i>*50/3 only</i>							
				RGBCCT <i>*50/3 only</i>							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-01-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

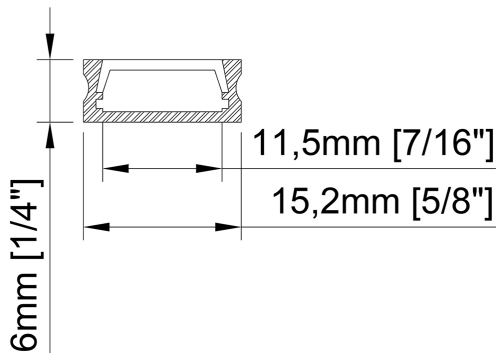

Size	15,2mm x 6mm x 3000mm 5/8" x 1/4" x 118 1/8"
Length	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

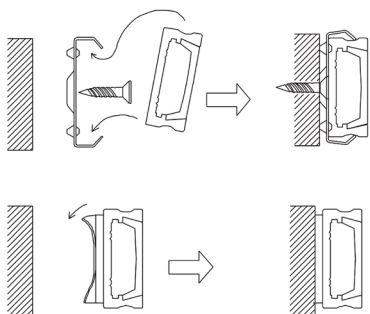


Accessories




PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER
TT	01	3000	O

TT-04-3000-O

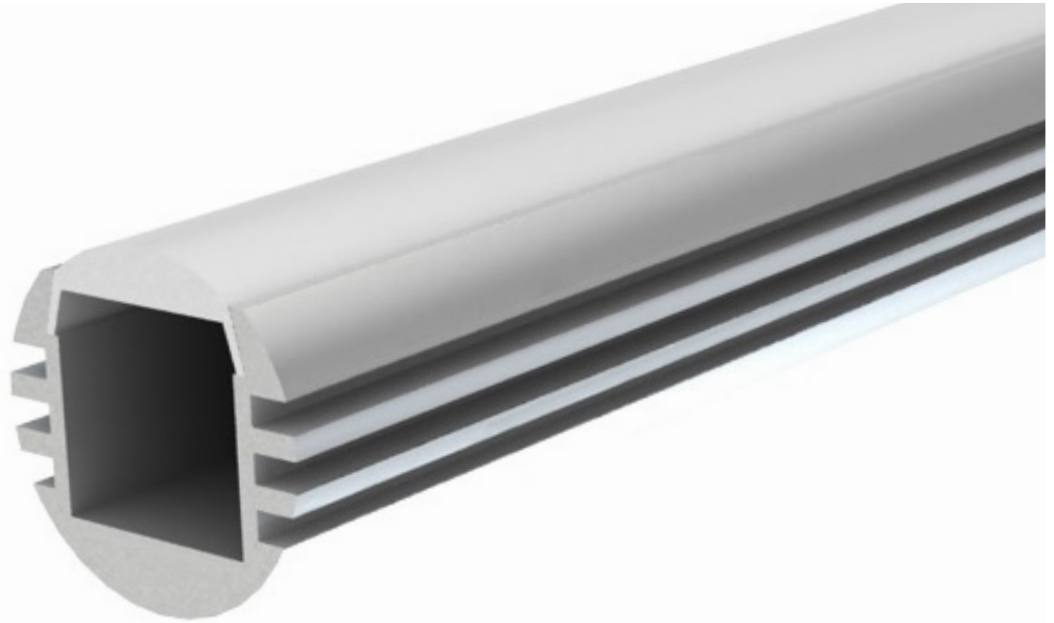

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

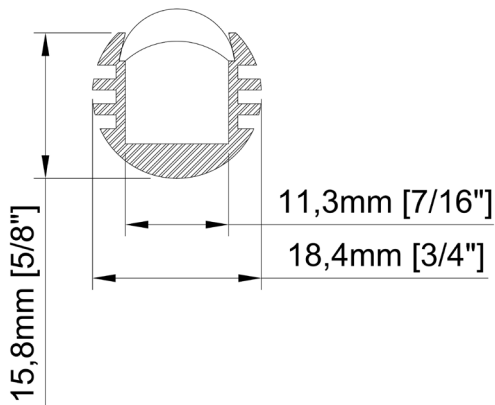


Size $\varnothing 18,4\text{mm} \times 3000\text{mm}$
 $\varnothing 3/4" \times 118 1/8"$

Lenght 3000mm
 118 1/8"

Internal width 11,3mm
 7/16"

Cover Opal

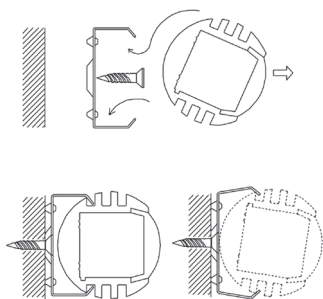

Accessories



TT-04-CLIP



TT-04-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	04	-	3000	-	O


TT-06-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

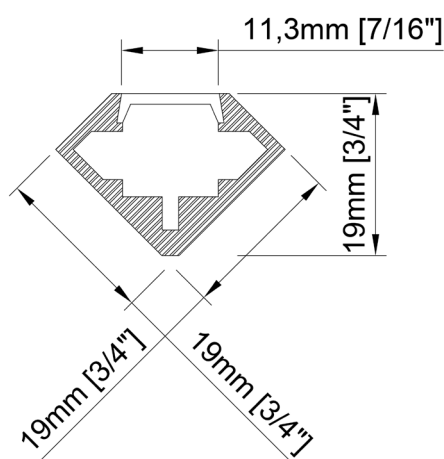

Size	18,4mm x 18,4mm x 3000mm $\frac{3}{4}'' \times \frac{3}{4}'' \times 118 \frac{1}{8}''$
Lenght	3000mm 118 $\frac{1}{8}''$
Internal width	14,1mm $\frac{9}{16}''$
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-06-CLITT-06-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	06	-	3000	-	O


TT-07-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

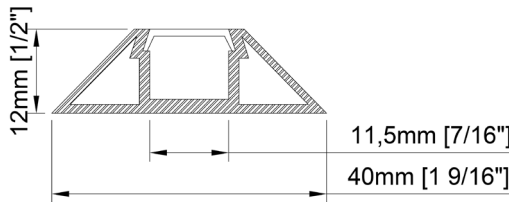

Size	40mm x 12mm x 3000mm 1 9/16" x 1/2" x 118 1/8"
Length	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

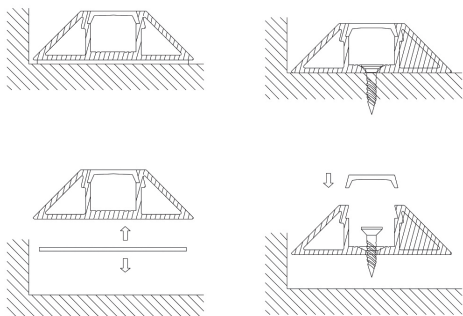

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	07	-	3000	-	O

TT-08-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").


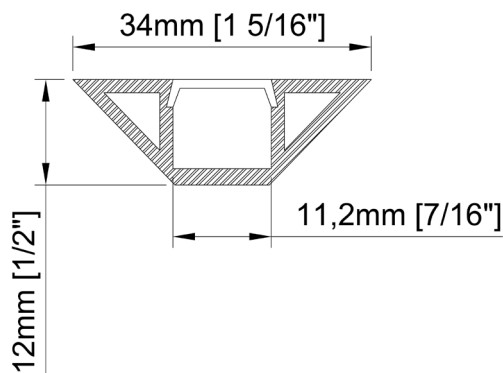


Size 34mm x 12mm x 3000mm
1⁵/₁₆" x 1/2" x 118 1/8"

Length 3000mm
118 1/8"

Internal width 11,2mm
7/16"

Cover Opal

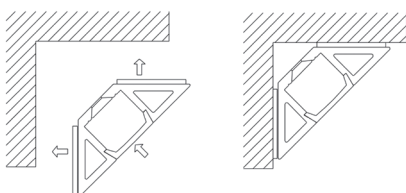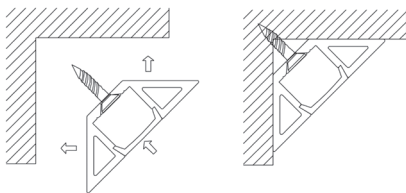


Accessories




PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER
TT	08	3000	O


TT-09-3000-O

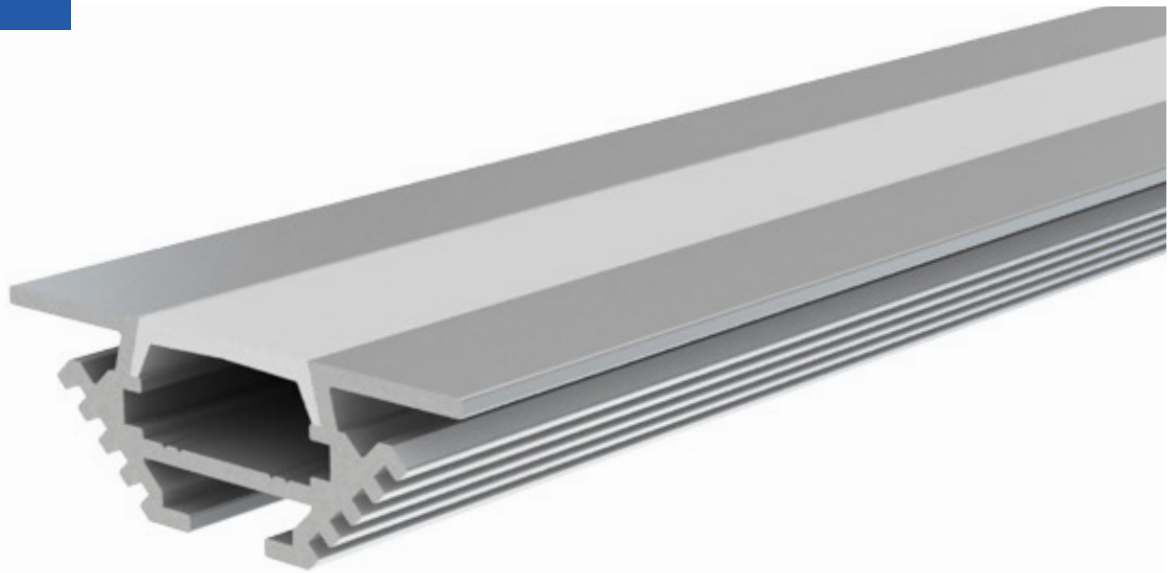

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118").

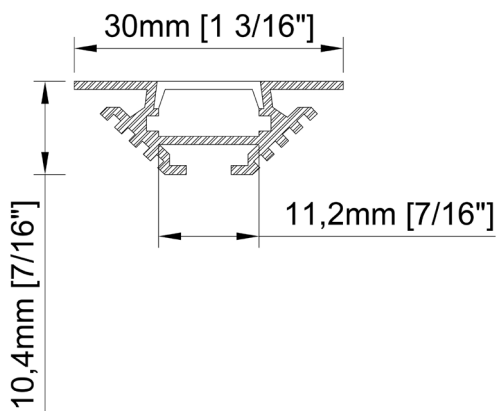

Size	30mm x 10,4mm x 3000mm 1 ³ / ₁₆ " x 7/ ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	11,2mm 7/ ₁₆ "
Cover	Opal

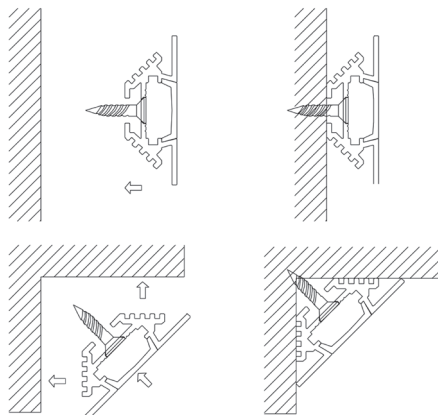

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	09	-	3000	-	O


TT-10-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

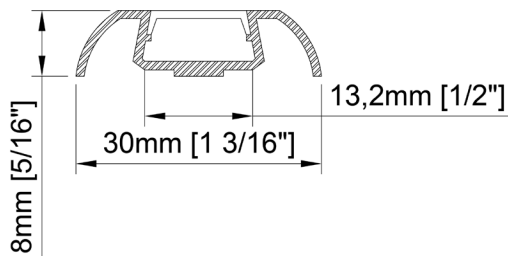

Size	30mm x 8mm x 3000mm 1 ³ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 1 ¹ / ₈ "
Internal width	13,2mm 1 ¹ / ₂ "
Cover	Opal

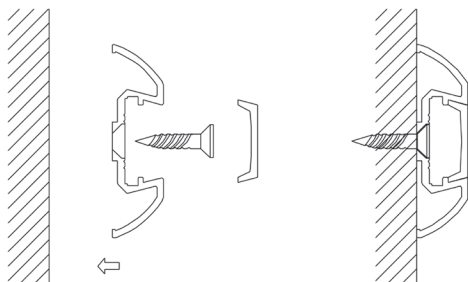

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	10	-	3000	-	O

TT-16-2000-O


- Aluminum profile for attaching a glass shelf of 8mm.
- Designed to cover the LED strips and diffuse the light in the glass.
- Designed to be wall mounted.
- Available in lengths 2000 mm (78³/₄").

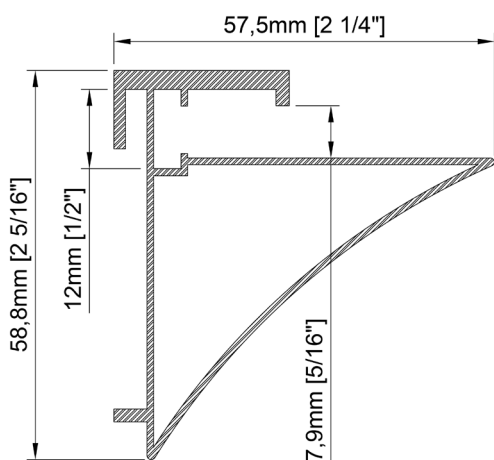

Size	57,5mm x 58,8mm x 2000mm 2 ¹ / ₄ " x 2 ⁵ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	None

*Glass not include.

Accessories



TT-16-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	16	-	2000	-	O


TT-21-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

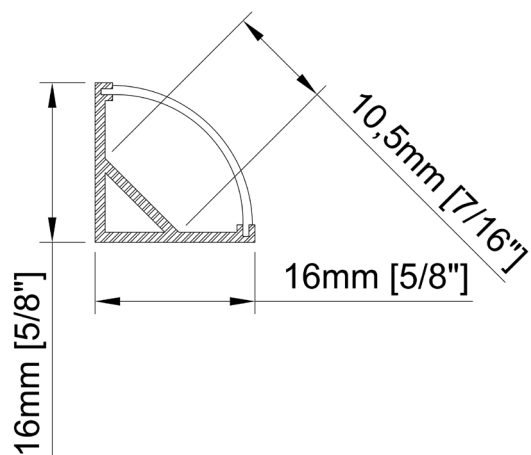

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-21-CLIP




TT-21-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	21	-	3000	-	O

TT-22-3000-O

- Aluminum profile with clear acrylic.
- Designed to cover the LED ribbons and dissipate heat.
- Acrylic lens concentrates the light in a range of 30°
- Swivel attachment to guide the light.
- Available in lengths 3000 mm (118¹/₈").

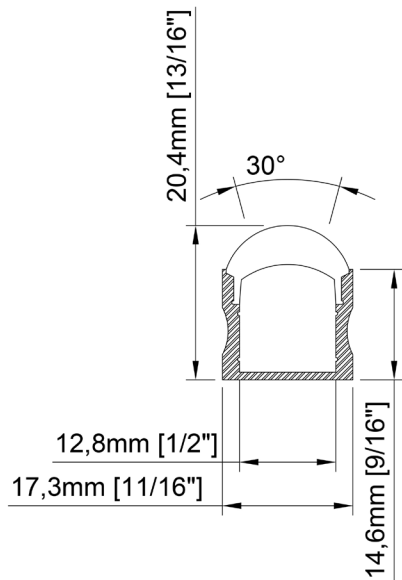


Size 20,4mm x 17,3mm x 3000mm
¹³/₁₆" x ¹¹/₁₆" x 118¹/₈"

Lenght 3000mm
 118¹/₈"

Internal width 12,8mm
¹/₂"

Cover Clear, 30° lens

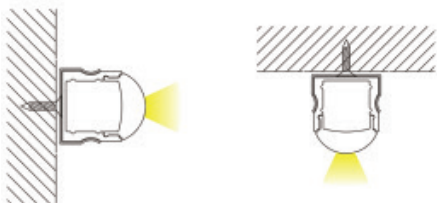

Accessories



TT-22-CLIP

TT-22-END



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	22	-	3000	-	O

TT-23-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

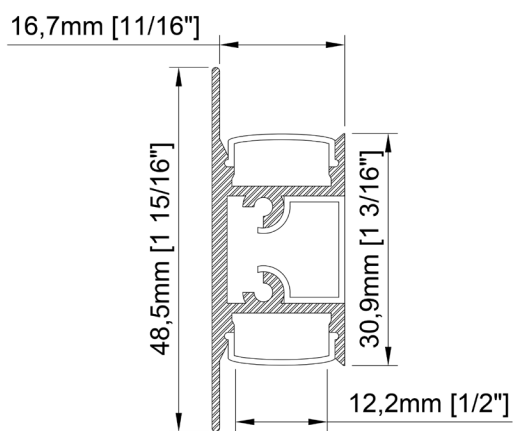

Size	48,5mm x 16,7mm x 2000mm 1 ¹⁵ / ₁₆ " x 1 ¹¹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	2 x 12,2mm 2 x 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

Accessories



TT-23-CLIP



TT-23-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	23	-	2000	-	O

TT-24-2000-O



- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

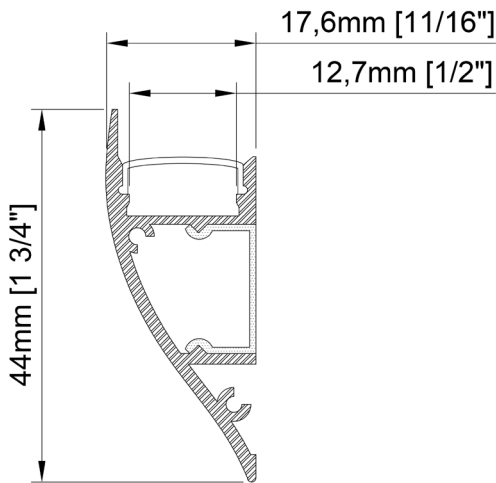

Size	44mm x 17,6mm x 2000mm 1 ³ / ₄ " x 11/16" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12,7mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-24-CLIP



TT-24-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	24	-	2000	-	O


TT-25-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

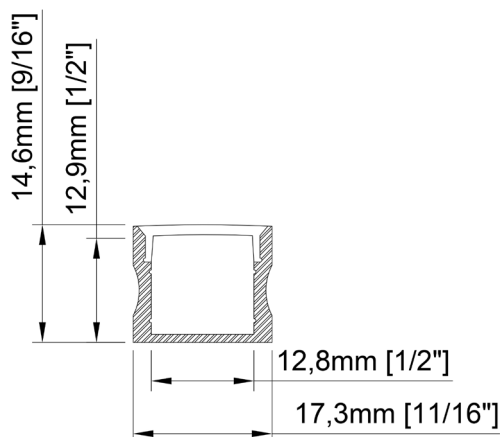

Size	17,3mm x 14,6mm x 3000mm 11/16" x 9/16" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	12,8mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

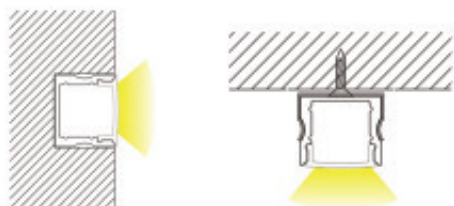

Accessories



TT-25-CLIP




TT-25-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	25	-	3000	-	O

TT-32-2000-O

- Aluminum profile with opal acrylic.
- Designed in flexible aluminum to conceal LED ribbons and dissipate heat on curved surfaces.
- Available in lengths 2000 mm (78³/₄ ").

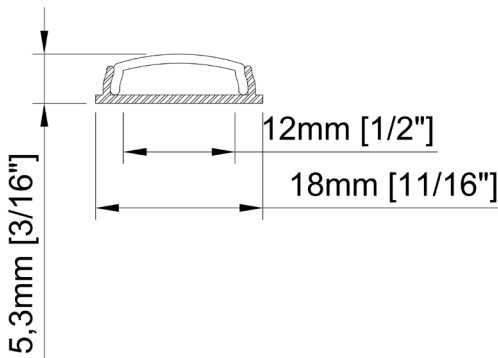

Size	18mm x 5,3mm x 2000mm 1 ¹ / ₁₆ " x 3 ³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	Opal PC diffuser

Accessories



TT-32-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	32	-	2000	-	O


TT-38-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

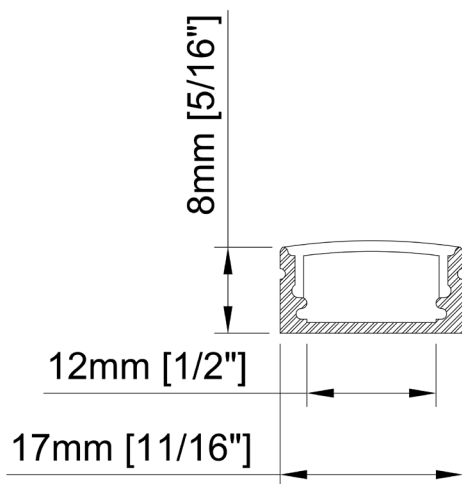

Size	17mm x 8mm x 3000mm 1 ¹ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Length	3000 mm 118 ¹ / ₈ "
Internal width	12mm 1 ¹ / ₂ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

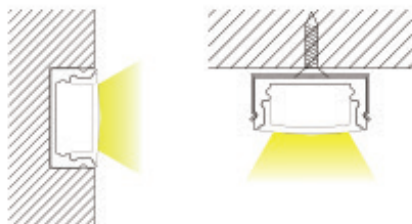

Accessories



TT-38-CLIP



TT-38-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	38	-	3000	-	O


TT-40-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

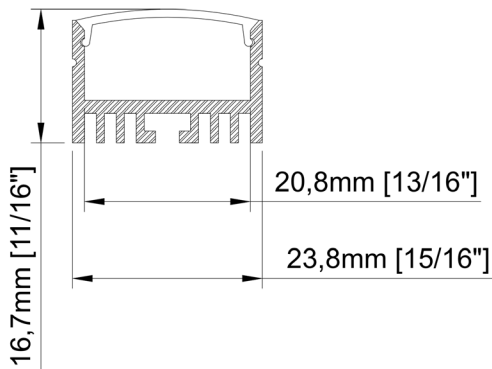

Size	23,5mm x 15mm x 2000mm $15/16" \times 5/8" \times 78^{3/4}"$
Lenght	2000mm $78^{3/4}"$
Internal width	20,4mm $13/16"$
Cover	PC diffused

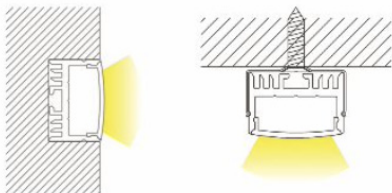

Accessories




PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	40	2000	O


TT-40-3000-O-BK



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

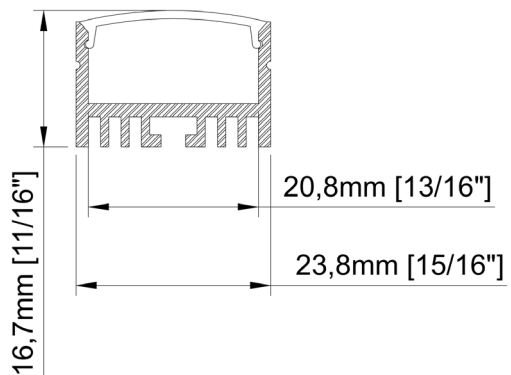

Size	23,8mm x 16,7mm x 3000mm 1 ⁵ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	20,8mm 1 ³ / ₁₆ "
Cover	PC diffused

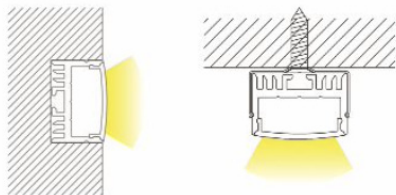

Accessories




PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	40	3000	O	BK


TT-52-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

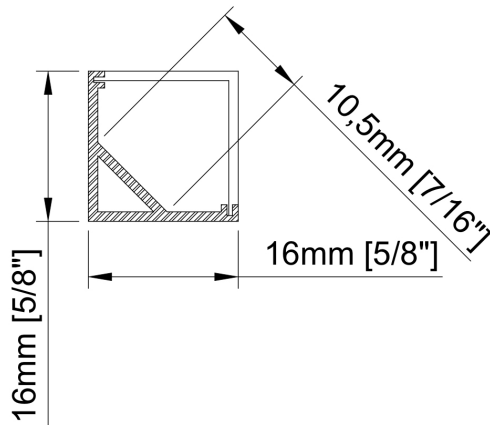

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Matte opal PMMA



Accessories



TT-52-CLIP



TT-52-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	52	-	3000	-	O

TT-64-3000-O



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

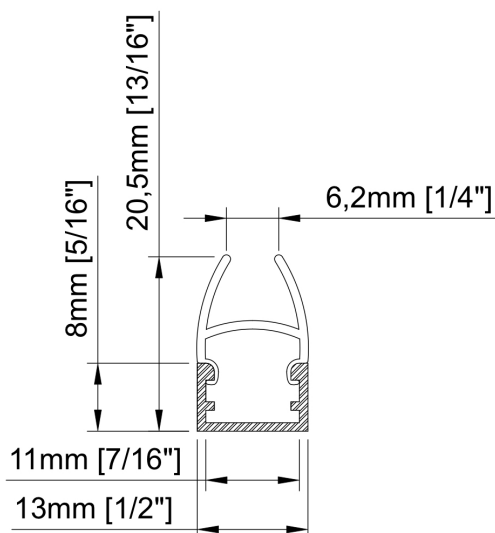

Size	13mm x 20,5mm x 3000mm 1/2" x 13/16" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	11mm 7/16"
Finish	BK - Black (n/a) Grey
Cover	PC diffused

*Glass not include.


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	64	-	3000	-	O


TT-65-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

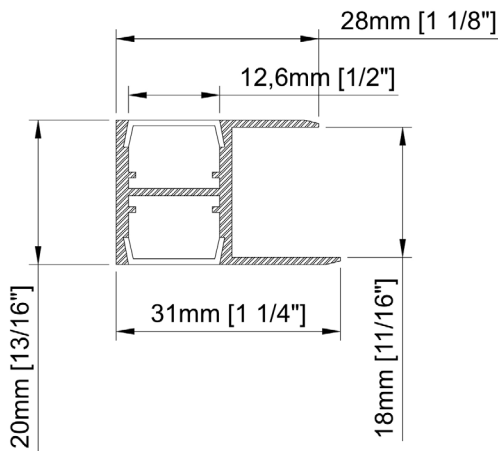

Size	31mm x 20mm x 3000mm 1 ¹ / ₄ " x 1 ³ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	2 x 12,6mm 2 x 1/2"
Finish	BK - Black (n/a) Grey
Cover	PC diffused




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	65	-	3000	-	O


TT-66-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

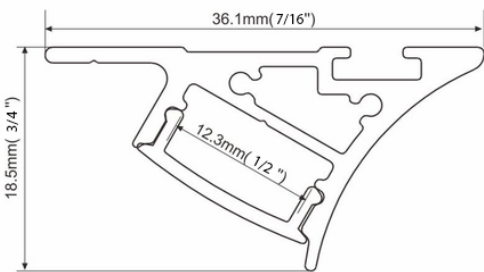

Size	31,6mm x 18,5mm x 2000mm 7/16" x 3/4" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12,3mm 1/2"
Cover	PC diffused

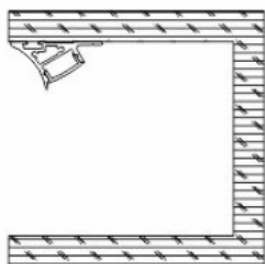

Accessories



TT-66-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	66	-	2000	-	O

TT-68-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

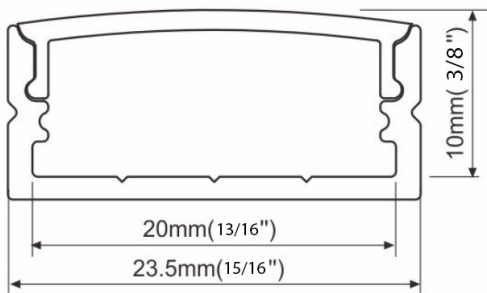


Size 23,5mm x 10mm x 3000mm
15¹/₁₆" x 3³/₈" x 118¹/₈"


Lenght 3000mm
118¹/₈"

Internal width 20mm
13³/₁₆"

Cover Matte opal PMMA

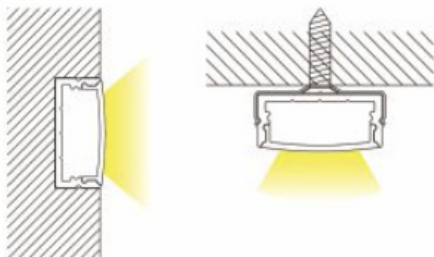

Accessories



TT-68-CLIP




TT-68-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	68	-	3000	-	O

TT-76-3000-O

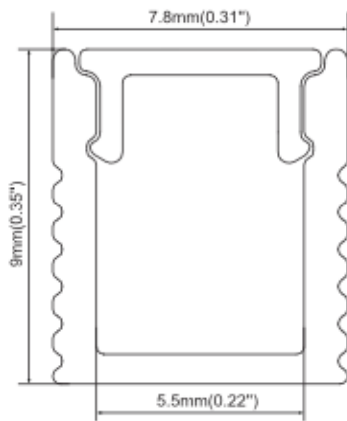

Size	7,8mm x 9mm x 3000mm $5/16" \times 3/8" \times 118 1/8"$
Length	3000mm $118 1/8"$
Internal width	5,5mm $1/4"$
Cover	PC

Accessories



TT-76-CLIP



TT-76-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	76	-	3000	-	O

RECESSED



Credit photo: Christian Marcoux



TT-02-3000 Page 33

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-03-3000 Page 34

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-14-3000 Page 35

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-17-2500 Page 36

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-18-2500 Page 37

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-19-2000 Page 38

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-39-3000 Page 39

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-49-2000 Page 40

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-50-2000 Page 41

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





TT-69-3000 Page 42

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-74-3000 Page 43

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE

TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											


28/6 221 lm/foot 5W/foot	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
28/6 H 527 lm/foot 6,25W/foot *24v only	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=OTE	P Plug-in
28/12 456 lm/foot 9W/foot *24v only	35 3500K			DCxxxx 12 inchs minimum	DCxxxx 12 inchs minimum			CV Dimmable
28/12 456 lm/foot 9W/foot *24v only	40 4000K							CV-BOX Dimmable with box
35/3 45 lm/foot 1,5W/foot	60 6000K							CV67 IP67 psu
35/6 120 lm/foot 3W/foot	RE RED							120V No dimmage 120v psu
22/15 425 lm/foot 9W/foot *24v only	GR GREEN							347V No dimmable 347V PSU
50/3 4,5W/foot	BL BLUE							010 0-10v PSU
DX/24 DIGITAL DMX *24v only	AM AMBER							
	PK PINK *28/6 only							
	CB CYAN *28/6 only							
	OR ORANGE *28/6 only							
	UV *28/6 only							
	RGB *50/3, 28/6 or 35/6 only							
	RGBWW *50/3 only							
	RGBNW *50/3 only							
	RGBCW *50/3 only							
	RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-02-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 1/8").

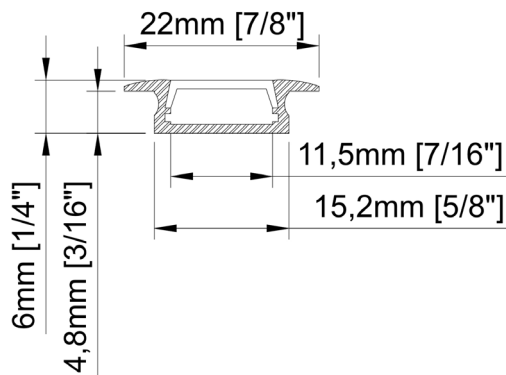

Size	15,2mm x 4,8mm x 3000mm 5/8" x 3/16" x 118 1/8"
Length	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

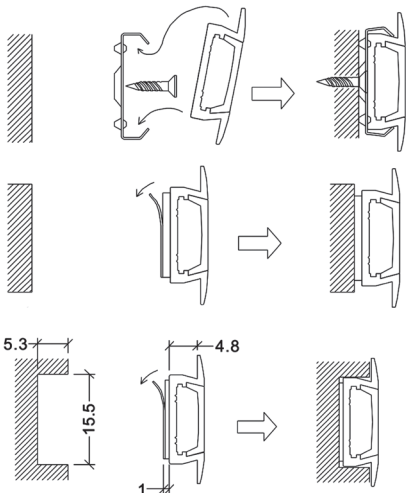


Accessories




PRODUCT CODE				
TT	MODEL	LENGTH (mm)	COVER	
TT	02	3000	O	




TT-03-3000-O

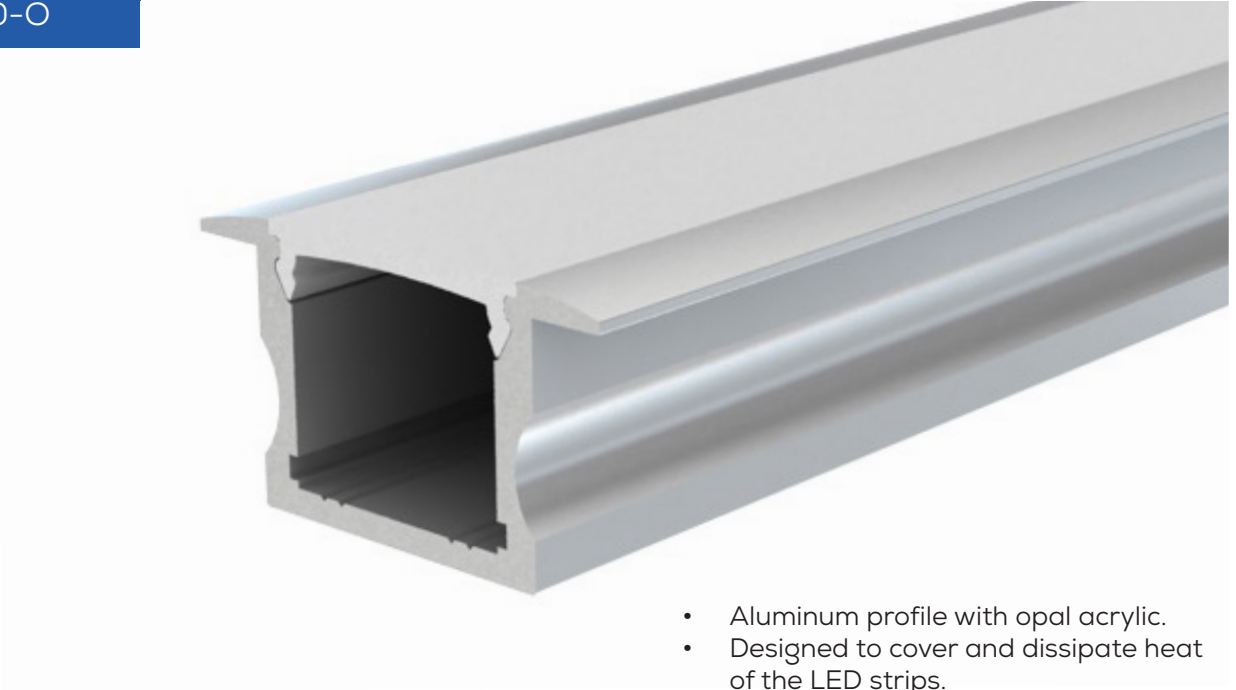

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 1/8").

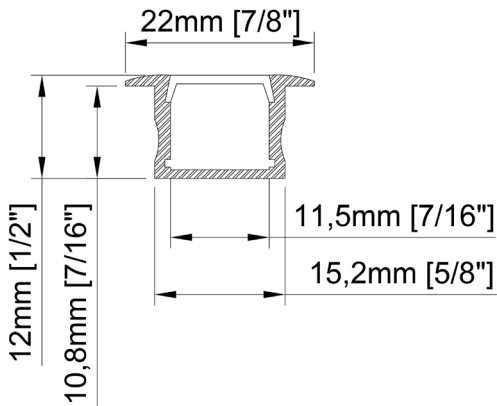

Size	15,2mm x 10,8mm x 3000mm 5/8" x 7/16" x 118 1/8"
Length	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

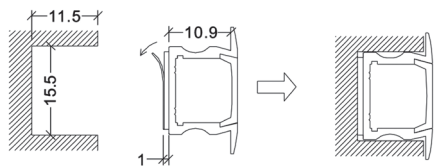

Accessories



TT-03-CLIP



TT-03-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	03	-	3000	-	O



TT-14-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

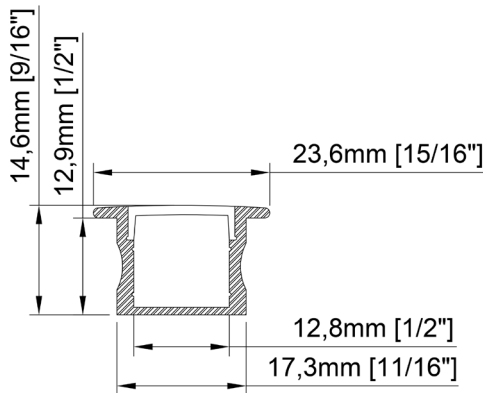

Size	17,3mm x 12,9mm x 3000mm 11/16" x 1/2" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

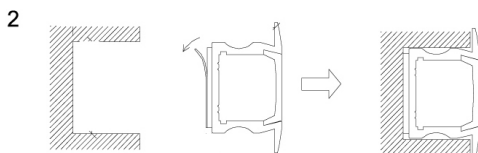

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	14	-	3000	-	O


TT-17-2500-O





- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

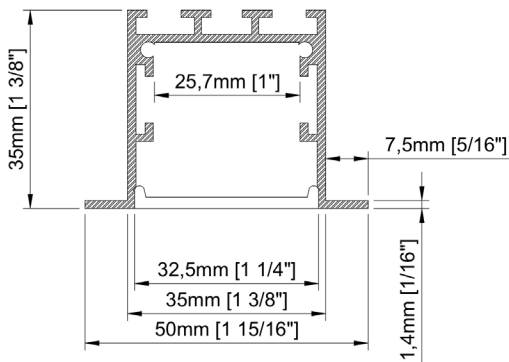

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	25,7mm 1"
Cover	PC diffused

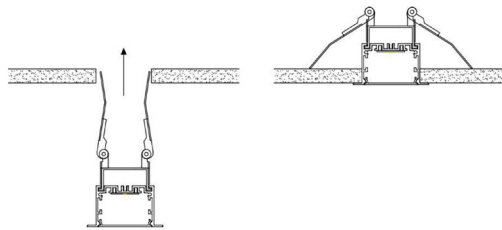

Accessories

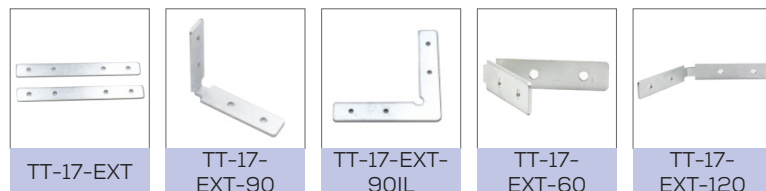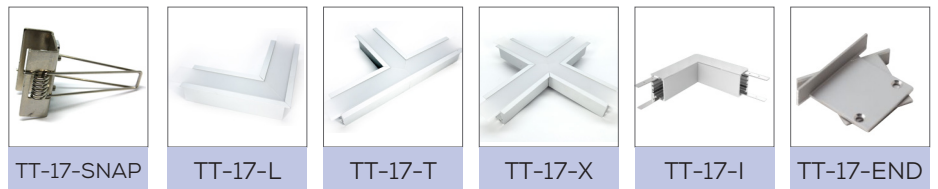


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	17	-	2500	-	O


TT-18-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

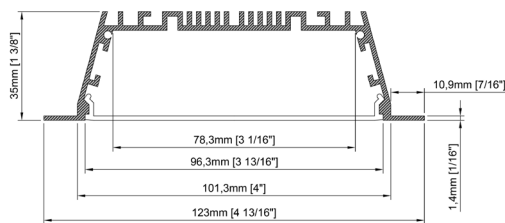

Size	123mm x 35mm x 2500mm 4 ⁷ / ₈ " x 1 ¹ / ₂ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	77,5mm 3"
Cover	PC diffuse

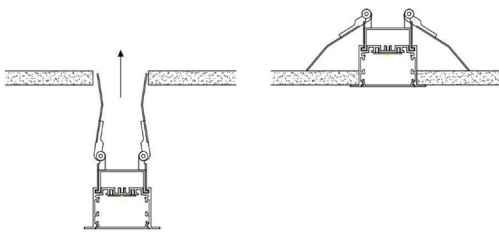

Accessories

					
TT-18-SNAP	TT-18-L	TT-18-T	TT-18-X	TT-18-I	TT-18-END
					
TT-18-EXT	TT-18-EXT-90	TT-18-EXT-90IL	TT-18-EXT-60	TT-18-EXT-120	


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	18	-	2500	-	O


TT-19-2000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

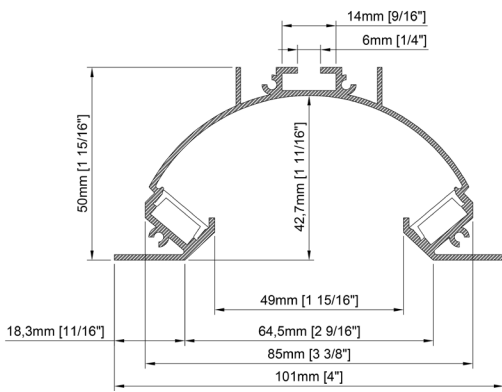

Size	101mm x 50mm x 2000mm 4" x 2" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	2 x 12mm 2 x 1/2"
Cover	Semi clear PMMA

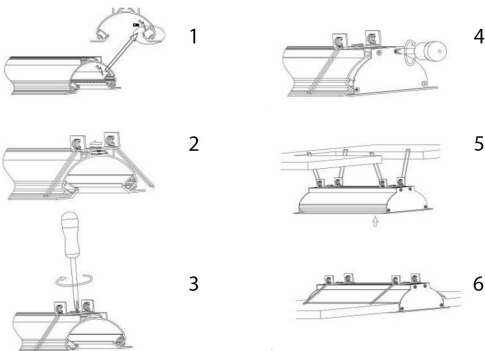


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	19	-	2000	-	O



TT-39-3000-O

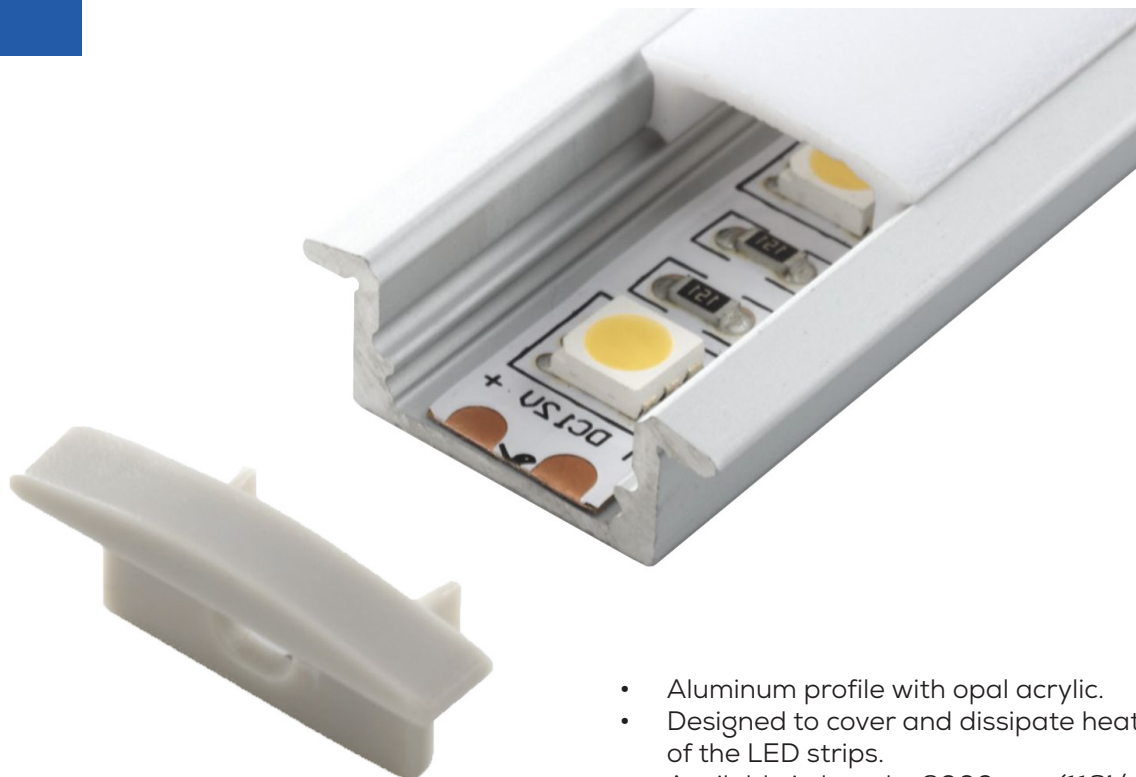

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

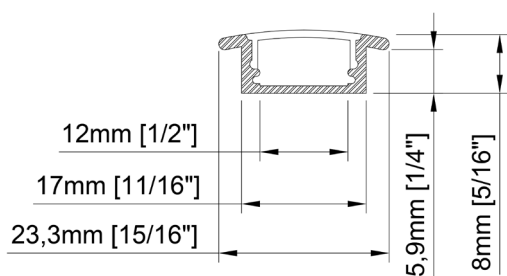

Size	23,3mm x 5,9mm x 3000mm 1 ⁵ / ₁₆ " x 1/4" x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories




TT-39-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	39	-	3000	-	O


TT-49-2000-O

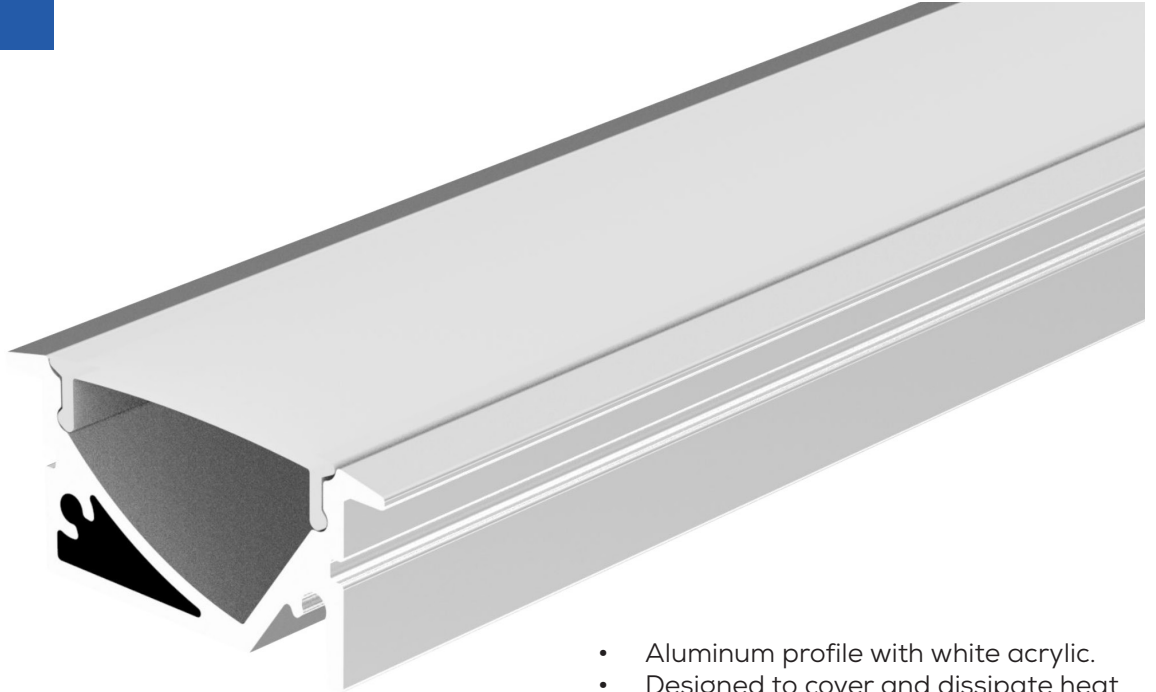

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

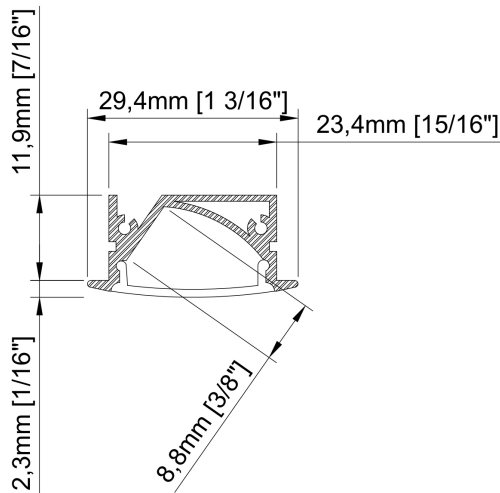

Size	29,4 x 14,2 x 2000 mm 1 ³ / ₁₆ " x ⁹ / ₁₆ " x 78 ³ / ₄ "
Length	2000 mm 78 ³ / ₄ "
Internal width	8,8 mm ³ / ₈ "
Cover	PC diffused



Accessories



TT-49-SNAP



TT-49-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	49	-	2000	-	O


TT-50-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

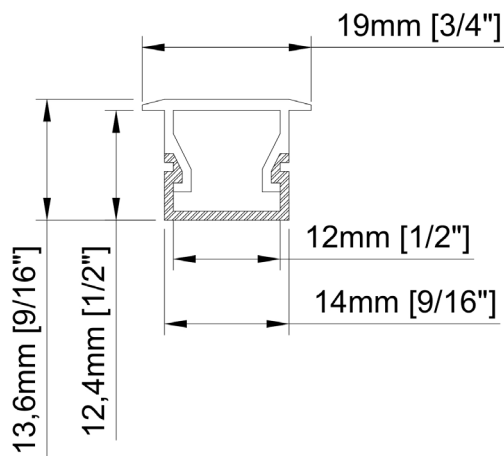

Size	19mm x 13,6mm x 2000mm 3/4" x 9/16" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

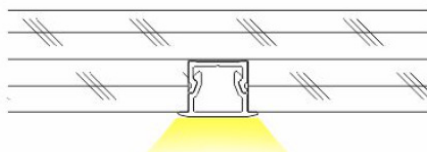

Accessories



TT-50-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	50	-	2000	-	O


TT-69-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

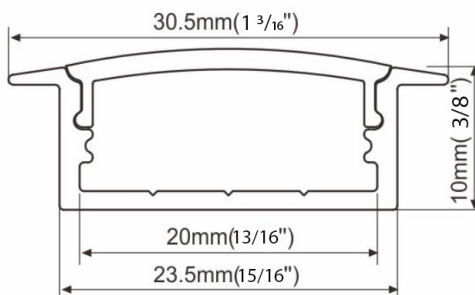

Size	30,5mm x 10mm x 3000mm 1 ³ / ₁₆ " x 3/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	20mm 1 ³ / ₁₆ "
Cover	Matte Opal PMMA

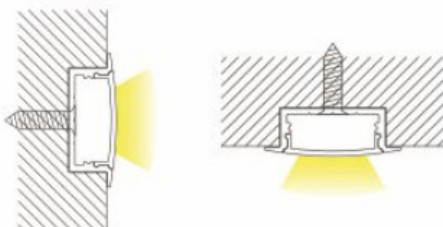

Accessories



TT-69-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	69	-	3000	-	O

TT-74-3000-O



Size	13,7mm x 9,3mm x 3000mm $9/16" \times 3/8" \times 118^{1/8}"$
Lenght	3000mm $118^{1/8}"$
Internal width	11,7mm $7/16"$
Cover	Silicone

Accessories



TT-74-END

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	74	3000	O

PENDANT



Credit photo: Volkswagen St-Nicolas



TT-13-3000 Page 49

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-15-3000 Page 50

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-15-3000-BK Page 51

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-20-2000 Page 52

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-31-2500 Page 53

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

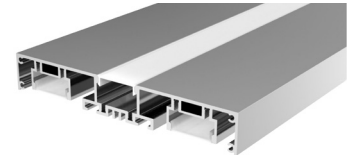

TT-37-2500 Page 54

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-46-2500 Page 55

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-47-2500 Page 56

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-48-2500 Page 57

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-48-2500-BK Page 58

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





TT-53-2000 Page 59

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-54-2000-BK Page 60

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-54-2000-WH Page 61

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-R25-600 Page 62

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8




TT-R25-900 Page 63

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16




TT-R25-1270 Page 64

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50




TT-R25-1800 Page 65

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8

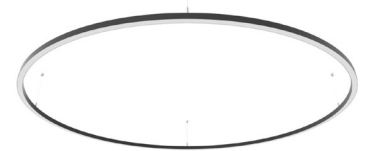

TT-R30-600 Page 66

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8




TT-R30-900 Page 67

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16



TT-R30-1200 Page 68


Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 47 1/4





TT-R50-900 Page 69

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16




TT-R50-1270 Page 70

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50



TT-R50-1800 Page 71

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8



TT-CANOPY-01 Page 72

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 11



TT-CANOPY-02 Page 73

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 13



TT-CANOPY-03 Page 74

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-



TT-CANOPY-04 Page 75

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-



TITANIUM

TECHNOLOGY

PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	CLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
			28/6 H 527 lm/feet 6,25W/feet *24v only	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=QTE	P Plug-in CV Dimmable CV-BOX Dimmable with box
			28/12 456 lm/feet 9W/feet *24v only	35 3500K				DCxxxx 12 inchs minimum			CV67 IP67 psu
			35/3 45 lm/feet 1,5W/feet	40 4000K							120V No dimmable 120v psu
			35/6 120 lm/feet 3W/feet	RE RED							347V No dimmable 347V PSU
			22/15 425 lm/feet 9W/feet *24v only	GR GREEN							010 0-10v PSU
			50/3 4,5W/feet	BL BLUE							
			DX/24 DIGITAL DMX *24V only	AM AMBER							
				PK PINK *28/6 only							
				CB CYAN *28/6 only							
				OR ORANGE *28/6 only							
				UV *28/6 only							
				RGB *50/3, 28/6 or 35/6 only							
				RGBWW *50/3 only							
				RGBNW *50/3 only							
				RGBCW *50/3 only							
				RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-13-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

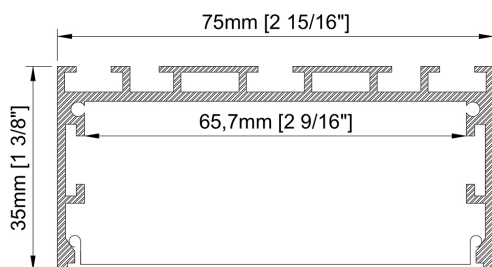

Size	75mm x 35mm x 3000mm 3" x 1 ³ / ₈ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	64mm 2 ¹ / ₂ "
Cover	PC diffused



Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	13	-	3000	-	O


TT-15-3000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

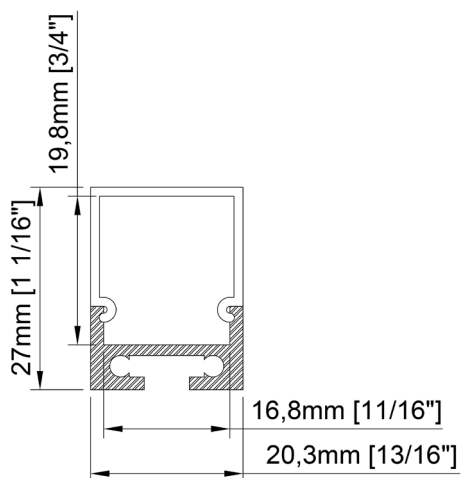

Size	20,3mm x 27mm x 3000mm 1 ³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₄ "
Internal width	16,8mm 1 ¹ / ₁₆ "
Cover	Matte opal PMMA

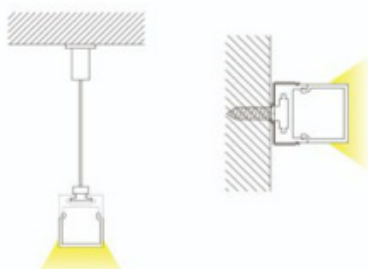

Accessories

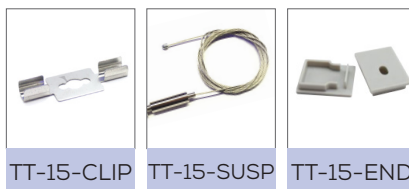


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	15	-	3000	-	O


TT-15-3000-O-BK




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

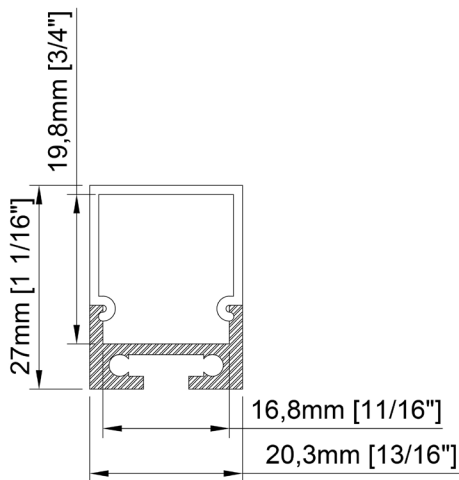

Size	20,3mm x 27mm x 3000mm 1 ³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₄ "
Internal width	16,8mm 1 ¹ / ₁₆ "
Cover	Matte opal PMMA
Finish	Black




Accessories



TT-15-CLIP



TT-15-SUSP



TT-15-END-BK


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER	-	FINISH
TT	-	15	-	3000	-	O	-	BK


TT-20-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

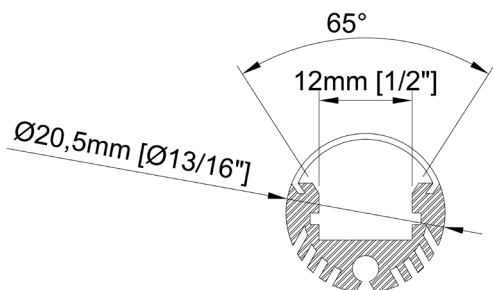

Size	Ø20,5mm x 2000mm Ø ¹³ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	Matte opal PMMA

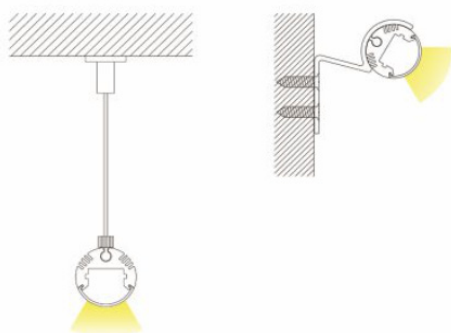

Accessories



TT-20-CLIP



TT-20-SUSP




TT-20-END

PRODUCT CODE


TT - MODEL - LENGHT (mm) - COVER

TT - 20 - 2000 - O

TT-31-2500-O

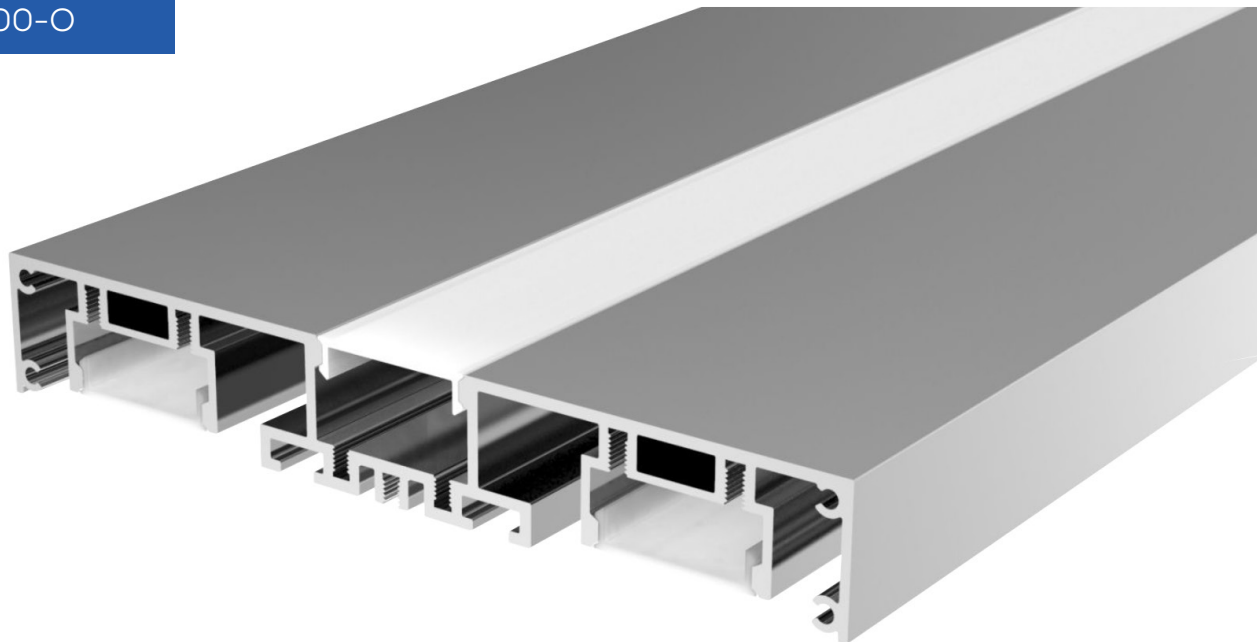

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

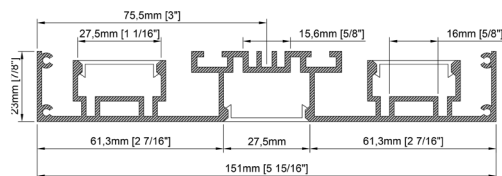

Size	151mm x 23mm x 2500mm 5 ¹⁵ / ₁₆ " x 7/8" x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	3 x 27mm 3 x 1 ¹ / ₁₆ "
Cover	PC frosted



Accessories



TT-31-SUSP




TT-31-END



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	31	-	2500	-	O

TT-37-2500-O

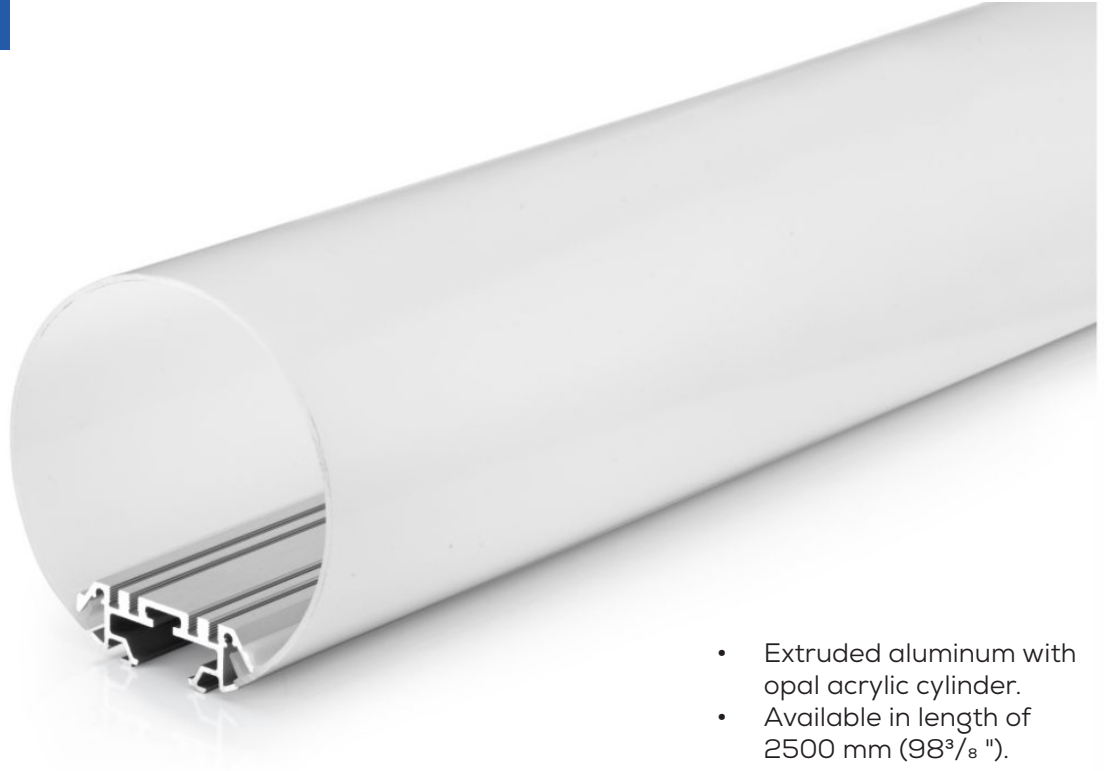


- Extruded aluminum with opal acrylic cylinder.
- Available in length of 2500 mm (98³/₈ ").

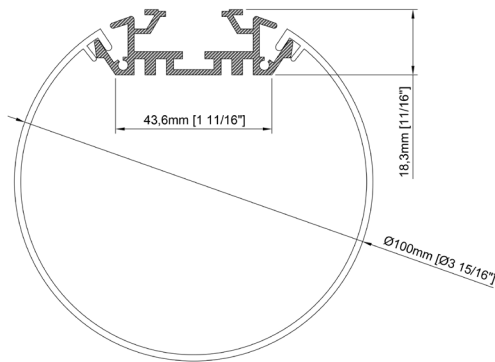

Size	Ø100 mm x 2500 mm 3 ¹⁵ / ₁₆ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	43mm 1 ¹¹ / ₁₆ "
Cover	PC diffused

Accessories

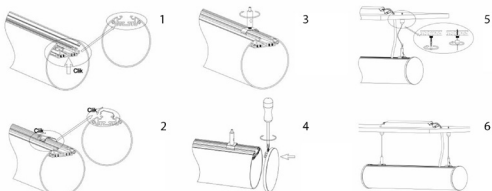


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	37	-	2500	-	O

TT-46-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

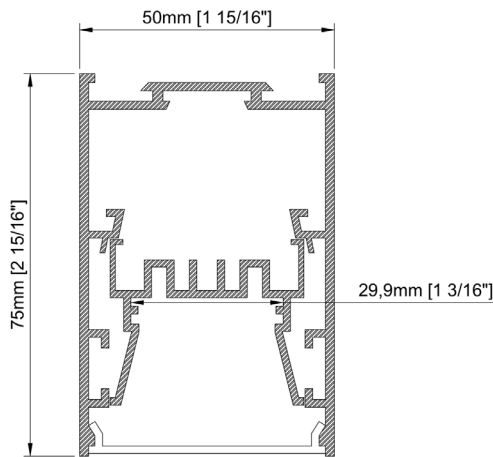


Size 75mm x 50mm x 2500mm
2¹⁵/₁₆" x 1¹⁵/₁₆" x 98³/₈"


Lenght 2500mm
98³/₈"

Internal width 29,9mm
1³/₁₆"

Cover PC frosted

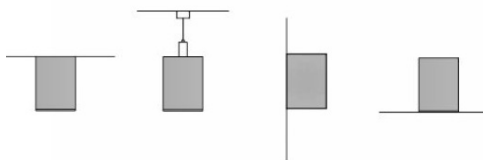

Accessories

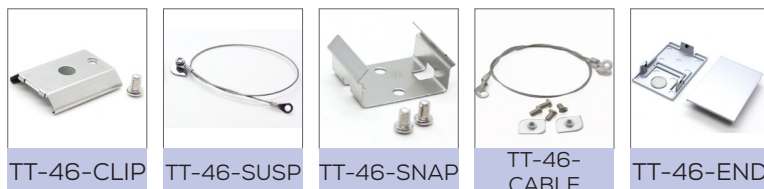


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	46	-	2500	-	O

TT-47-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

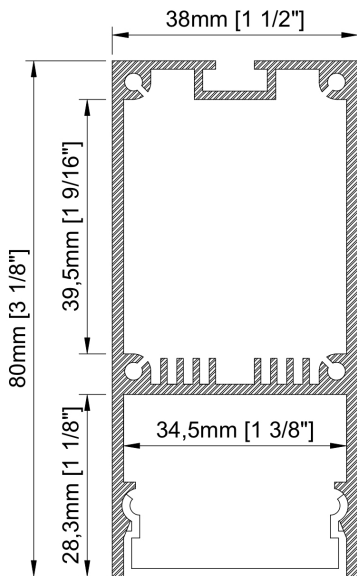

Size	80mm x 38mm x 2500mm 3 ¹ / ₈ " x 1 ¹ / ₂ " x 98 ³ / ₈ "
Length	2500mm 98 ³ / ₈ "
Internal width	34,5mm 1 ³ / ₈ "
Cover	PC diffused



Accessories



TT-47-SUSP



TT-47-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	47	-	2500	-	O

TT-48-2500-O





- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

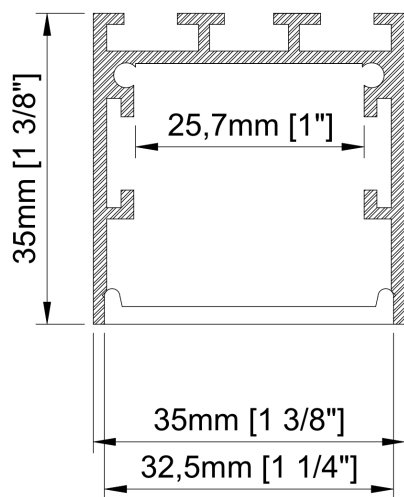

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	2,57mm 1"
Cover	PC diffused

Accessories

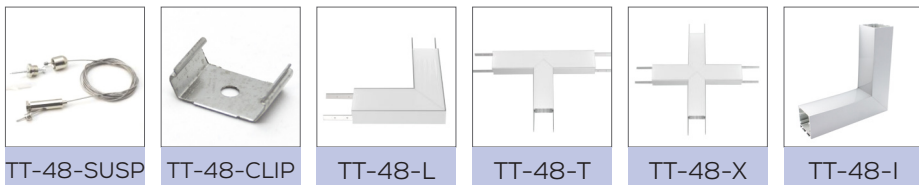


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	48	-	2500	-	O

TT-48-2500-O-BK




- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

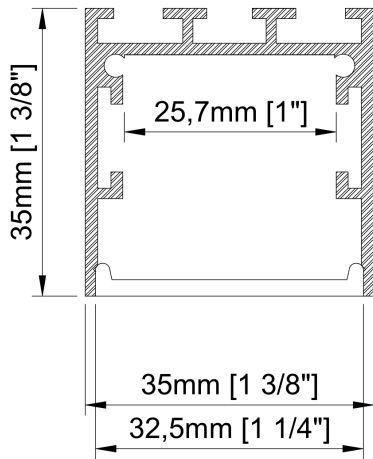

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	25,7mm 1"
Cover	PC diffused
Finish	BK-Black

Accessories



TT-48-SUSP-BK	TT-48-CLIP	TT-48-L-BK	TT-48-T-BK	TT-48-X-BK	TT-48-I-BK
TT-48-EXT	TT-48-EXT-90	TT-48-EXT-90IL	TT-48-EXT-60	TT-48-EXT-120	TT-48-END-BK


PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	50	2000	O	BK

TT-53-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

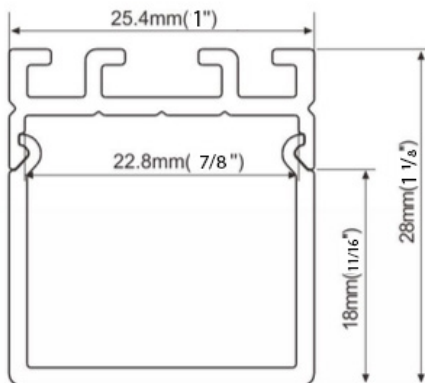


Size	25,4mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
------	---

Lenght	2000mm 78 ³ / ₄ "
--------	--

Internal width	22,8mm 7/8"
----------------	----------------

Cover	PC diffused
-------	-------------

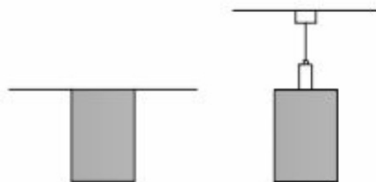

Accessories



TT-53-CLIP



TT-53-SUSP




TT-53-END


PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	53	2000	O

TT-54-2000-O-BK

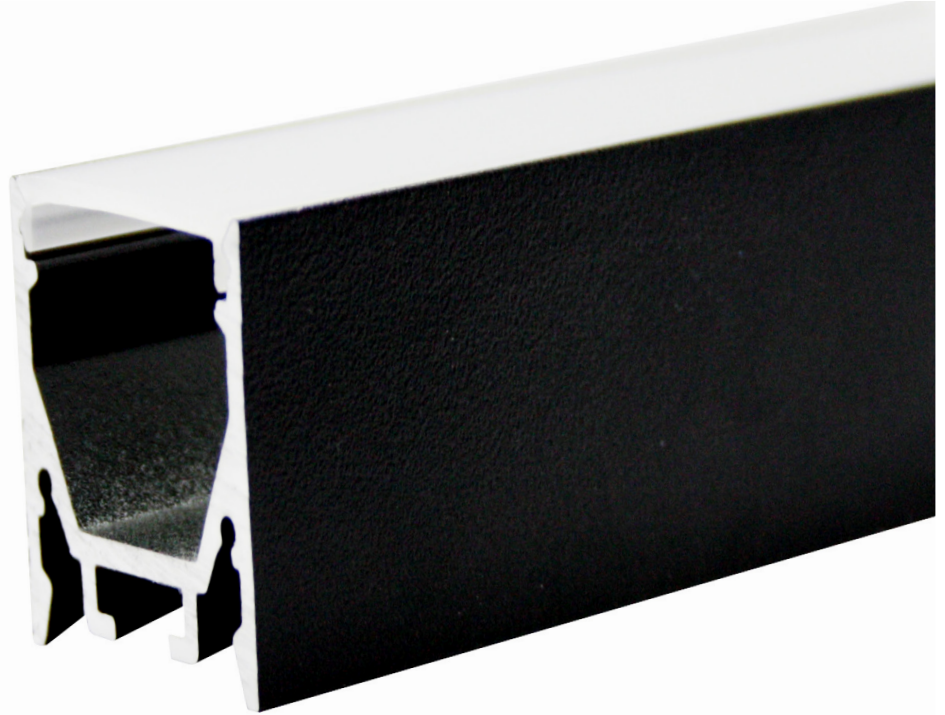

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

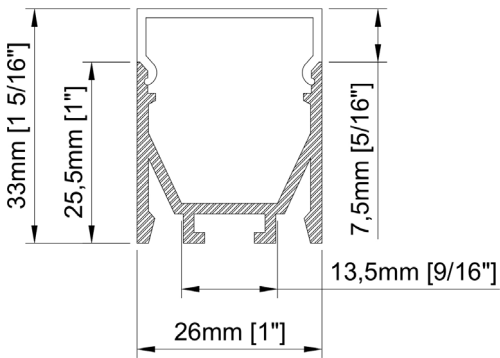


Size 25mm x 25mm x 2000mm
1" x 1" x 78³/₄"

Length 2000mm
78³/₄"

Internal width 13,2mm
1/2"

Cover PC diffused



Accessories



TT-54-CLIP



TT-54-SUSP



TT-54-END-BK


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER	-	FINISH
TT	-	54	-	2000	-	O	-	BK


TT-54-2000-O-WH



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

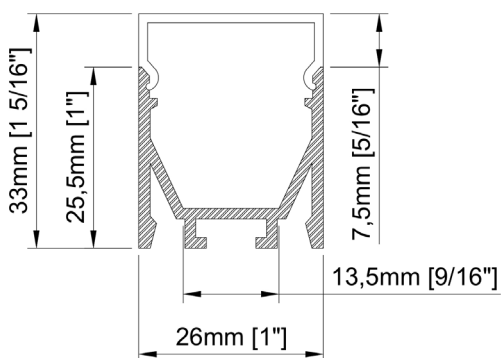

Size	25mm x 25mm x 2000mm 1" x 1" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,2mm 1/2"
Cover	PC diffused







Accessories

TT-54-CLIP	TT-54-SUSP	TT-54-END-WH

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	54	2000	O	WH

TT-R25-600

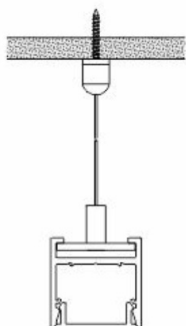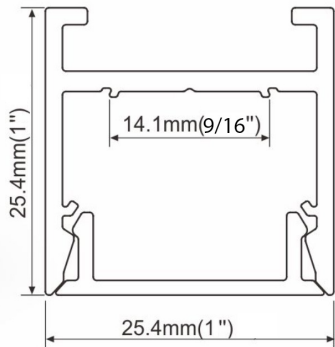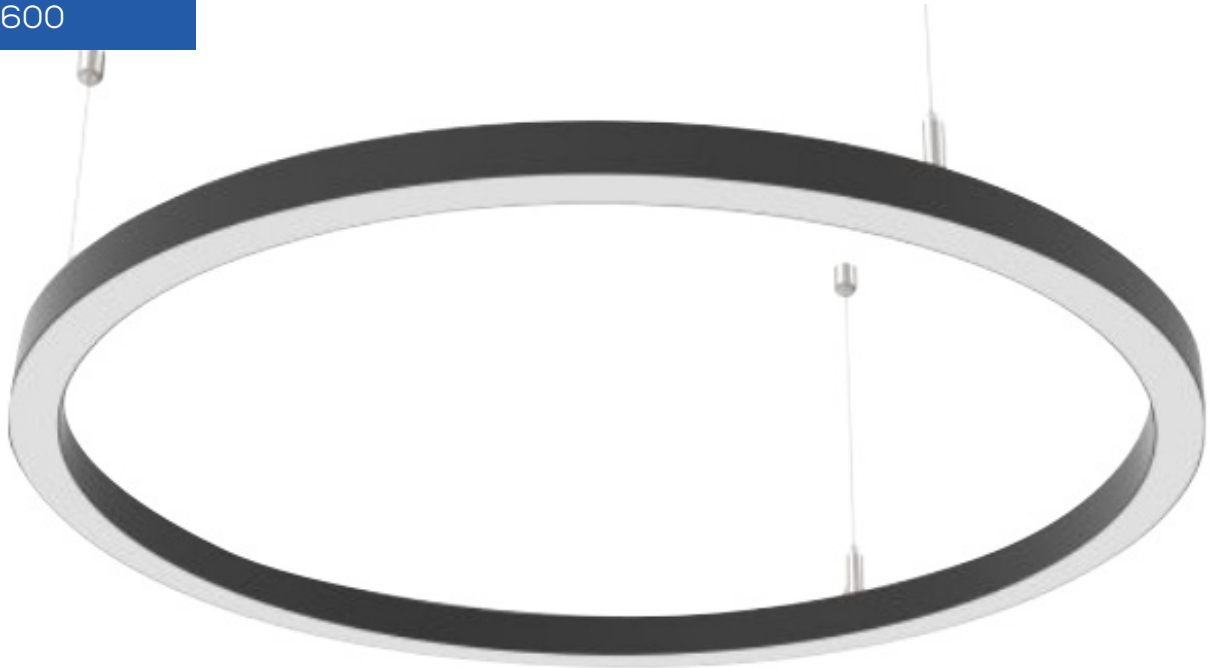

Size	25,4mm x 25,4mm x Ø 600mm 1" x 1" x 23 ⁵ / ₈ "
Diameter	Ø 600mm 23 ⁵ / ₈ "
Internal width	14,1mm 9/ ₁₆ "





Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	600

TT-R25-900

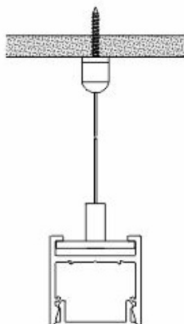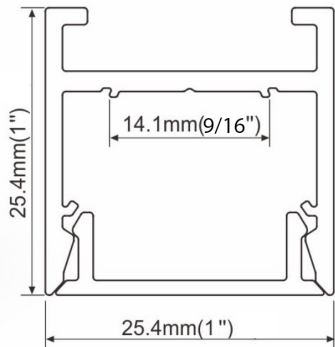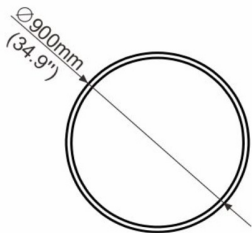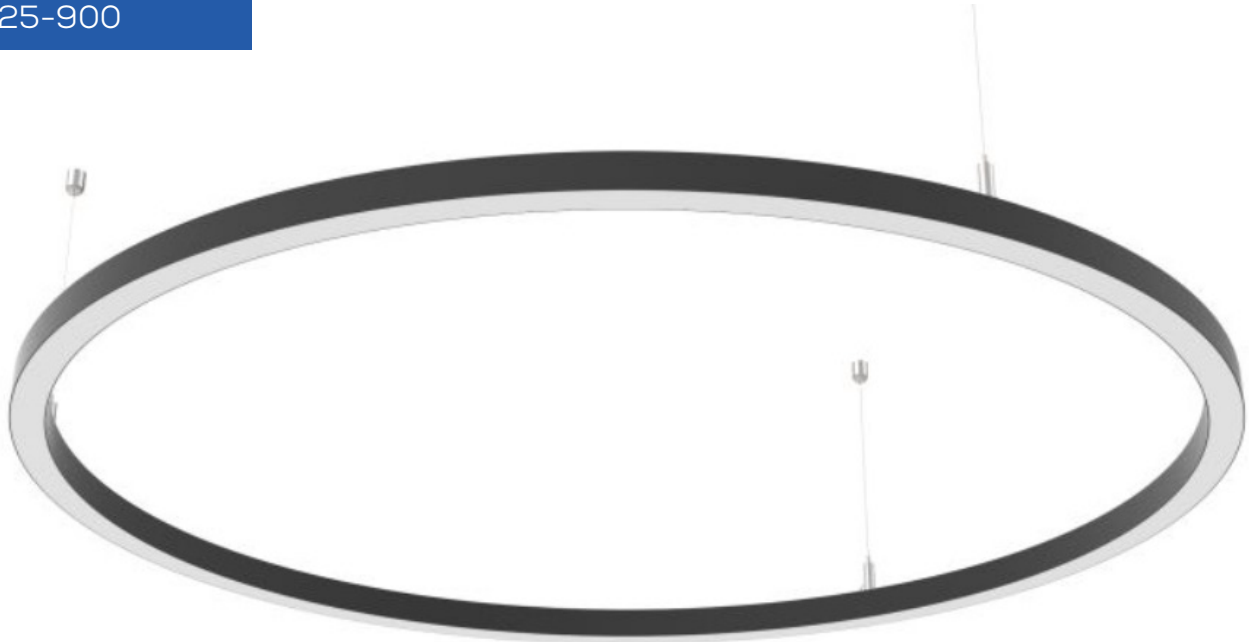

Size	25,4mm x 25,4mm x Ø 900mm 1" x 1" x 35 ⁷ / ₁₆ "
Diameter	Ø 900mm 35 ⁷ / ₁₆ "
Internal width	14,1mm 9 ⁹ / ₁₆ "





Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	900

TT-R25-1270

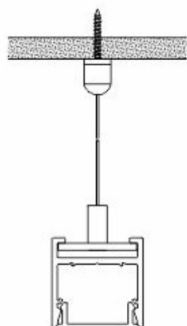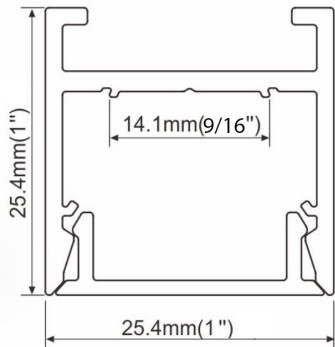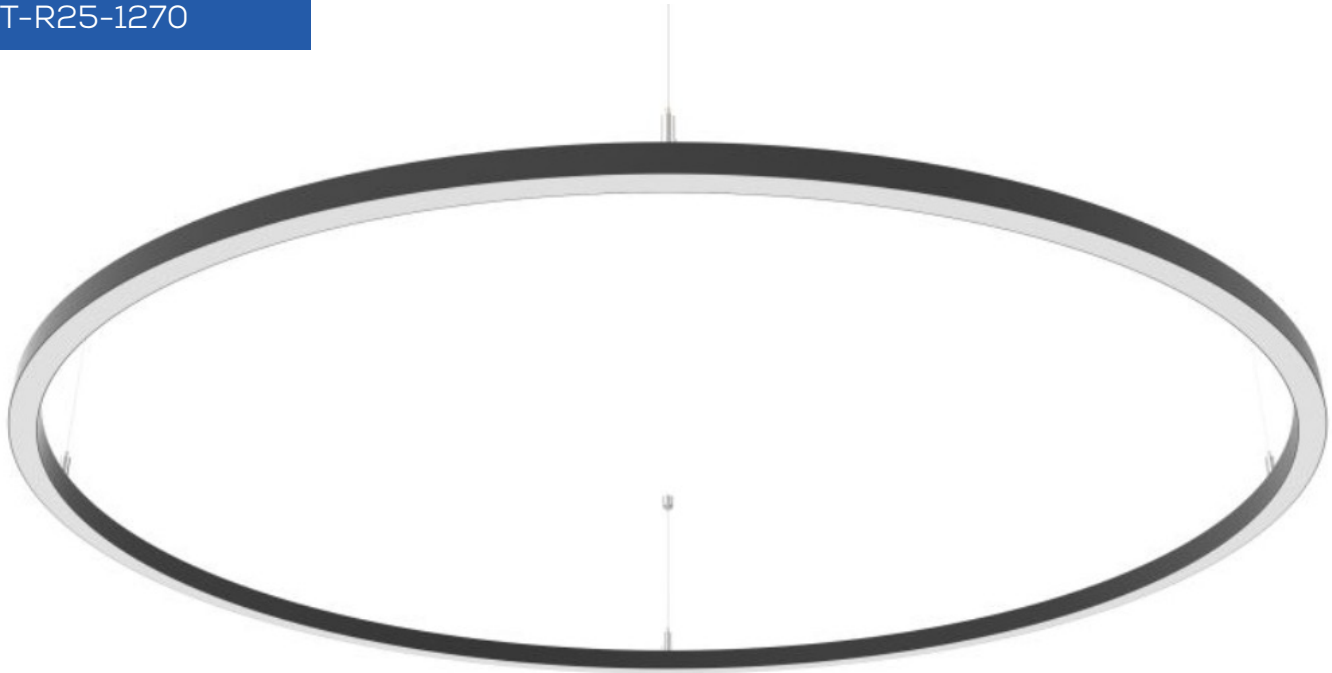

Size	25,4mm x 25,4mm x Ø 1270mm 1" x 1" x 50"
Diameter	Ø 1270mm 50"
Internal width	14,1mm 9/16"




Accessories and power supply included




PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	1270


TT-R25-1800

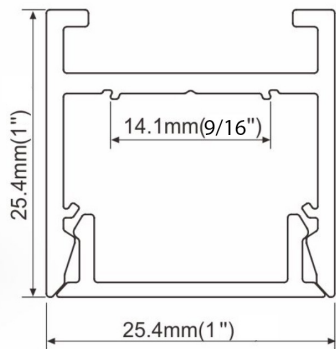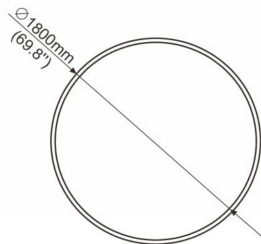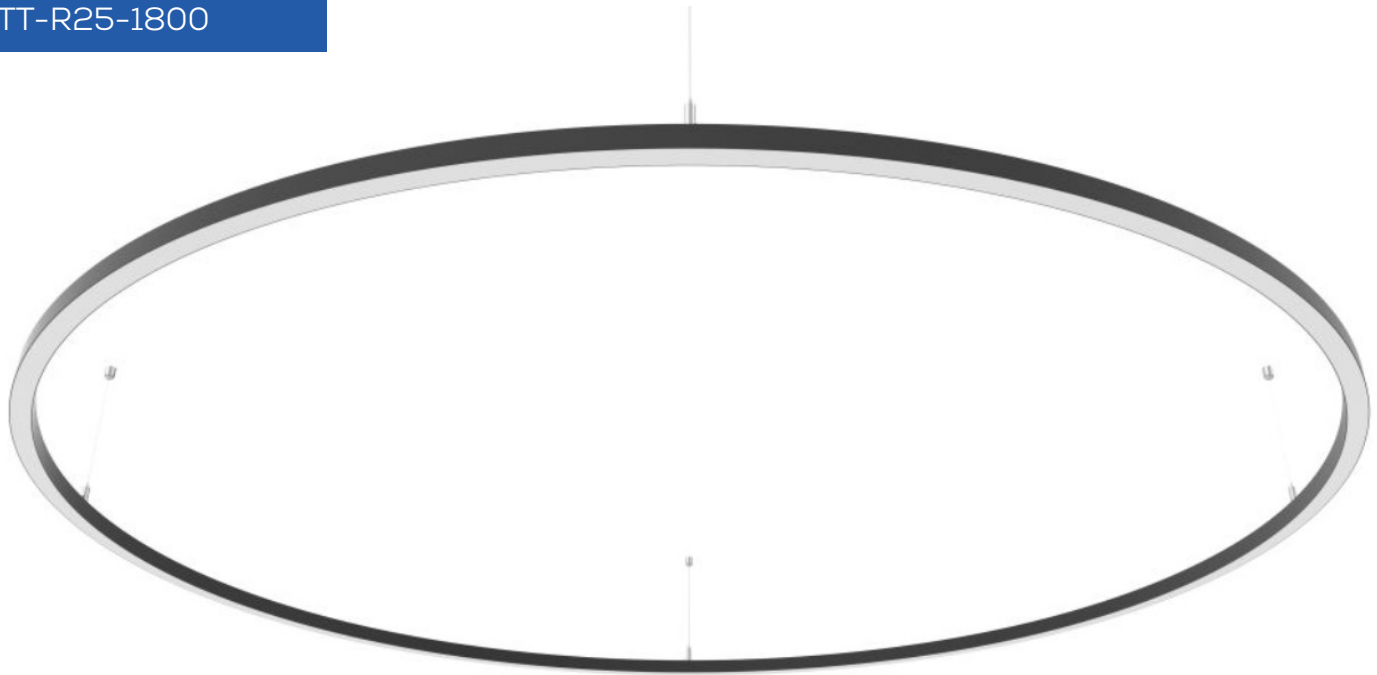

Size	25,4mm x 25,4mm x Ø 1800mm 1" x 1" x 70 ⁷ / ₈ "
Diameter	Ø 1800mm 70 ⁷ / ₈ "
Internal width	14,1mm 9/16"




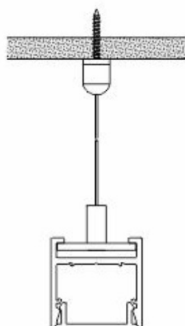


Accessories and power supply included



PRODUCT CODE				
TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	1800

TT-R30-600

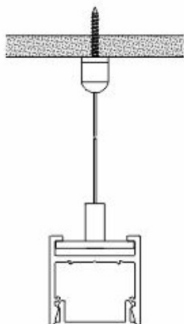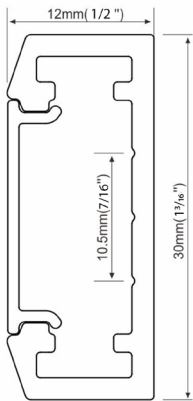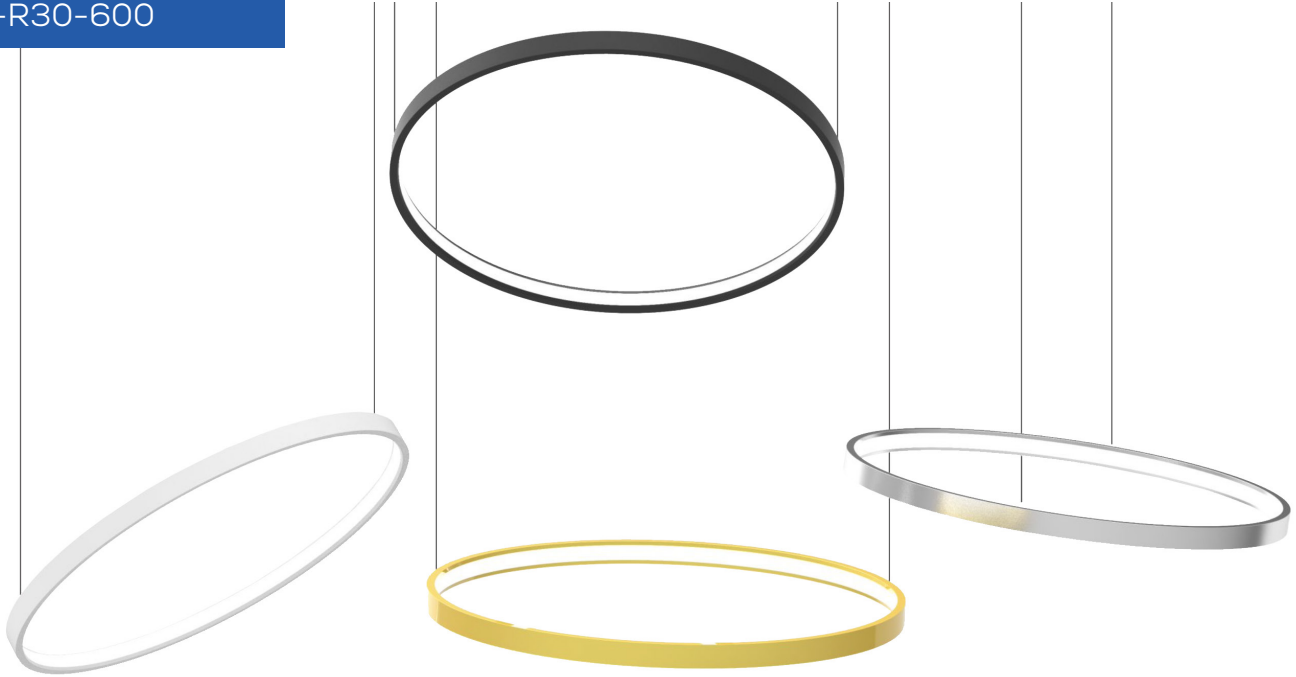

Size	12mm x 30mm x Ø 600mm 1/2" x 1 3/16" x 23 5/8"
Diameter	Ø 600mm 23 5/8"
Internal width	10,5mm 7/16"

Accessories and power supply included







TT-R30-SUSP

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	600

TT-R30-900

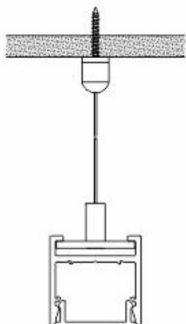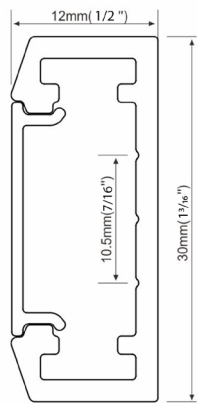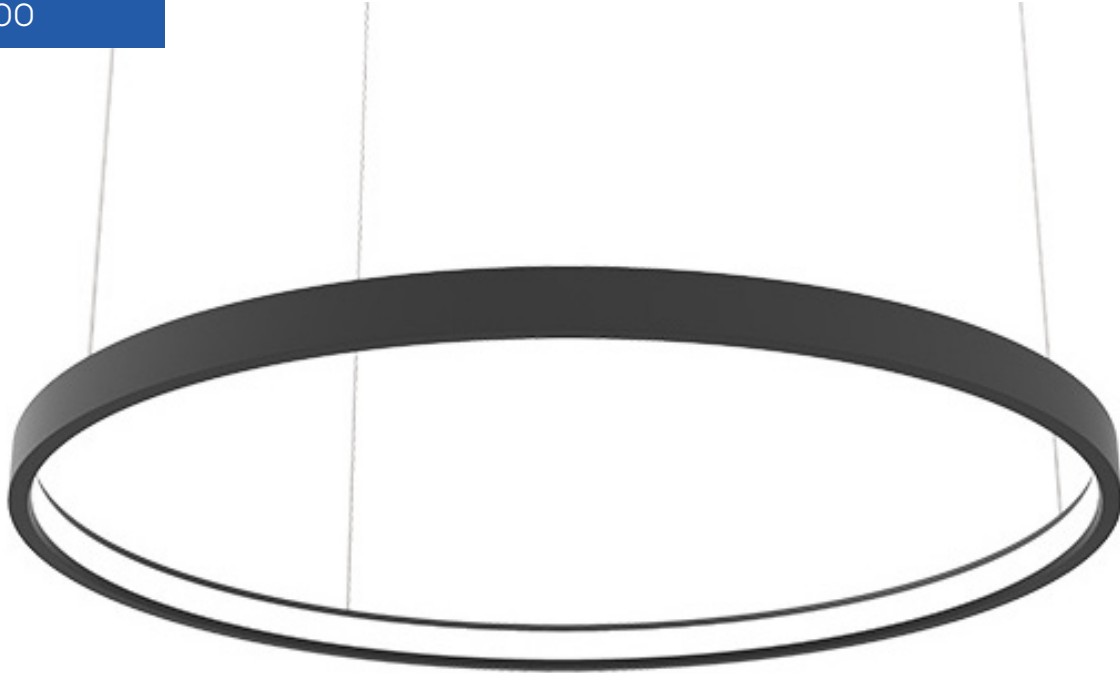

Size	12mm x 30mm x Ø 900mm 1/2" x 1 3/16" x 35 7/16"
Diameter	Ø 900mm 35 7/16"
Internal width	10,5mm 7/16"

Accessories and power supply included







TT-R30-SUSP

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	900

TT-R30-1200

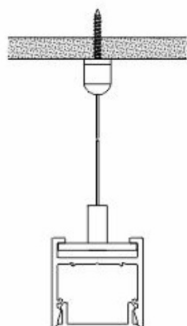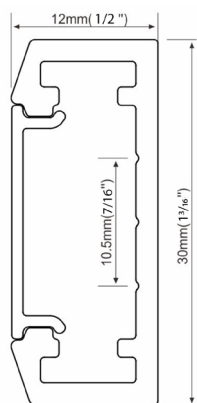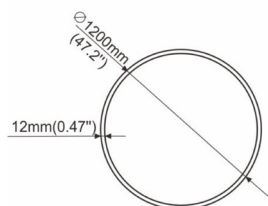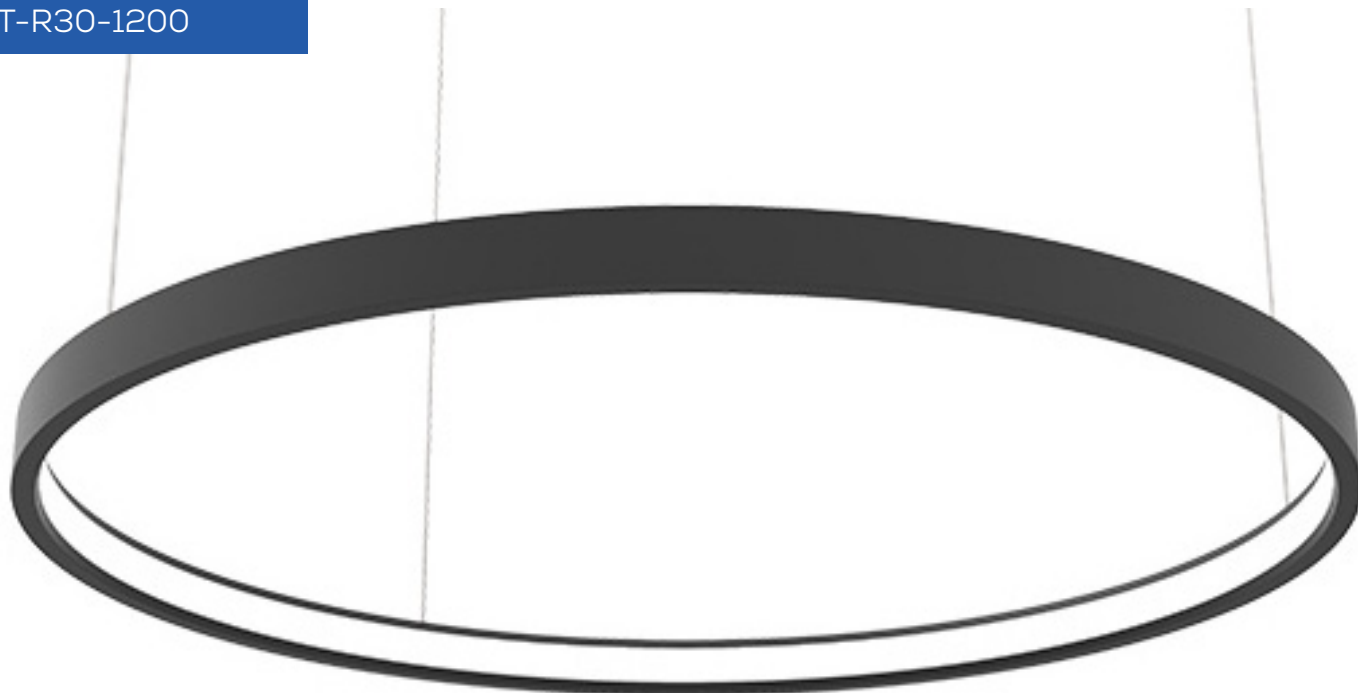

Size	12mm x 30mm x Ø 1200mm 1/2" x 1 3/16" x 47 1/4"
Diameter	Ø 1200mm 47 1/4"
Internal width	10,5mm 7/16"

Accessories and power supply included







TT-R30-SUSP

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	1200

TT-R50-900

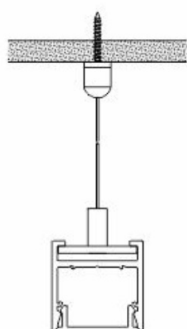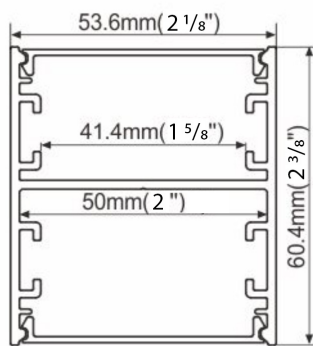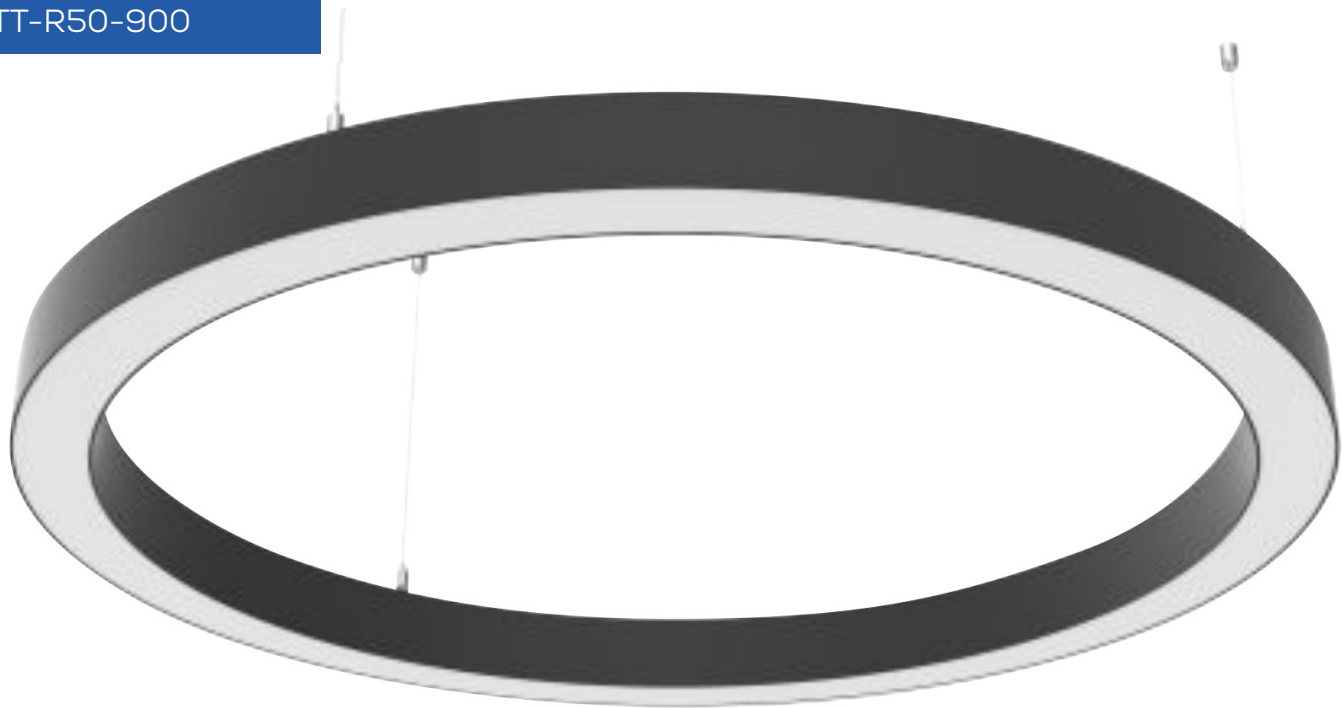

Size	53,6mm x 60,4mm x Ø 900mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 35 ⁷ / ₁₆ "
Diameter	Ø 900mm 35 ⁷ / ₁₆ "
Internal width	41,1mm 1 ⁵ / ₈ "




Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	900

TT-R50-1270

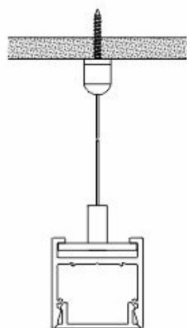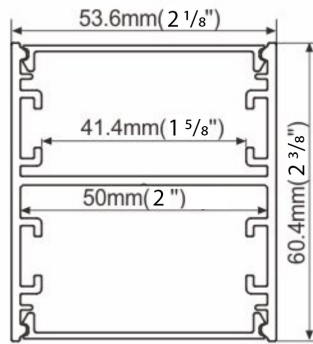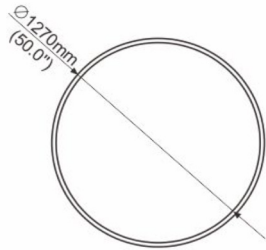

Size	53,6mm x 60,4mm x Ø 1270mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 50"
Diameter	Ø 1270mm 50"
Internal width	41,1mm 1 ⁵ / ₈ "





Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	1270

TT-R50-1800

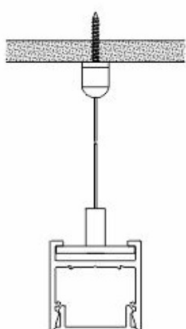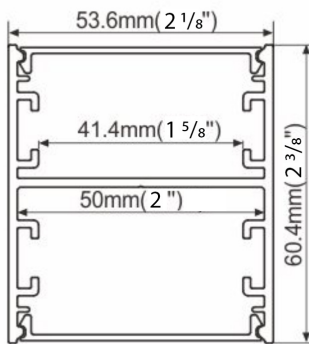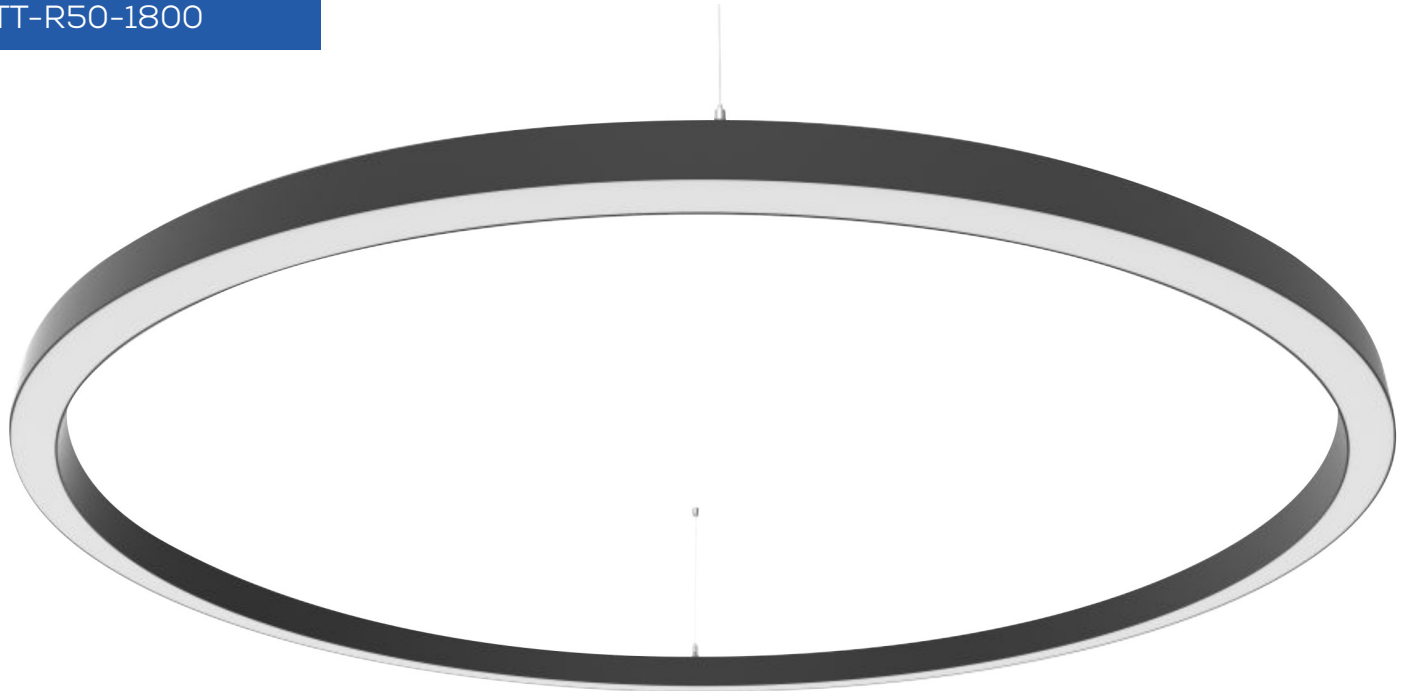



Size	53,6mm x 60,4mm x Ø 1800mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 70 ⁷ / ₈ "
Diameter	Ø 1800mm 70 ⁷ / ₈ "
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included



PRODUCT CODE



TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	1800

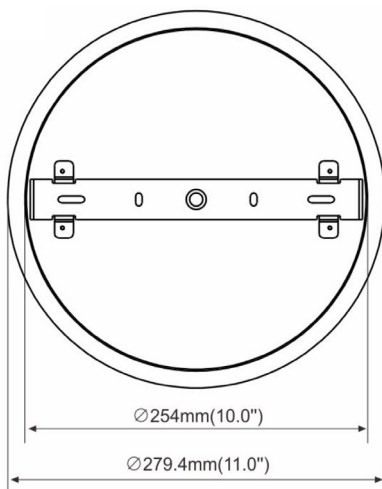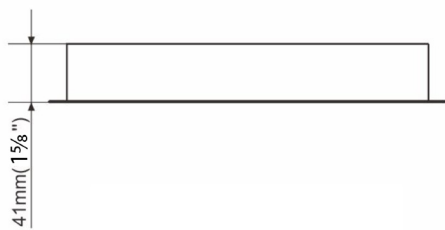

Size	41mm x Ø 279,4mm 1 ⁵ / ₈ " x 11"
Diameter	Ø 279,4mm 11"
Internal width	254mm 10"

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	CANOPY	-	01

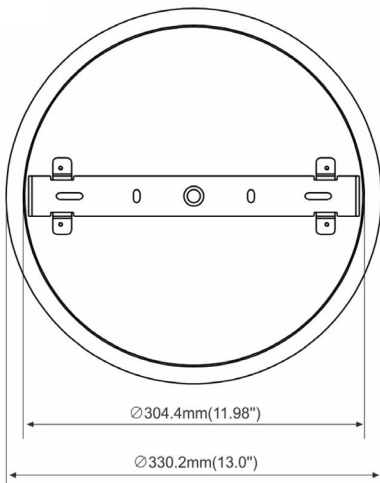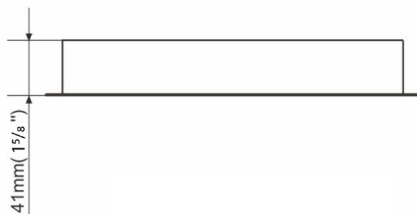

Size	41mm x Ø 330,2mm 1 ⁵ / ₈ " x 13"
Diameter	Ø 330,2mm 13"
Internal width	Ø 304,4mm 12"



PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	CANOPY	-	02



Size 60mm x 150mm x 380mm
 $2 \frac{3}{8}'' \times 5 \frac{7}{8}'' \times 1'-3''$

Internal width 120mm x 350mm
 $4 \frac{3}{4}'' \times 1'-1 \frac{3}{4}''$

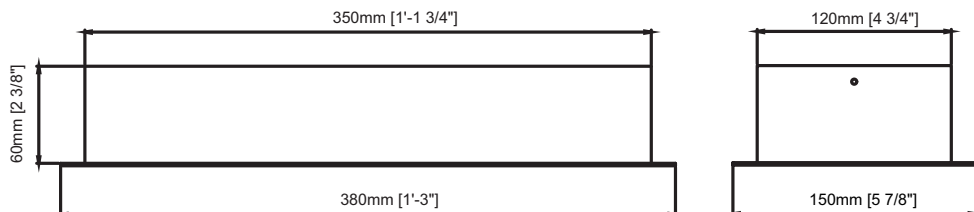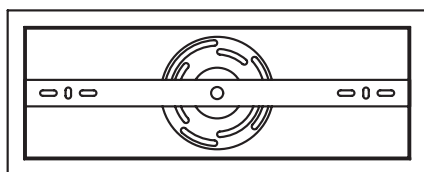

PRODUCT CODE




TT - TYPE - MODEL

TT - CANOPY - 03



Size 60mm x 150mm x 730mm
2 3/8" x 5 7/8" x 2'-4 3/4"

Internal width 120mm x 700mm
4 3/4" x 2'-3 1/2"

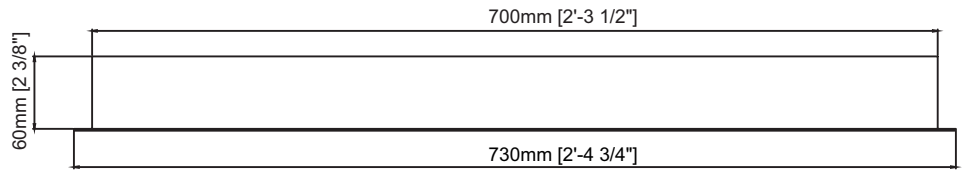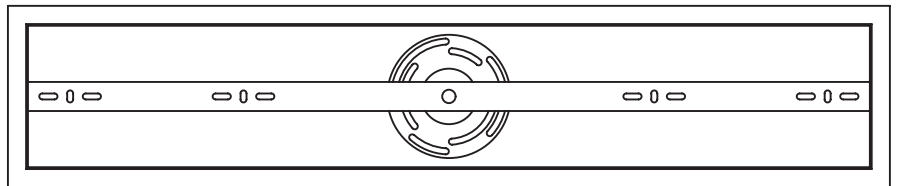

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	CANOPY	-	04

BLACK SHADOW SERIES



Credit photo: Cuisines Simard




TT-55-3000-BK Page 79

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-56-3000-BK Page 80

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

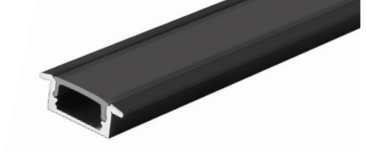

TT-57-3000-BK Page 81

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

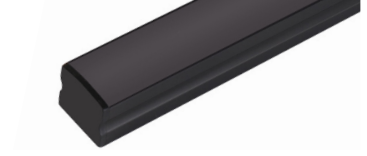

TT-58-3000-BK Page 82

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-59-3000-BK Page 83

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-60-3000-BK Page 84

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-61-3000-BK Page 85

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-62-3000-BK Page 86

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

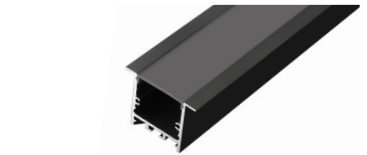

TT-63-3000-BK Page 87

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

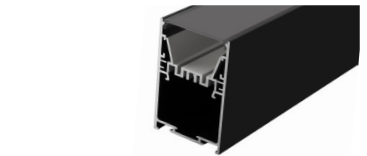


TT-73-3000-BK Page 88

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-74-3000-O-BK Page 89

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-75-3000-O-BK Page 90

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
			30 3000K	30	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=QTE	P Plug-in
			28/6 H 527 lm/feet 6,25W/feet *24v only	35 3500K			DCxxxx 12 inchs minimum	DCxxxx 12 inchs minimum			CV Dimmable
			28/12 456 lm/feet 9W/feet *24v only	40 4000K							CV-BOX Dimmable with box
			35/3 45 lm/feet 1,5W/feet	60 6000K							CV67 IP67 psu
			35/6 120 lm/feet 3W/feet	RE RED							120V No dimmage 120v psu
			22/15 425 lm/feet 9W/feet *24v only	GR GREEN							347V No dimmage 347V PSU
			50/3 4,5W/feet	BL BLUE							Q10 0-10v PSU
			DX/24 DIGITAL DMX *24V only	AM AMBER							
				PK PINK *28/6 only							
				CB CYAN *28/6 only							
				OR ORANGE *28/6 only							
				UV *28/6 only							
				RGB *50/3, 28/6 or 35/6 only							
				RGBWW *50/3 only							
				RGBNW *50/3 only							
				RGBCW *50/3 only							
				RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

TT-55-3000-O-BK

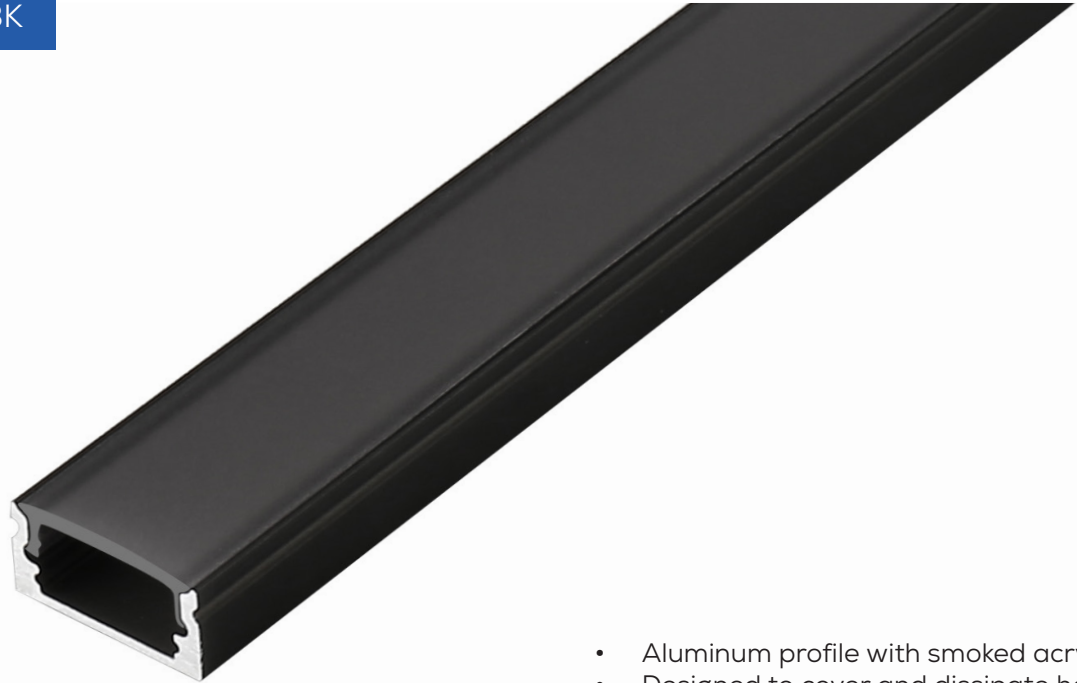

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

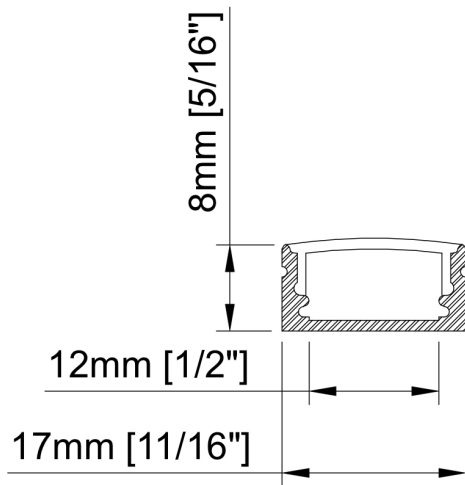

Size	17mm x 8mm x 3000mm 1 ¹ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1 ¹ / ₂ "
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-55-CLIP




TT-55-END


PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	55	3000	O	BK

TT-56-3000-O-BK

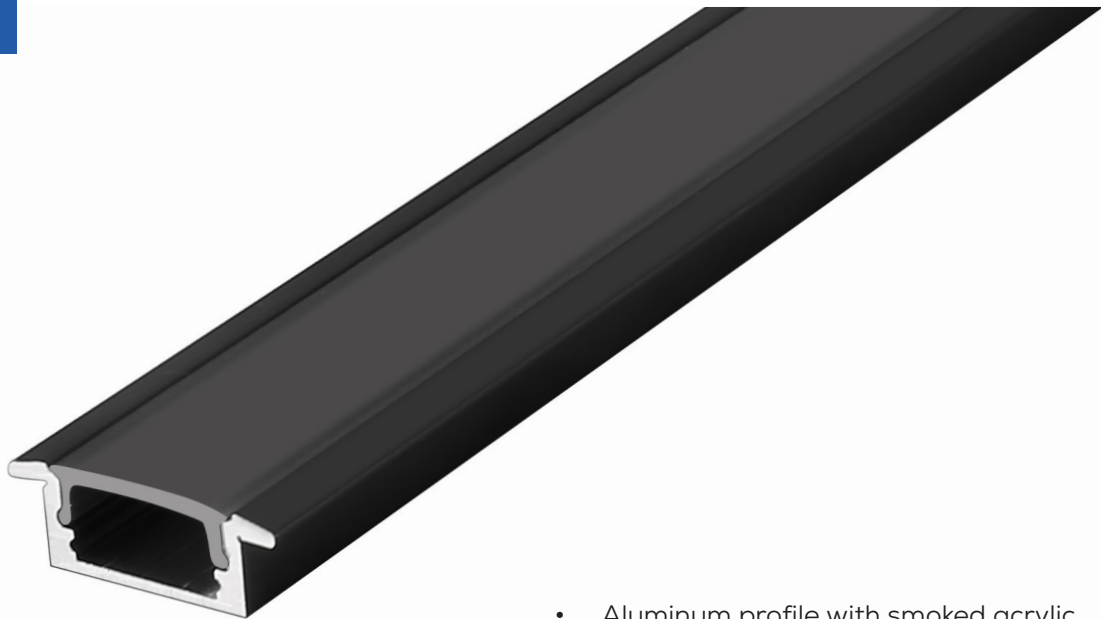

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

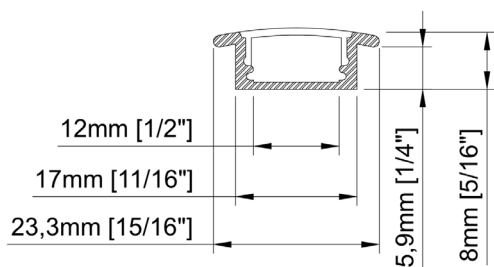

Size	23,3mm x 8mm x 3000mm 1 ⁵ / ₁₆ " x 5/ ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories




TT-56-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	56	-	3000	-	O	-	BK

TT-57-3000-O-BK

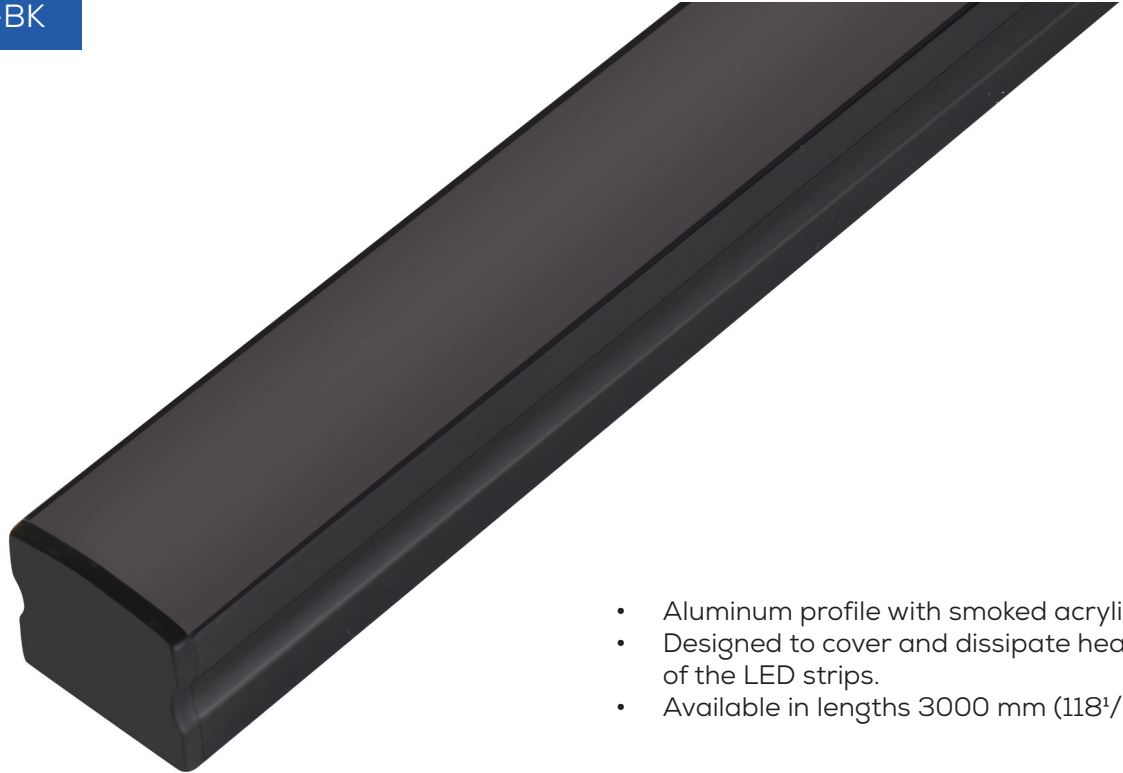

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

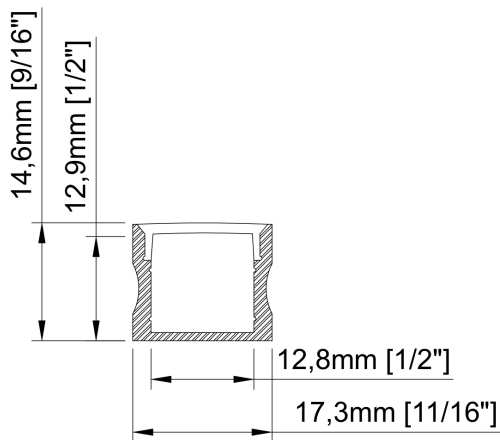

Size	17mm x 14,6mm x 3000mm 1 ¹ / ₁₆ " x 9 ⁹ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-57-CLIP



TT-57-END


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	57	3000	O	BK

TT-58-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

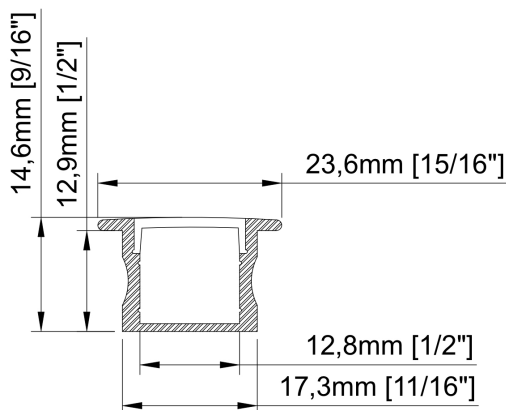

Size	23,6mm x 14,6mm x 3000mm $15/16" \times 9/16" \times 118 1/8"$
Lenght	3000mm $118 1/8"$
Internal width	12,8mm $1/2"$
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-58-END


PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	58	3000	O	BK

TT-59-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

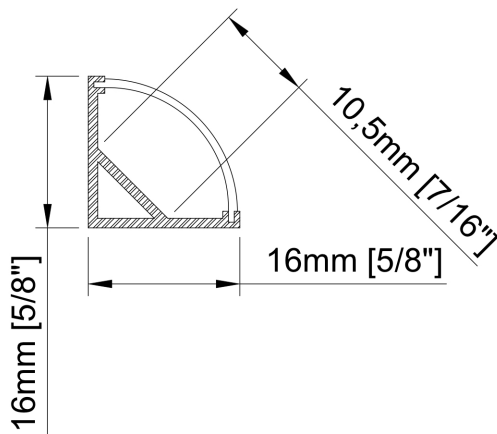

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-59-CLIP



TT-59-END


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	59	3000	O	BK

TT-60-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

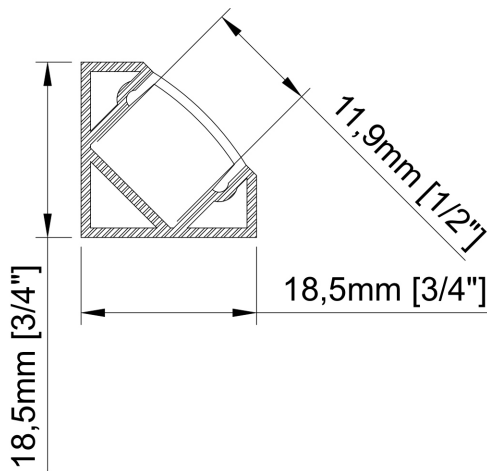

Size	18,5mm x 18,5mm x 3000mm 3/4" x 3/4" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	11,9mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-60-CLIP




TT-60-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	60	-	3000	-	O	-	BK

TT-61-3000-O-BK

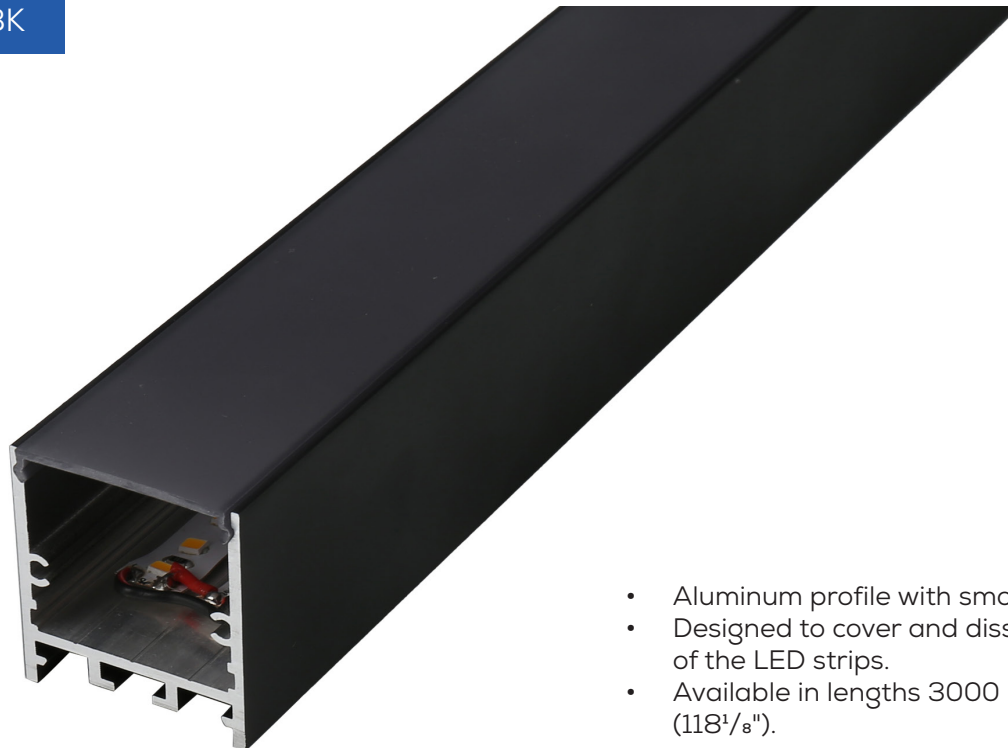

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

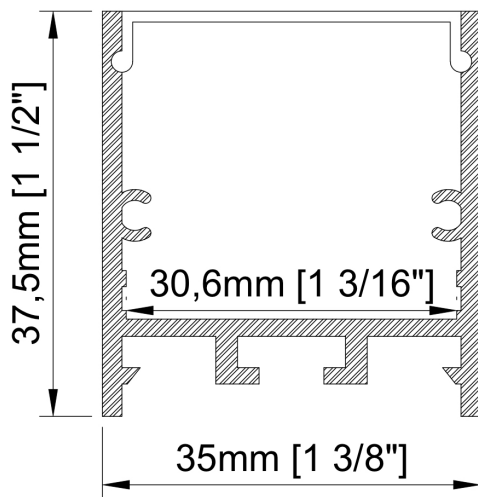

Size	35mm x 37,5mm x 3000mm 1 ³ / ₈ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black


Accessories



TT-61-CLIP



TT-61-SUSP



TT-61-END


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	61	3000	O	BK


TT-62-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

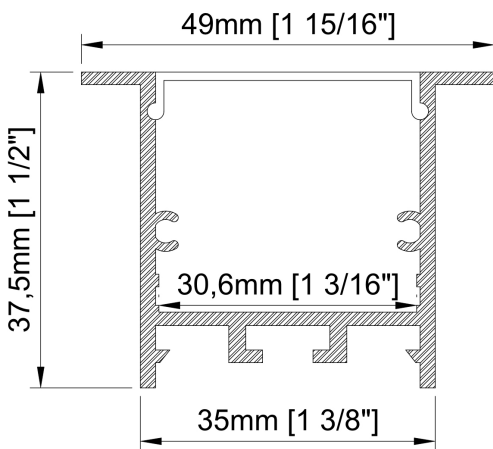

Size	49mm x 37,5mm x 3000mm 1 ¹⁵ / ₁₆ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black

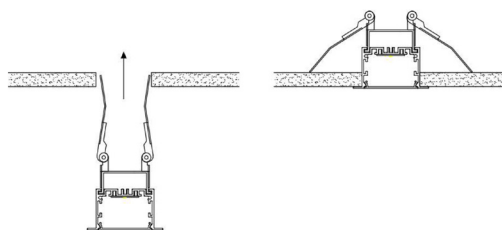

Accessories



TT-62-SNAP




TT-62-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	62	-	3000	-	O	-	BK

TT-63-3000-O-BK

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

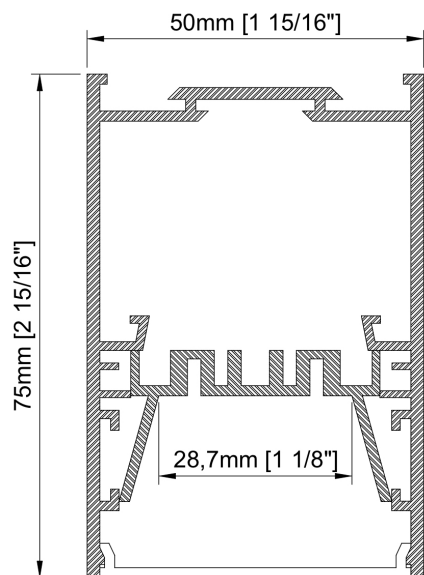

Size	50mm x 75mm x 3000mm 1 ¹⁵ / ₁₆ " x 2 ¹⁵ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	28,7mm 1 ¹ / ₈ "
Cover	Smoked PC diffused
Finish	BK-Black

Accessories

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	63	-	3000	-	O	-	BK



TT-63-CLIP



TT-63-SUSP



TT-63-SNAP




TT-63-CABLE



TT-63-END

TT-74-3000-O-BK

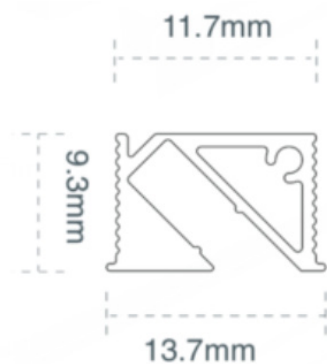

Size	13,7mm x 9,3mm x 3000mm $\frac{9}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	11,7mm $\frac{7}{16}''$
Cover	Silicone

Accessories





TT-74-END-BK

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	74	3000	O	BK

TT-75-3000-O-BK

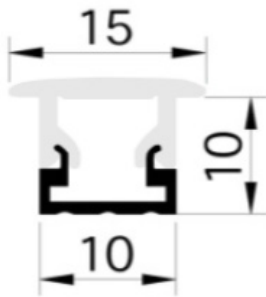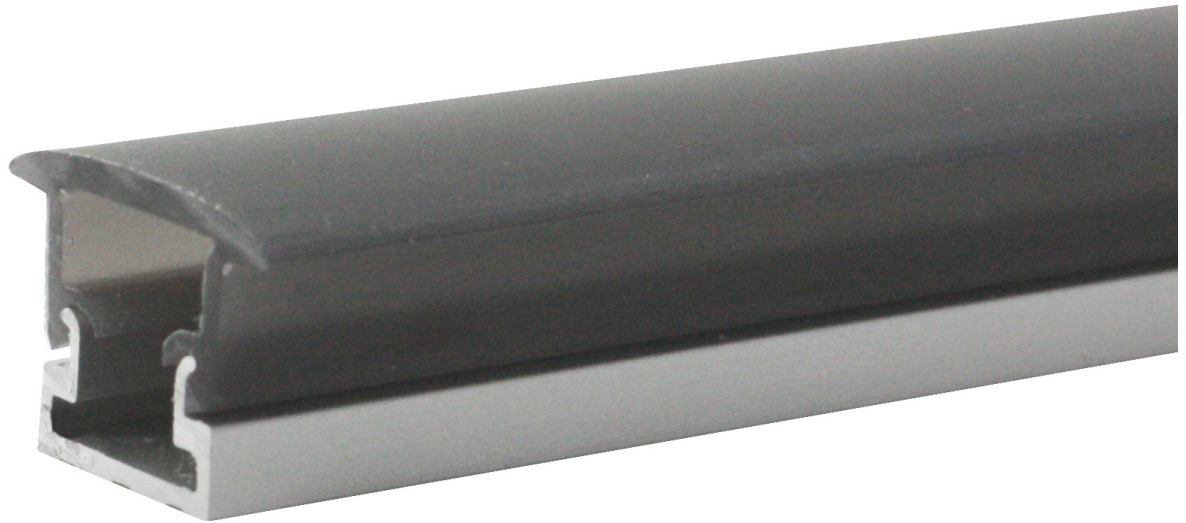

Size	15mm x 10mm x 3000mm $5/8"$ x $3/8"$ x $118 1/8"$
Length	3000mm $118 1/8"$
Internal width	10mm $3/8"$
Cover	PMMA

Accessories




TT-75-END-BK

PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER	FINISH
TT	75	3000	O	BK

TT-73-3000-O-BK

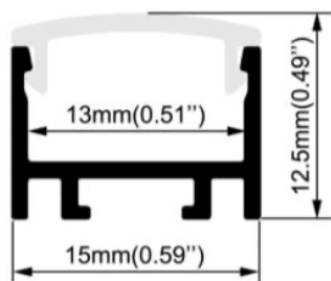

Size	15mm x 12,5mm x 3000mm $\frac{5}{8}'' \times \frac{1}{2}'' \times 78\frac{3}{4}''$
Lenght	3000mm 118 $\frac{1}{8}''$
Internal width	13mm $\frac{1}{2}''$
Cover	PMMA

Accessories



TT-73-END-BK



TT-73-MAG

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER	FINISH
TT	73	3000	O	BK

TRIM-LESS MUD-IN




Credit photo: Godomo




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-26-3000 Page 95




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-27-3000 Page 96



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-28-3000 Page 97

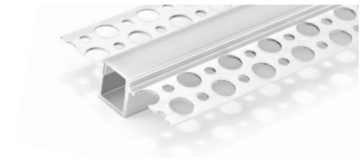

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-29-3000 Page 98



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-33-2000 Page 99



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-34-2000 Page 100



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-36-2000 Page 101




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-41-2000 Page 102



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


TT-72-2000 Page 103




PRODUCT BUILDER CODE

TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
TT	-		-		-		-		-		-		-		-		-		-		-	
						28/6 221 lm/feet 5W/feet 28/6 H 527 lm/feet 6,25W/feet *24v only 28/12 456 lm/feet 9W/feet *24v only 35/3 45 lm/feet 1,5W/feet 35/6 120 lm/feet 3W/feet 22/15 425 lm/feet 9W/feet *24v only 50/3 4,5W/feet DX/24 DIGITAL DMX *24V only		27 2700K 30 3000K 35 3500K 40 4000K 60 6000K RE RED GR GREEN BL BLUE AM AMBER PK PINK *28/6 only CB CYAN *28/6 only OR ORANGE *28/6 only UV *28/6 only RGB *50/3, 28/6 or 35/6 only RGBWW *50/3 only RGBNW *50/3 only RGBCW *50/3 only RGBCCT *50/3 only	20 65	12 24	Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum DCxxxx 12 inchs minimum	empty No lead out Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum	NE No end cap EC With end cap	NC No Clip xC x=OTE	n/a No psu P Plug-in CV Dimmable CV-BOX Dimmable with box CV67 IP67 psu 120V No dimmable 120v psu 347V No dimmable 347V PSU O10 0-10v PSU							


For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

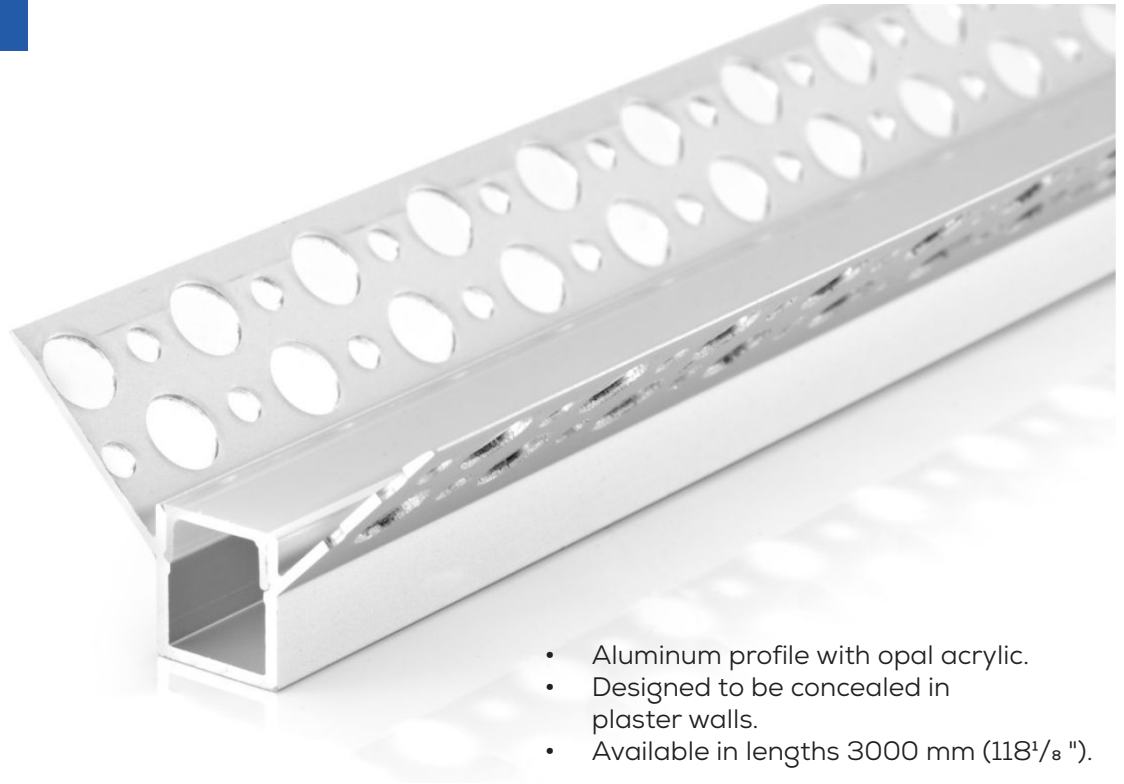

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

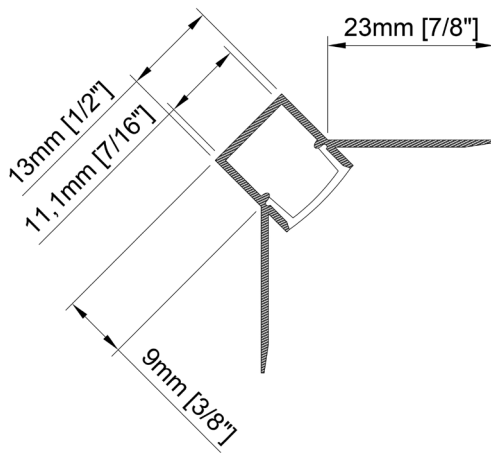

Size	13mm x 14mm x 3000mm 3/8" x 9/16" x 118 ¹ / ₈ "
Length	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm 7/16"
Cover	PC diffused

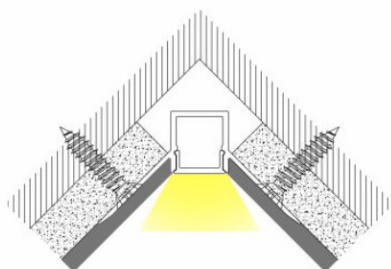

Accessories



TT-26-END


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER
TT	26	3000	O


TT-27-3000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

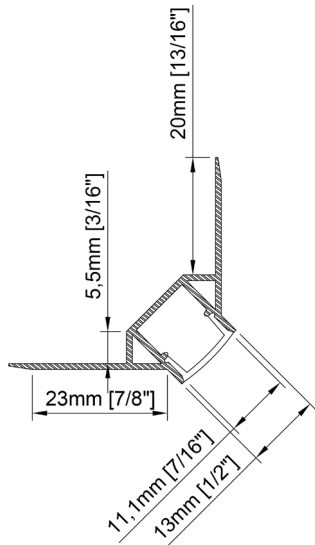

Size	13mm x 14mm x 3000mm $\frac{3}{8}'' \times \frac{9}{16}'' \times 118\frac{1}{8}''$
Length	3000 mm $118\frac{1}{8}''$
Internal width	11,1mm $\frac{7}{16}''$
Cover	PC diffused

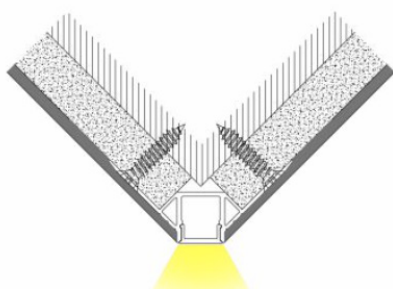

Accessories




TT-27-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	27	-	3000	-	O


TT-28-3000-O

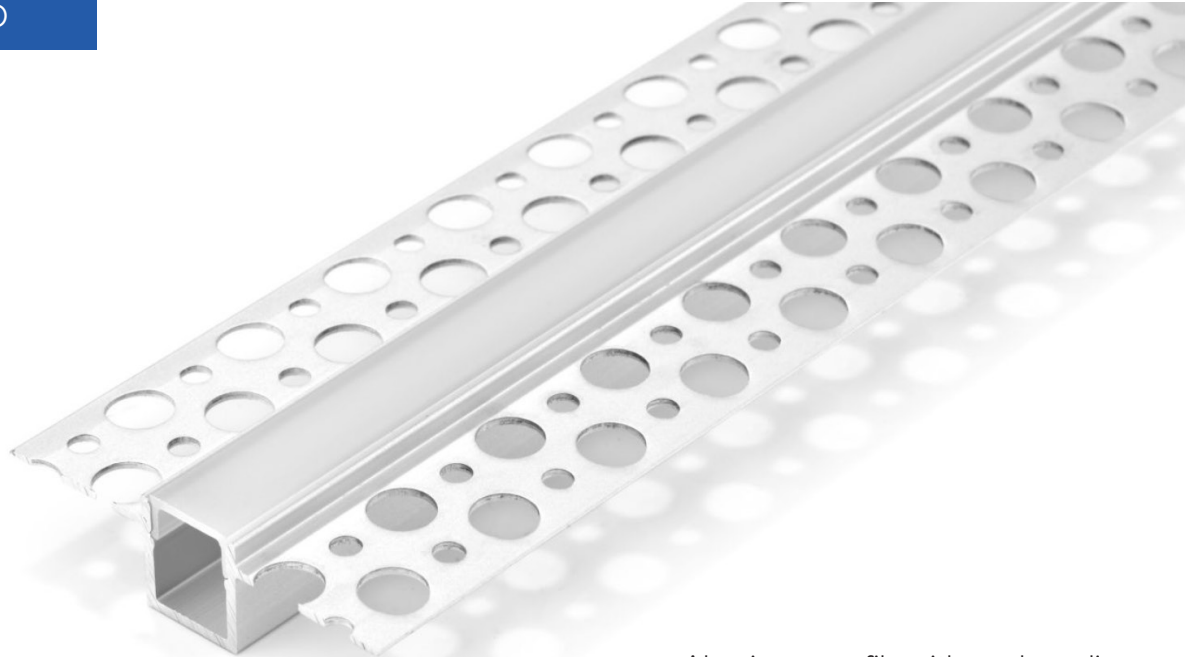

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

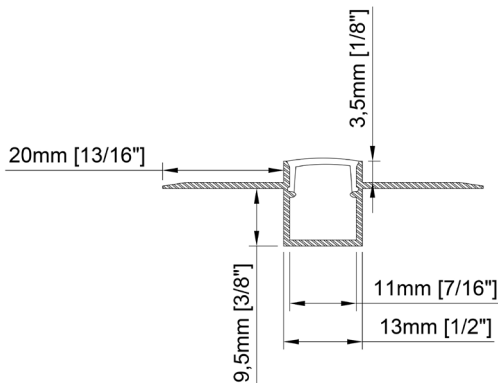

Size	13mm x 14mm x 3000mm 3/8" x 9/16" x 118 ¹ / ₈ "
Length	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm 7/16"
Cover	PC diffused

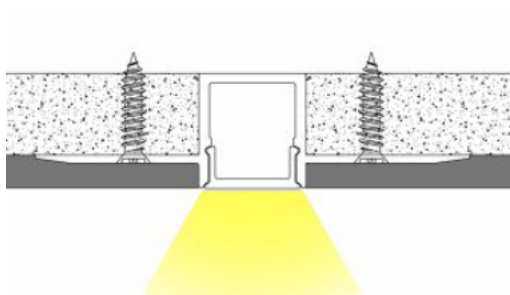

Accessories




TT-28-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	28	-	3000	-	O


TT-29-3000-O

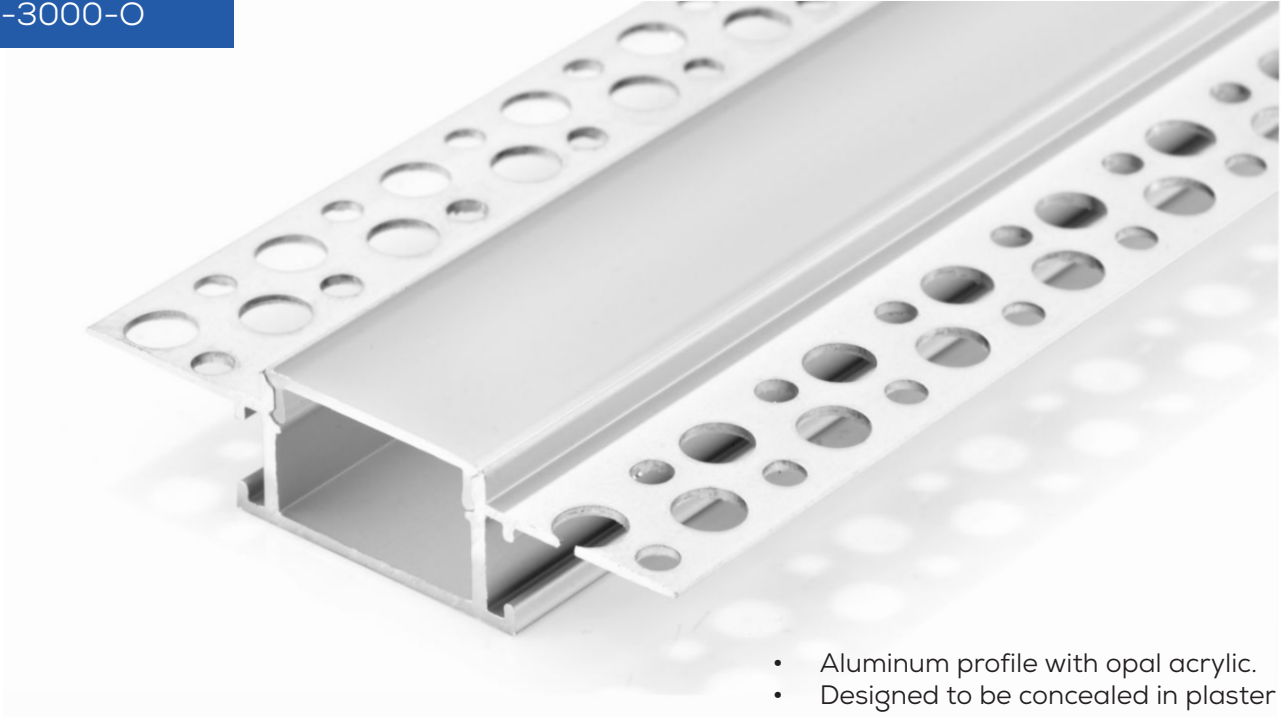

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

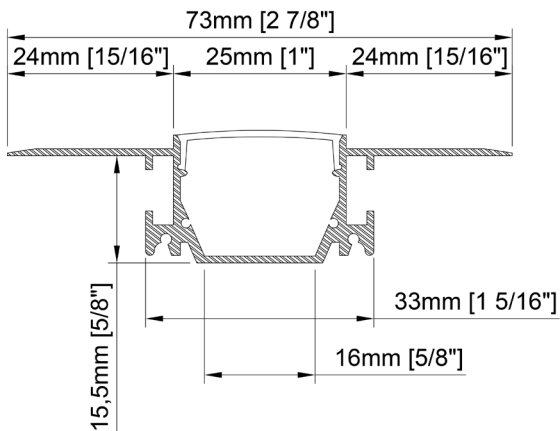

Size	25mm x 18,5mm x 3000mm 3/8" x 3/4" x 118 ¹ / ₈ "
Length	3000 mm 118 ¹ / ₈ "
Internal width	16mm 5/8"
Cover	PC diffused

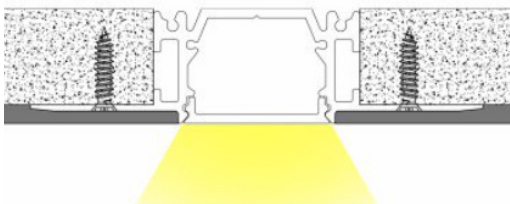

Accessories



TT-29-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	29	-	3000	-	O


TT-33-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

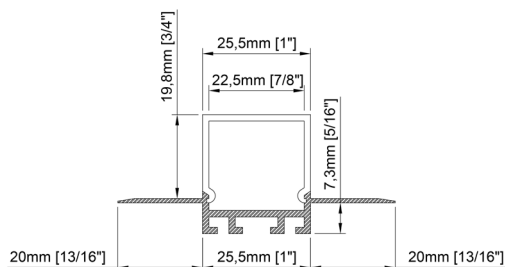

Size	25,5mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	22,5mm 7/ ₈ "
Cover	PC diffused



Accessories



TT-33-END


PRODUCT CODE

TT	MODEL	LENGTH (mm)	COVER
TT	33	2000	O


TT-34-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

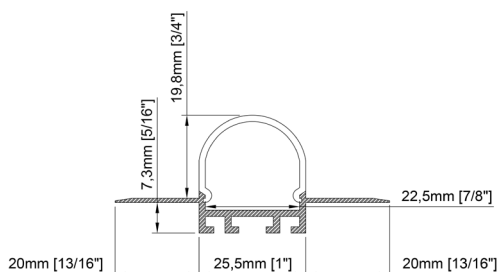

Size	25,5mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	22,5mm 7/8"
Cover	PC diffused



Accessories



TT-34-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	34	-	2000	-	O


TT-36-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

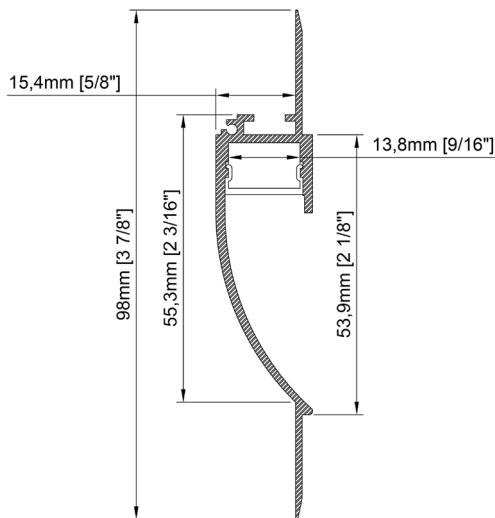

Size	98mm x 15mm x 2000mm 3 ⁷ / ₈ " x 5/8" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	13,8mm 9/16"
Cover	PC diffused
Finish	White

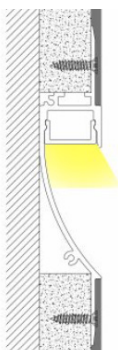

Accessories



TT-36-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	36	-	2000	-	O


TT-41-2000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat the LED strips.
- Available in lengths 2000 mm (78³/₄").

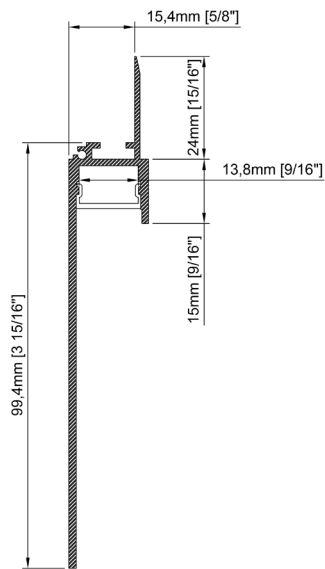

Size	99,4mm x 15,4mm x 2000mm 3 ¹⁵ / ₁₆ " x 5 ⁸ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,8mm 9 ⁹ / ₁₆ "
Cover	PC diffused
Finish	White

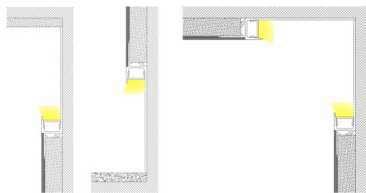


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	41	-	2000	-	O


TT-72-2000-0

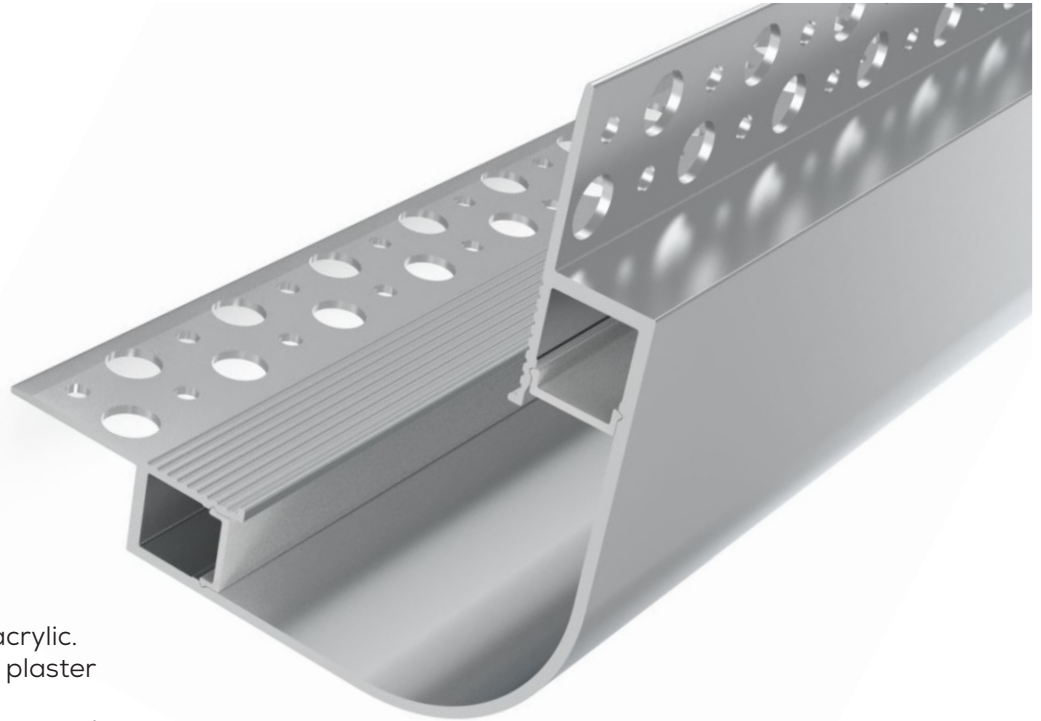

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm (78³/₄ ").

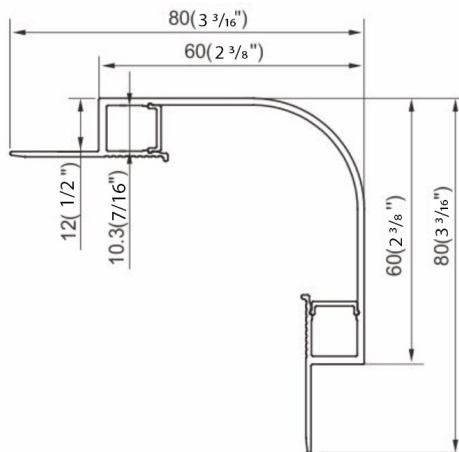

Size	80mm x 80mm x 2000mm 3 ³ / ₁₆ " x 3 ³ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	10,3mm X 2 7/ ₁₆ "
Cover	PC diffused
Finish	White



Accessories



TT-72-END

PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	72	2000	0

TRIM-LESS TILES




Credit photo: Godomo

TITANIUM

TECHNOLOGY



TT-11-2000 Page 106

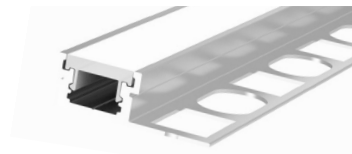

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-43-2000 Page 107



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-44-2000 Page 108

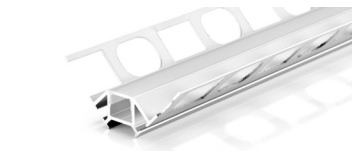

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-45-2000 Page 109



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

PRODUCT BUILDER CODE

TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											

28/6
221 lm/foot
5W/foot

28/6 H
527 lm/foot
6,25W/foot
*24v only

28/12
456 lm/foot
9W/foot
*24v only

35/3
45 lm/foot
1,5W/foot

35/6
120 lm/foot
3W/foot

22/15
425 lm/foot
9W/foot
*24v only

50/3
4,5W/foot

DX/24
DIGITAL DMX
*24V only

27
2700K

30
3000K

35
3500K

40
4000K

60
6000K

RE
RED

GR
GREEN

BL
BLUE

AM
AMBER

PK
PINK

CB
CYAN

OR
ORANGE

UV
*28/6 only

RGB
*50/3, 28/6 or 35/6 only

RGBWW
*50/3 only

RGBNW
*50/3 only

RGBCW
*50/3 only

RGBCCT
*50/3 only

20

65

12

24

Hxxxx
12 inches minimum

DCxxxx
12 inches minimum

DCxxxx
12 inches minimum

empty
No lead out

Hxxxx
12 inches minimum

DCxxxx
12 inches minimum

NE
No end cap

EC
With end cap

NC
No Clip

xC
x=QTE

n/a
No psu

P
Plug-in

CV
Dimmable

CV-BOX
Dimmable with box

CV67
IP67 psu


120V
No dimmable
120v psu

347V
No dimmable
347V PSU


010
0-10v PSU

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-11-2000-O

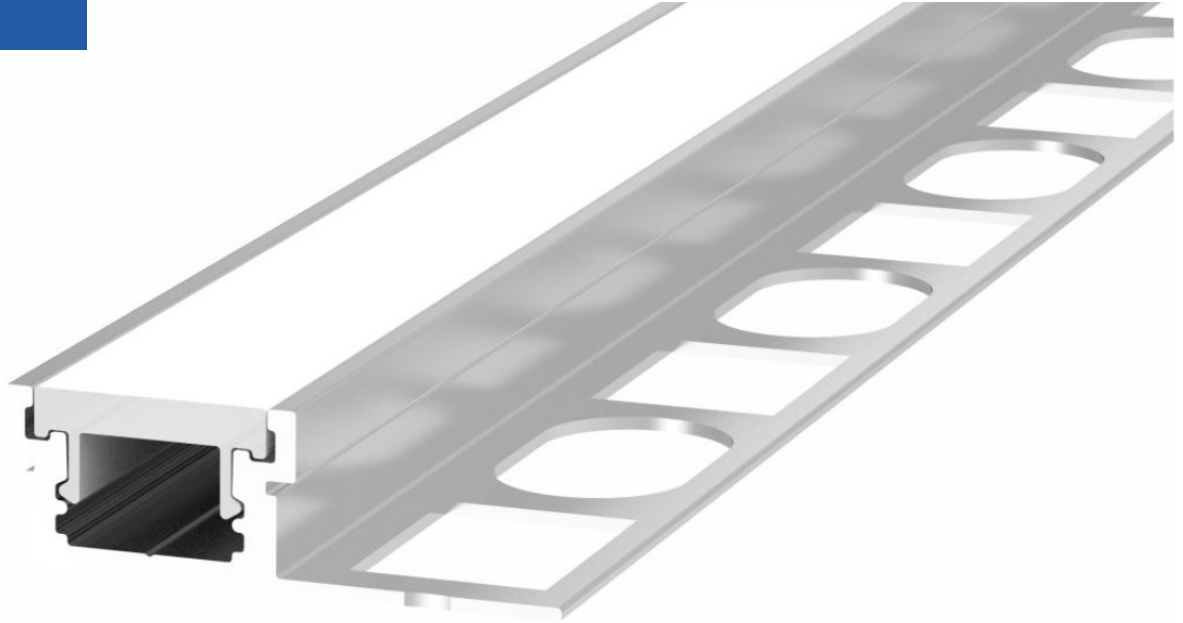

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

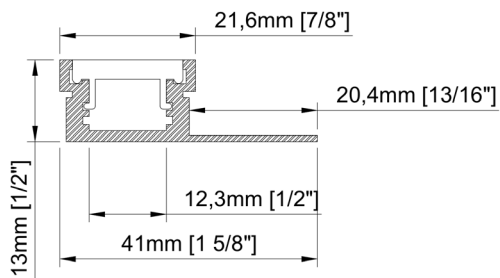

Size	41mm x 13mm x 2000mm 1 ⁵ / ₈ " x 1 ¹ / ₂ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12,3mm 1 ¹ / ₂ "
Cover	PC diffused

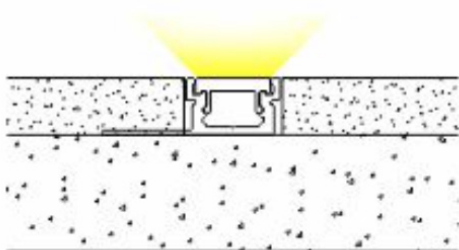

Accessories



TT-11-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	11	-	2000	-	O


TT-43-2000-O




- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

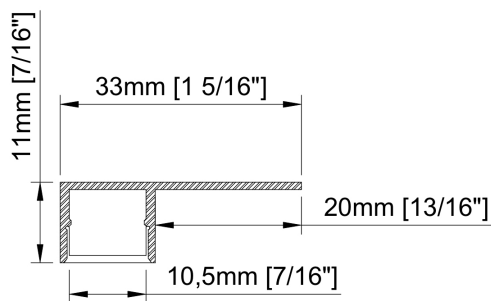

Size	33mm x 11mm x 2000mm 1 ⁵ / ₁₆ " x 7/ ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

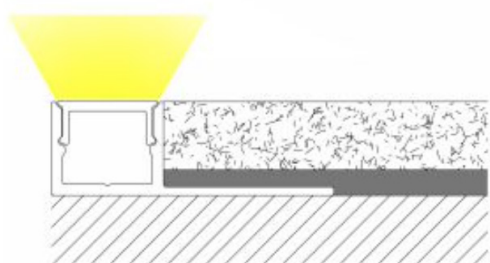

Accessories




TT-43-END

PRODUCT CODE


TT - MODEL - LENGHT (mm) - COVER

TT - 43 - 2000 - O


TT-44-2000-O

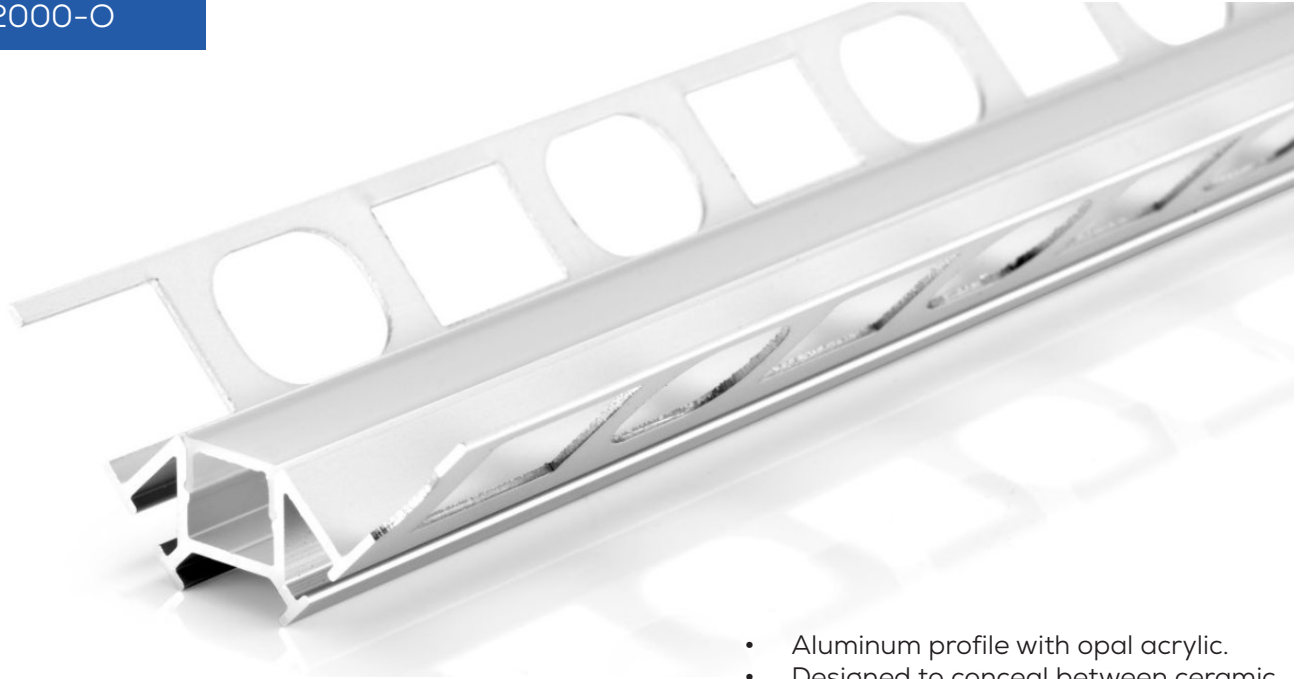

- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

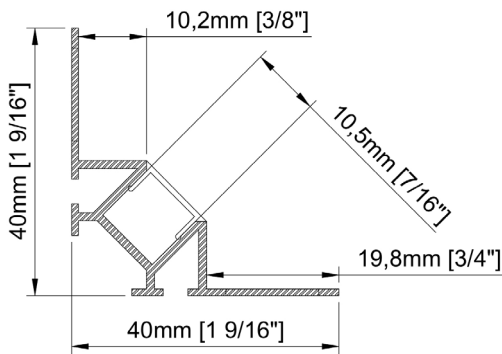

Size	40mm x 40mm x 2000mm 1 ⁹ / ₁₆ " x 1 ⁹ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

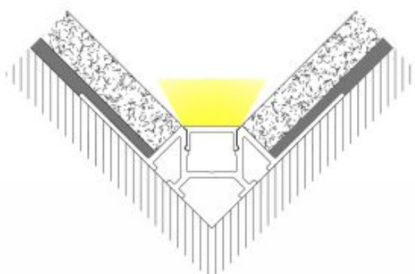

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	44	-	2000	-	O


TT-45-2000-O



- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

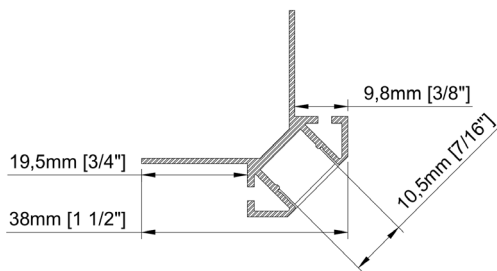

Size	38mm x 38mm x 2000mm 1 ¹ / ₂ " x 1 ¹ / ₂ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

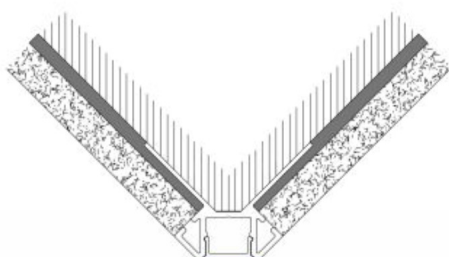

Accessories



PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	45	2000	O

BOTTOM WALL



Credit photo: Cuisines Simard




TT-30-2000 Page 112



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-51-2000 Page 113



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


PRODUCT BUILDER CODE

TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
TT	-		-		-		-		-		-		-		-		-		-		-	


	28/6 221 lm/foot 5W/foot	27 2700K	20	12	Hxxxx 12 inches minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
	28/6 H 527 lm/foot 6,25W/foot <small>*24v only</small>	30 3000K	65	24	DCxxxx 12 inches minimum	Hxxxx 12 inches minimum	EC With end cap	xC x=OTE	P Plug-in
	28/12 456 lm/foot 9W/foot <small>*24v only</small>	35 3500K			DCxxxx 12 inches minimum			CV Dimmable	CV-BOX Dimmable with box
	35/3 45 lm/foot 1,5W/foot	40 4000K						CV67 IP67 psu	120V No dimmable 120v psu
	35/6 120 lm/foot 3W/foot	60 6000K						120V No dimmable 120v psu	347V No dimmable 347V PSU
	22/15 425 lm/foot 9W/foot <small>*24v only</small>	RE RED						347V No dimmable 347V PSU	010 0-10v PSU
	50/3 4,5W/foot	GR GREEN							
	DX/24 DIGITAL DMX <small>*24v only</small>	BL BLUE							
		AM AMBER							
		PK PINK <small>*28/6 only</small>							
		CB CYAN <small>*28/6 only</small>							
		OR ORANGE <small>*28/6 only</small>							
		UV <small>*28/6 only</small>							
		RGB <small>*50/3, 28/6 or 35/6 only</small>							
		RGBWW <small>*50/3 only</small>							
		RGBNW <small>*50/3 only</small>							
		RGBCW <small>*50/3 only</small>							
		RGBCCT <small>*50/3 only</small>							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-30-2000-O

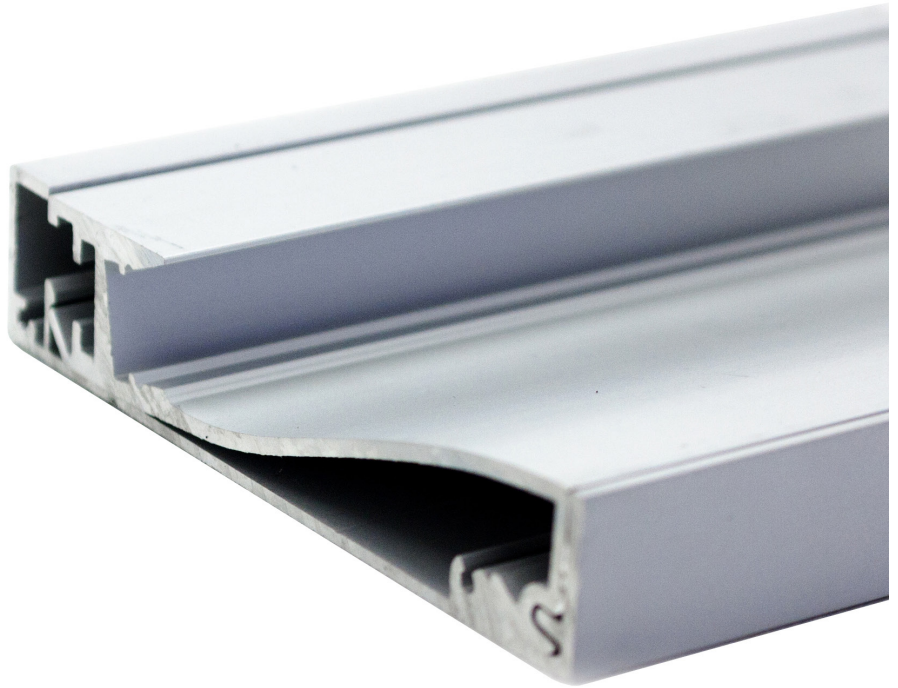

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

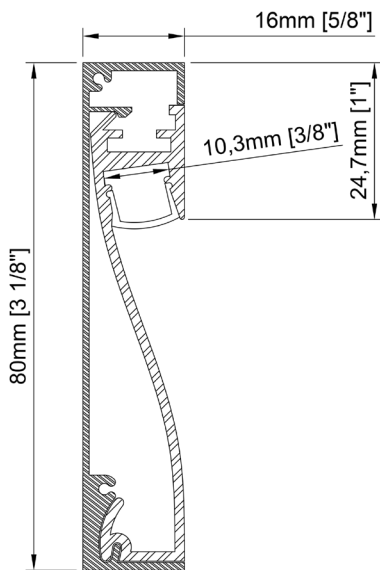

Size	80mm x 16mm x 2000mm 3 ¹ / ₈ " x 5 ⁵ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,3mm 3 ³ / ₈ "
Cover	PC diffused

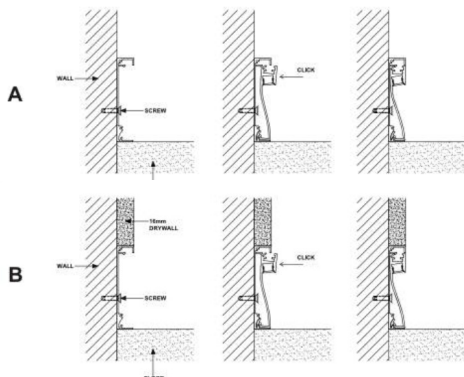


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	30	-	2000	-	O

TT-51-2000-O

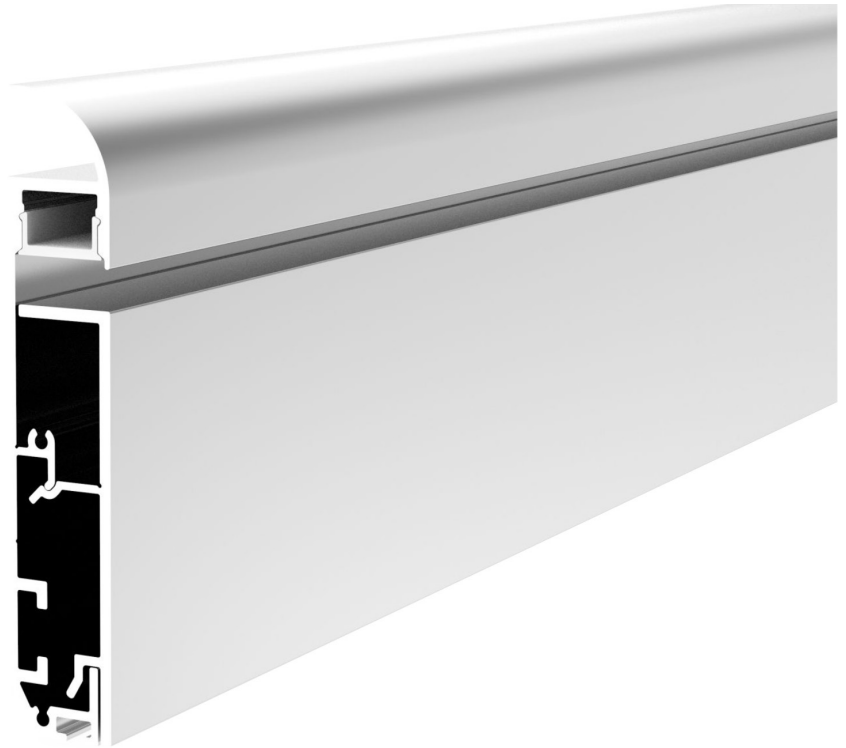

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

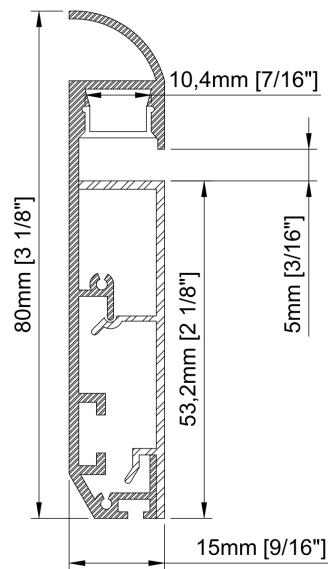


Size 80mm x 15mm x 2000mm
3¹/₈" x 9⁹/₁₆" x 78³/₄"

Lenght 2000mm
78³/₄"

Internal width 10,4mm
7⁷/₁₆"

Cover PC diffused

Accessories

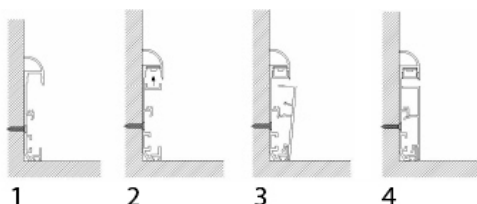

TT-51-END



TT-51-EXT

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 51 - 2000 - O

CLOSET



Credit photo: Godomo


TITANIUM

TECHNOLOGY


TT-35-2000-O



- Aluminum profile with opal acrylic.
- Designed for wardrobes.
- Available in lengths 2000 mm (78³/₄ ").

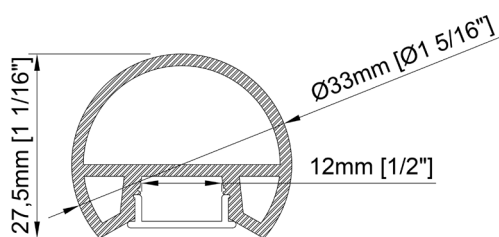

Size	27,5mm x 33mm x 2000mm 1 ¹ / ₁₆ " x 1 ⁵ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

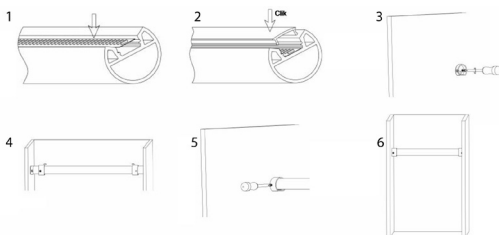


Accessories



PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	35	-	2000	-	O



STAIRS




TITANIUM


TECHNOLOGY

TT-42-2000-O

- Aluminum profile with opal acrylic.
- Designed for stairs with non-slip rubber band.
- Available in lengths 2000 mm (78³/₄ ").

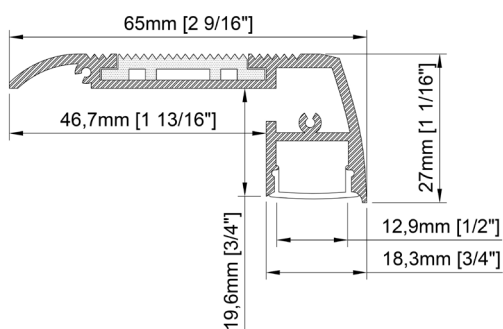

Size	65mm x 27mm x 2000mm 2 ⁹ / ₁₆ " x 1 ¹ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12,9mm 1/2"
Cover	PC diffused
Finish	Black

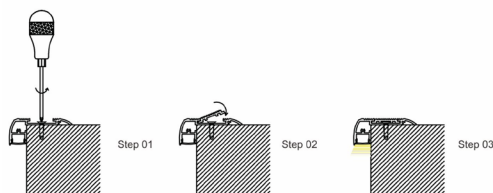

Accessories



PRODUCT CODE

TT	MODEL	LENGHT (mm)	COVER
TT	42	2000	O

TRIM-LESS CONCRETE




Credit photo: Maison Profab


TITANIUM

TECHNOLOGY

TT-12-3000-O

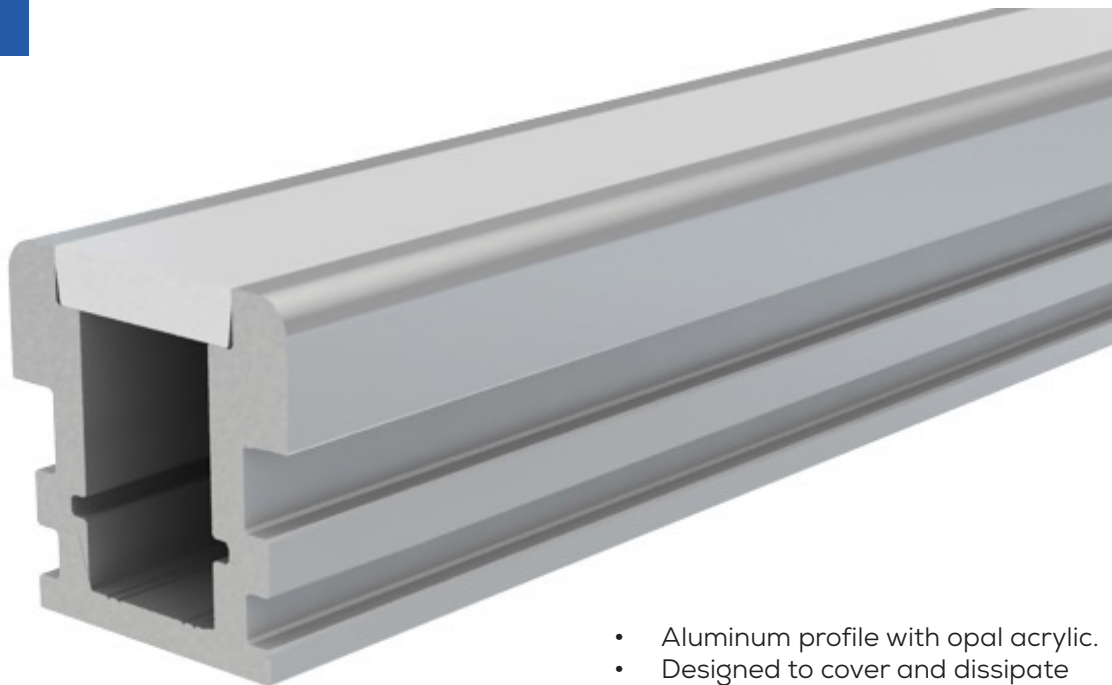

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈"").

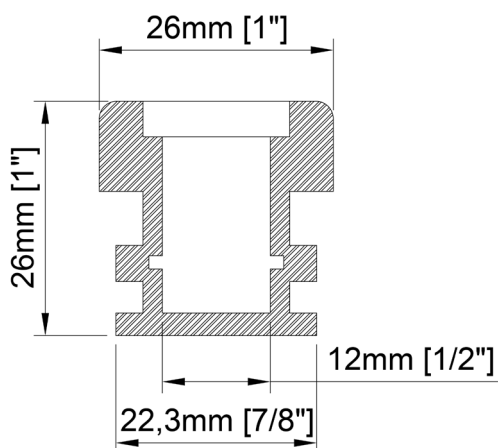

Size	26mm x 26mm x 3000mm 1" x 1" x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	PC diffused

Accessories



TT-12-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 12 - 3000 - O

SUSPENDED CEILING



Credit photo: Godomo


TITANIUM

TECHNOLOGY


TT-67-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

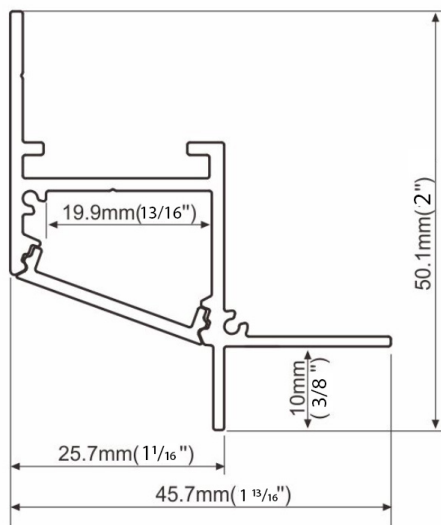

Size	45,7mm x 50,1mm x 2000mm 1 ¹³ / ₁₆ " x 2" x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	19,9mm 1 ³ / ₁₆ "
Cover	PC diffused

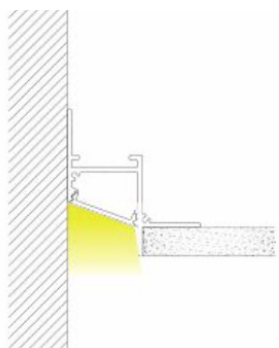

Accessories



TT-67-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER


TT - 67 - 2000 - O

EDGE




Credit photo: Groupe Dallaire

TT-70-2000-O

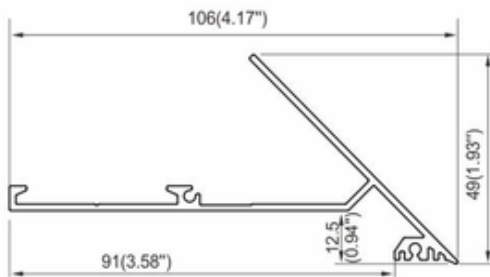

Size	2000 mm x 91 mm x 49 mm 78 ³ / ₄ " x 3 ¹ / ₂ " x 1 ⁷ / ₈ "
Length	2000 mm 78 ³ / ₄ "
Internal width	13 mm 1/2"
Cover	PC diffused

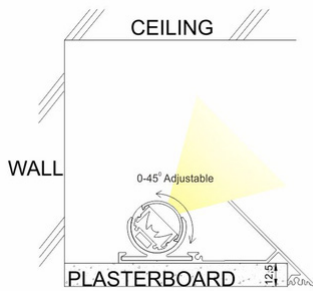


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	70	-	2000	-	O


TT-71-2000-O

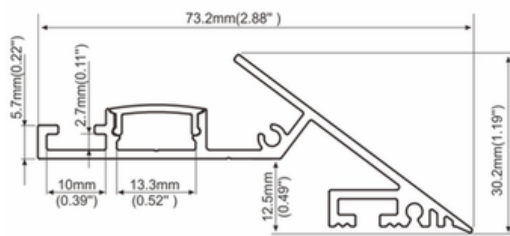

Size	73,2mm x 30,2mm x 2000mm 2 ⁷ / ₈ " x 1 ³ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,3mm 9/ ₁₆ "
Cover	Semi-clear PMMA

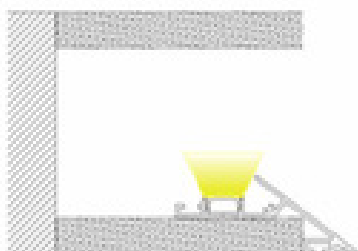

Accessories




TT-71-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	71	-	2000	-	O

FLEX

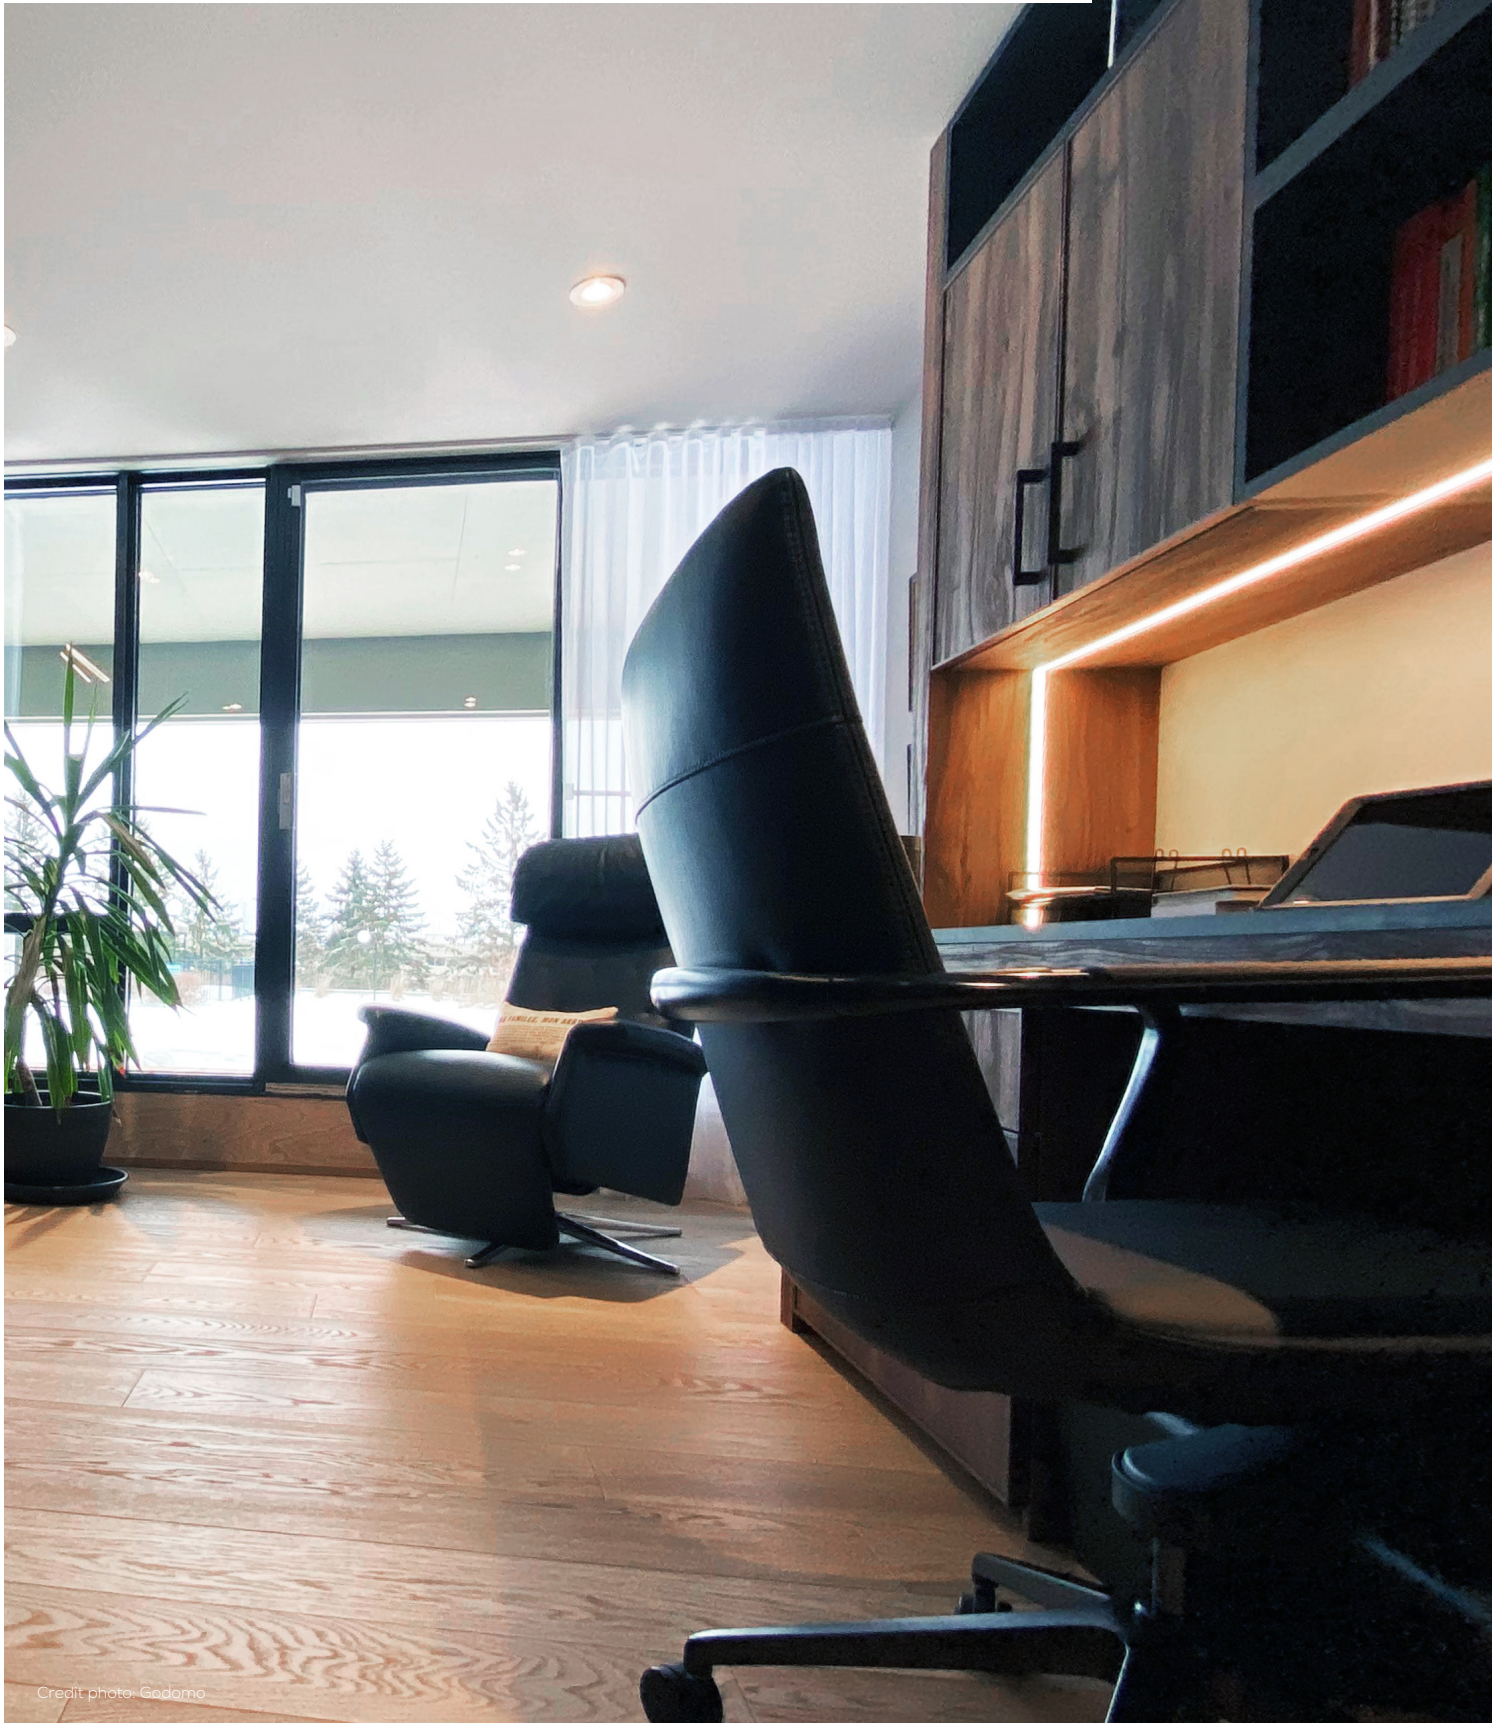

Credit photo: Godomo



TT-FLEX-01 Page 128



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-FLEX-02 Page 129



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5.9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


PRODUCT BUILDER CODE

TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											


28/6 221 lm/feet 5W/feet	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
28/6 H 527 lm/feet 6,25W/feet *24v only	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=OTE	P Plug-in
28/12 456 lm/feet 9W/feet *24v only	35 3500K			DCxxxx 12 inchs minimum	DCxxxx 12 inchs minimum			CV Dimmable
35/3 45 lm/feet 1.5W/feet	40 4000K							CV-BOX Dimmable with box
35/6 120 lm/feet 3W/feet	60 6000K							CV67 IP67 psu
22/15 425 lm/feet 9W/feet *24v only	RE RED							120V No dimmable 120v psu
50/3 4,5W/feet	GR GREEN							347V No dimmable 347V PSU
DX/24 DIGITAL DMX *24V only	BL BLUE							010 0-10v PSU
	AM AMBER							
	PK PINK *28/6 only							
	CB CYAN *28/6 only							
	OR ORANGE *28/6 only							
	UV *28/6 only							
	RGB *50/3, 28/6 or 35/6 only							
	RGBWW *50/3 only							
	RGBNW *50/3 only							
	RGBCW *50/3 only							
	RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-FLEX-01

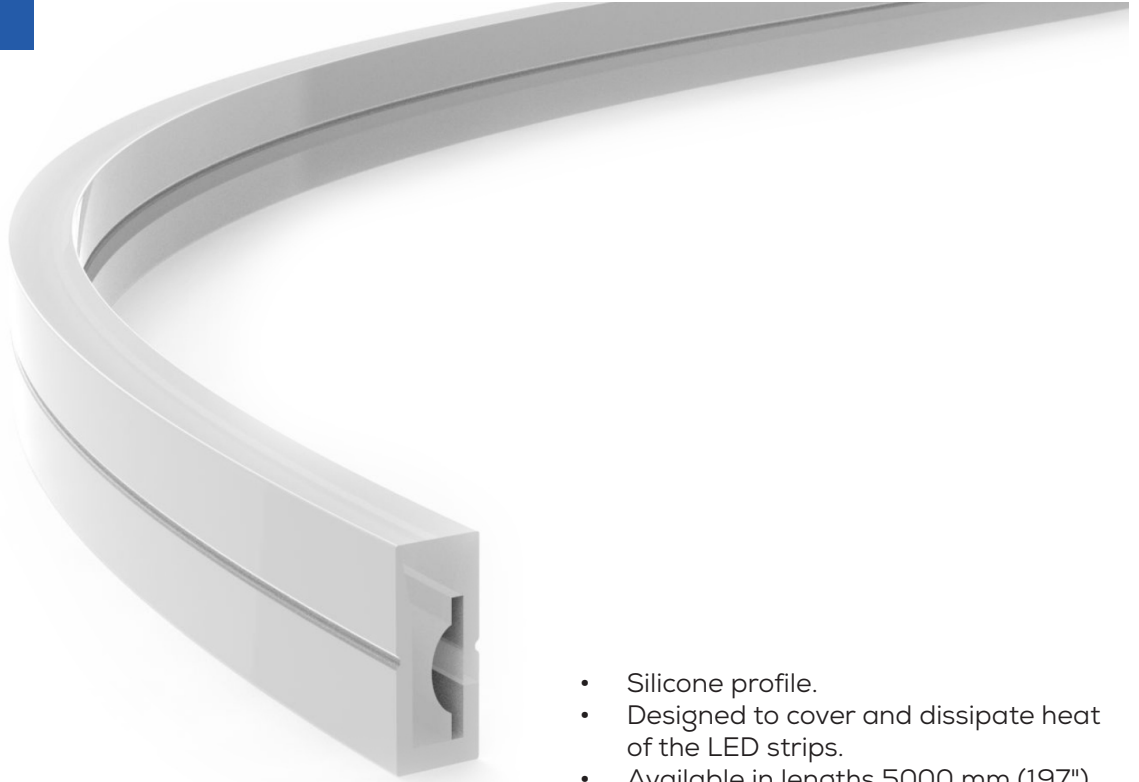


- Silicone profile.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

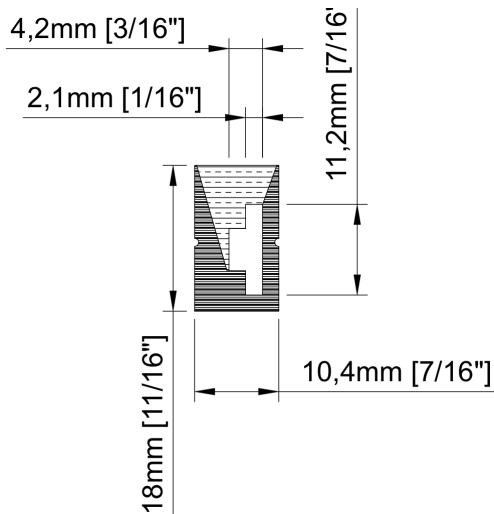

Size	10,4mm x 18mm x 5000mm 7/16" x 11/16" x 197"
Length	5000mm 197"
Internal width	11,2mm 7/16"
Cover	White silicone

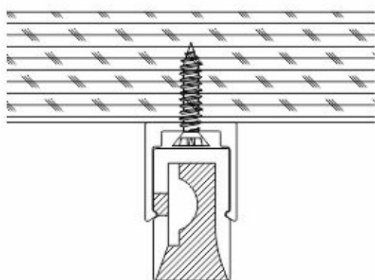


Accessories




PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	FLEX	-	01


TT-FLEX-02

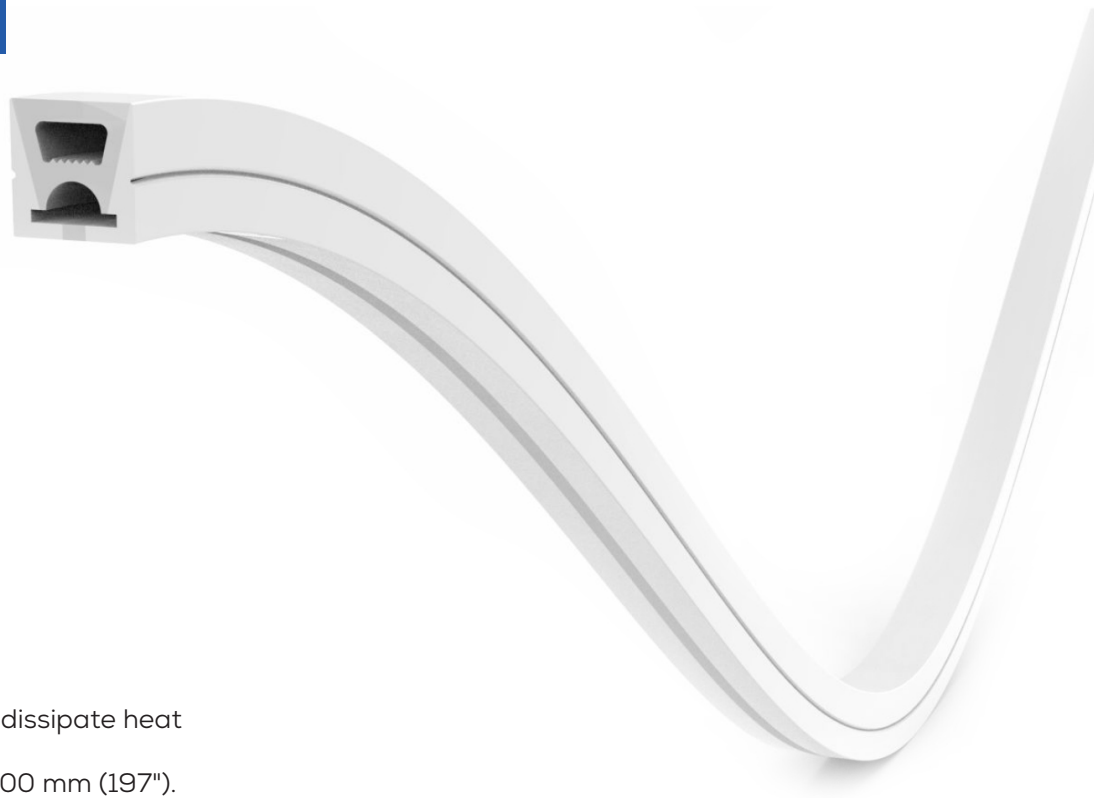


- Silicone profile.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

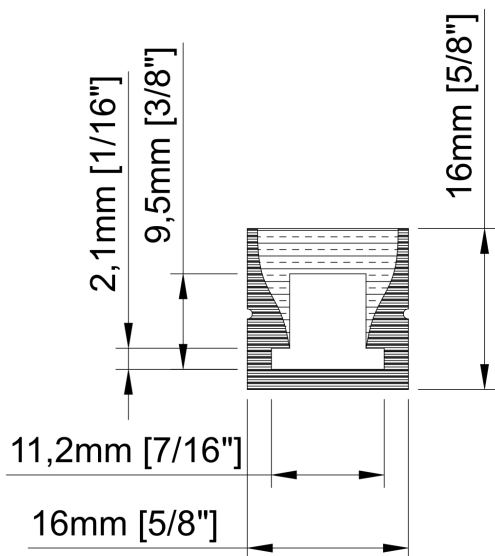

Size	16 mm x 16 mm x 5000 mm 5/8" x 5/8" x 197"
Lenght	5000mm 197"
Internal width	11,2mm 7/16"
Cover	White silicone

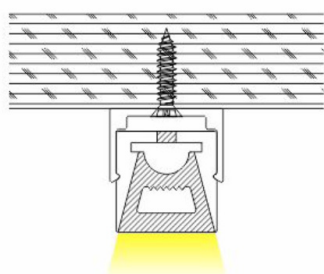

Accessories



PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	FLEX	-	02

LIMITED ONE (1) YEAR WARRANTY



Titanium Technology offers this limited warranty for one (1) year from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of one (1) year covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|--------------------------|--------------------------|-----------------------|
| 1) Nicolaudie Controller | 5) TT-CAB-XX | 9) TT-WiFi |
| 2) LTECH Controller | 6) TT-DMX-XX | 10) Aluminium profile |
| 3) TT-ACC-XX | 7) TT-PSU-IP20 / PLUG-IN | 11) TT-Y-XX |
| 4) TT-AMP-XX | 8) TT-U-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

TITANIUM

TECHNOLOGY



TITANIUM TECHNOLOGY
2323, boulevard Versant Nord #111
Québec, QC
G1N 4P4 CANADA
Toll free (866)-476-8115
www.titaniumtechnology.com
sales@titaniumtechnology.com
www.facebook.com/titaniumtechnologie

TITANIUM TECHNOLOGY USA
NEWARK DE 19713
Toll free (866)-476-8115 ext.203
www.titaniumtechnology.com
sales@titaniumtechnology.com
www.facebook.com/titaniumtechnologie