


TITANIUM
TECHNOLOGY



Cabinets and millwork
2025

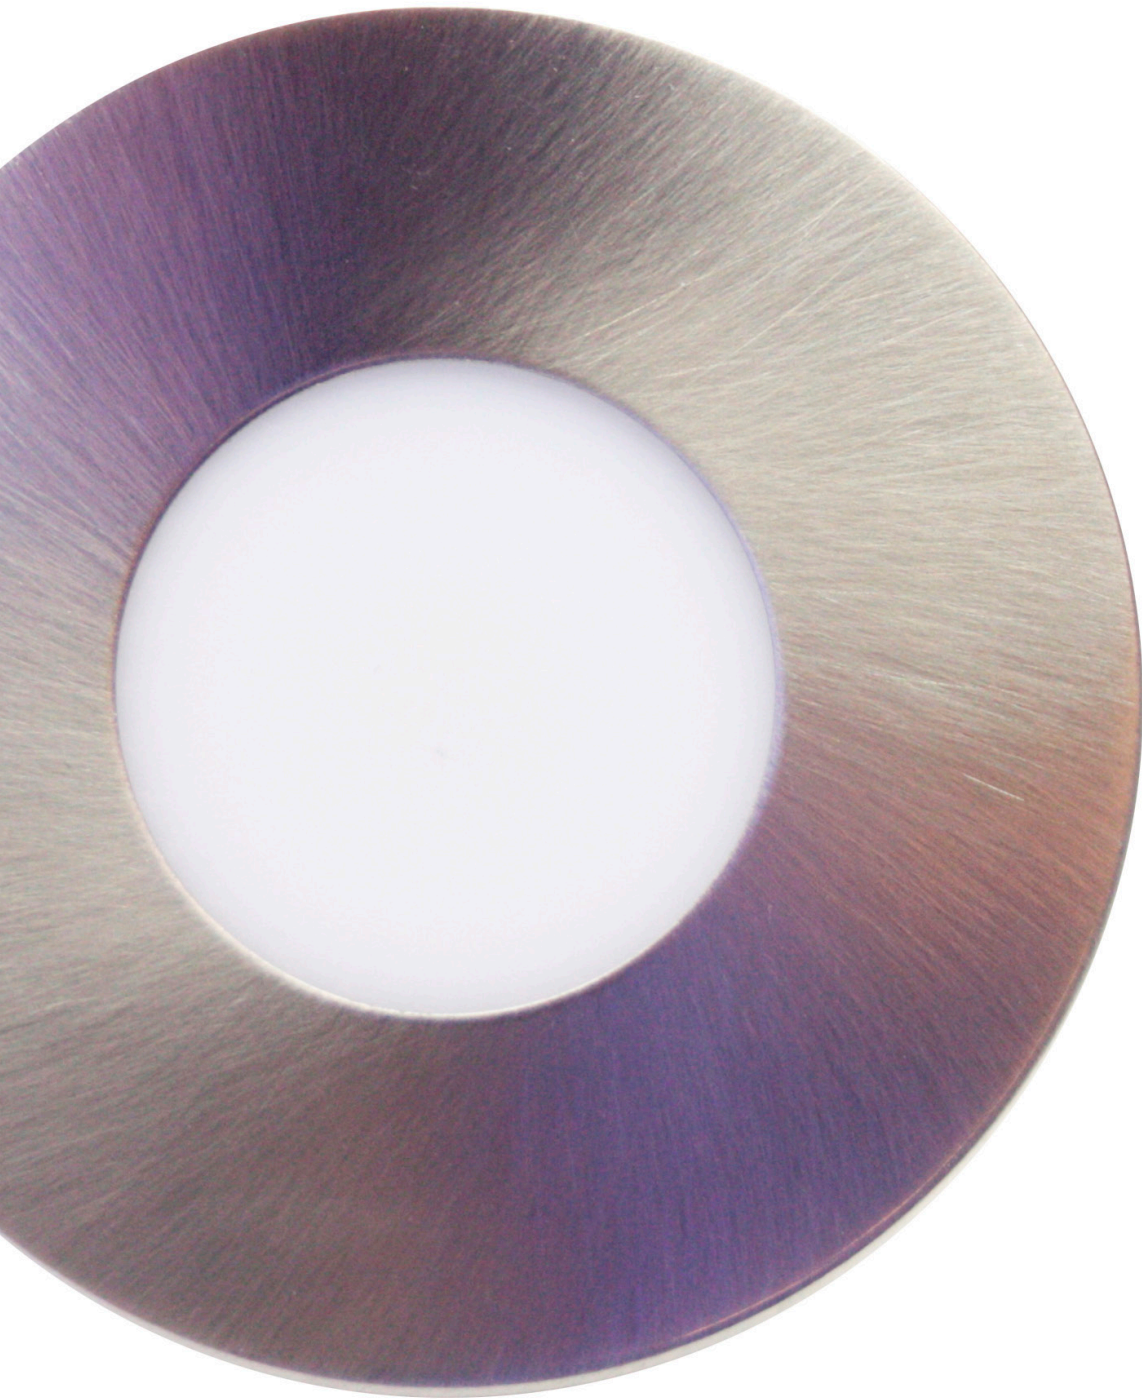


Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-38-3000 Page 7



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-79-3000 Page 8



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-14-3000 Page 9



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-39-3000 Page 10



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-74-3000 Page 11



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-55-3000-BK Page 12



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-56-3000-BK Page 13




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-58-3000-BK Page 14



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-74-3000-O-BK Page 15





TT-2216-L1500 Page 16

Voltage	Luminous flux (lm/m)					Power		
24vDC	27K	30K	35K	40K	60K	34,12w / m	10,40w / feet	170,56w / roll
	1399	1403	1438	1502	1649			



TT-3528-L600-5MM Page 17

Voltage	Luminous flux (lm/m)					Power		
12vDC 24vDC	27K	30K	35K	40K	50K	9,84w / m	3w / feet	49,2w / roll
	117	119	91	104	-			



TT-SIL-0410 Page 18

Voltage	Luminous flux (lm/m)					Power				
12vDC 24vDC	-	-	-	-	-	1000	1500	2000	2500	3000
						12w/m	18w/m	24w/m	30w/m	36w/m



TT-COB-528 Page 19

Voltage	Luminous flux (lm/m)					Power	
12vDC 24vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		




TT-2025FR-L600 Page 20

Voltage	Luminous flux (lm/m)	Power
12vDC	-	8w / m 2,5w / feet



TT-PUCK-3W Page 21

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K	40K	60K	63
		230	240	260	




TT-PUCK-400-V4 Page 22

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K	40K	60K	63
		330	350	360	



TT-PUCK-2.2W Page 23

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Cut hole (mm)
12	2.2	175	56



TT-ACC-RELAY-CONTACTOR Page 24

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Cut hole (mm)
120	2000	-	-



TT-DR-CV-020 Page 25

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,24A	1600mA	19,2	Yes 5% ~ 100% Triac
	24	0,22A	830mA		



TT-DR-CV-030 Page 26

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CV-040 Page 27

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CV-060 Page 28

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CV-080 Page 29

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3300mA		



TT-DR-CV-025-BOX Page 30

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,9A	2,1A	25	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	0,9A	1,05A		



TT-DR-CV-050-BOX Page 31

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,6A	4,16A	50	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	1,6A	2,1A		




TT-DR-CV-096-BOX Page 32

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	10,4 mm	Dimmable
120	12	1,7A	8,33A	96	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase
	24 Class 2	1,6A	4A		



TT-DR-CV-200-BOX Page 33

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	3,2A	16,6A	200	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	3,2A	8,3A		



TT-DR-CV-096-24V-BOX-TRK Page 34

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	1,6A	4A	96	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase



TT-DR-CV-200-24V-BOX-TRK Page 35

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	3,2A	8,3A	200	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage



TT-DR-CV-384-24V-BOX-5IN1 Page 36

Voltage in (vDC)	Voltage out (vDC)	Amperage in	17,538 mm	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - 0-10V - Potentiometer - 10V PWM



TT-DR-CV-384-24V-BOX Page 37

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase



TT-DR-CVB-030 Page 38

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CVB-040 Page 39

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CVB-060 Page 40

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CVB-080 Page 41

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3400mA		



TT-DR-CVB-100 Page 42

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,2A	8A	96	Yes 5% ~ 100% Triac
	24 Class 2	1,2A	4A		



TT-DR-CVB65-DMX Page 43

Voltage in (vAC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
110 ~ 277	24	-	-	300	Yes 0,1% ~ 100%



TT-DR-CVZ-022 Page 44

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Power (W)	Dimmable
100 ~ 240	12	1,8A	22	Yes 5% ~ 100% Triac
	24 Class 2	0,92A		



TT-DR-CVZ-060 Page 45

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	12	5A	2,5A	60	Yes 5% ~ 100% Triac



TT-DR-CVZ-090 Page 46


Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	24	7,5A	2,5A	90	Yes 5% ~ 100% Triac




TT-38-3000-O



- Extrudé d'aluminium avec bande d'acrylique opale.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

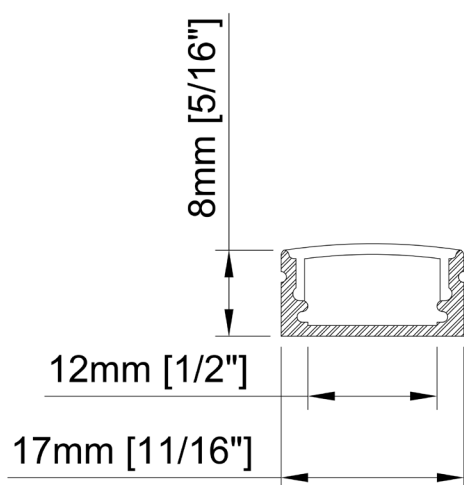

Dimension	17mm x 8mm x 3000mm 11/16" x 5/16" x 118 ¹ / ₈ "
Longueur	3000 mm 118 ¹ / ₈ "
Largeur interne	12mm 1/2"
Couvercle	PMMA Opale Mat PMMA transparent PMMA noir PC diffusé

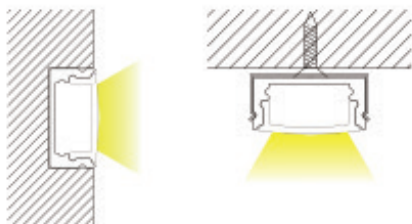

Accessoires



TT-38-CLIP



TT-38-END


CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE
TT	-	38	-	3000	-	O

TT-79-3000-O



- Designed to use with the TT-2025FR-L600 LED strip.
- Available in lengths 3000 mm (118¹/₈").

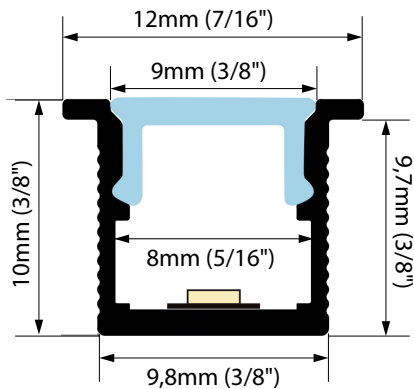

Size	10mm x 9,8mm x 3000mm ³ / ₈ " x ³ / ₈ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Finish	AL - Aluminium BK - Black WH- White
Cover	PC

Accessories



TT-79-CLIP



TT-79-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	79	-	3000	-	O	-	BK
TT	-	79	-	3000	-	O	-	



TT-14-3000-O



- Extrudé d'aluminium avec bande d'acrylique opale.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

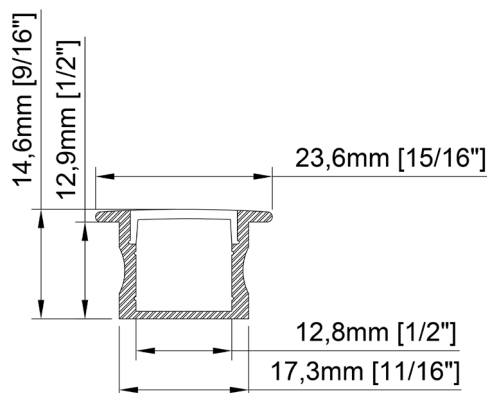

Dimension	17,3mm x 12,9mm x 3000mm $11\frac{1}{16}'' \times 1\frac{1}{2}'' \times 118\frac{1}{8}''$
Longueur	3000mm $118\frac{1}{8}''$
Largeur interne	12,8mm $\frac{1}{2}''$
Couvercle	PMMA Opale Mat PMMA transparent PMMA noir PC diffusé

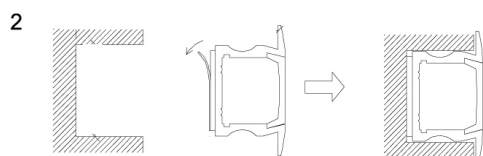

Accessoires



TT-14-CLIP




TT-14-END


CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE
TT	-	14	-	3000	-	O


TT-39-3000-O

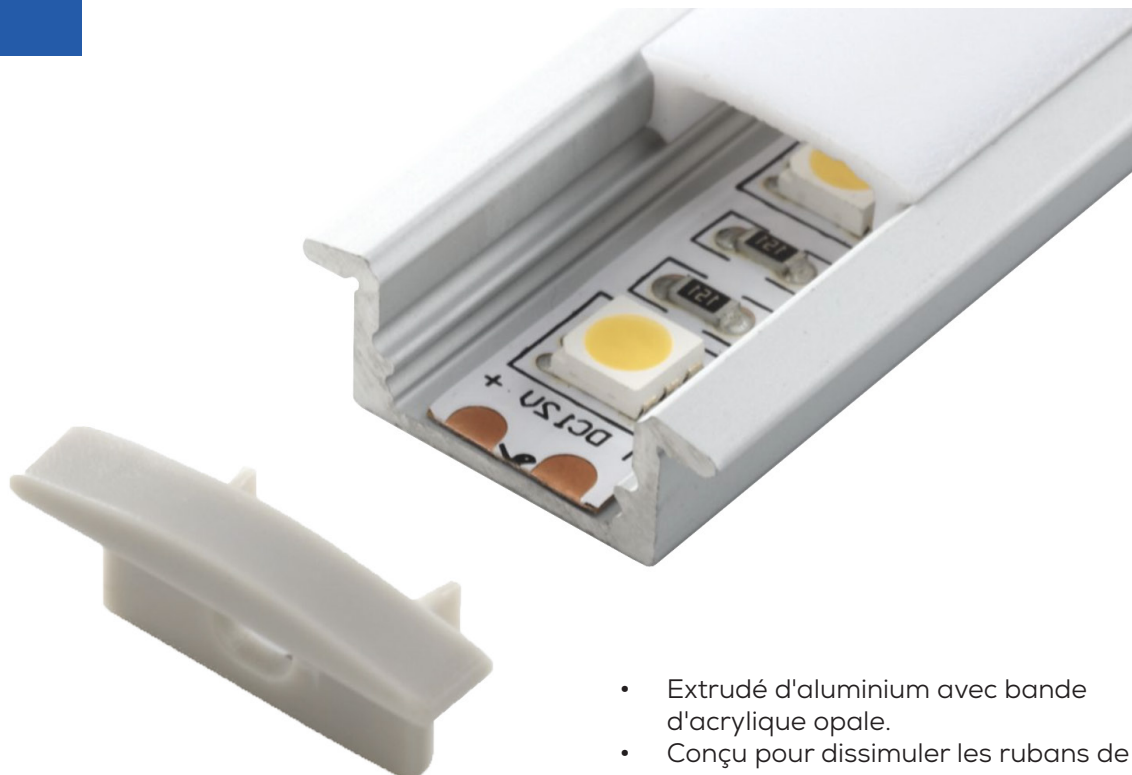

- Extrudé d'aluminium avec bande d'acrylique opale.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

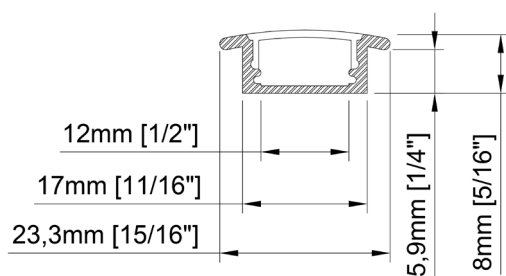

Dimension	23,3mm x 5,9mm x 3000mm $15/16'' \times 1/4'' \times 118\frac{1}{8}''$
Longueur	3000mm $118\frac{1}{8}''$
Largeur interne	12mm $1/2''$
Couvercle	PMMA Opale Mat PMMA transparent PMMA noir PC diffusé

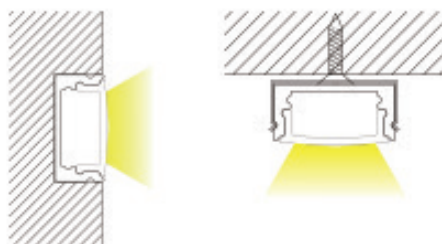

Accessoires




TT-39-END

CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE
TT	-	39	-	3000	-	O

TT-74-3000-O

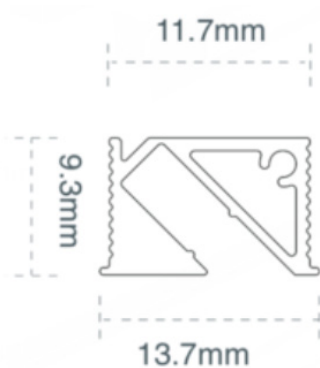

Dimension	13,7mm x 9,3mm x 3000mm $\frac{9}{16}" \times \frac{3}{8}" \times 118\frac{1}{8}"$
Longueur	3000mm $118\frac{1}{8}"$
Largeur interne	11,7mm $\frac{7}{16}"$
Couvercle	Silicone

Accessoires



TT-74-END


CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE
TT	-	74	-	3000	-	O

TT-55-3000-O-BK



- Extrudé d'aluminium avec bande d'acrylique fumée.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

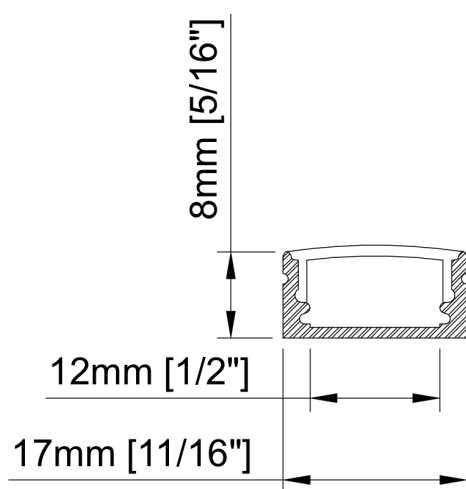

Dimension	17mm x 8mm x 3000mm $11/16" \times 5/16" \times 118^{1/8}"$
Longueur	3000mm $118^{1/8}"$
Largeur interne	12mm $1/2"$
Couvercle	Fumé PMMA Opale Mat PMMA Transparent PC diffusé
Finition	BK-Noir

Accessoires



TT-55-CLIP




TT-55-END


CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE	-	FINITION
TT	-	55	-	3000	-	O	-	BK

TT-56-3000-O-BK

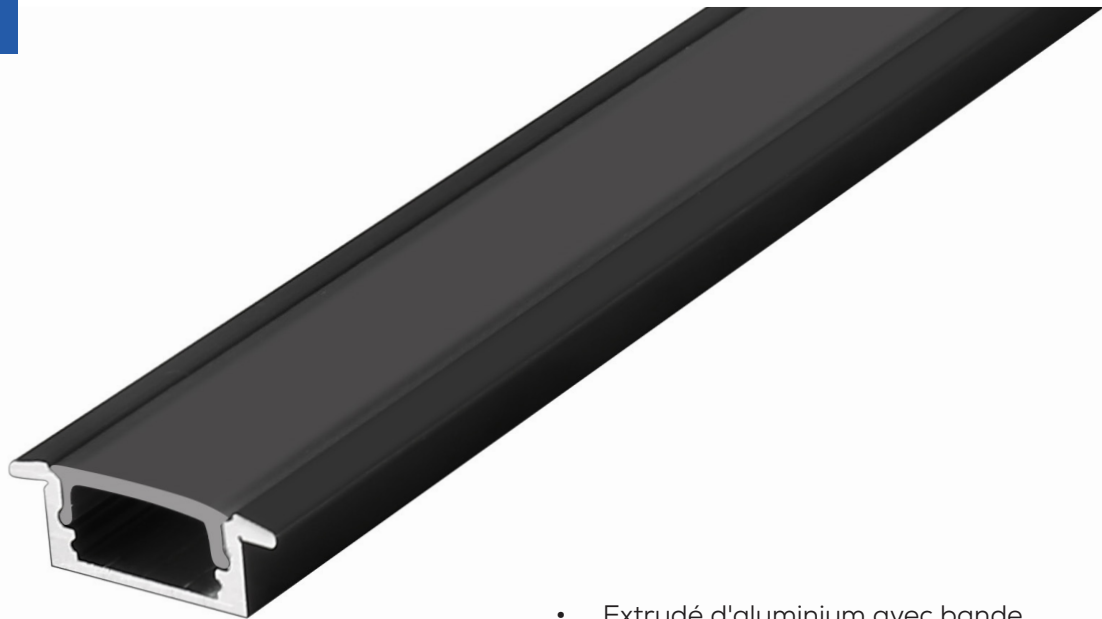

- Extrudé d'aluminium avec bande d'acrylique fumée.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

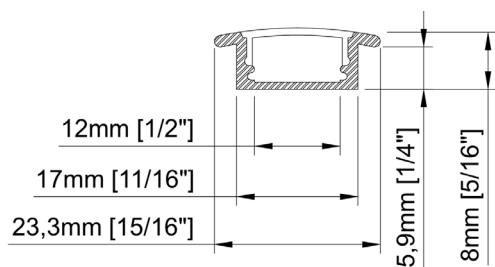

Dimension 23,3mm x 8mm x 3000mm
15¹/₁₆" x 5¹/₁₆" x 118¹/₈"

Longueur 3000mm
118¹/₈"

Largeur interne 12mm
1¹/₂"

Couvercle Fumé
PMMA Opale Mat
PMMA Transparent
PC diffusé

Finition BK-Noir

Accessoires



TT-56-END


CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE	-	FINITION
TT	-	56	-	3000	-	O	-	BK

TT-58-3000-O-BK



- Extrudé d'aluminium avec bande d'acrylique fumée.
- Conçu pour dissimuler les rubans de DEL et dissiper la chaleur de ceux-ci.
- Disponible en longueur de 3000 mm (118¹/₈").

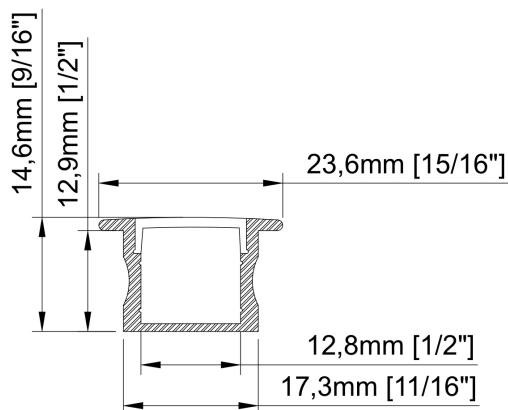

Dimension	23,6mm x 14,6mm x 3000mm $15/16'' \times 9/16'' \times 118^{1/8}''$
Longueur	3000mm $118^{1/8}''$
Largeur interne	12,8mm $1/2''$
Couvercle	Fumé PMMA Opale Mat PMMA Transparent PC diffusé
Finition	BK-Noir

Accessoires




TT-58-END

CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE	-	FINITION
TT	-	58	-	3000	-	O	-	BK

TT-74-3000-O-BK

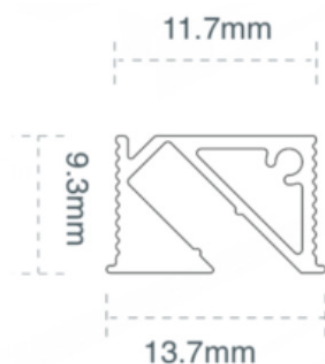

Dimension 13,7mm x 9,3mm x 3000mm
 $\frac{9}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$

Longueur 3000mm
 $118\frac{1}{8}''$

Largeur interne 11,7mm
 $\frac{7}{16}''$

Couvercle Silicone


Accessoires




TT-74-END-BK

CODE PRODUIT

TT	-	MODÈLE	-	LONGUEUR (mm)	-	COUVERCLE	-	FINITION
TT	-	74	-	3000	-	O	-	BK

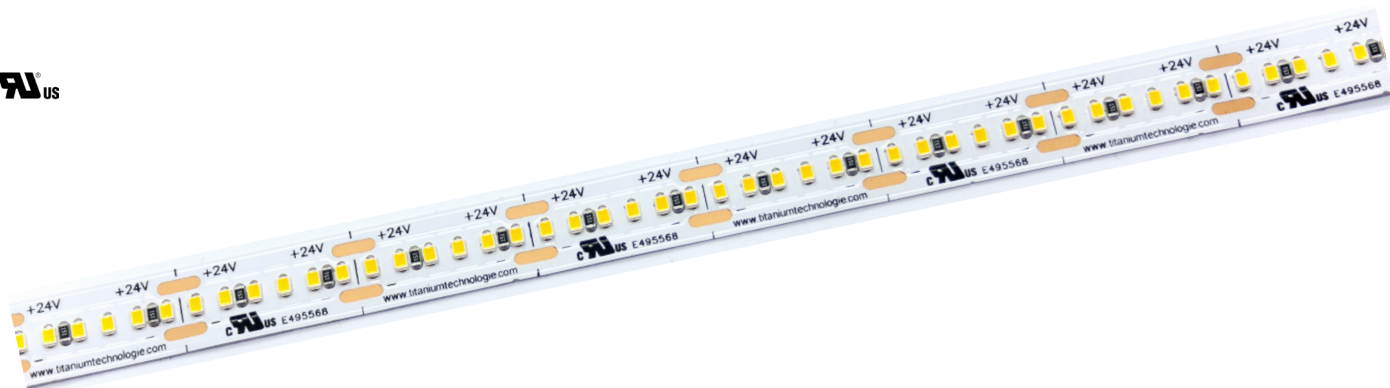

- Ruban Del SMD2216 en rouleau de 5 mètres.

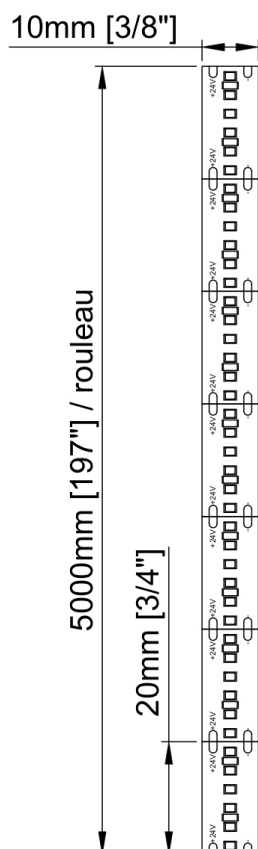

Tension	24vDC		
DEL/m	300 /m		
Puissance	9,84w/m	16,40w/m	22,85w/m
	3w /piéd	5w /piéd	6w /piéd
	49,21w/rouleau	82,02w/roul.	114,25w/roul.
Ampérage	0,39 / m	0,66 / m	0,82 / m
	0,12 / piéd	0,2/ piéd	0,25/ piéd
	1,95 / rouleau	3,3 / rouleau	4,1 / rouleau
Lumens	27K - 193 lm/piéd	341 lm/piéd	483 lm/piéd
	30K - 243 lm/piéd	391 lm/piéd	433 lm/piéd
	35K - 293 lm/piéd	441 lm/piéd	583 lm/piéd
	40K - 343 lm/piéd	491 lm/piéd	633 lm/piéd
	60K - 393 lm/piéd	541 lm/piéd	683 lm/piéd
IRC	90		
Angle	120°		
Dimension	IP20	10mm x 1,1mm x 5000mm 3/8" x 1/16" x 1967/8"	
Ligne de coupe	20 mm 3/4"		
Finition	Blanc		
Gradable	Oui		
Couleur DEL	27K - Blanc chaud 2700K		
	30K - Blanc chaud 3000K		
	35K - Blanc neutre 3500K		
	40K - Blanc neutre 4000K		
	50K -Blanc froid 6000K		
	R - Rouge		
	G - Vert		
	B - Bleu		
	A - Ambre		
Temp. fonctionnement	-40°C ~ 70°C		
IP	20		

CODE PRODUIT

TT	- SMD	- DEL PAR ROULEAU	- IP	- PUISSANCE	- COULEUR DEL	- TENSION
TT	- 2216	- L1500	- 20	- 3W	- 27K	- 24V
TT	- 2216	- L1500	- 20	-	-	- 24V



- Rouleau de 5 mètres.

Tension	24vDC	
DEL/m	120 / m	
Puissance	9,84w / m 3w / pied 49,2w / rouleau	
Ampérage	0,82A / m 0,25A / pied 4,1A / rouleau	
Lumens	27K - 117 lm / pied 30K - 119 lm / pied 35K - 91 lm / pied 40K - 104 lm / pied	
IRC (RA)	90	
Angle	120°	
Dimension	IP20	5mm x 2,2mm x 5000mm $\frac{3}{16}" \times \frac{1}{8}" \times 196\frac{7}{8}"$
Ligne de coupe	50 mm 2"	
Finition	Blanc	
Gradable	Oui	
Couleur DEL	22K - Blanc chaud 2200K 27K - Blanc chaud 2700K 30K - Blanc chaud 3000K 35K - Blanc neutre 3500K 40K - Blanc neutre 4000K 50K - Blanc froid 5000K	
Temp. fonctionnement	-40°C ~ 70°C	
IP	20	

CODE PRODUIT

TT	-	SMD	-	DEL PAR ROULEAU	-	IP	-	LARGEUR	-	COULEUR DEL	-	TENSION
TT	-	3528	-	L600	-	20	-	5MM	-	27K	-	24V
TT	-	3528	-	L600	-	20	-	5MM	-		-	24V

TT-SIL-0410




- Ruban DEL flexible en silicone avec câble à chaque extrémité.
- Connecteur Dupont à chaque extrémité.




Tension	12vDC		24vDC		
DEL/m	144 / m				
Puissance	1000mm	1500mm	2000mm	2500mm	3000mm
	12w	18w	24w	30w	36w
Longueur câble	2m 78 ³ / ₄ "				
Dimension	4mm x 10mm 5 ⁵ / ₃₂ " x 13 ¹³ / ₃₂ "				
	1000mm 39 ³ / ₈ "	1500mm 59 ¹ / ₁₆ "	2000mm 78 ³ / ₄ "	2500mm 98 ⁷ / ₁₆ "	3000mm 118 ¹ / ₈ "
Ligne de coupe	25 mm 1"		50 mm 2"		
Finition	Silicone blanc				
Gradable	Yes				
Couleur DEL	30K - Blanc chaud 3000K 40K - Blanc neutre 4000K				
IP	66				

CODE PRODUIT

TT	-	MODÈLE	-	VERSION	-	LONGUEUR (mm)	-	COULEUR DEL	-	TENSION
TT	-	SIL	-	0410	-	1000	-	30K	-	24V
TT	-	SIL	-	0410	-		-		-	

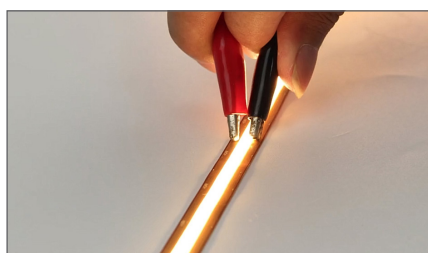

- 3M adhesive for long-lasting hold

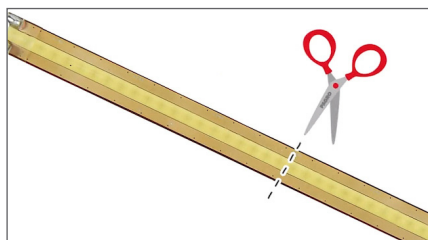

- Can be cut at any location


Voltage	12vDC	24vDC
LED/m	528 / m	
Power	3,35 w / feet 11 w / m	
Lumens	27K - 1040 lm / m	317 lm / feet
	30K - 1040 lm / m	317 lm / feet
	35K - 1040 lm / m	317 lm / feet
	40K - 1120 lm / m	342 lm / feet
	50K - 1120 lm / m	342 lm / feet
CRI	90	
size	8mm x 5000mm 5/16" x 196 7/8"	
Dimmable	Yes	
LED Colour	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K 5000 - Cold white 5000K	
IP	20, 67	

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L528	-	20	-	2700	-	24V
TT	-	COB	-	L528	-	20	-		-	



- LED strip available in 6 meter roll and 100 meter roll.
- The last LED will not light if the cut is between the last LED and the end of the last resistor.

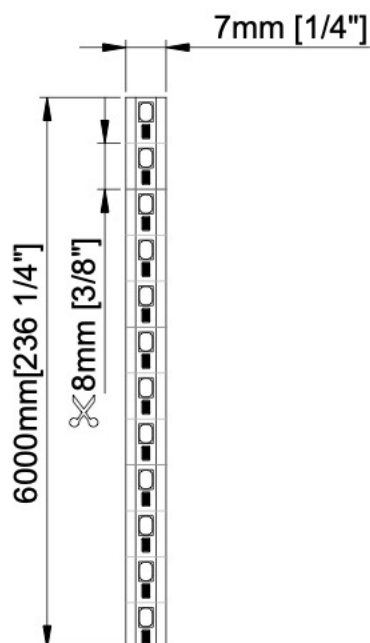

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	2,5w / feet 8w / m	
Amperage	0,21A / feet	0,1A / feet
Lumens	301 lm / feet	308 lm / feet
CRI	90	
Size	6,7mm x 6000mm 1/4" x 236 1/4"	
Cut line	Can be cut at any location (see note)	
Dimmable	Yes	
Couleur LED	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K	
IP	20	



PRODUCT CODE

TT	-	TYPE	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2025FR	-	L600	-	IP20	-	2700	-	12V
TT	-	2025FR	-	L600	-	IP20	-		-	

TT-PUCK-3W



- Rondelles pour armoires de cuisine.

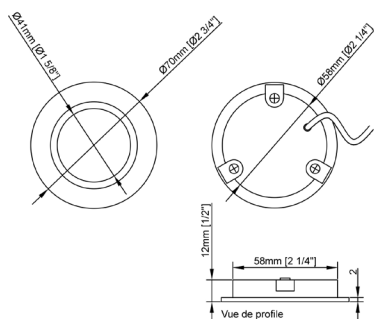

Tension	12vDC
Puissance	3w
Ampérage	0,25A
Angle	120°
IRC	90
Lumens	230 (30K) 240 (40K) 260 (60K)
Dimension	Ø70mm x 13mm Ø2 3/4" x 1/2"
Ouverture d'installation	63 mm 2 1/2"
Finition	W - Blanc BK - Noir C - Argent BR - Nickel Brossé
Gradable	Oui
Couleur DEL	27K - Blanc chaud 2700K CCT - Blanc chaud 3000K (finition W et BK) Blanc neutre 4000K
IP	20



CODE PRODUIT

TT	-	MODÈLE	-	PUISSANCE	-	FINITION	-	COULEUR DEL
TT	-	PUCK	-	3W	-	BK	-	27K
TT	-	PUCK	-	3W	-		-	

TT-PUCK-400-V4



- Puck for kitchen cabinets.

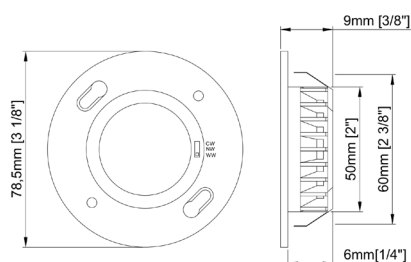

Voltage	12vDC	24vDC
Power	3w	
Amperage	0,25A	0.125A
Angle	120°	
Lumen	330 (30K) 350 (40K) 360 (60K)	
CRI	90	
Size	Ø78,5mm x 9mm Ø3 1/8" x 3/8"	
Cut hole	63 mm 2 1/2"	
Finish	W - White BK - Black C - Silver BR - Nickel Brush OR - Gold GM - Matte gold	
Dimmable	Yes	
LED Colour	CCT - Warm white 3000K Neutral white 4000K Cold white 5000K	
IP	20	

Accessories



TT-PUCK-400-V3-WH



TT-PUCK-400-V3-C



TT-PUCK-400-V3-BR



TT-PUCK-400-V3-BK



TT-PUCK-400-V3-OR




TT-PUCK-400-V3-GM


PRODUCT CODE

TT	-	MODEL	-	TYPE	-	VOLTAGE	-	FINISH
TT	-	PUCK	-	400-V3	-	12V	-	BK
TT	-	PUCK	-	400-V3	-		-	

TT-PUCK-2.2W

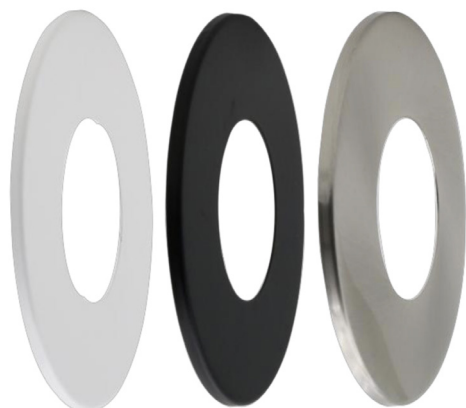

- Rondelles minces pour armoires de cuisine.
- Trois choix d'anneaux de finition.

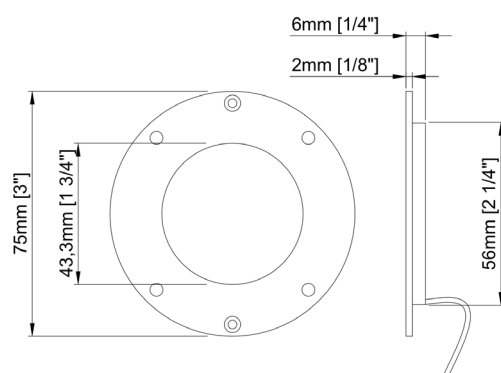

Tension	12vDC
Puissance	2,2w
Ampérage	0,183A
Angle	110°
Lumens	175 lm
IRC	90
Dimension	Ø75mm x 6mm Ø3" x 1/4"
Ouverture d'installation	56 mm 2 1/4"
Gradable	Oui
Couleur DEL	27K - Blanc chaud 2700K 30K - Blanc chaud 3000K 40K - Blanc neutre 4000K 50K - Blanc froid 5000K
IP	20

Accessoires




TT-PUCK-2.2W-WH



TT-PUCK-2.2W-BN




TT-PUCK-2.2W-BK



TT-PUCK-2.2W-WH-A



TT-PUCK-2.2W-BN-A



TT-PUCK-2.2W-BK-A

CODE PRODUIT



TT	-	MODÈLE	-	PUISSANCE	-	COULEUR DEL
TT	-	PUCK	-	2.2W	-	27K
TT	-	PUCK	-	2.2W	-	

TT-ACC-RELAY-
CONTACTOR



- Enhance your kitchen’s safety with our innovative electric relay, designed for cabinet installations. This smart device automatically cuts power to outlets when the drawer closed, ensuring appliances stop generating heat. The result? Reduced risks of overheating and potential damage. ETL-certified and compliant with building code safety standards, this relay offers peace of mind and reliability. Perfect for modern kitchens, it combines energy efficiency with robust protection. Upgrade your space with this simple, dependable solution!

Voltage	120 vAC
Power	2000 w
Amperage	20 A
Wire length of the IR detector	1m 39 3/8"
Finish	White
Model	Decora

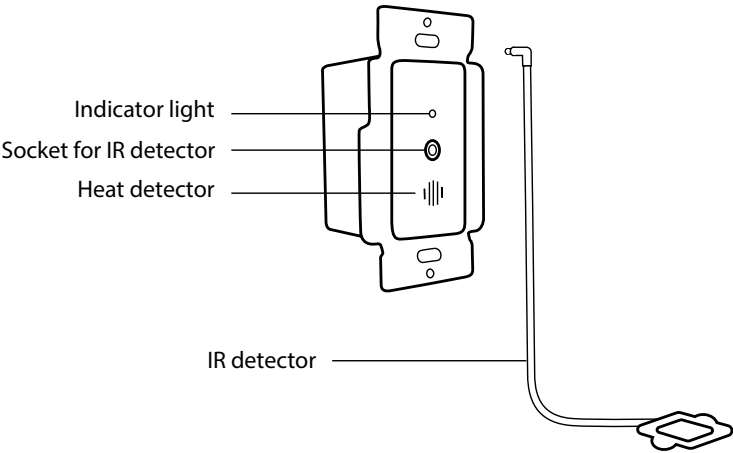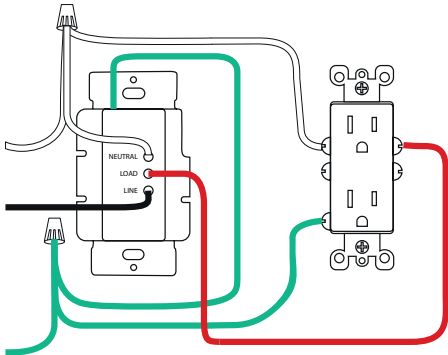


PRODUCT CODE

TT	-	MODEL	-	TYPE
TT	-	ACC	-	RELAY-CONTACTOR




- Transformers dimmable to the primary 120vAC.
- 16 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

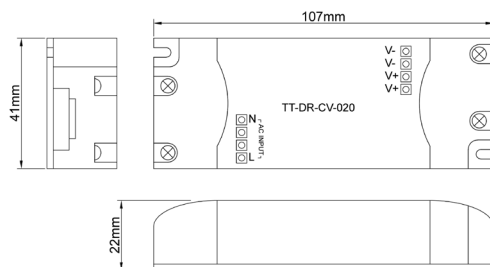


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,24A	0,22A
Amperage out	1600mA	830mA
Power	19,2w	
Size	107mm x 41mm x 22mm 4 1/4" x 1 5/8" x 7/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	020	-	12V
TT	-	DR	-	CV	-	020	-	

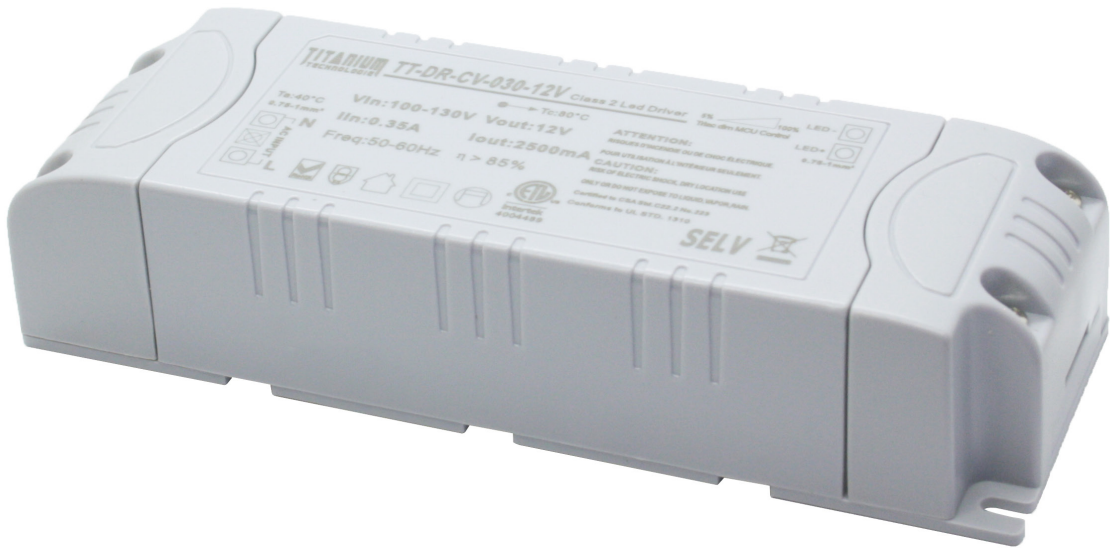

- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

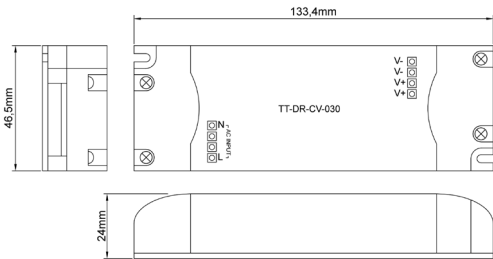


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2000mA	1250mA
Power	30w	
Size	133mm x 46,5mm x 24mm 5 1/4" x 1 7/8" x 1"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	030	-	12V
TT	-	DR	-	CV	-	030	-	



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

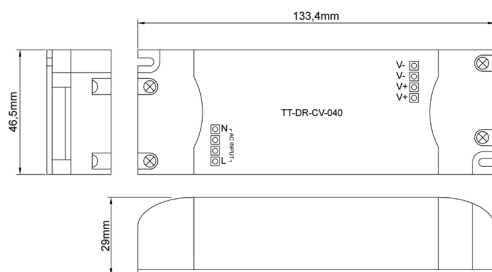


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	
Size	133mm x 46,5mm x 29mm 5 1/4" x 1 7/8" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	040	-	12V
TT	-	DR	-	CV	-	040	-	



- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

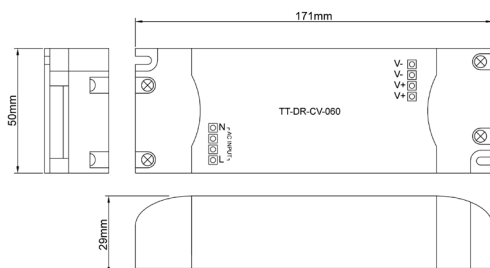


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	4000mA	2500mA
Power	60w	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	060	-	12V
TT	-	DR	-	CV	-	060	-	



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

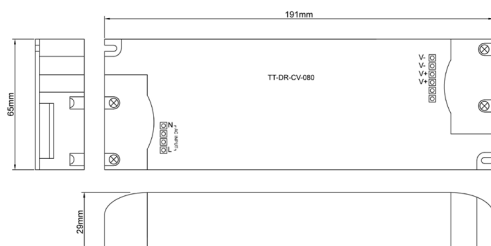


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,1A	1A
Amperage out	6000mA	3300mA
Power	72w	
Size	191mm x 65mm x 29mm 7 1/2" x 2 1/2" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	080	-	12V
TT	-	DR	-	CV	-	080	-	



- Transformers dimmable to the primary 120vAC.
- 20 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

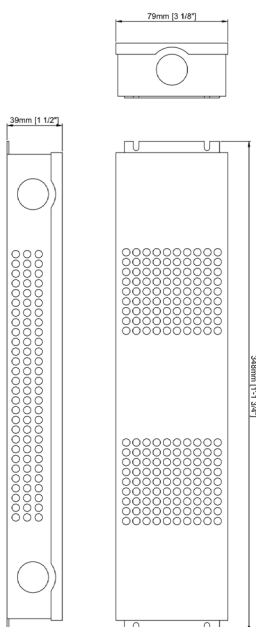

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,9 A	0,9 A
Amperage out	2,1A	1,05A
Power	25w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	025	-	12V	-	BOX
TT	-	DR	-	CV	-	025	-		-	BOX

TT-DR-CV-050-BOX



- Transformers dimmable to the primary 120vAC.
- 40 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

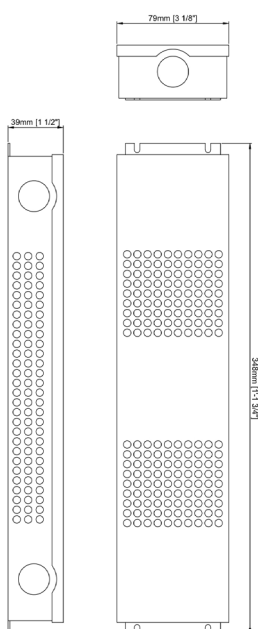

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,6 A	1,6 A
Amperage out	4,16 A	2,1 A
Power	50w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	050	-	12V	-	BOX
TT	-	DR	-	CV	-	050	-		-	BOX

TT-DR-CV-096-BOX



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

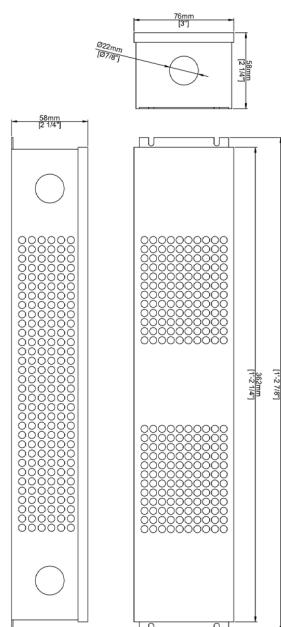


Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,7A	1,6A
Amperage out	8,33A	4A
Power	100w	96w
Minimum load	1w	
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "	
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV	
IP	66	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	096	-	12V	-	BOX
TT	-	DR	-	CV	-	096	-		-	BOX



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%

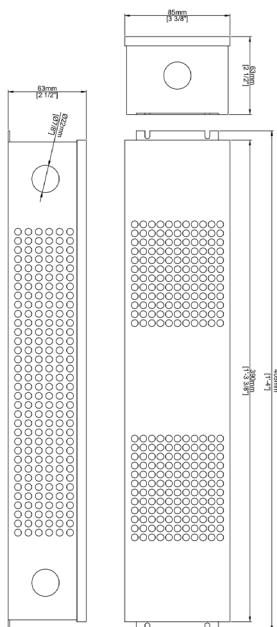

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	3,2A	3,2A
Amperage out	16,6A	8,3A
Power	200w	
Minimum Load	1w	
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"	
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac	
IP	66	


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	200	-	12V	-	BOX
TT	-	DR	-	CV	-	200	-		-	BOX

TT-DR-CV-096-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2
- Frequency of 2000Hz
- Optimized for TT-TRK serie

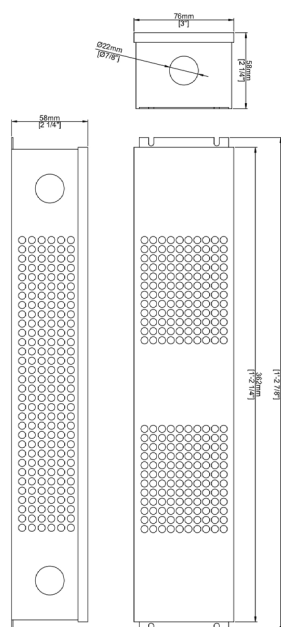

Voltage in	120vAC
Voltage out	24vDC Classe 2
Amperage in	1,6A
Amperage out	4A
Power	96w
Minimum load	1w
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	096	-	24V	-	BOX	-	TRK


TITANIUM

TECHNOLOGY

TT-DR-CV-200-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Frequency of 2000Hz
- Optimized for TT-TRK serie

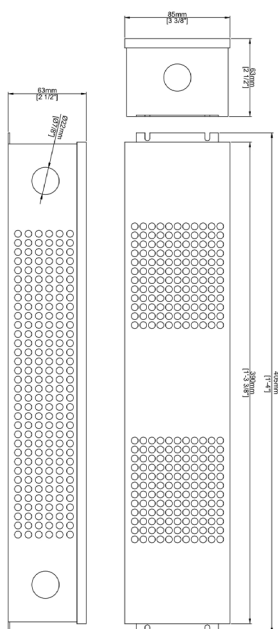

Voltage in	120vAC
Voltage out	24vDC
Amperage in	3,2A
Amperage out	8,3A
Power	200w
Minimum Load	1w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac
IP	66


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	200	-	24V	-	BOX	-	TRK

TT-DR-CV-384-
24V-BOX- 5 IN 1



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- 5 in 1
- Class 2

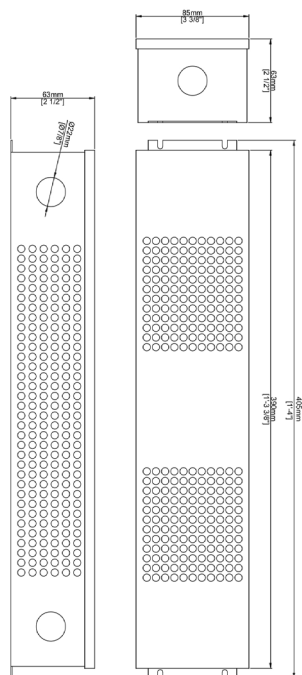

Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes 5% ~100% Triac - 0-10V - Potentiometer - 10V PWM
IP	66
Dimming	Triac 0-10V Potentiometer 10V pwm Phase


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-5IN1

TT-DR-CV-384-
24V-BOX



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- ELV dimming
- Class 2

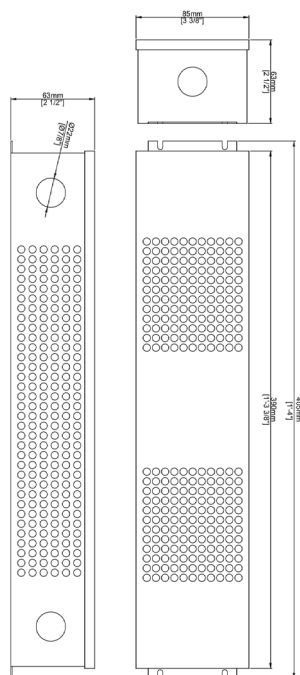


Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66
Dimming	Foward phase Reverse phase ELV MLV Triac

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-ELV



- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

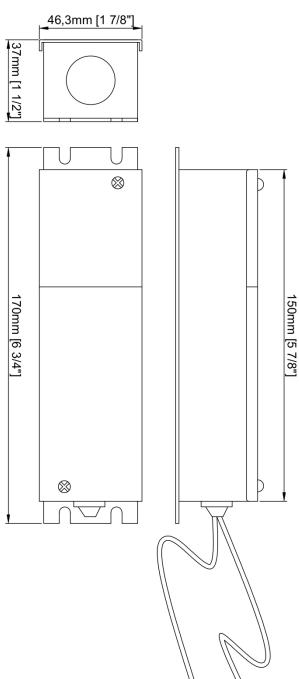


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2000mA	1250mA
Power	30w	
Size	170mm x 46,3mm x 37mm 6 ³ / ₄ " x 1 ⁷ / ₈ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	030	-	12V
TT	-	DR	-	CVB	-	030	-	



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

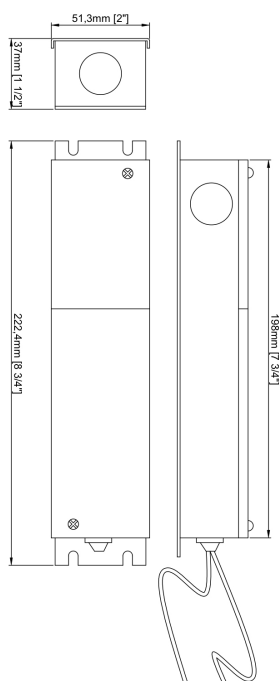


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	
Size	222,3mm x 51,3mm x 37mm 8 3/4" x 2" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	040	-	12V
TT	-	DR	-	CVB	-	040	-	



- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

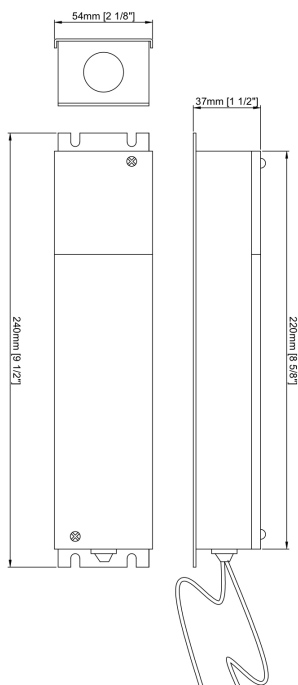


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	4000mA	2500mA
Power	60w	
Size	240mm x 54mm x 37mm 9 1/2" x 2 1/8" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	060	-	12V
TT	-	DR	-	CVB	-	060	-	



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

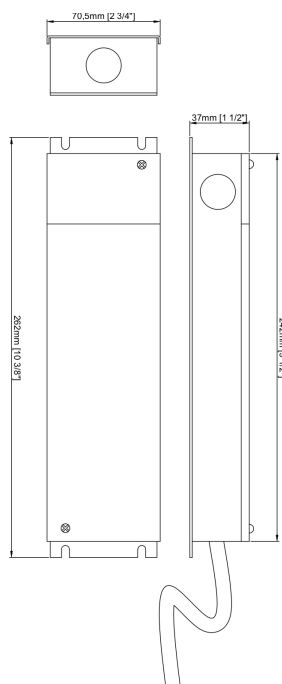


Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,1A	1A
Amperage out	6000mA	3400mA
Power	72w	
Size	262mm x 70,5mm x 37mm 10 3/8" x 2 3/4" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	080	-	12V
TT	-	DR	-	CVB	-	080	-	



- Transformers dimmable to the primary 120vAC.
- 77 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

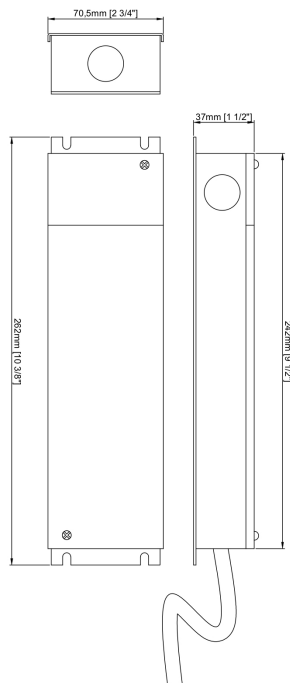

Voltage in	120vAC	
Voltage out	12vDC	24vDC Clase 2
Amperage in	1,2A	1,2A
Amperage out	8A	4A
Power	96w	
Size	262mm x 70,5mm x 37mm 10 ³ / ₈ " x 2 ³ / ₄ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	100	-	12V
TT	-	DR	-	CVB	-	100	-	

TT-DR-CVB65-DMX



- Triac dimmable from 5% to 100%
- Class 2
- For dry and wet location.

Voltage in	110~277vAC
Voltage out	24vDC
Amperage in	?
Amperage by color	DW : 12,5 A CCT : 6,25 A RGB : 4,17 A RGBW : 3,13 A RGBCW : 2,5 A
Power	300w
Number of channels	3C - 3 Channels 4C - 4 Channels 5C - 5 Channels
Size	316mm x 125mm x 42,7mm 12 7/16" x 4 15/16" x 1 11/16"
Dimmable	Yes 0,1% ~100%
Working temperature	-40°C ~ 60°C
IP	65

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	CHANNELS	-	POWER	-	VOLTAGE OUT
TT	-	DR	-	CVB65	-	DMX	-	3C	-	300	-	24V
TT	-	DR	-	CVB65	-	DMX	-		-	300	-	24V



- 22 watts maximum load.
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector

Voltage in	100-240 vAC	
Voltage out	12vDC Class 2	24vDC Class 2
Amperage	1,8A	0,92A
Power	22w	
Size	120mm x 60mm x 16mm 4 3/4" x 2 5/16" x 5/8"	
Dimmable	Yes by remote via the control port	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	022	-	12V
TT	-	DR	-	CVZ	-	022	-	



- 60 watts maximum load.
- Maximum of 30 watts per output
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector

Voltage in	100-240 vAC
Voltage out	12vDC Class 2
Amperage out total	5A
Amperage out	2,5A per output
Power	60w
Size	254mm x 60mm x 16mm 10" x 2 5/16" x 5/8"
Dimmable	Yes by remote via the control port
IP	20

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	060	-	12V

TT-DR-CVZ-090



- 90 watts maximum load.
- Maximum of 30 watts per output
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector

Voltage in	100-240 vAC
Voltage out	24vDC Class 2
Amperage out total	7,5A
Amperage out	2,5A per output
Power	90w
Size	308mm x 61,5mm x 16mm 12 1/8" x 2 1/2" x 5/8"
Dimmable	Yes by remote via the control port
IP	20



PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	090	-	24V

TT-ACC-IR-01



- Détecteur IR encastrable.

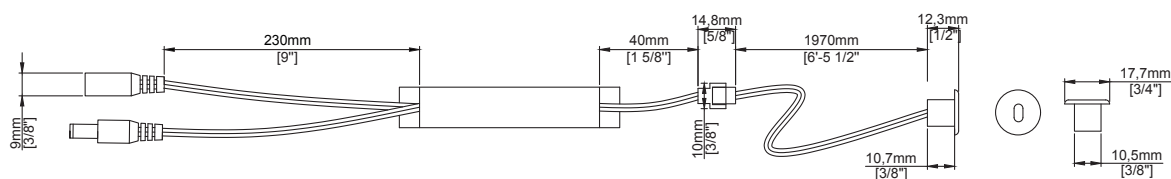



Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	10mm 3/8"

TT-ACC-IR-02



- Détecteur IR en surface.

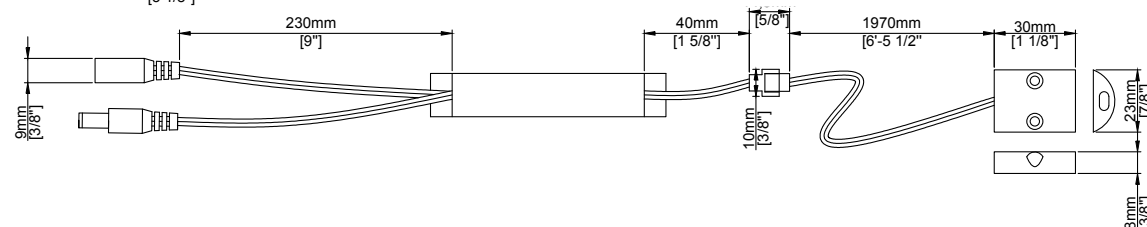


Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm


TT-ACC-IR-05



- Détecteur double IR encastrable.




Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	10mm 3/8"

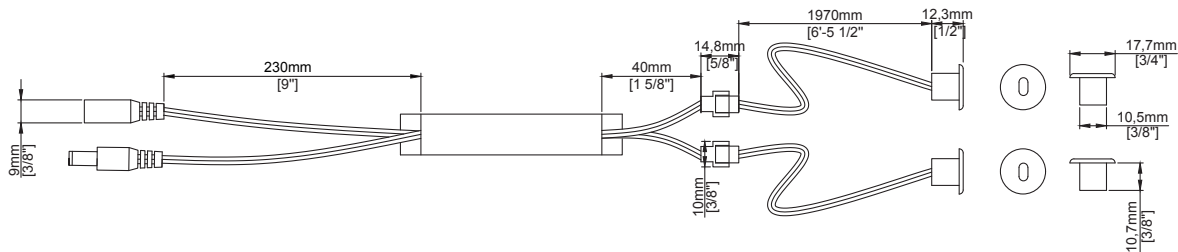


TT-ACC-IR-06



- Détecteur double IR en surface.



Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm

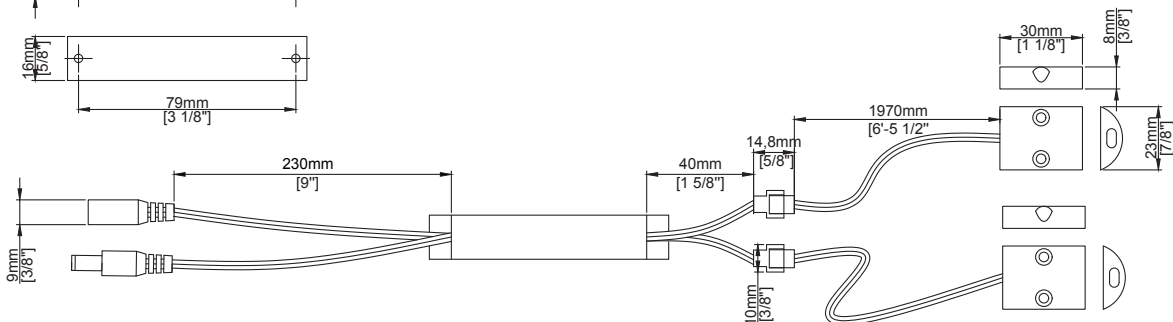

TT-ACC-IR-11



- Détecteur IR encastré.
- Apparaît et disparaît graduellement

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	8mm 3/8"

TT-ACC-IR-12



- Détecteur infrarouge à montage en surface.
- Apparaît et disparaît graduellement.

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm

TT-ACC-IR-15



- Détecteur double IR encastrable.

Ampérage	12 ~ 24vC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	8mm 3/8"

TT-ACC-IR-16



- Détecteur double IR montage en surface.
- Apparaît et disparaît graduellement

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm

TT-U-13



- Gradateur tactile.

Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	14mm 1/2"

TT-U-14



- Commutateur tactile.
- Passer sur la surface du panneau de bois

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	32mm 15/16"



- Détecteur de mouvement encastrable.

Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	16mm 5/8"

TT-DIS-TRK



- Ce rail magnétique est conçu pour être coupé à tout moment sur sa longueur

CODE PRODUIT

TT	-	TYPE	-	MODÈLE	-	TENSION	-	COULEUR
TT	-	DIS	-	TRK	-	12V	-	BK
TT	-	DIS	-	TRK	-		-	

Tension	12vDC	24vDC
Puissance	60w max.	120w max.
Ampérage	5A max.	5A max.
Couleur	BK - Noir WH - Blanc	
Longueur	2000mm 78 3/4"	

TT-DIS-CONNECT



- Ce connecteur alimente le rail magnétique à partir d'un transformateur équipé d'un connecteur dupont

CODE PRODUIT

TT	-	TYPE	-	MODÈLE	-	TENSION	-	COULEUR
TT	-	DIS	-	CONNECT	-	12V	-	BK
TT	-	DIS	-	CONNECT	-		-	

Tension	12vDC	24vDC
Puissance	36w max.	72w max.
Ampérage	3A max.	3A max.
Couleur	BK - Noir WH - Blanc	
Longueur câble	1000mm 39 3/8"	

TT-DIS-PLUG




- Ce connecteur alimente le produit (rondelle, bande DEL) à partir d'un transformateur équipé d'un connecteur dupont

CODE PRODUIT

TT	-	TYPE	-	MODÈLE	-	TENSION	-	COULEUR
TT	-	DIS	-	PLUG	-	12V	-	BK
TT	-	DIS	-	PLUG	-		-	

Tension	12vDC	24vDC
Puissance	36w max.	72w max.
Ampérage	3A max.	3A max.
Couleur	BK - Noir WH - Blanc	
Longueur câble	1000mm 39 3/8"	

TT-DIS-EXT



- Les extensions magnétiques sont utilisées pour relier 2 rails magnétiques (TT-DIS-TRK) ensemble.

CODE PRODUIT

TT	-	TYPE	-	MODÈLE
TT	-	DIS	-	EXT

TT-DIS-END



- Embout pour rails magnétiques (TT-DIS-TRK)
- Disponible en noir ou blanc

CODE PRODUIT

TT	-	TYPE	-	MODÈLE	-	COULEUR
TT	-	DIS	-	END	-	BK
TT	-	DIS	-	END	-	

TT-ACC-IR-11



- Détecteur IR encastré.
- Apparaît et disparaît graduellement

Ampérage	12 ~ 24vCC
----------	------------

Tension	36w-72w
---------	---------

Connecteur entrée, sortie	2,1mm
------------------------------	-------

Ouverture d'installation	8mm 3/8"
-----------------------------	-------------

TT-ACC-IR-12



- Détecteur infrarouge à montage en surface.
- Apparaît et disparaît graduellement.

Ampérage	12 ~ 24vCC
----------	------------

Tension	36w-72w
---------	---------

Connecteur entrée, sortie	2,1mm
------------------------------	-------

TT-ACC-IR-15



- Détecteur double IR encastrable.

Ampérage	12 ~ 24vC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	8mm 3/8"

TT-ACC-IR-16



- Détecteur double IR montage en surface.
- Apparaît et disparaît graduellement

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm

TT-ACC-IR-21



- Détecteur IR encastré.
- Apparaît et disparaît graduellement
- Connecteur Dupont

Tension	12 ~ 24vDC
---------	------------

Puissance	36w-72w
-----------	---------

Ampérage	3A max.
----------	---------

Trou de coupe	8mm 3/8"
---------------	-------------

TT-ACC-IR-22



- Détecteur IR de surface.
- Apparaît et disparaît graduellement
- Connecteur Dupont

Tension	12 ~ 24vDC
---------	------------

Puissance	36w-72w
-----------	---------

Ampérage	3A max.
----------	---------

TT-ACC-IR-25



- Détecteur IR double encastré.
- Apparaît et disparaît graduellement
- Connecteur Dupont

Tension	12 ~ 24vDC
---------	------------

Puissance	36w-72w
-----------	---------

Ampérage	3A max.
----------	---------

Trou de coupe	8mm 3/8"
---------------	-------------

TT-ACC-IR-26



- Détecteur IR double de surface.
- Apparaît et disparaît graduellement
- Connecteur Dupont

Tension	12 ~ 24vDC
---------	------------

Puissance	36w-72w
-----------	---------

Ampérage	3A max.
----------	---------

TT-U-13



- Gradateur tactile.

Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	14mm 1/2"

TT-U-14



- Commutateur tactile.
- Passer sur la surface du panneau de bois

Ampérage	12 ~ 24vCC
Tension	36w-72w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	32mm 15/16"



- Détecteur de mouvement encastrable.

Ampérage	12 ~ 24vCC
Tension	30w-60w
Connecteur entrée, sortie	2,1mm
Ouverture d'installation	16mm 5/8"

TT-ACC-CONNECT-SPLIT1X2



- Branchement un pour deux connecteurs 2.1mm AWG16

TT-ACC-CONNECT-SPLIT1X3



- Branchement un pour trois connecteurs 2.1mm AWG16

TT-ACC-CONNECT-SPLIT1X4



- Branchement un pour quatre connecteurs 2.1mm AWG16

TT-ACC-CONNECT-SPLIT1X8



- Branchement un pour huit connecteurs 2.1mm AWG16

TT-ACC-CONNECT-2.1-M



- Branchement à bornier vers 2.1mm mâle.

TT-ACC-CONNECT-2.1-F



- Branchement à bornier vers 2.1mm femelle.

TT-ACC-CONNECT-2.1-1M



- Câble 1 mètre avec connecteurs 2.1mm. AWG16

TT-ACC-CONNECT-2.1-M2



- Section de câble vers connecteur 2.1mm mâle.

TT-ACC-CONNECT-2.1-F2




- Section de câble vers connecteur 2.1mm femelle.

TT-ACC-CONNECT-D



- Câble d'extension avec connecteur Dupont.
- Disponible en longueur de : 500mm, 1000mm, 1500mm, 2000mm and 5000mm
- Disponible en longueur de : 20in, 39in, 59in, 78in and 196in
- Maximum 3A

TT-ACC-CONNECT-D-SPLIT3X1

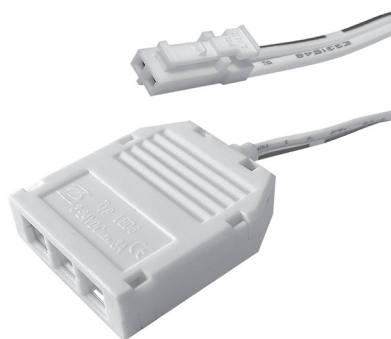

- Branchement 3 pour 1 avec connecteur Dupont.
- Maximum 3A

TT-ACC-CONNECT-D-SPLIT6X1



- Branchement 6 pour 1 avec connecteur Dupont.
- Maximum 3A

LIMITED ONE (1) YEAR WARRANTY

Titanium Technology offers this limited warranty for one (1) year from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of one (1) year covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|--------------------------|--------------------------|-----------------------|
| 1) Nicolaudie Controller | 5) TT-CAB-XX | 9) TT-WiFi |
| 2) LTECH Controller | 6) TT-DMX-XX | 10) Aluminium profile |
| 3) TT-ACC-XX | 7) TT-PSU-IP20 / PLUG-IN | 11) TT-Y-XX |
| 4) TT-AMP-XX | 8) TT-U-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.



LIMITED THREE (3) YEARS WARRANTY

Titanium Technology offers this limited warranty for three (3) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.



This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of three (3) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scratches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :


- | | | |
|-----------------|-------------------|-------------------------------|
| 1) TT-2216-XX * | 6) TT-5630-XX * | 11) TT-FL-XX-XX |
| 2) TT-2835-XX * | 7) TT-DOWN-007-XX | 12) TT-PSU-IP20-XX (MEANWELL) |
| 3) TT-335-XX * | 8) TT-DOWN-008-XX | 13) TT-PUCK-2.2W-XX |
| 4) TT-3528-XX * | 9) TT-DOWN-016-XX | 14) TT-PUCK-3W-XX |
| 5) TT-5050-XX * | 10) TT-DR-CV-XX | 15) TT-PUCK-400-V3 |

* LED strips are only guaranteed if they are installed in our aluminum profiles and use our transformers.

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

TITANIUM

TECHNOLOGY

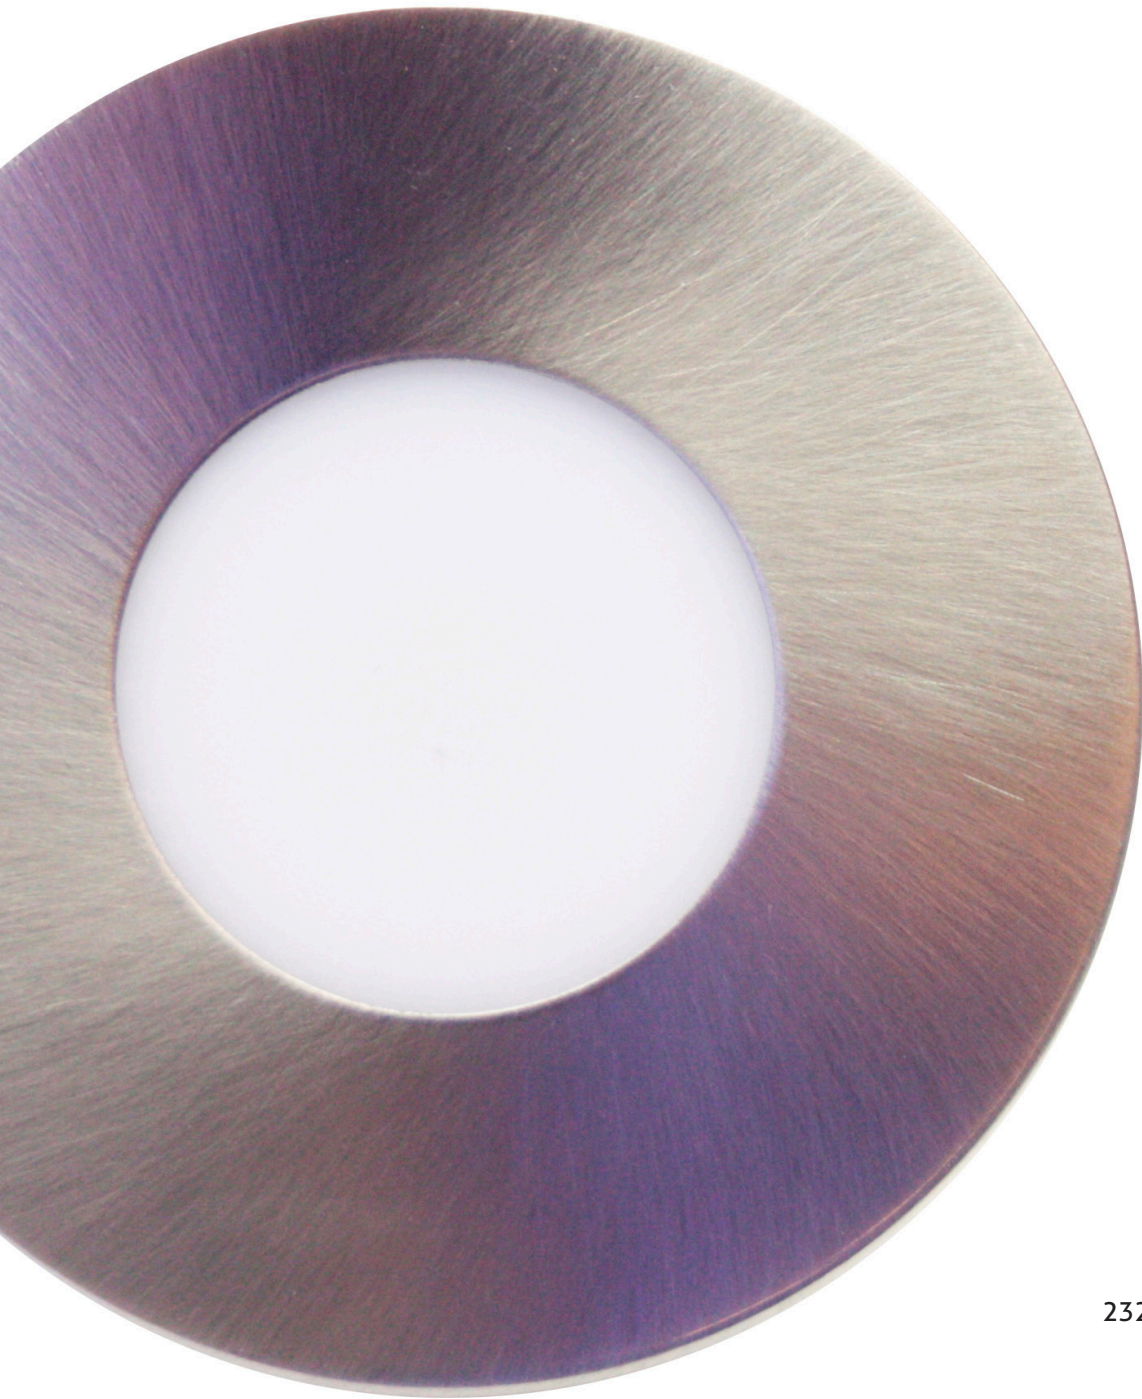

TITANIUM TECHNOLOGY

2323, boulevard Versant Nord #111
Québec, QC
G1N 4P4 CANADA

Toll free (866)-476-8115
www.titaniumtechnology.com
sales@titaniumtechnology.com
www.facebook.com/titaniumtechnologie

TITANIUM TECHNOLOGY USA

NEWARK DE 19713

Toll free (866)-476-8115 ext.203
www.titaniumtechnology.com
sales@titaniumtechnology.com
www.facebook.com/titaniumtechnologie