

TITANIUM
TECHNOLOGY

Catalog
2025

TITANIUM

TECHNOLOGY

Titanium Technology is a company that works in the field of LED lighting. We are from the era where technologies are exploding and taking more and more space in our lives, we offer people tailor-made solutions that live up to their expectations. The Titanium Technology team is working with its distributors to complete their LED lighting projects. The challenges of our customers are our greatest motivation.

Discover Titanium Technology.

TABLE OF CONTENTS

OUR LED LIGHT SOURCES

LED light sources	4
-------------------------	---

GLOB

Glob	6
------------	---

ALUMINUM PROFILE

Surface	66
Recessed	94
Pendant	108
Black shadow series	140
Trim-less mud-in	156
Trim-less tiles	170
Bottom wall	176
Closet	180
Stairs	182
Trim-less concrete	184
Suspended ceiling	186
Edge	188
Flex	192

LED ENGINES

LED engines	196
-------------------	-----

CABINETS AND MILLWORK

Cabinet and millwork	226
----------------------------	-----

ARCHITECTURAL

Architectural	240
---------------------	-----

RECESSED SPOTLIGHT

Recessed spotlight	260
--------------------------	-----

TRACK LIGHTING SYSTEM

Linear	281
Curved	316

POWER SUPPLY

Dimmable	349
Fixed voltage	379

CONTROLS

Wall mount	398
Wireless	403
Stick	427
Sunlite suite 3	428
Stand alone	429
Decoders	430
Amplifier	433

ACCESSORIES

Housings	440
Sensors	444
Connector 2,1mm	453
Connector FL serie	455
Cable	463
EZ-Clip	470
Fastclip	477
Doubleface 3M	479

ANNEXE

Annexe	480
--------------	-----

OUR LED LIGHT SOURCES ---

L150

(30 mm distance between points)

With a distance of 30mm between points, the light sources will be relatively spaced apart. This may create the appearance of distinct points of light, but the overall lighting may appear less even and consistent.

L300

(15 mm distance between points)

At a distance of 15mm between points, the light sources will be closer together, which can give more even lighting while still maintaining some distinction between individual points.

OPAL

The opal lens is design for standard lighting. Allow an optimal light diffusion and keep high brightness.

MILKY

This lens is created for thin profile, eliminate the dot hot spot from LED source.

Without lens





L600


(7 mm distance between points)

With a distance of just 7mm between points, the light sources will be even closer together, which can create more even and soft lighting, with less distinction between individual points.

L1500

(3 mm distance between points)

With a distance of only 3mm between points, the light sources will be very close together, providing extremely even and continuous lighting. This gives the best result in terms of uniformity and softness of lighting, with minimal perception of individual points of light.

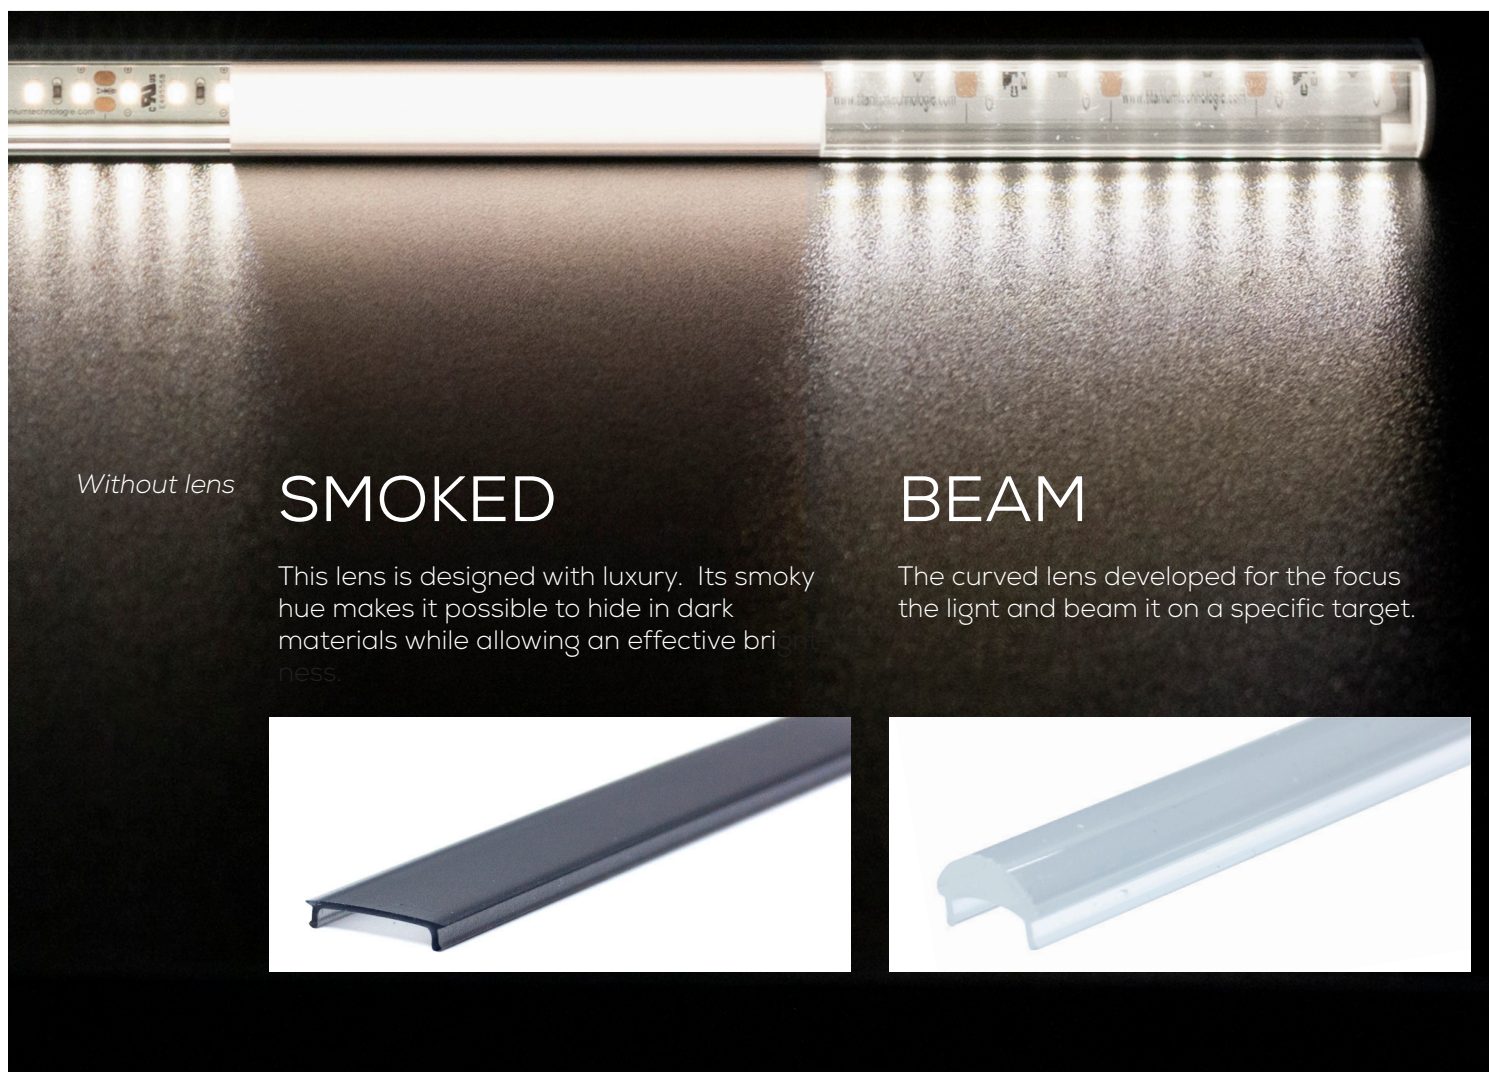

Without lens


SMOKED

This lens is designed with luxury. Its smoky hue makes it possible to hide in dark materials while allowing an effective brightness.

BEAM

The curved lens developed for the focus the light and beam it on a specific target.

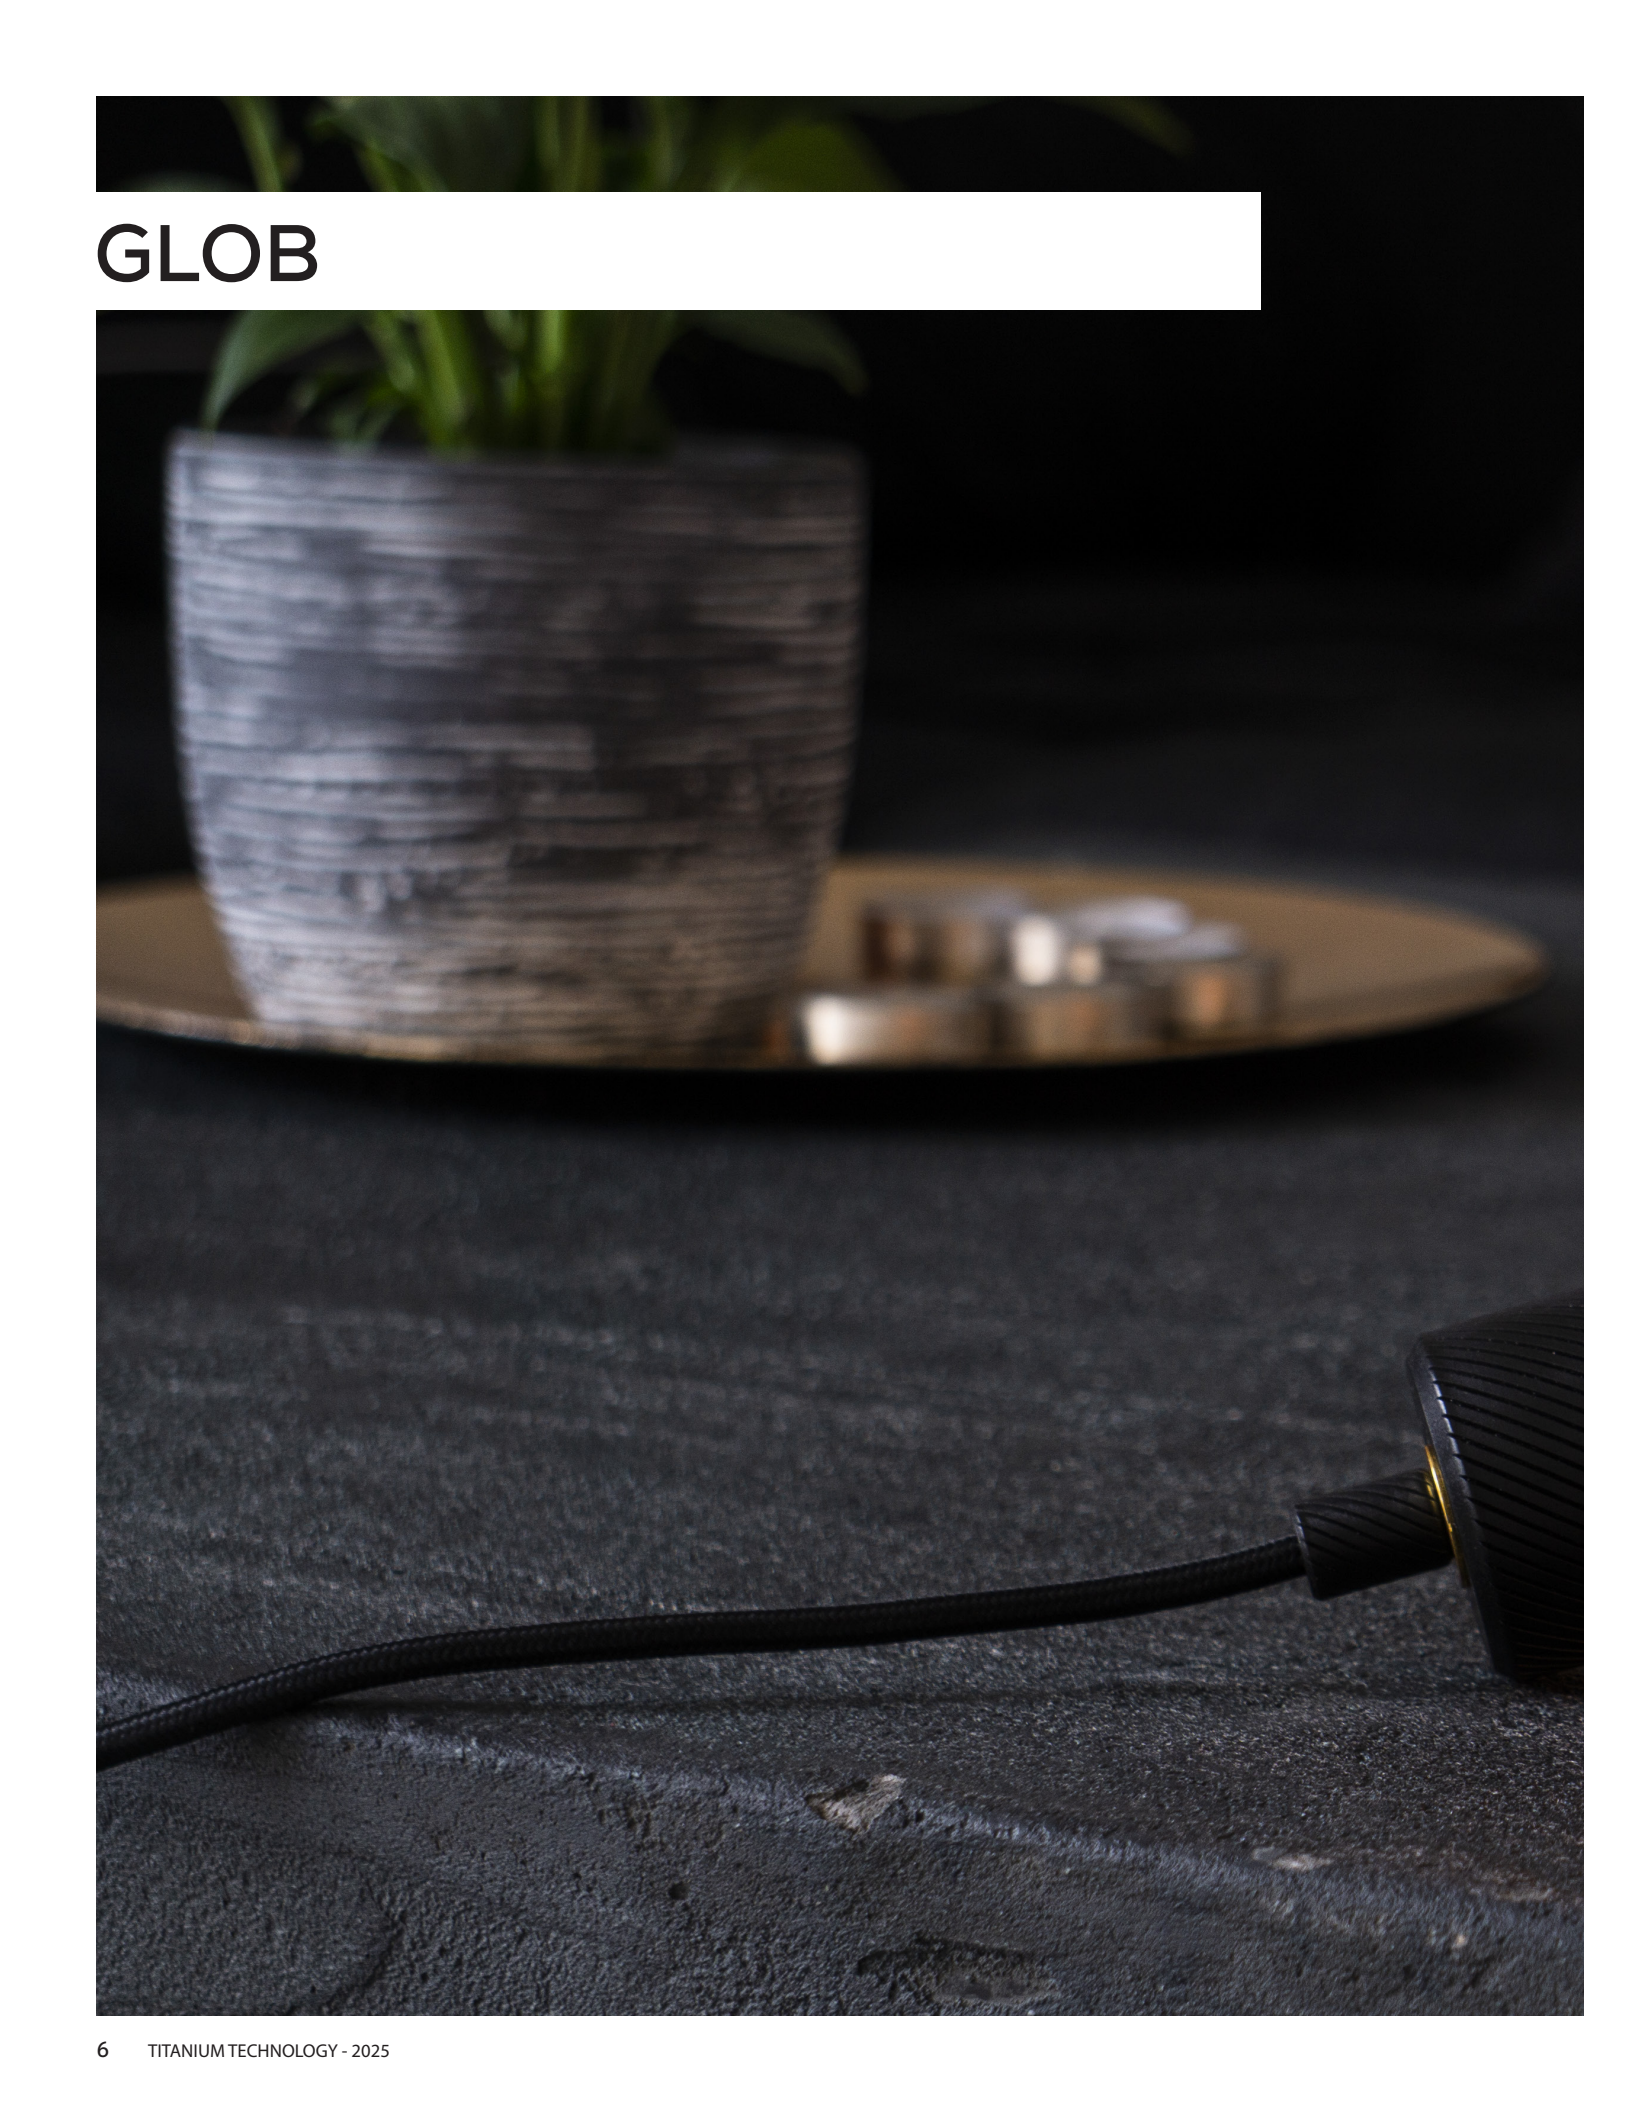

A dark, moody photograph. In the background, a potted plant with green leaves sits in a grey, textured pot on a round, metallic tray. In the foreground, a black cable with a textured, braided appearance lies on a dark, textured surface. The cable's connector, which has a gold-colored ring, is visible on the right side. The overall lighting is low, creating a sophisticated and modern aesthetic.

GLOB



GLOB



TT-GLOB-15006 Page 15

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15008 Page 16

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15042 Page 17

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	290	100



TT-GLOB-15043 Page 18

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15052 Page 19

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15030 Page 20

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	6	550	150



TT-GLOB-15056 Page 21

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15058 Page 22

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	230	200



TT-GLOB-15060 Page 23

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	6	250	300



TT-GLOB-15070 Page 24

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	125



TT-GLOB-15071 Page 25

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	230	200



TT-GLOB-15073 Page 26

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15075 Page 27

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15076 Page 28

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	125



TT-GLOB-15078 Page 29

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5,5	320	200



TT-GLOB-15079 Page 30

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	340	300



TT-GLOB-15031 Page 31

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	4,5	300	150



TT-GLOB-15453 Page 32

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	90



TT-GLOB-15454 Page 33

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	90



TT-GLOB-15580 Page 34

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	-	125



TT-GLOB-15581 Page 35

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	-	150



TT-GLOB-15460 Page 36

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	500	-



TT-GLOB-15462 Page 37

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15463 Page 38

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15464 Page 39

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15465 Page 40

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15466 Page 41

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15467 Page 42

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15468 Page 43

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	-



TT-GLOB-15469 Page 44

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
110	5,5	550	90



TT-GLOB-MR1 Page 45

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	320	180



TT-GLOB-AR1 Page 46

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	320	180



TT-GLOB-BR1 Page 47

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	5	270	180



TT-GLOB-F1 Page 48

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	0,2	-	35



TT-GLOB-F4 Page 49

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	0,2	-	35



TT-GLOB-T2 Page 50

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	0,8	-	60



TT-GLOB-T7 Page 51

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	1	-	125



TT-GLOB-T8 Page 52

Voltage (vAC)	Power (W/m)	Luminous flux (lm/m)	Diameter (mm)
120	1	-	125



TT-GLOB-10135 Page 53

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	1 x E26	-



TT-GLOB-10164 Page 54

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10165 Page 55

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-



TT-GLOB-10166 Page 56

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	7 x E26	-



TT-GLOB-10167 Page 57

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10168 Page 58

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-



TT-GLOB-10170 Page 59

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	3 x E26	-



TT-GLOB-10173 Page 60

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	5 x E26	-

TT-GLOB-10176 Page 61

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	57 max.	9 x E26	-

TT-GLOB-99996 Page 62

Voltage (vAC)	Power (W/m)	Socket type	Diameter (mm)
120	20 max.	1 x E26	-





- The 125 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15006

TT-GLOB-15008



- The 200 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.
- Lucentia: enhanced lighting.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE			
TT	-	SERIE	- MODEL
TT	-	GLOB	- 15008



- The R80 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	290
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	80 mm (3 1/8")
Height	100 mm (4")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15042

TT-GLOB-15043



- The R200 glass bulb from the Lucentia series evokes elegance and simplicity. A bubble of clear glass, symbol of purity, delicately envelops innovative technology. Her LED ring diffuses a warm 2200K light, offering a soft and welcoming atmosphere. With its E26 type tip, it integrates easily to any type of light fixture, bringing a contemporary touch to any space.

Lucentia: enhanced lighting.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200 mm (7 7/8")
Height	110 mm (4 1/4")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15043



- The Lucentia series evokes timeless elegance in a bulb. A bubble of interior smoked glass 125, delicate and captivating, captures imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	115mm (4 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15052

TT-GLOB-15030



- The Lucentia series evokes timeless elegance in a bulb. A bubble of interior smoked glass 125, delicate and captivating, captures imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	6w
Dimmable	Yes
Lumen	550
Kelvin	1900K
Angle	45°
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	150mm (5 7/8")
Height	200mm (7 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15030

TT-GLOB-15056



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 125, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15056

TT-GLOB-15058



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 200, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15058



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 300, delicate and mesmerizing, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	6w
Dimmable	Yes
Lumen	250
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	300mm (11 ³ / ₄ ")
Height	320mm (12 ⁵ / ₈ ")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15060

TT-GLOB-15070



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 125 twisted, delicate and captivating, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space.

Voltage	120vAC
Power	5.5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7⁄8")
Height	165mm (6 1⁄2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15070

TT-GLOB-15071



- The Lucentia series evokes timeless elegance in a lightbulb. A bubble of smoked glass 200 twisted, delicate and captivating, capture imagination with its mysterious brilliance. At the heart of this beauty lies a ring of LEDs, emitting a glow warm and comforting 1900K. E26 type tip provides compatibility universal, allowing this light bulb melting harmoniously in any space

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	230
Kelvin	1900K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15071

TT-GLOB-15073



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 125 line gilded glass bubble, symbol of refinement, capturing the radiance of the setting sun. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also illuminates minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15073

TT-GLOB-15075



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 200 line gilded glass bubble, symbol of refinement, capturing the radiance of the setting sun. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15075

TT-GLOB-15076



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 125 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5..5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15076



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 200 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5,5w
Dimmable	Yes
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	200mm (7 7/8")
Height	230mm (9")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15078

TT-GLOB-15079



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 300 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	5w
Dimmable	Yes
Lumen	340
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	300mm (11 ³ / ₄ ")
Height	320mm (12 ⁵ / ₈ ")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15079

TT-GLOB-15031



- The Lucentia series redefines luminous elegance with its masterpiece: the glass bulb. A 150 golden glass bubble, symbol of refinement, capturing the radiance of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	4,5w
Dimmable	Yes
Lumen	300
Kelvin	2200K
Angle	45°
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	150mm (5 7/8")
Height	200mm (7 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15031

TT-GLOB-15453



- The Lucentia series redefines luminous elegance with its frosted glass bulb. Symbol of refinement, she captures the softness of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	90mm (3 9/16")
Height	210mm (8 1/4")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15453

TT-GLOB-15454



- The Lucentia series redefines luminous elegance with its frosted glass bulb. Symbol of refinement, she captures the softness of the sun setting. At its heart, a delicate ring of LEDs of exquisite warmth at 2200K, providing soft light and enveloping, perfect for creating a soothing atmosphere. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia not only illuminates spaces, but also minds, creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	90mm (3 9/16")
Height	210mm (8 1/4")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15454

TT-GLOB-15580



- The Lucentia series evokes time-less elegance with its deep black bulb. At its center, a ring of LEDs with a captivating warmth of 2200K. This bulb provides soft light and enveloping, perfect for creating a soothing atmosphere. The E26 type tip offers universal compatibility, allowing this bulb to blend seamlessly into any space.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	125mm (4 7/8")
Height	165mm (6 1/2")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15580

TT-GLOB-15581



- The Lucentia series evokes timeless elegance with its deep black bulb. At its center, a ring of LEDs with a captivating warmth of 2200K. This bulb provides soft light and enveloping, perfect for creating a soothing atmosphere. The E26 type tip offers universal compatibility, allowing this bulb to blend seamlessly into any space.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26
Diameter	150mm (5 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15581

TT-GLOB-15460



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.



Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	500
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15460



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15462

TT-GLOB-15463



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.



Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	500
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15463

TT-GLOB-15464



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15464

TT-GLOB-15465



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.



Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	500
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15465



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.



Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15466

TT-GLOB-15467



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.



Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	500
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15467



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	550
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15468



- The Lucentia series redefines luminous elegance with its masterpiece: the light bulb in the form of drinking glasses. His creativity will make any space attractive and mysterious. At its heart, a delicate ring of exquisitely warm LEDs at 2200K, providing a soft, enchantress. Its E26 type tip ensures easy installation in any compatible light fixture. Lucentia illuminates the spirits creating an atmosphere of pure magic in every room.

Voltage	110vAC
Power	5,5w
Dimmable	Yes
Lumen	500
Kelvin	2200K
CRI	90
Lifetime	20 000 Hours
Socket Type	E26

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	15469



- The Lucentia series evokes timeless elegance with its deep black metal bulb. At its center is a captivatingly warm 2200K LED ring. This bulb provides a soft, enveloping light, perfect for creating a soothing ambiance. The E26 base offers universal compatibility, allowing this bulb to blend seamlessly into any space.

Voltage	120vAC
Power	5w
Gradable	Oui
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	15 000 Hours
Diameter	180mm (7 1/8")
Height	200mm (7 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	MR1



- The Lucentia series evokes timeless elegance with its deep black metal bulb. At its center is a captivatingly warm 2200K LED ring. This bulb provides a soft, enveloping light, perfect for creating a soothing ambiance. The E26 base offers universal compatibility, allowing this bulb to blend seamlessly into any space.

Voltage	120vAC
Power	5w
Gradable	Oui
Lumen	320
Kelvin	2200K
CRI	90
Lifetime	15 000 Hours
Diameter	180mm (7 1/8")
Height	200mm (7 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	AR1



- The Lucentia series evokes timeless elegance with its unique bamboo bulb. At its center is a ring of captivatingly warm 2200K LEDs. This bulb provides a soft, enveloping light, perfect for creating a soothing ambiance. The E26 base offers universal compatibility, allowing this bulb to blend seamlessly into any space.

Voltage	120vAC
Power	5w
Gradable	Oui
Lumen	270
Kelvin	2200K
CRI	90
Lifetime	15 000 Hours
Diameter	180mm (7 1/8")
Height	200mm (7 7/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	BR1



- The Lucentia series redefines luminous elegance with its masterpiece: the bulb that creates a vibrant, dancing flame effect. Its creativity will make any space attractive and mysterious. It delivers a soft 1800K light. Its E26 base ensures easy installation in any compatible fixture. Lucentia illuminates the mind, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	0,2w
Gradable	Oui
Kelvin	1800K
Lifetime	15 000 Hours
Diameter	35mm (1 3/8")
Height	95mm (3 3/4")
Socket type	E27

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	F1



- The Lucentia series redefines luminous elegance with its masterpiece: the bulb that creates a vibrant, dancing flame effect. Its creativity will make any space attractive and mysterious. It delivers a soft 1800K light. Its E26 base ensures easy installation in any compatible fixture. Lucentia illuminates the mind, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	0,2w
Gradable	Yes
Kelvin	1800K
Lifetime	15 000 Hours
Diameter	35mm (1 3/8")
Height	110mm (4 5/16")
Socket type	E27

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	F4

TT-GLOB-T2



- The Lucentia series redefines luminous elegance with its masterpiece: the frosted glass bulb that houses a vibrant, dancing flame at its center. Its creativity will make any space attractive and mysterious. It emits a soft 1800K light. Its E26 base ensures easy installation in any compatible fixture. Lucentia illuminates the mind, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	0,8w
Gradable	Yes
Kelvin	1800K
Lifetime	15 000 Hours
Diameter	60mm (2 3/8")
Height	108mm (4 1/4")
Socket type	E27

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	T2



- The Lucentia series redefines luminous elegance with its masterpiece: the smoked glass bulb that houses a vibrant, dancing flame at its center. Its creativity will make any space attractive and mysterious. It emits a soft 1800K light. Its E26 base ensures easy installation in any compatible fixture. Lucentia illuminates the mind, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	1w
Gradable	Oui
Kelvin	1800K
Lifetime	15 000 Hours
Diameter	125mm (4 ¹⁵ / ₁₆ "
Height	160mm (6 ⁵ / ₁₆ "
Socket type	E27

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	T7



- The Lucentia series redefines luminous elegance with its masterpiece: the smoked glass bulb that houses a vibrant, dancing flame at its center. Its creativity will make any space attractive and mysterious. It emits a soft 1800K light. Its E26 base ensures easy installation in any compatible fixture. Lucentia illuminates the mind, creating an atmosphere of pure magic in every room.

Voltage	120vAC
Power	1w
Gradable	Oui
Kelvin	1800K
Lifetime	15 000 Hours
Diameter	125mm (4 15/16")
Height	160mm (6 5/16")
Socket type	E27

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	T8



- Discover the canopy, a essential element of the Lucentia series. Measuring 3 meters in length, it can be adjusted according to your needs. Equipped with an E26 neck compatible with bulbs from the series, it combines functionality and aesthetics to illuminate your space with elegance.

Voltage	120vAC
Power	57w max.
Socket Type	1 x E26
Cable Type	1 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50mm x 80mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10135



- The beautiful three-branched canopy from the Lucentia series offers timeless elegance. With a length of 3 meters, it easily adapts to any space. Its adjustable design allows for optimal flexibility. Finished with an E26 neck, it gracefully accommodates the series' bulbs, adding a touch of sophistication to every room.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50mm x 80mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10164

TT-GLOB-10165




- Discover the magnificent canopy five-pointed series Lucentia. Measuring 3 meters in length, it adapts perfectly to your needs thanks to its adjustability. Its elegant design ends with an E26 neck compatible with bulbs in the series. A perfect combination of functionality and aesthetics to illuminate your space with style.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10165

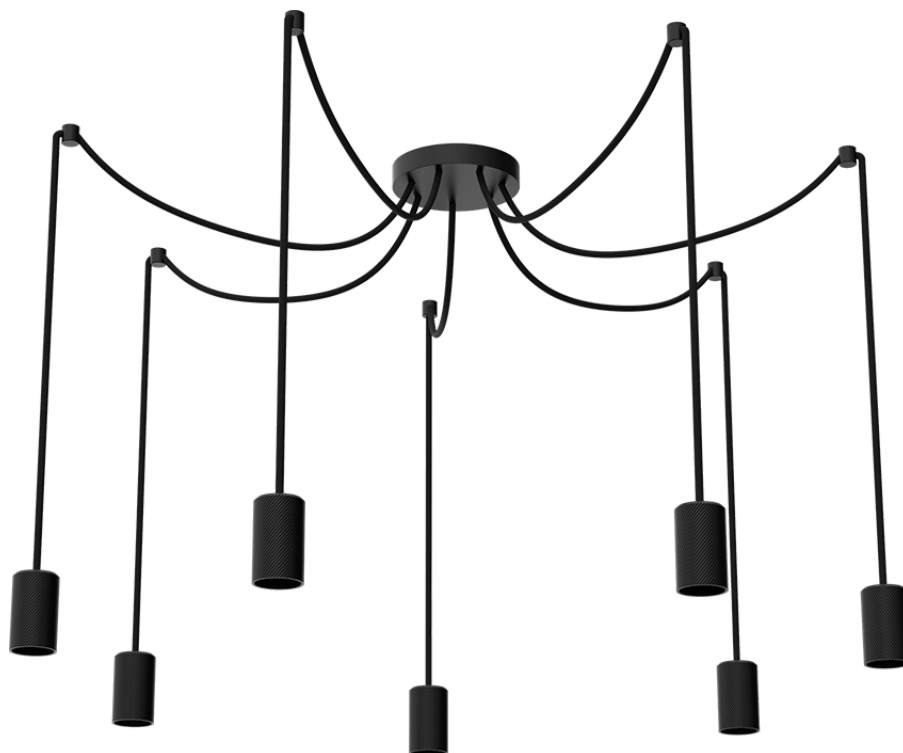


- The seven-branched canopy of the Lucentia series offers contemporary elegance. With its 3 meters of adjustable length, it adapts perfectly to any space. Its minimalist design highlights every detail. Finished with an E26 neck, it easily accepts bulbs from the series, illuminating your interior with style.

Voltage	120vAC
Power	57w max.
Socket Type	7 x E26
Cable Type	7 x 3m
Colour	Black
Canopy Size	Ø120mm x 25mm (4 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10166

TT-GLOB-10167

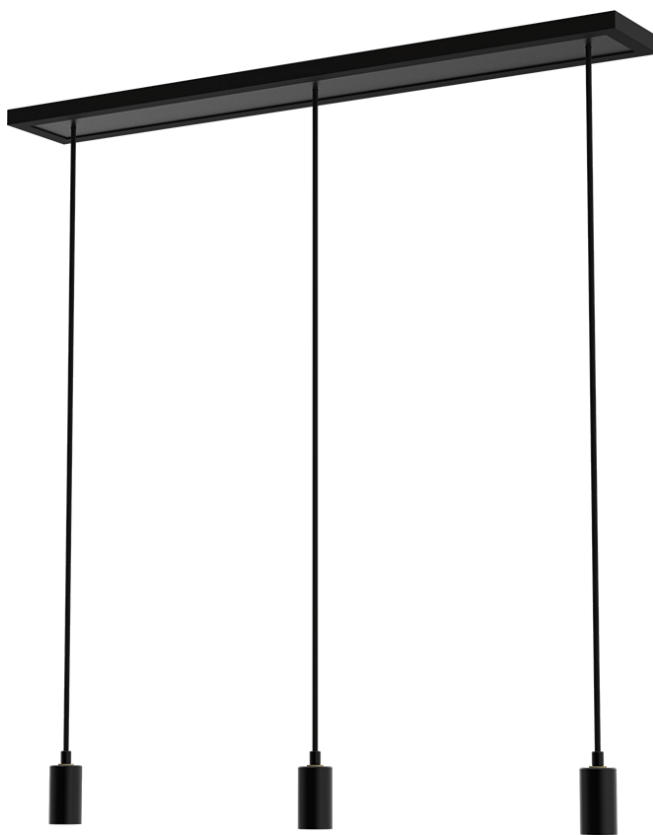


- The Lucentia series offers a rectangular canopy with three branches 3 meters long, adjustable according to needs. Its elegant design ends with an E26 neck compatible with the bulbs of the series, offering a luminous solution versatile and aesthetic for any space.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 1,5m
Colour	Black
Canopy Size	990mm x 150mm x 25mm (39" x 5 7/8" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10167

TT-GLOB-10168

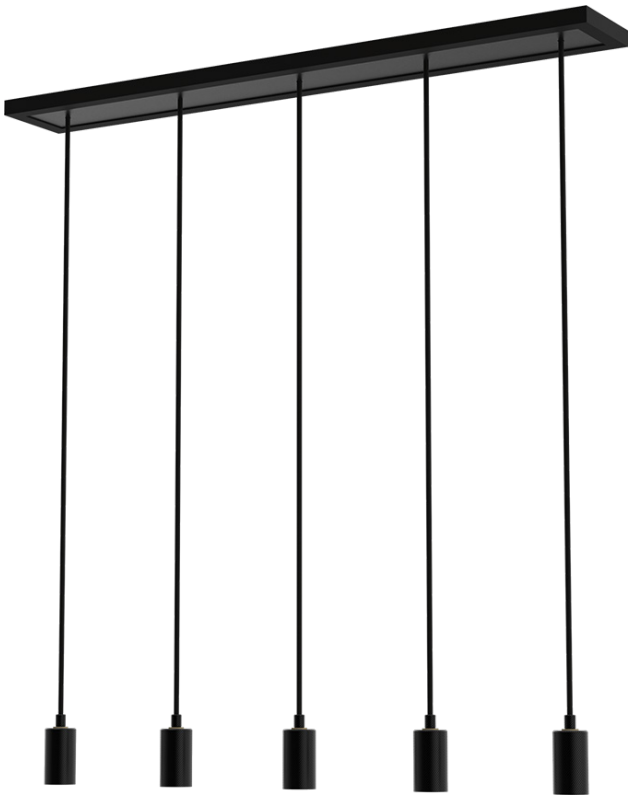

- The rectangular canopy with five branches from the Lucentia series offers contemporary elegance. Measuring 3 meters long, it easily adapts to various spaces. Its E26 neck allows the use of compatible bulbs, thus harmonizing the lighting with the style of the series. Its adjustability ensures an arrangement perfect as needed.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 1,5m
Colour	Black
Canopy Size	990mm x 150mm x 25mm (39" x 5 7/8" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10168

TT-GLOB-10170



- Discover the superb square canopy with three branches from the Lucentia series. With its 3 meters of adjustable length according to your needs, it offers unparalleled elegance and functionality. Featuring an E26 neck compatible with series bulbs, it will illuminate your space with style and sophistication.

Voltage	120vAC
Power	57w max.
Socket Type	3 x E26
Cable Type	3 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 ³ / ₄ " x 12 ³ / ₄ " x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 ¹ / ₈ ")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10170

TT-GLOB-10173



- The square canopy with five branches of the series Lucentia offers contemporary elegance. Measuring 3 meters long, it easily adjusts according to the needs. Its modern design is completed with an E26 neck, compatible with bulbs in the range. A perfect fusion of functionality and style for any space.

Voltage	120vAC
Power	57w max.
Socket Type	5 x E26
Cable Type	5 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 3/4" x 12 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10173

TT-GLOB-10176



- Discover the magnificent nine-branched square canopy from the Lucentia series. Measuring 3 meters long, it adapts to your needs thanks to its flexible adjustment. Its elegant design ends with an E26 neck compatible with bulbs in the series. A perfect fusion of functionality and contemporary aesthetics.

Voltage	120vAC
Power	57w max.
Socket Type	9 x E26
Cable Type	9 x 1,5m
Colour	Black
Canopy Size	325 x 325 x 25mm (12 3/4" x 12 3/4" x 1")
Socket Size	Ø50 x 80 mm (Ø 2" x 3 1/8")

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	10176

TT-GLOB-99996



- Discover the magnificent cube lamp holder from the Lucentia series. Its elegant design with an E26 neck compatible with bulbs in the series. Its sleek design allows you to transform each of our globs into a work of art. A perfect fusion of functionality and contemporary aesthetics.

Voltage	120vAC
Power	20w max.
Socket Type	E26
Cable Type	1,5m cable with switch
Colour	Black
Size	120 x 120 x 120mm (1" x 1" x 1")
Weight	800 grams

PRODUCT CODE

TT	-	SERIE	-	MODEL
TT	-	GLOB	-	99996

ALUMINUM PROFILE



Credit photo: Maison Profab



SURFACE



Credit photo: Cuisines Simard




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-01-3000 Page 71



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-04-3000 Page 72



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-06-3000 Page 73




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-07-3000 Page 74



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-09-3000 Page 75



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-10-3000 Page 76



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-16-3000 Page 77



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-21-3000 Page 78



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-22-3000 Page 79





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-23-2000 Page 80




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-24-2000 Page 81



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-25-3000 Page 82

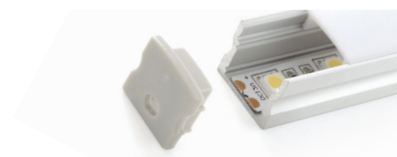

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-32-2000 Page 83



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-38-3000 Page 84



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-2000 Page 85



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-40-2000-BK Page 86




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-52-3000 Page 87



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-64-3000 Page 88






Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-65-3000 Page 89



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-66-2000 Page 90

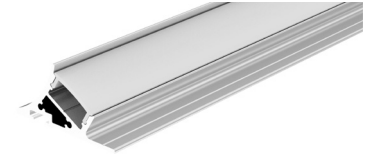

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-68-3000 Page 91



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-76-3000 Page 92



Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-80-2000 Page 93



PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/feet 5W/feet 28/6 H 527 lm/feet 6,25W/feet *24v only 28/12 456 lm/feet 9W/feet *24v only 35/3 45 lm/feet 1.5W/feet 35/6 120 lm/feet 3W/feet 22/15 425 lm/feet 9W/feet *24v only 50/3 4,5W/feet DX/24 DIGITAL DMX *24v only	27 2700K 30 3000K 35 3500K 40 4000K 60 6000K RE RED GR GREEN BL BLUE AM AMBER PK PINK *28/6 only CB CYAN *28/6 only OR ORANGE *28/6 only UV *28/6 only RGB *50/3, 28/6 or 35/6 only RGBWW *50/3 only RGBNW *50/3 only RGBCW *50/3 only RGBCCT *50/3 only	20 65	12 24	Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum DCxxxx 12 inchs minimum	empty No lead out Hxxxx 12 inchs minimum DCxxxx 12 inchs minimum	NE No end cap EC With end cap	NC No Clip xC x=QTE	n/a No psu P Plug-in CV Dimmable CV-BOX Dimmable with box CV67 IP67 psu 120V No dimmable 120v psu 347V No dimmable 347V PSU 010 0-10v PSU

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-01-3000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

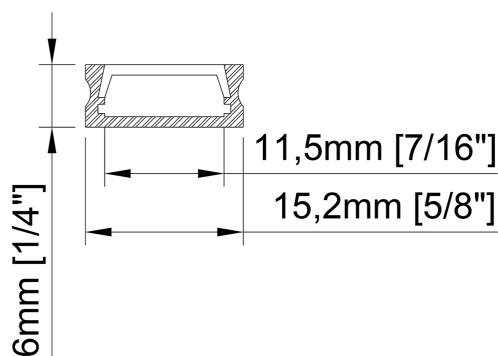

Size	15,2mm x 6mm x 3000mm $5/8" \times 1/4" \times 118 \frac{1}{8}"$
Lenght	3000mm $118 \frac{1}{8}"$
Internal width	11,5mm $7/16"$
Cover	Opal

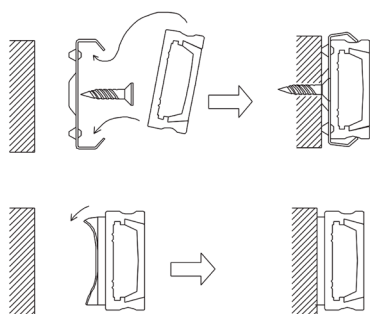

Accessories



TT-01-CLIP



TT-01-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	01	-	3000	-	O


TT-04-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

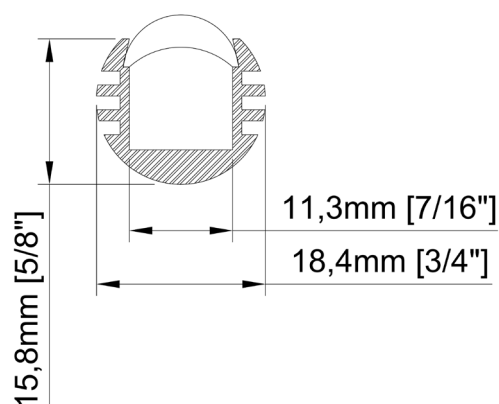

Size	Ø18,4mm x 3000mm Ø¾" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,3mm 7/16"
Cover	Opal



Accessories



TT-04-CLIP



TT-04-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	04	-	3000	-	O


TT-06-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

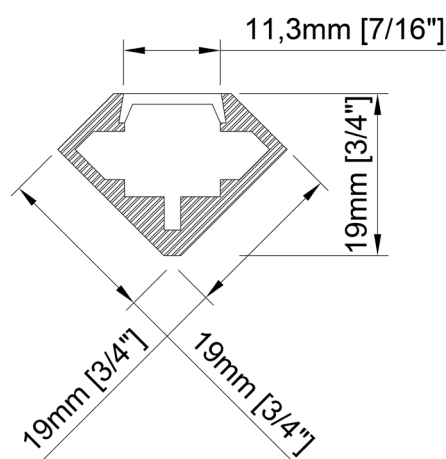

Size	18,4mm x 18,4mm x 3000mm $\frac{3}{4}'' \times \frac{3}{4}'' \times 118 \frac{1}{8}''$
Lenght	3000mm 118 $\frac{1}{8}''$
Internal width	14,1mm $\frac{9}{16}''$
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-06-CLITT-06-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	06	-	3000	-	O


TT-07-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

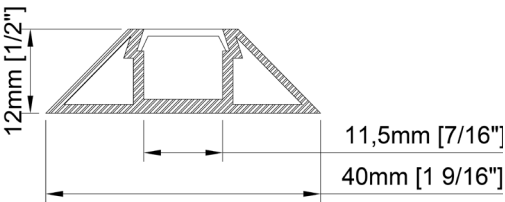

Size	40mm x 12mm x 3000mm 1 9/16" x 1/2" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	11,5mm 7/16"
Cover	Opal

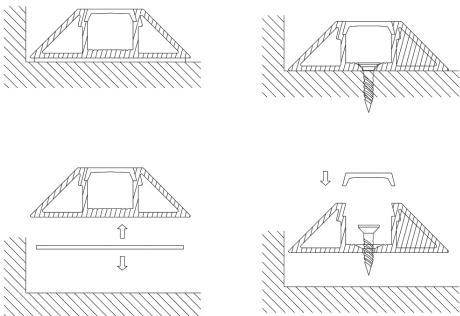


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	07	-	3000	-	O


TT-09-3000-O

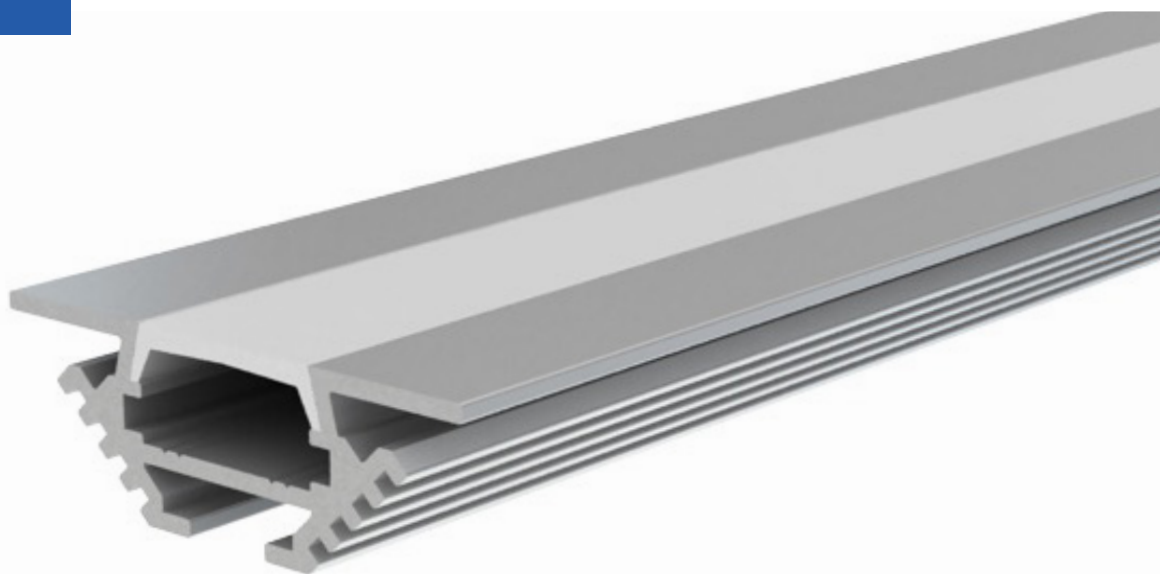

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118").

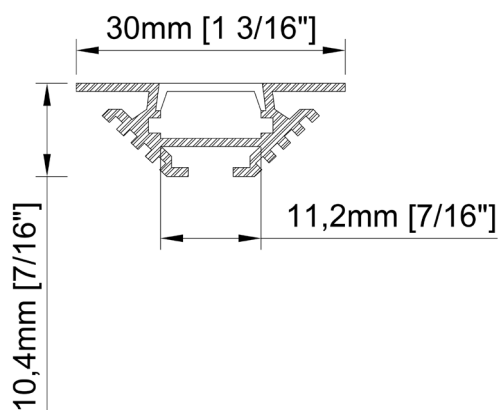

Size	30mm x 10,4mm x 3000mm $1\frac{3}{16}" \times \frac{7}{16}" \times 118\frac{1}{8}"$
Lenght	3000mm $118\frac{1}{8}"$
Internal width	11,2mm $\frac{7}{16}"$
Cover	Opal

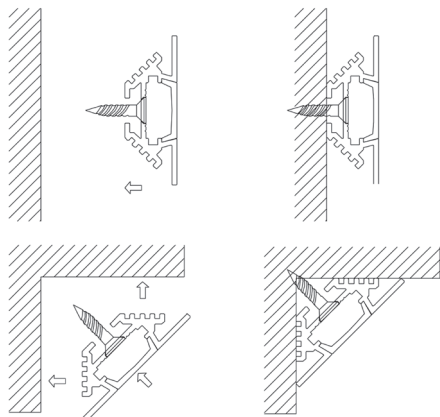

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	09	-	3000	-	O


TT-10-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 ").

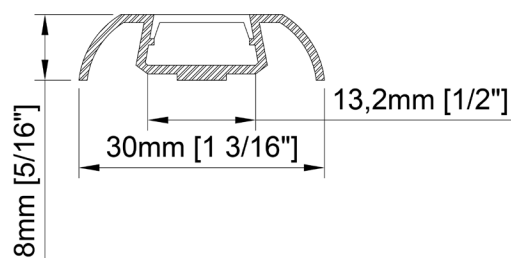

Size	30mm x 8mm x 3000mm $1\frac{3}{16}" \times \frac{5}{16}" \times 118\frac{1}{8}"$
Lenght	3000mm $118\frac{1}{8}"$
Internal width	13,2mm $\frac{1}{2}"$
Cover	Opal

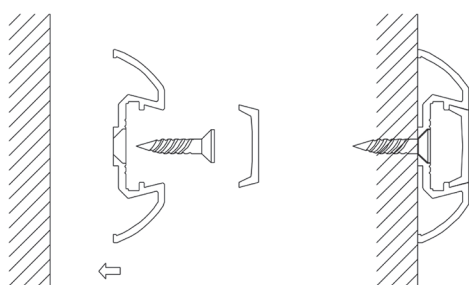

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	10	-	3000	-	O

TT-16-2000-O

- Aluminum profile for attaching a glass shelf of 8mm.
- Designed to cover the LED strips and diffuse the light in the glass.
- Designed to be wall mounted.
- Available in lengths 2000 mm (78³/₄").

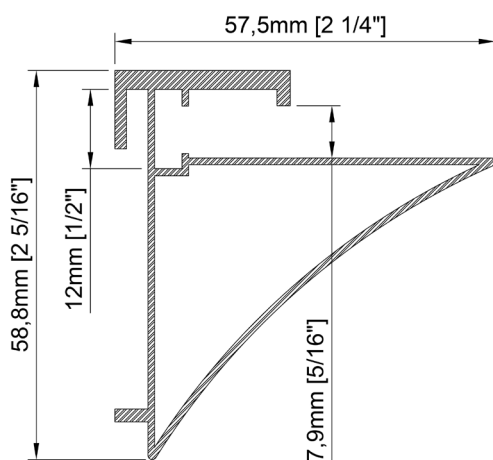

Size	57,5mm x 58,8mm x 2000mm 2 ¹ / ₄ " x 2 ⁵ / ₁₆ " x 78 ³ / ₄ "
Length	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	None

*Glass not include.

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	16	-	2000	-	O


TT-21-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

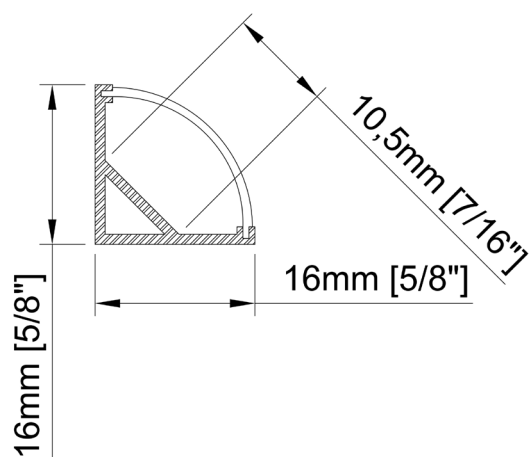

Size	16mm x 16mm x 3000mm $\frac{5}{8}$ " x $\frac{5}{8}$ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm $\frac{7}{16}$ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-21-CLIP




TT-21-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	21	-	3000	-	O

TT-22-3000-O

- Aluminum profile with clear acrylic.
- Designed to cover the LED ribbons and dissipate heat.
- Acrylic lens concentrates the light in a range of 30°
- Swivel attachment to guide the light.
- Available in lengths 3000 mm (118¹/₈").

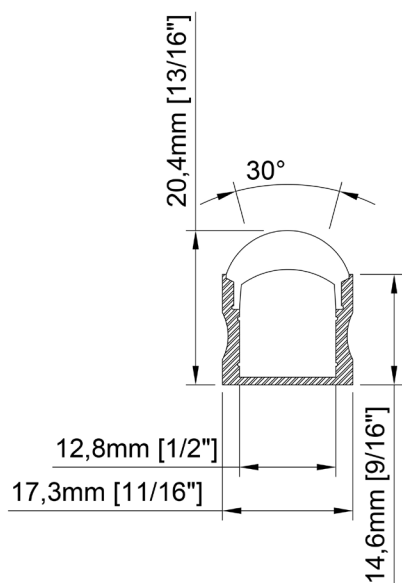


Size	20,4mm x 17,3mm x 3000mm $13/16" \times 11/16" \times 118 1/8"$
------	--

Lenght	3000mm $118 1/8"$
--------	----------------------

Internal width	12,8mm $1/2"$
----------------	------------------

Cover	Clear, 30° lens
-------	-----------------

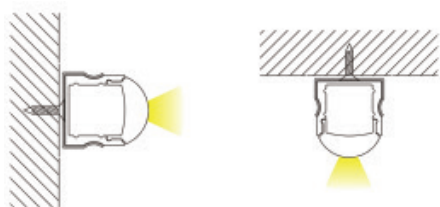

Accessories



TT-22-CLIP



TT-22-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	22	-	3000	-	O


TT-23-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

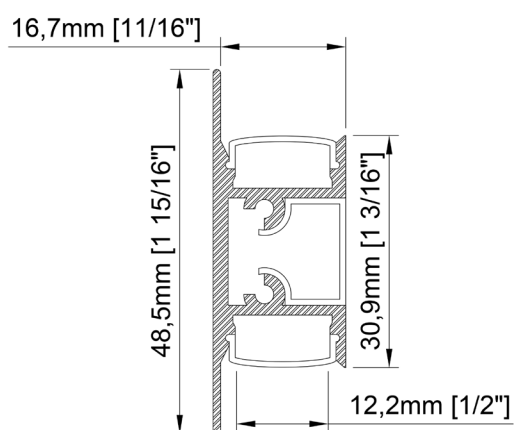

Size	48,5mm x 16,7mm x 2000mm $1\frac{15}{16}$ " x $1\frac{11}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	2 x 12,2mm 2 x $1\frac{1}{2}$ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-23-CLIP



TT-23-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	23	-	2000	-	O


TT-24-2000-O



- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

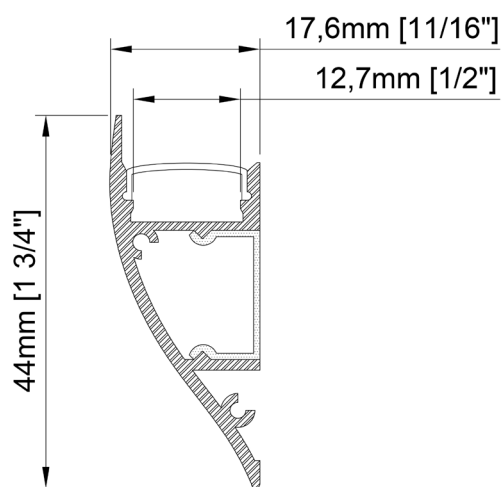

Size	44mm x 17,6mm x 2000mm 1 ³ / ₄ " x 11 ¹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12,7mm 1 ¹ / ₂ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser



Accessories



TT-24-CLIP



TT-24-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	24	-	2000	-	O


TT-25-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

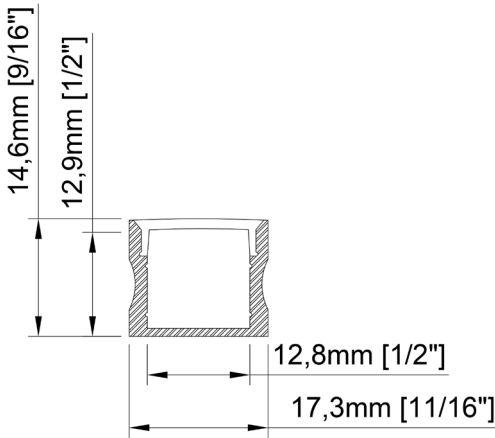

Size	17,3mm x 14,6mm x 3000mm 11/16" x 9/16" x 118 1/8"
Lenght	3000mm 118 1/8"
Internal width	12,8mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

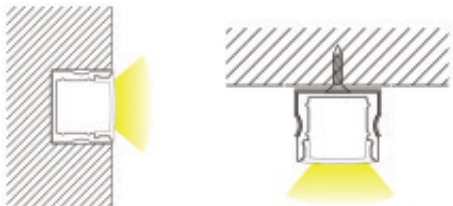

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	25	-	3000	-	O

TT-32-2000-O

- Aluminum profile with opal acrylic.
- Designed in flexible aluminum to conceal LED ribbons and dissipate heat on curved surfaces.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

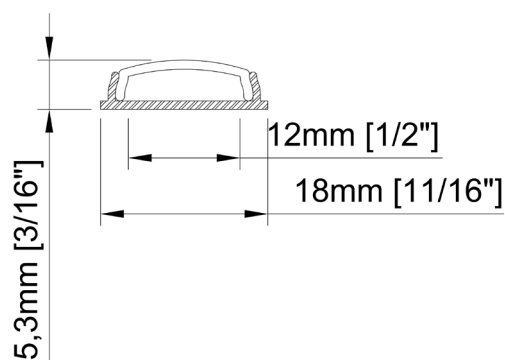

Size	18mm x 5,3mm x 2000mm $1\frac{1}{16}$ " x $\frac{3}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	12mm $\frac{1}{2}$ "
Cover	Opal PC diffuser

Accessories



TT-32-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	32	-	2000	-	O


TT-38-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

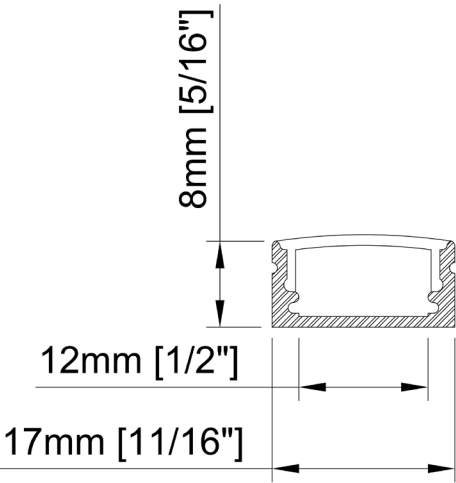

Size	17mm x 8mm x 3000mm 11/16" x 5/16" x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

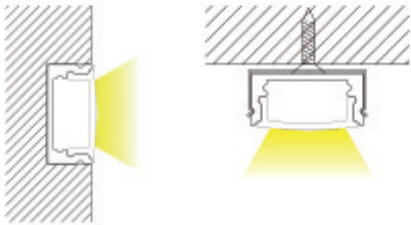

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	38	-	3000	-	O


TT-40-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

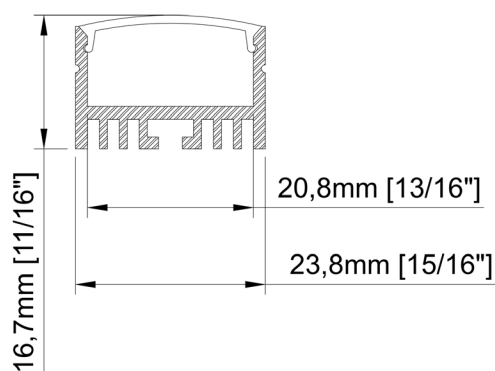

Size	23,5mm x 15mm x 2000mm $15/16" \times 5/8" \times 78^{3/4}"$
Lenght	2000mm $78^{3/4}"$
Internal width	20,4mm $13/16"$
Cover	PC diffused

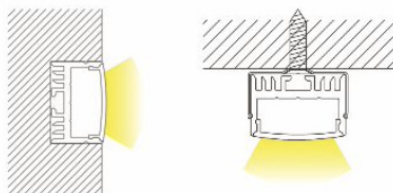

Accessories



TT-40-CLIP



TT-40-END



TT-40-SUSP


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	40	-	2000	-	O


TT-40-2000-O-BK



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

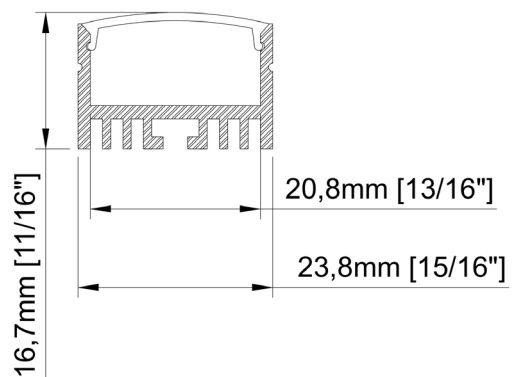

Size	23,8mm x 16,7mm x 2000mm $1\frac{5}{16}$ " x $1\frac{11}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	20,8mm $1\frac{3}{16}$ "
Cover	PC diffused

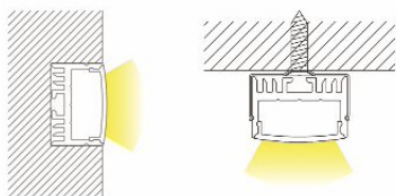

Accessories



TT-40-
CLIP



TT-40-
END-BK



TT-40-
SUSP


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	40	-	2000	-	O	-	BK


TT-52-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

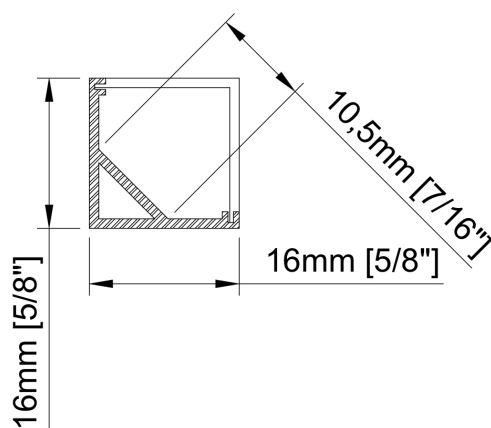

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Matte opal PMMA



Accessories



TT-52-CLIP



TT-52-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	52	-	3000	-	O

TT-64-3000-O



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

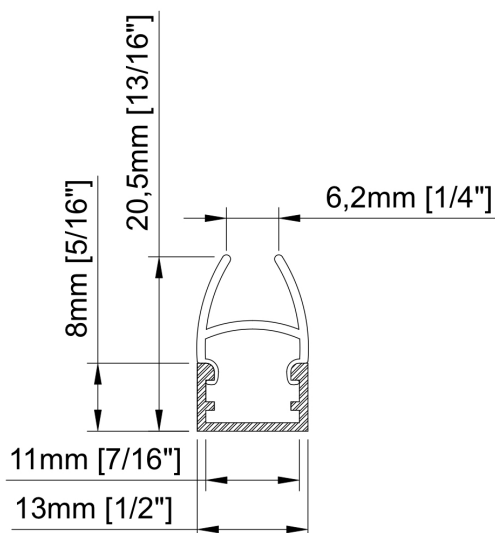

Size	13mm x 20,5mm x 3000mm $1/2" \times 13/16" \times 118\frac{1}{8}"$
Lenght	3000mm $118\frac{1}{8}"$
Internal width	11mm $7/16"$
Finish	BK - Black (n/a) Grey
Cover	PC diffused


*Glass not include.

PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	64	-	3000	-	O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm ($118\frac{1}{8}$ ").

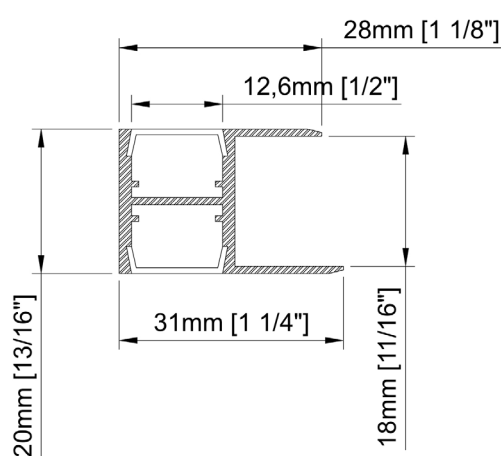

Size	31mm x 20mm x 3000mm $1\frac{1}{4}$ " x $\frac{13}{16}$ " x $118\frac{1}{8}$ "
Lenght	3000mm $118\frac{1}{8}$ "
Internal width	2 x 12,6mm 2 x $\frac{1}{2}$ "
Finish	BK - Black (n/a) Grey
Cover	PC diffused




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	65	-	3000	-	O


TT-66-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

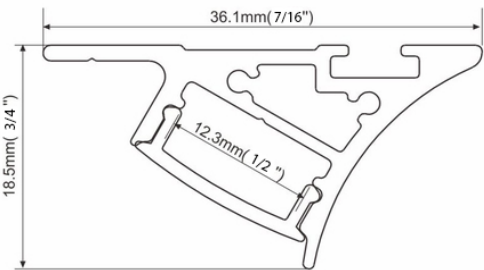

Size	31,6mm x 18,5mm x 2000mm 7/16" x 3/4" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12,3mm 1/2"
Cover	PC diffused



Accessories



TT-66-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	66	-	2000	-	O

TT-68-3000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

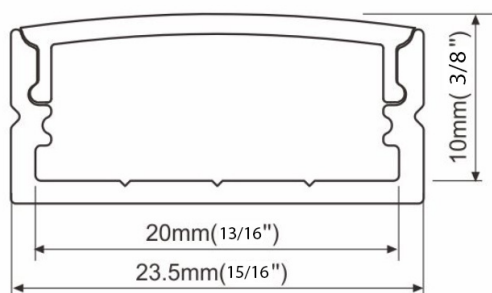


Size 23,5mm x 10mm x 3000mm
 $15/16'' \times 3/8'' \times 118\frac{1}{8}''$


Lenght 3000mm
 $118\frac{1}{8}''$

Internal width 20mm
 $13/16''$

Cover Matte opal PMMA

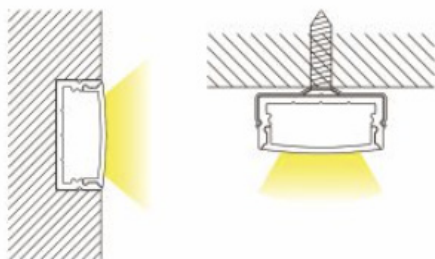

Accessories



TT-68-CLIP




TT-68-END

PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	68	-	3000	-	O

TT-76-3000-O

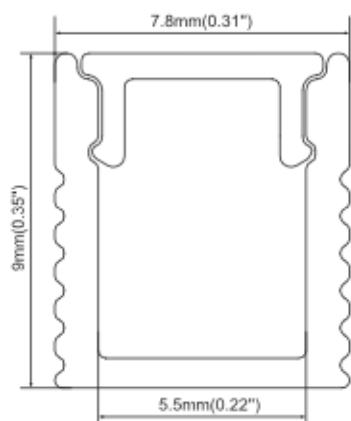

Size	7,8mm x 9mm x 3000mm $\frac{5}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	5,5mm $\frac{1}{4}''$
Cover	PC

Accessories



TT-76-CLIP




TT-76-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	76	-	3000	-	O


TT-80-2000-O

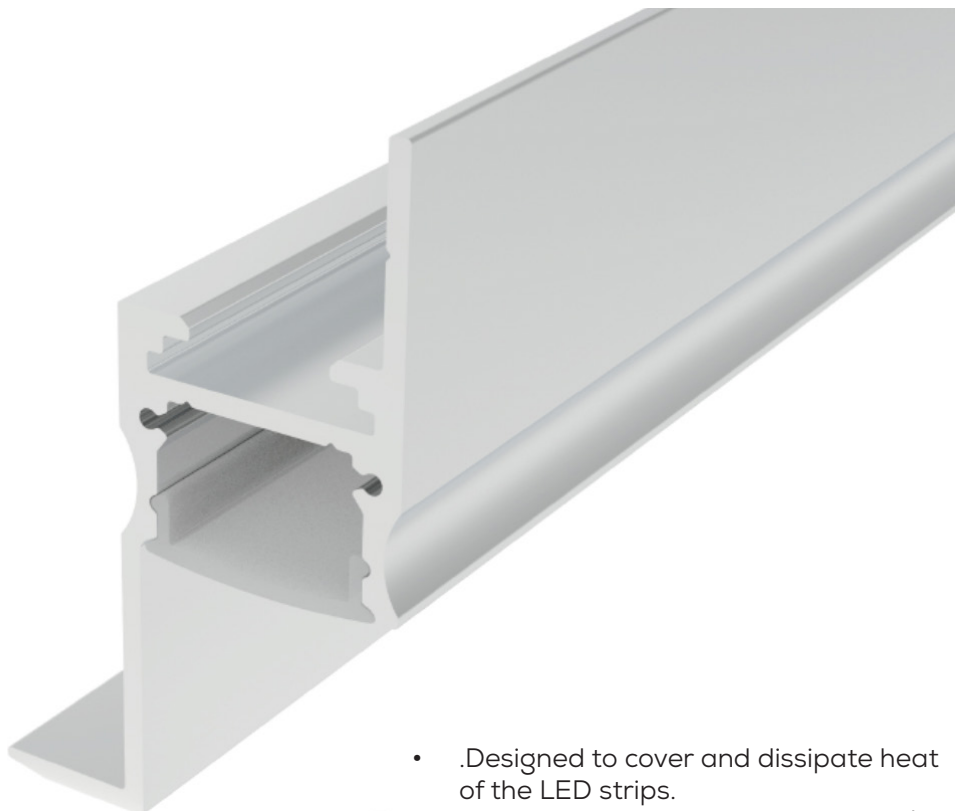

- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

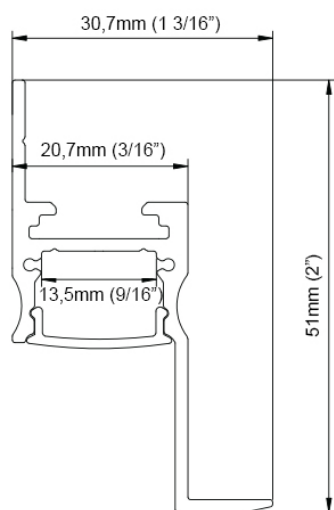

Size	20,7mm x 51mm x 2000mm ³ / ₁₆ " x 2" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,5mm ⁹ / ₁₆ "
Finish	White
Cover	PC



Accessories



TT-80-EXT



TT-80-EXT-90



TT-80-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	80	-	2000	-	O

RECESSED



Credit photo: Christian Marcoux



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-02-3000 Page 97



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-14-3000 Page 98



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-17-2500 Page 99



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-18-2500 Page 100



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-19-2000 Page 101




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-39-3000 Page 102



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-49-2000 Page 103



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-50-2000 Page 104



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-69-3000 Page 105



TT-74-3000 Page 106

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-79-3000 Page 107

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE

[illegible]

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TITANIUM

TECHNOLOGY


TT-02-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118 1/8").

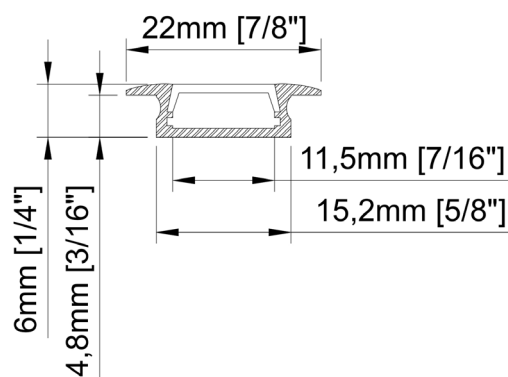

Size	15,2mm x 4,8mm x 3000mm $\frac{5}{8}'' \times \frac{3}{16}'' \times 118 \frac{1}{8}''$
Length	3000mm $118 \frac{1}{8}''$
Internal width	11,5mm $\frac{7}{16}''$
Cover	Opal

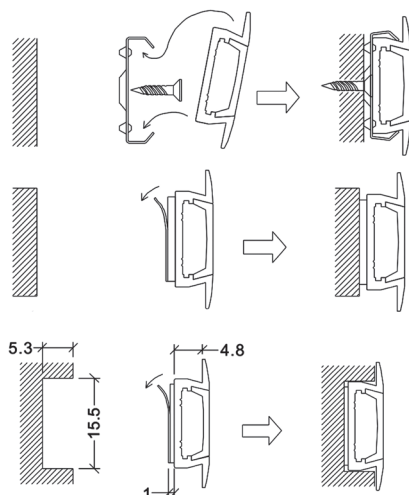

Accessories



TT-02-CLIP



TT-02-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	02	-	3000	-	O


TT-14-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

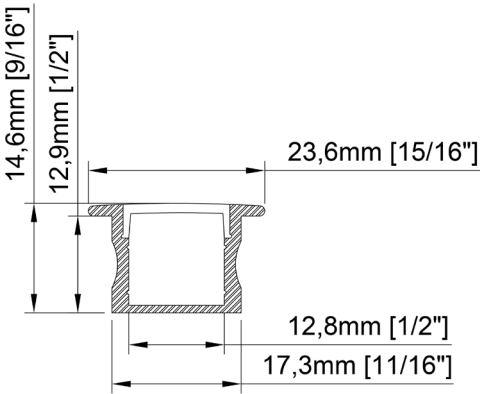

Size	17,3mm x 12,9mm x 3000mm 11/16" x 1/2" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12,8mm 1/2"
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

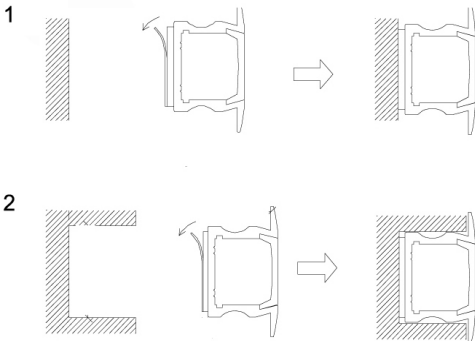

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	14	-	3000	-	O

TT-17-2500-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

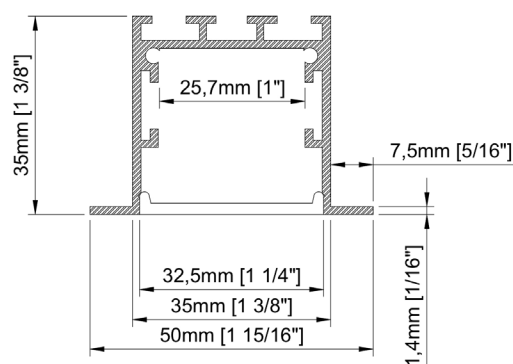


Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
------	--

Lenght	2500mm 98 ³ / ₈ "
--------	--

Internal width	25,7mm 1"
----------------	--------------

Cover	PC diffused
-------	-------------

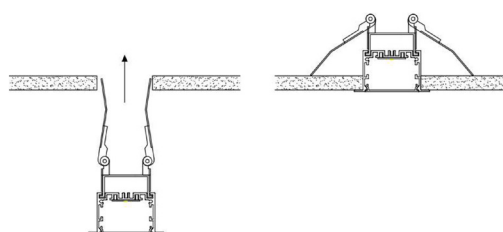

Accessories



TT-17-SNAP




TT-17-L



TT-17-T



TT-17-X




TT-17-I



TT-17-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	17	-	2500	-	O



TT-17-EXT



TT-17-EXT-90



TT-17-EXT-90IL




TT-17-EXT-60




TT-17-EXT-120

TT-18-2500-O

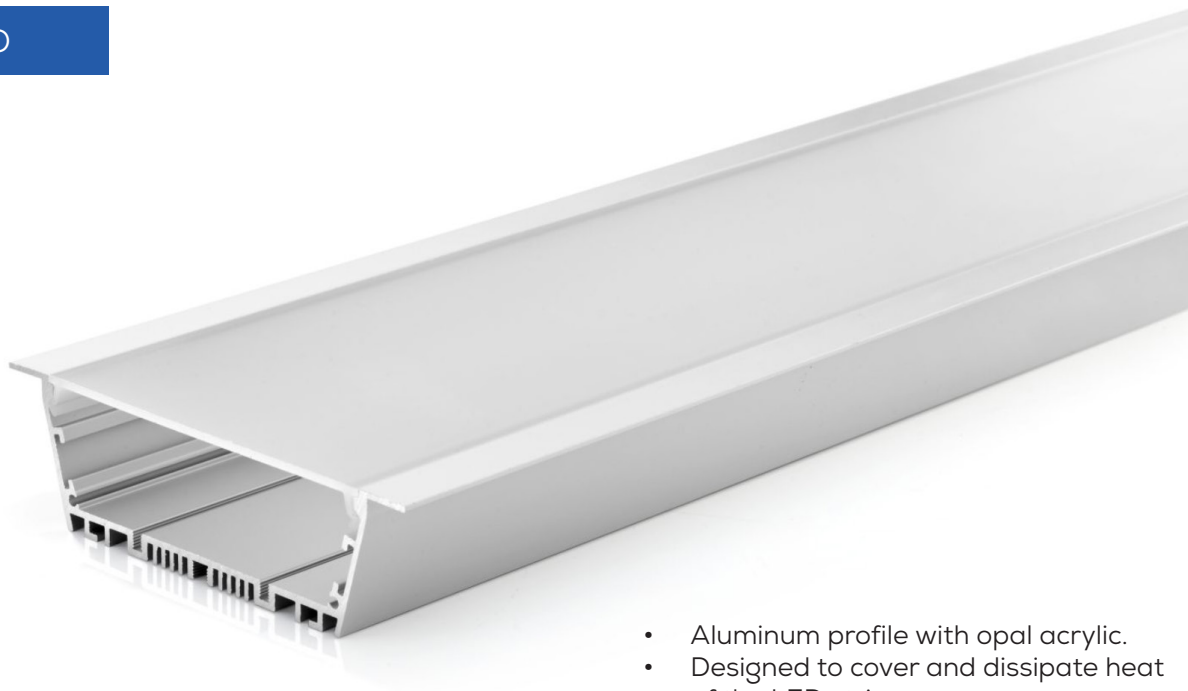

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

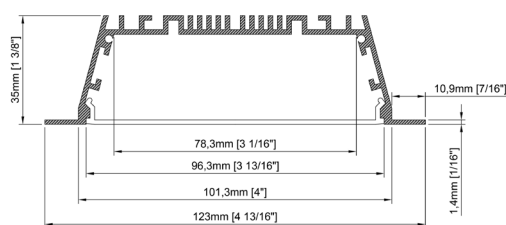


Size 123mm x 35mm x 2500mm
4⁷/₈" x 1¹/₂" x 98³/₈"

Length 2500mm
98³/₈"

Internal width 77,5mm
3"

Cover PC diffuse

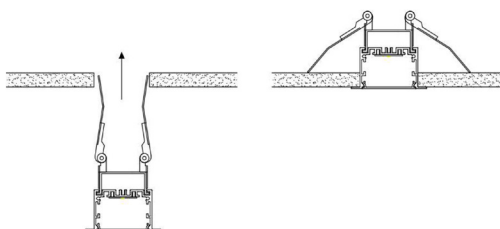

Accessories



TT-18-SNAP



TT-18-L



TT-18-T




TT-18-X



TT-18-I



TT-18-END



TT-18-EXT



TT-18-EXT-90



TT-18-EXT-90IL



TT-18-EXT-60



TT-18-EXT-120


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	18	-	2500	-	O

TT-19-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

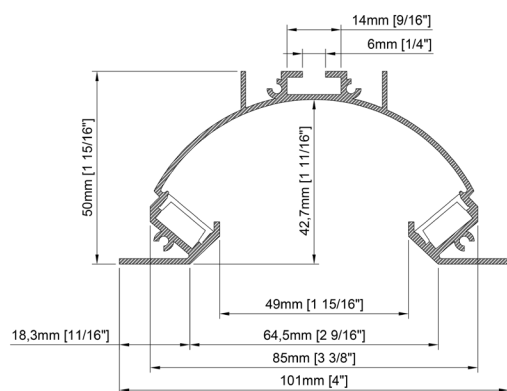


Size 101mm x 50mm x 2000mm
4" x 2" x $78\frac{3}{4}$ "

Lenght 2000mm
 $78\frac{3}{4}$ "

Internal width 2 x 12mm
2 x $1\frac{1}{2}$ "

Cover Semi clear PMMA

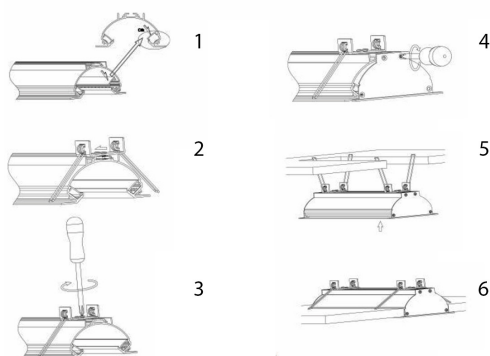

Accessories



TT-19-SNAP




TT-19-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	19	-	2000	-	O


TT-39-3000-O

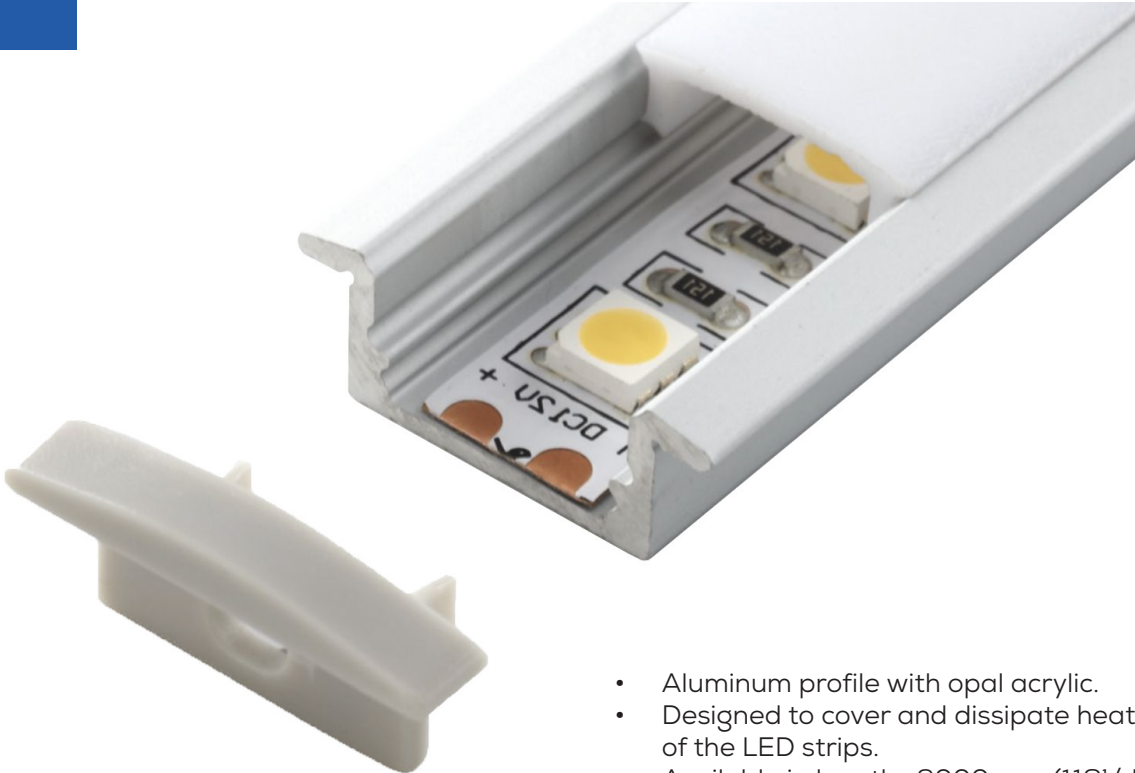

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

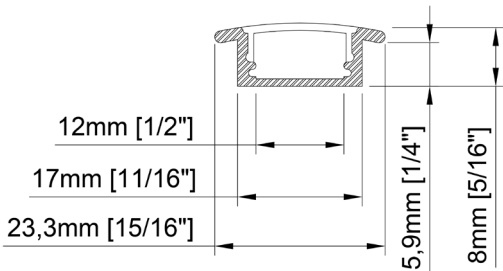

Size	23,3mm x 5,9mm x 3000mm ¹⁵ / ₁₆ " x ¹ / ₄ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm ¹ / ₂ "
Cover	Matte Opal PMMA Clear PMMA Black PMMA PC diffuser

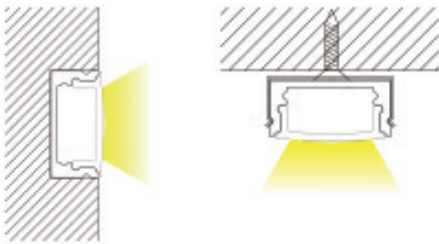


Accessories




PRODUCT CODE						
TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	39	-	3000	-	O


TT-49-2000-O

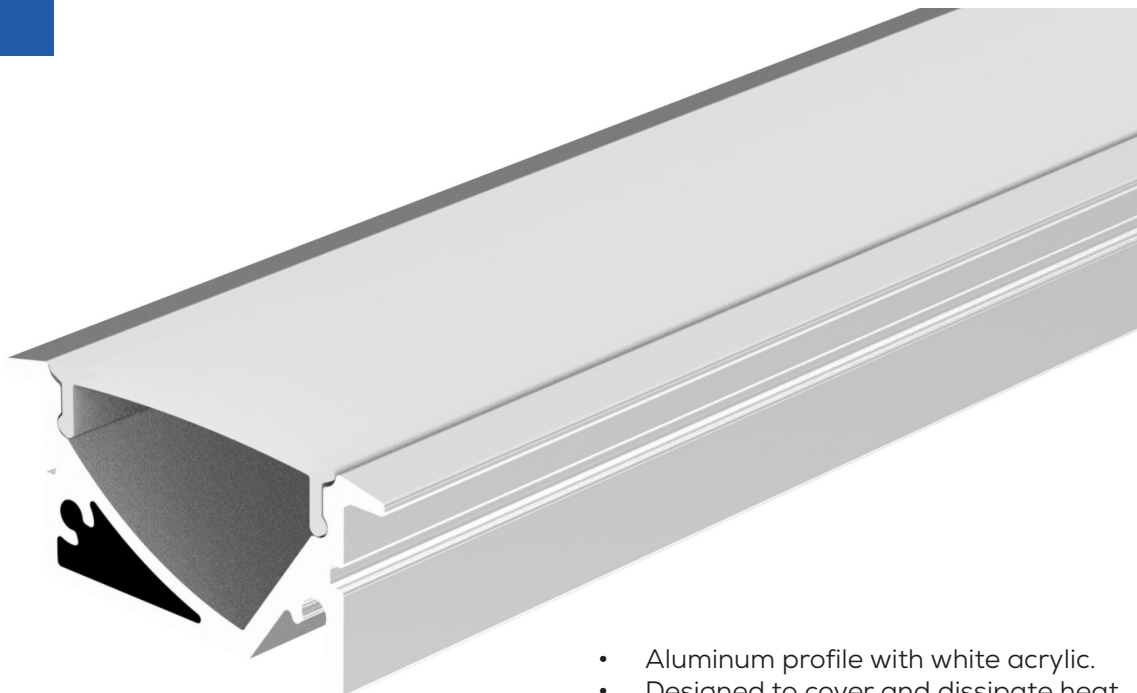

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

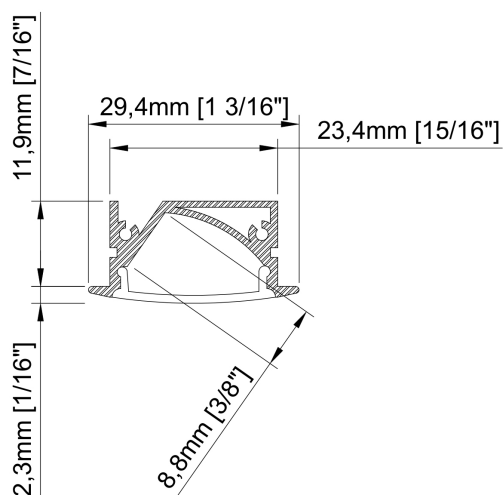

Size	29,4 x 14,2 x 2000 mm $1\frac{3}{16}$ " x $\frac{9}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000 mm $78\frac{3}{4}$ "
Internal width	8,8 mm $\frac{3}{8}$ "
Cover	PC diffused



Accessories



TT-49-SNAP



TT-49-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	49	-	2000	-	O


TT-50-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

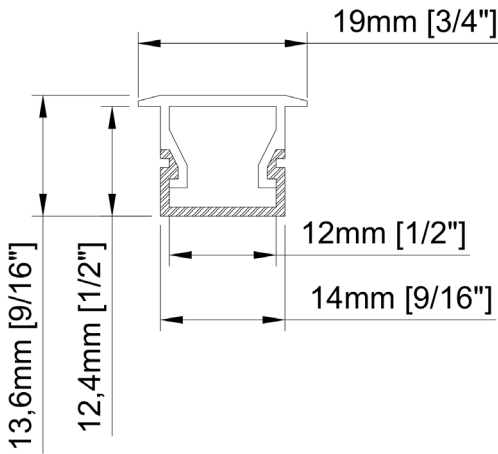

Size	19mm x 13,6mm x 2000mm 3/4" x 9/16" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

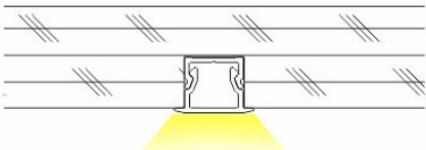

Accessories



TT-50-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	50	-	2000	-	O


TT-69-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

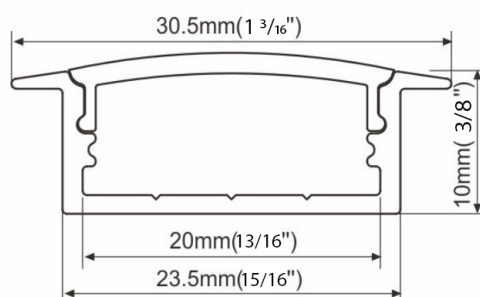

Size	30,5mm x 10mm x 3000mm 1 ³ / ₁₆ " x 3/ ₈ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	20mm 1 ³ / ₁₆ "
Cover	Matte Opal PMMA

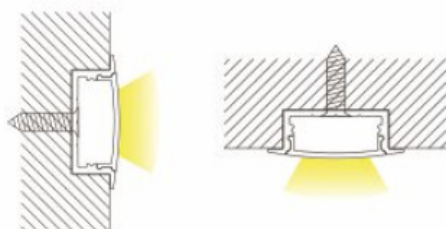

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	69	-	3000	-	O

TT-74-3000-O



- Designed to use with a 5mm LED strip.

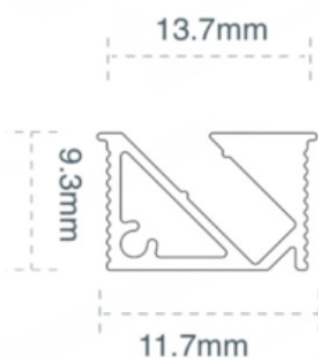

Size	13,7mm x 9,3mm x 3000mm $\frac{9}{16}" \times \frac{3}{8}" \times 118\frac{1}{8}"$
Lenght	3000mm $118\frac{1}{8}"$
Internal width	11,7mm $\frac{7}{16}"$
Color	WH - White BK - Black
Cover	Silicone

Accessories



TT-74-
END-WH



TT-74-
END-BK


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	COLOR
TT	-	74	-	3000	-	O	-	WH
TT	-	74	-	3000	-	O	-	


TT-79-3000-O



- Designed to use with the TT-2025FR-L600 LED strip.
- Available in lengths 3000 mm (118¹/₈").

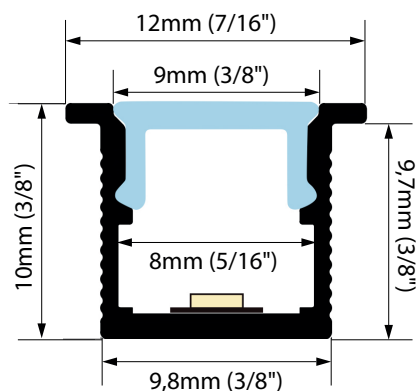

Size	10mm x 9,8mm x 3000mm $\frac{3}{8}" \times \frac{3}{8}" \times 118\frac{1}{8}"$
Lenght	3000mm 118 ¹ / ₈ "
Finish	AL - Aluminium BK - Black WH- White
Cover	PC

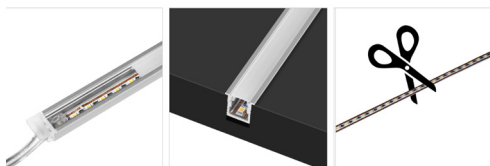

Accessories



TT-79-CLIP



TT-79-END



TT-79-END-BK



TT-79-END-WH

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	79	-	3000	-	O	-	BK
TT	-	79	-	3000	-	O	-	

PENDANT



Credit photo: Volkswagen St-Nicolas



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-13-3000 Page 113



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-15-3000 Page 114



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-15-3000-BK Page 115




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-20-2000 Page 116



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-31-2500 Page 117



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-37-2500 Page 118



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-46-2500 Page 119



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-47-2500 Page 120



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-48-2500 Page 121



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-48-2500-BK Page 122





Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-53-2000 Page 123



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-54-2000-BK Page 124




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-54-2000-WH Page 125



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8

TT-R25-600 Page 126




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16

TT-R25-900 Page 127




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50

TT-R25-1270 Page 128




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8

TT-R25-1800 Page 129

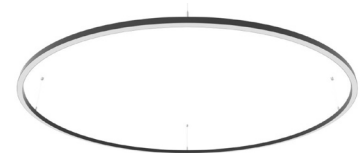

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 23 5/8

TT-R30-600 Page 130




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16

TT-R30-900 Page 131



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 47 1/4


TT-R30-1200 Page 132

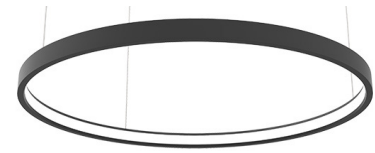




TT-R50-900 Page 133

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 35 7/16




TT-R50-1270 Page 134

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 50

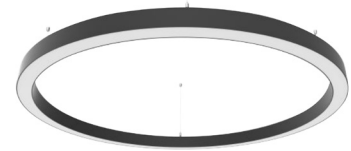

TT-R50-1800 Page 135

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	90	2700 ~ 6000	Ø 70 7/8



TT-CANOPY-01 Page 136

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 11



TT-CANOPY-02 Page 137

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	Ø 13



TT-CANOPY-03 Page 138

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-



TT-CANOPY-04 Page 139

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
-	-	-	-	-



PRODUCT BUILDER CODE


[illegible]

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

TT-13-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈ ").

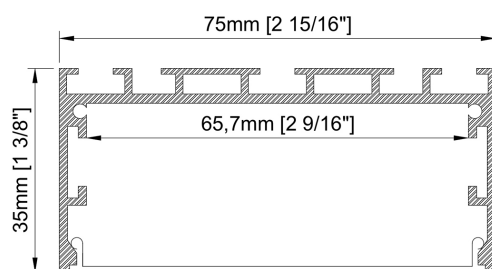

Size

75mm x 35mm x 3000mm
3" x 1³/₈" x 118¹/₈"

Length


3000mm
118¹/₈"

Internal width

64mm
2¹/₂"

Cover

PC diffused



Accessories




TT-13-END




TT-13-SUSP



TT-13-L



TT-13-T




TT-13-X



TT-13-EXT



TT-13-EXT-90



TT-13-EXT-90IL



TT-13-EXT-60



TT-13-EXT-120


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER
TT	-	13	-	3000	-	O


TT-15-3000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

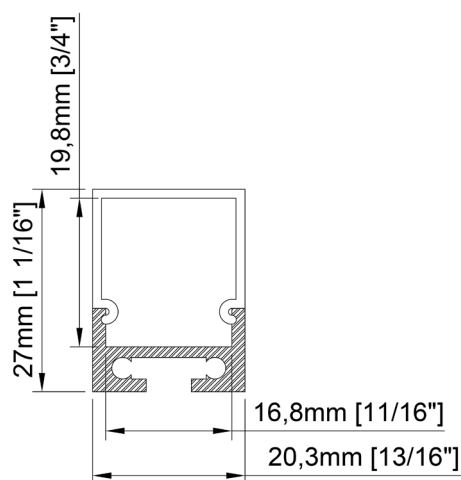

Size	20,3mm x 27mm x 3000mm $13/16'' \times 1 1/16'' \times 118 1/8''$
Lenght	3000mm $118 1/4''$
Internal width	16,8mm $11/16''$
Cover	Matte opal PMMA

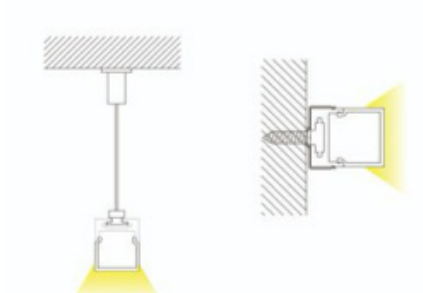

Accessories



TT-15-CLIP



TT-15-SUSP



TT-15-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	15	-	3000	-	O


TT-15-3000-O-BK



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

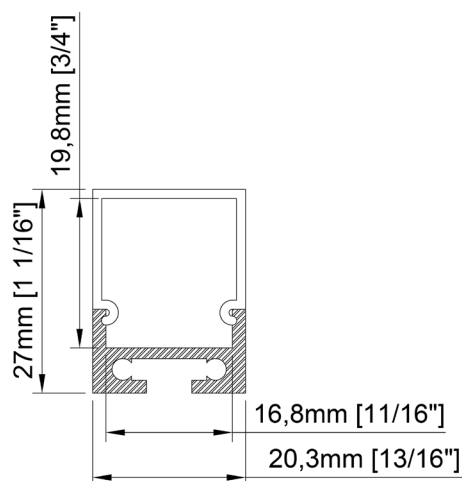

Size	20,3mm x 27mm x 3000mm ¹³ / ₁₆ " x 1 ¹ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₄ "
Internal width	16,8mm ¹¹ / ₁₆ "
Cover	Matte opal PMMA
Finish	Black

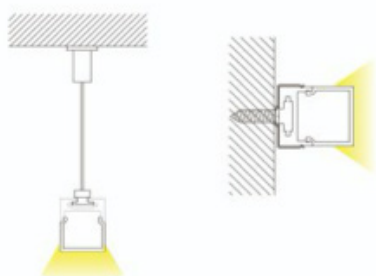


Accessories



TT-15-CLIP



TT-15-SUSP-BK



TT-15-END-BK


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	15	-	3000	-	O	-	BK

TT-20-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

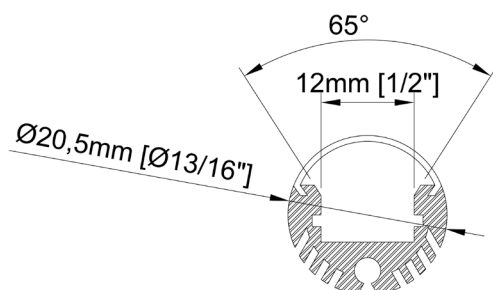


Size $\varnothing 20,5\text{mm} \times 2000\text{mm}$
 $\varnothing 13/16" \times 78^{3/4}"$

Lenght 2000mm
78³/₄"

Internal width 12mm
1/2"

Cover Matte opal PMMA

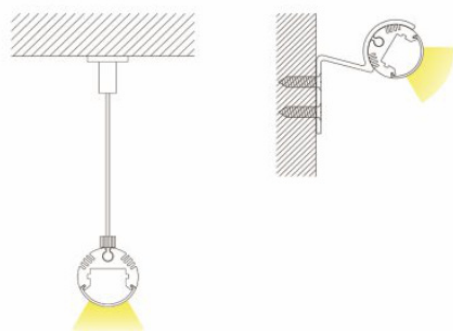

Accessories



TT-20-CLIP



TT-20-SUSP




TT-20-END

PRODUCT CODE


TT - MODEL - LENGHT (mm) - COVER

TT - 20 - 2000 - O

TT-31-2500-O

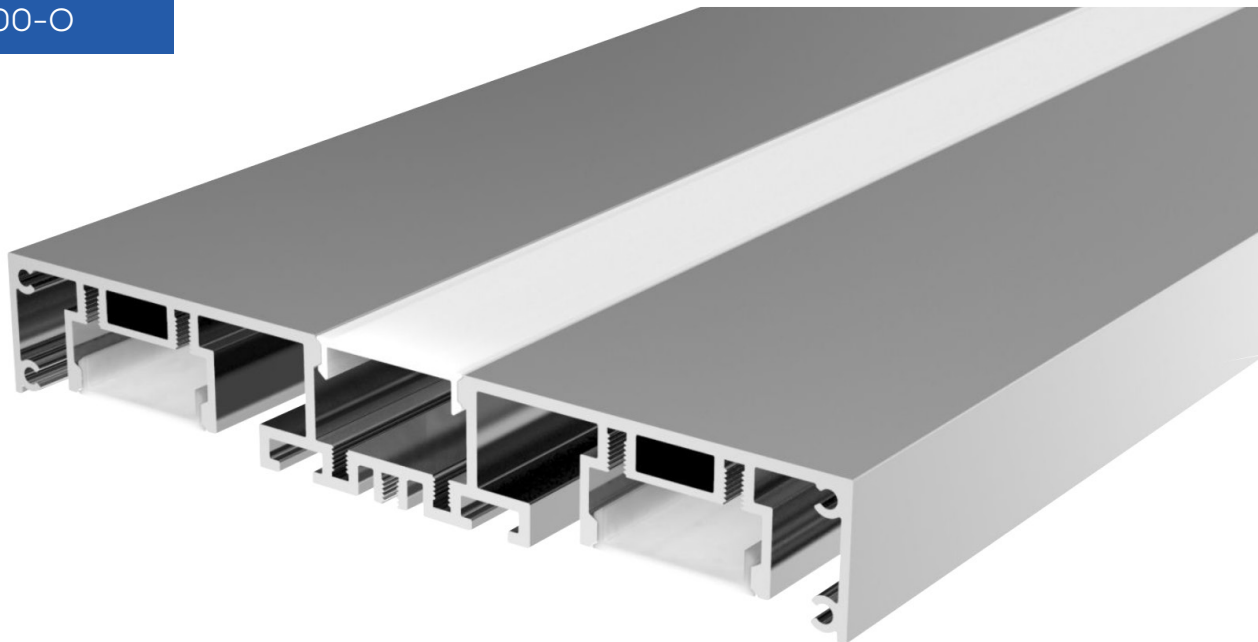

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm ($98\frac{3}{8}$ ").

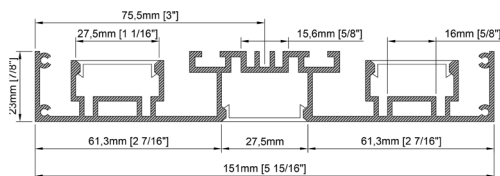

Size 151mm x 23mm x 2500mm
 $5\frac{15}{16}$ " x $\frac{7}{8}$ " x $98\frac{3}{8}$ "

Lenght 2500mm
 $98\frac{3}{8}$ "

Internal width 3 x 27mm
3 x $1\frac{1}{16}$ "

Cover PC frosted



Accessories



TT-31-SUSP



TT-31-END



PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	31	-	2500	-	O

TT-37-2500-O




- Extruded aluminum with opal acrylic cylinder.
- Available in length of 2500 mm (98³/₈ ").

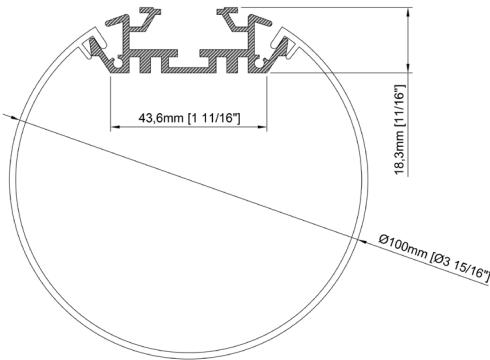

Size	Ø100 mm x 2500 mm 3 ¹⁵ / ₁₆ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	43mm 1 ¹¹ / ₁₆ "
Cover	PC diffused

Accessories

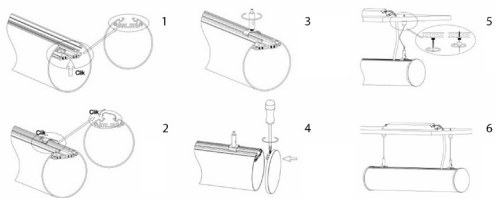


PRODUCT CODE						
TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	37	-	2500	-	O


TT-46-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm ($98\frac{3}{8}$ ").

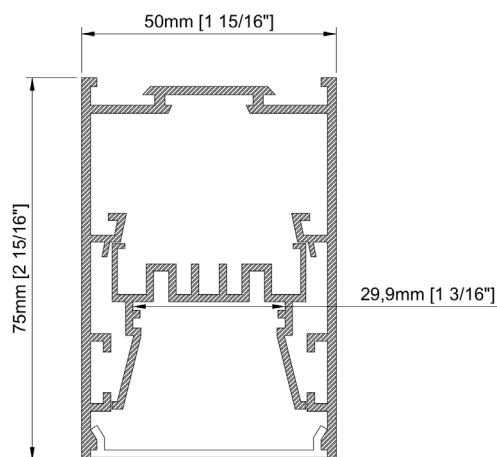

Size	75mm x 50mm x 2500mm $2\frac{15}{16}$ " x $1\frac{15}{16}$ " x $98\frac{3}{8}$ "
Lenght	2500mm $98\frac{3}{8}$ "
Internal width	29,9mm $1\frac{3}{16}$ "
Cover	PC frosted

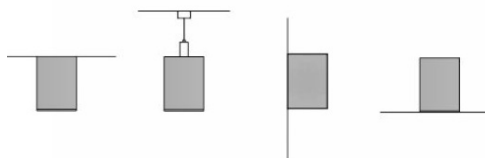

Accessories

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	46	-	2500	-	O



TT-46-CLIP



TT-46-SUSP



TT-46-SNAP



TT-46-
CABLE




TT-46-END

TT-47-2500-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈").

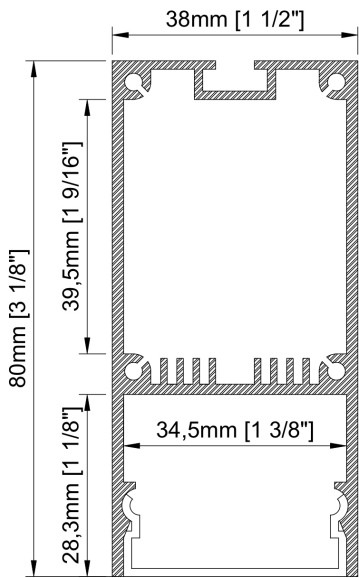

Size	80mm x 38mm x 2500mm 3 ¹ / ₈ " x 1 ¹ / ₂ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	34,5mm 1 ³ / ₈ "
Cover	PC diffused



Accessories



TT-47-SUSP



TT-47-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	47	-	2500	-	O

TT-48-2500-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm ($98\frac{3}{8}$ ").

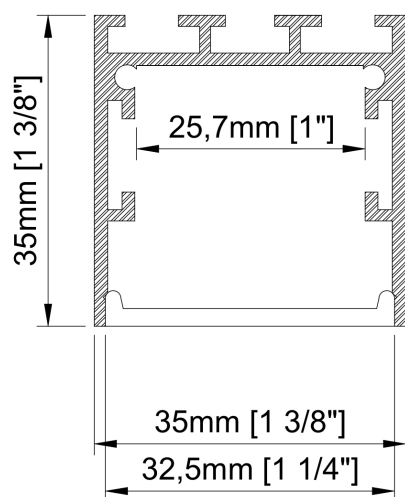


Size 35mm x 35mm x 2500mm
 $1\frac{3}{8}$ " x $1\frac{3}{8}$ " x $98\frac{3}{8}$ "

Lenght 2500mm
 $98\frac{3}{8}$ "

Internal width 2,57mm
1"

Cover PC diffused

Accessories




TT-48-SUSP




TT-48-CLIP



TT-48-L



TT-48-T



TT-48-X




TT-48-I



TT-48-EXT



TT-48-EXT-90



TT-48-EXT-90IL



TT-48-EXT-60



TT-48-EXT-120




TT-48-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	48	-	2500	-	O


TT-48-2500-O-BK

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2500 mm (98³/₈ ").

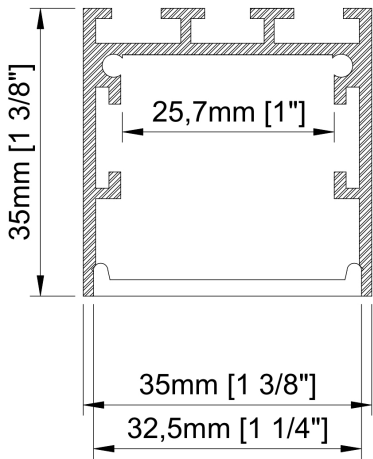

Size	35mm x 35mm x 2500mm 1 ³ / ₈ " x 1 ³ / ₈ " x 98 ³ / ₈ "
Lenght	2500mm 98 ³ / ₈ "
Internal width	25,7mm 1"
Cover	PC diffused
Finish	BK-Black

Accessories




PRODUCT CODE					
TT	MODEL	LENGHT (mm)	COVER	FINISH	
TT	50	2000	O	BK	


TT-53-2000-O



- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

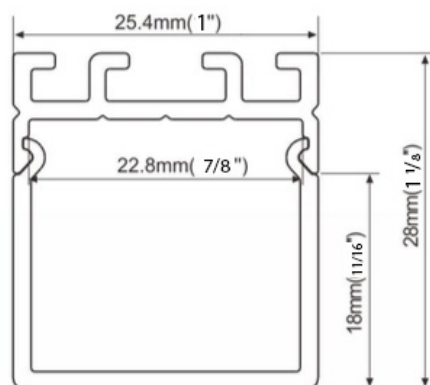

Size	25,4mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	22,8mm 7/ ₈ "
Cover	PC diffused

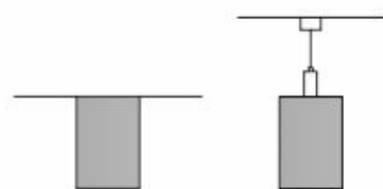

Accessories



TT-53-CLIP



TT-53-SUSP





TT-53-END

PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	53	-	2000	-	O

TT-54-2000-O-BK

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

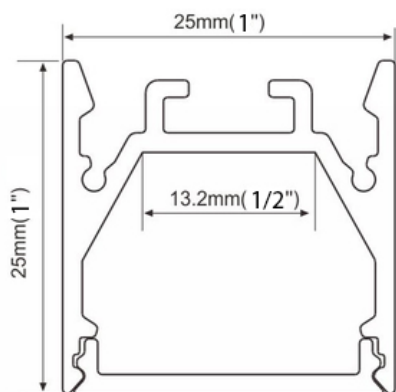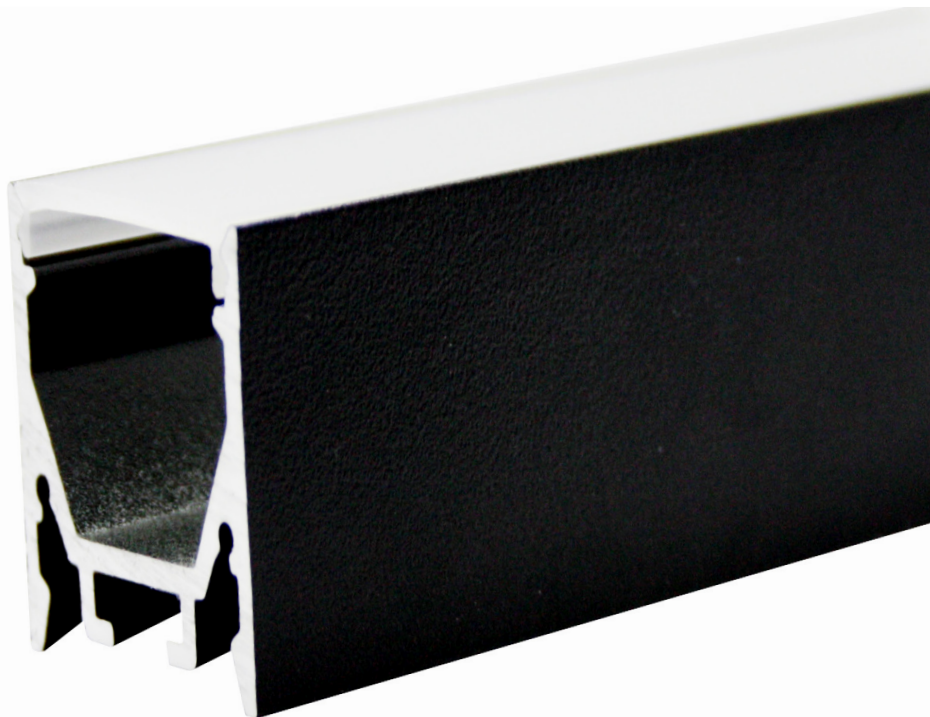

Size	25mm x 25mm x 2000mm 1" x 1" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,2mm 1/2"
Cover	PC diffused



Accessories



TT-54-CLIP



TT-54-SUSP




TT-54-END-BK

PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	54	-	2000	-	O	-	BK

TT-54-2000-O-WH

- Aluminum profile with white acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄ ").

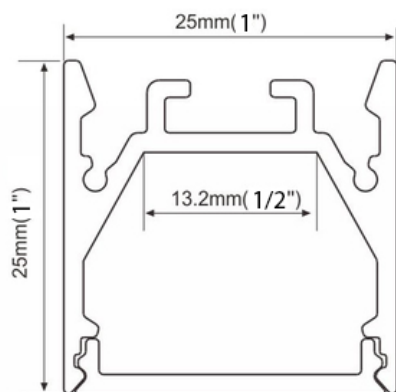

Size	25mm x 25mm x 2000mm 1" x 1" x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,2mm 1/2"
Cover	PC diffused



Accessories



TT-54-CLIP



TT-54-SUSP







TT-54-END-WH

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	54	-	2000	-	O	-	WH

TT-R25-600

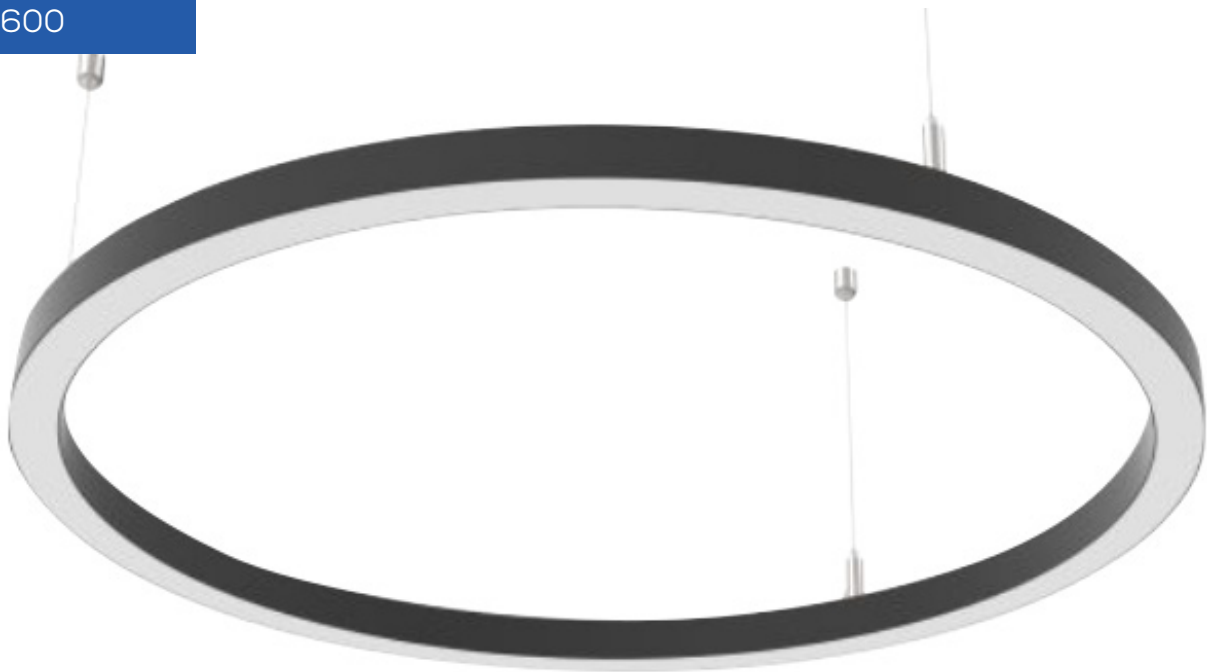





Size	25,4mm x 25,4mm x Ø 600mm 1" x 1" x 23 ⁵ / ₈ "
Diameter	Ø 600mm 23 ⁵ / ₈ "
Internal width	14,1mm 9/16"

Accessories and power supply included



PRODUCT CODE			
TT	-	MODEL	-
TT	-	R25	-
			DIAMETER (mm)
			600

TT-R25-900

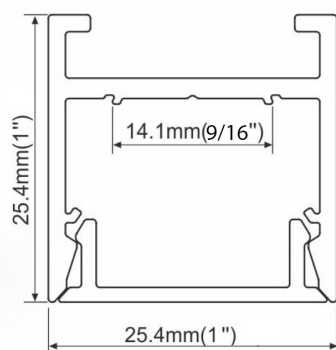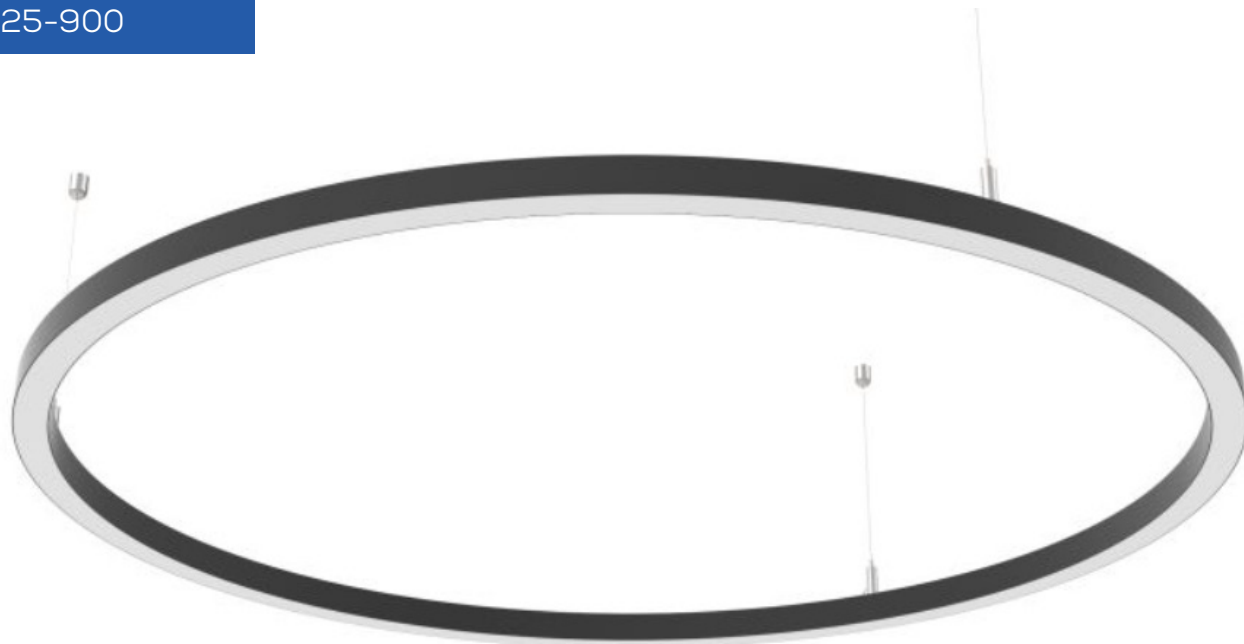

Size	25,4mm x 25,4mm x Ø 900mm 1" x 1" x 35 ⁷ / ₁₆ "
------	--

Diameter	Ø 900mm 35 ⁷ / ₁₆ "
----------	--

Internal width	14,1mm 9 ⁹ / ₁₆ "
----------------	--


Accessories and power supply included



TT-R25-LED



TT-R25-SUSP







TT-R25-EXT

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	900

TT-R25-1270

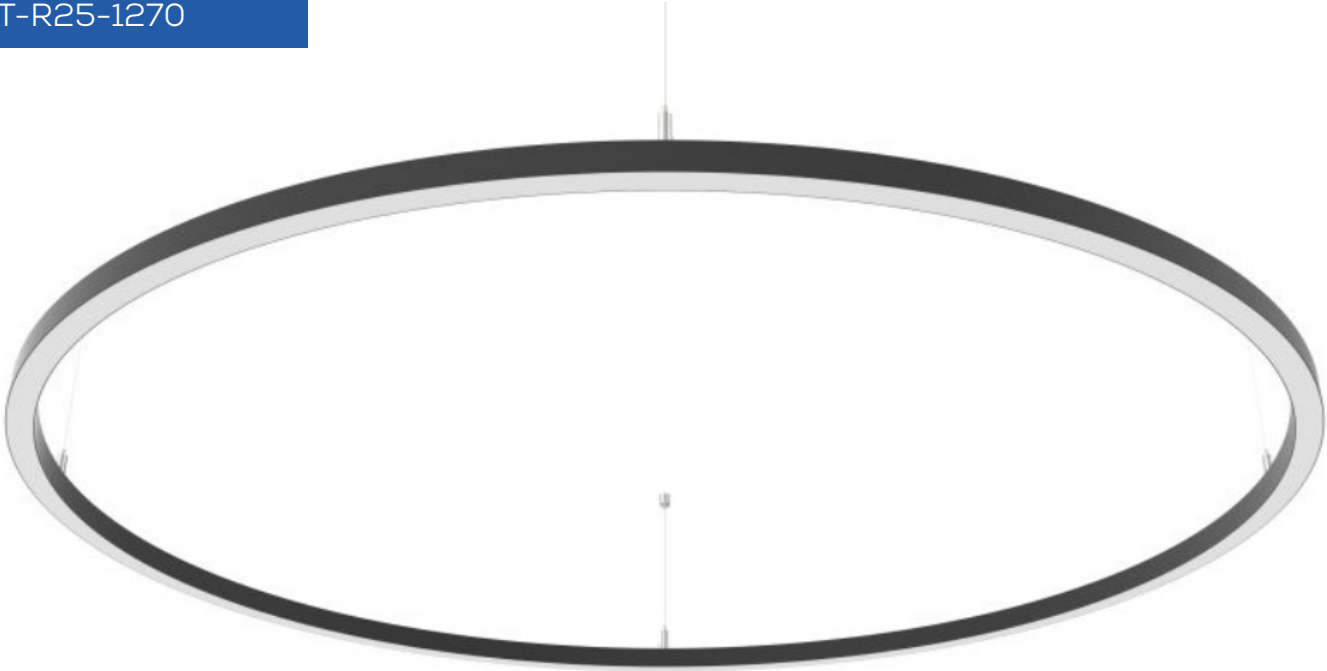





Size	25,4mm x 25,4mm x Ø 1270mm 1" x 1" x 50"
Diameter	Ø 1270mm 50"
Internal width	14,1mm 9/16"

Accessories and power supply included



PRODUCT CODE			
TT	-	MODEL	-
TT	-	R25	-
			DIAMETER (mm)
			1270

TT-R25-1800

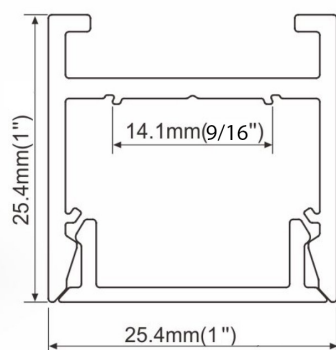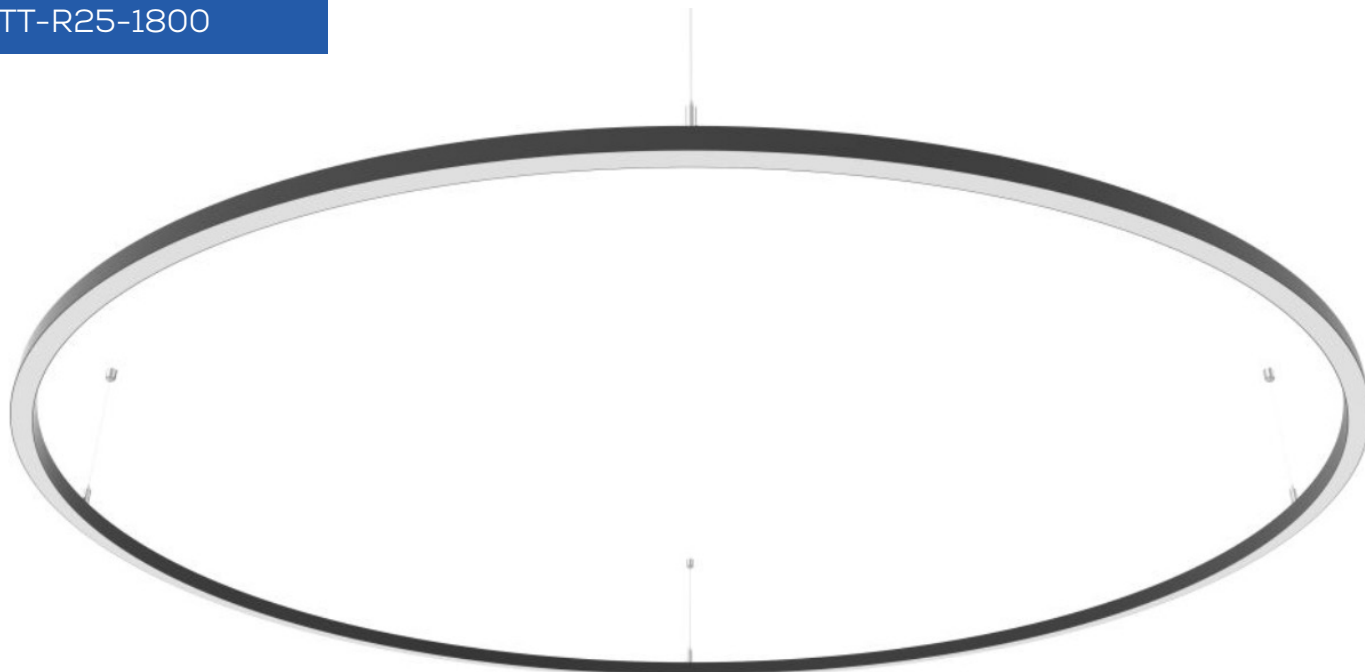

Size	25,4mm x 25,4mm x Ø 1800mm 1" x 1" x 70 ⁷ / ₈ "
------	--

Diameter	Ø 1800mm 70 ⁷ / ₈ "
----------	--

Internal width	14,1mm 9/16"
----------------	-----------------





Accessories and
power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R25	-	1800

TT-R30-600

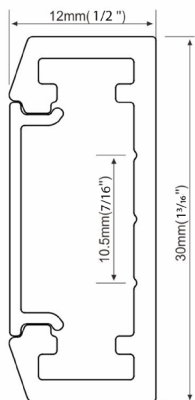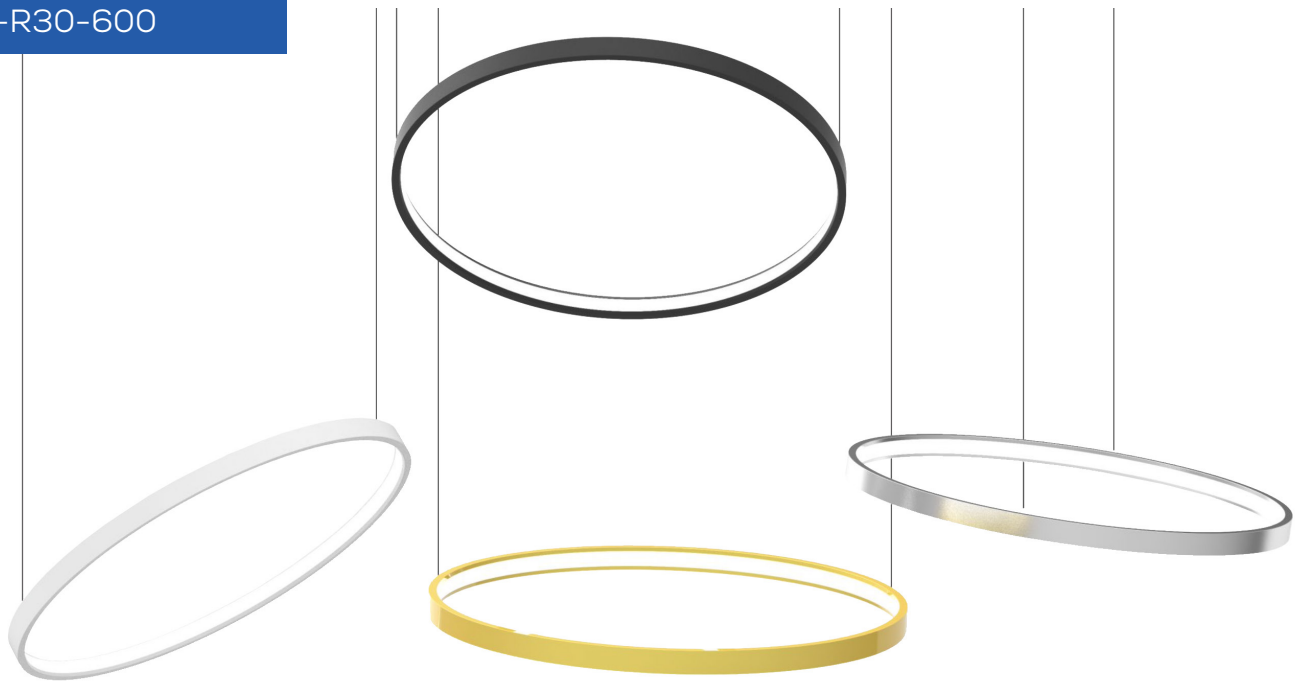

Accessories and
power supply included







Size	12mm x 30mm x Ø 600mm 1/2" x 1 3/16" x 23 5/8"
Diameter	Ø 600mm 23 5/8"
Internal width	10,5mm 7/16"

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	600

TT-R30-900

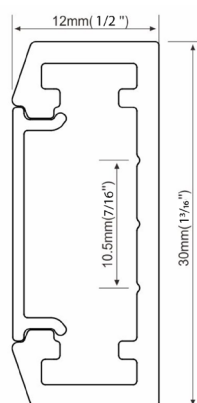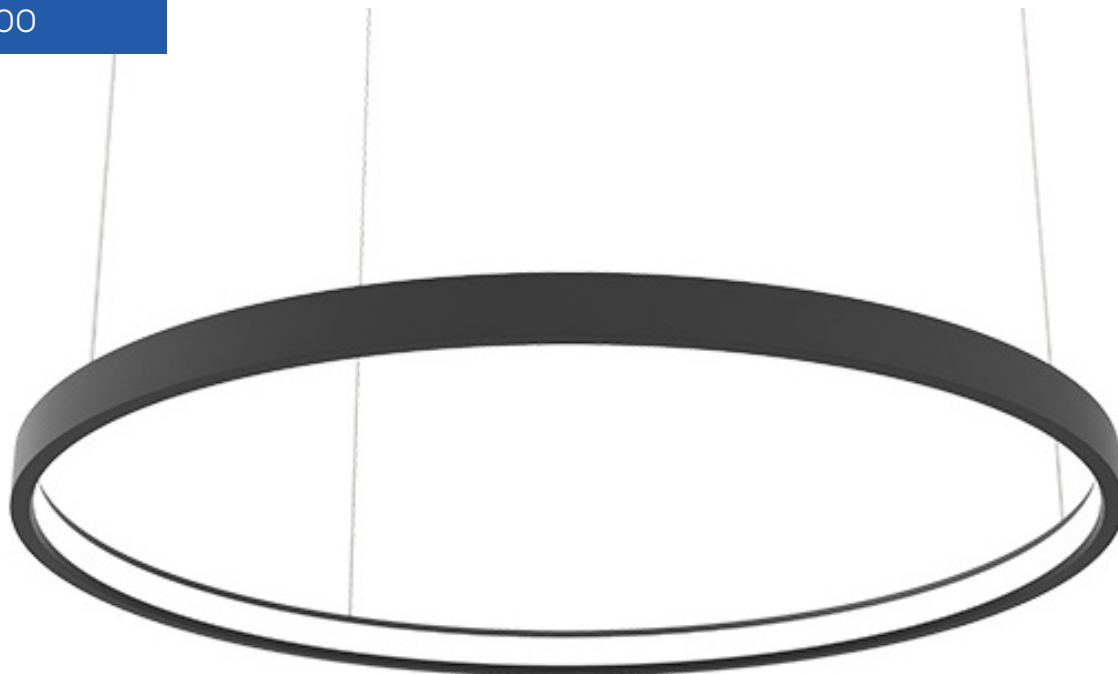

Size	12mm x 30mm x $\varnothing 900\text{mm}$ $1/2" \times 1 3/16" \times 35 7/16"$
Diameter	$\varnothing 900\text{mm}$ $35 7/16"$
Internal width	10,5mm $7/16"$





Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	900

TT-R30-1200

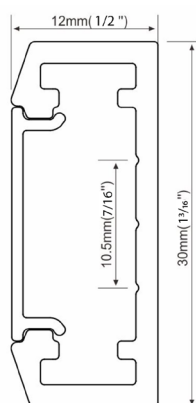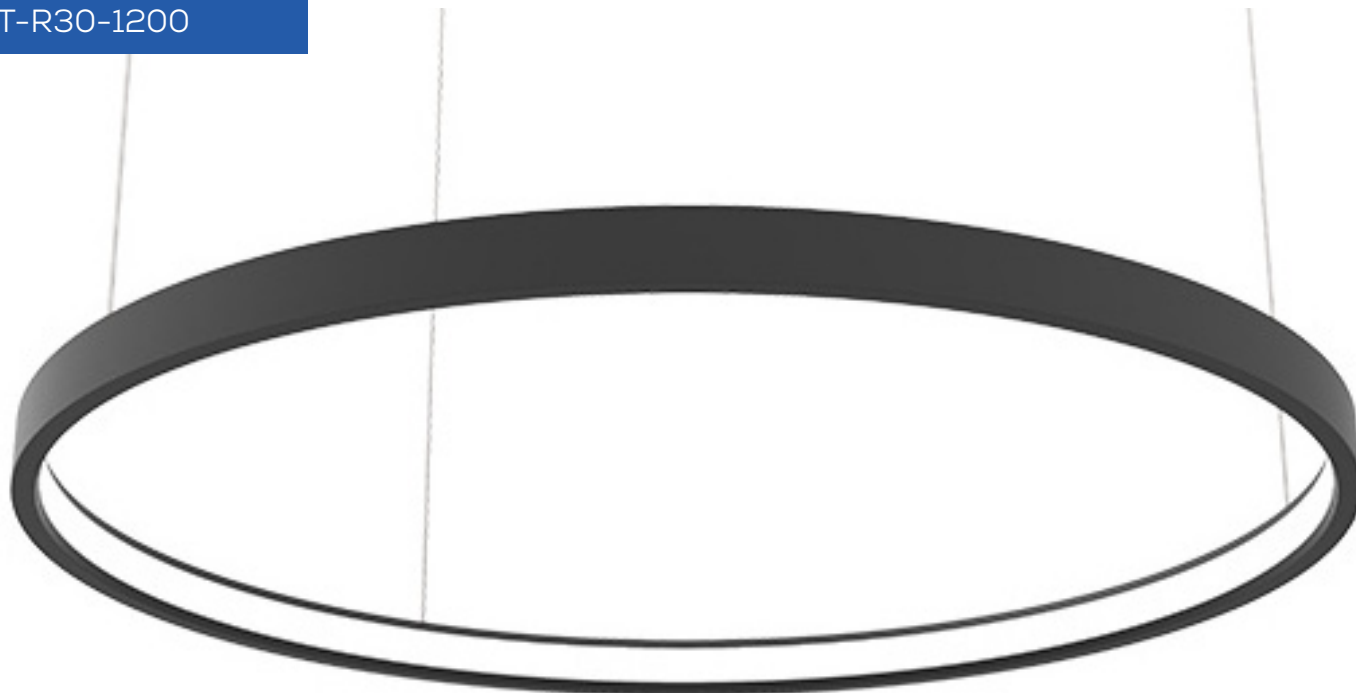

Size	12mm x 30mm x Ø 1200mm 1/2" x 1 3/16" x 47 1/4"
------	--

Diameter	Ø 1200mm 47 1/4"
----------	---------------------

Internal width	10,5mm 7/16"
----------------	-----------------





Accessories and power supply included



PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R30	-	1200

TT-R50-900

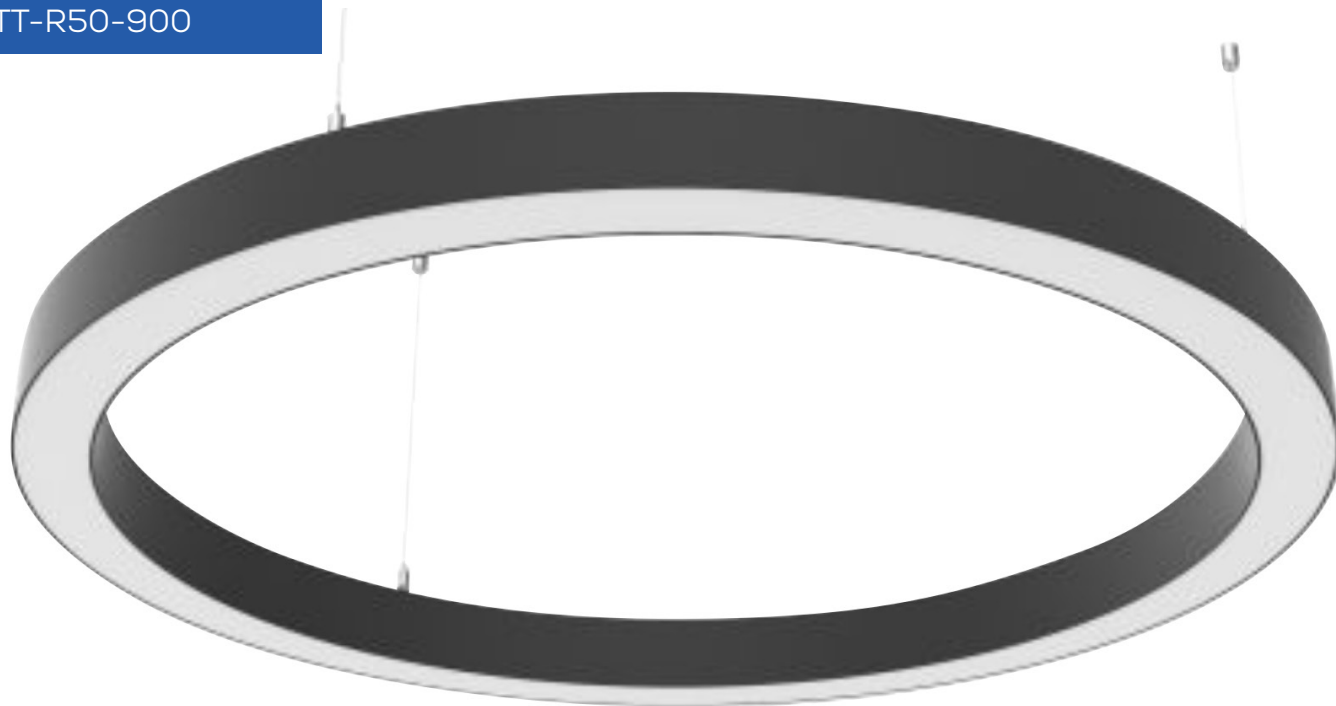

Size	53,6mm x 60,4mm x Ø 900mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 35 ⁷ / ₁₆ "
Diameter	Ø 900mm 35 ⁷ / ₁₆ "
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included



TT-R50-LED



TT-R50-SUSP



TT-R50-EXT







TT-R50-CLIP

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	900

TT-R50-1270

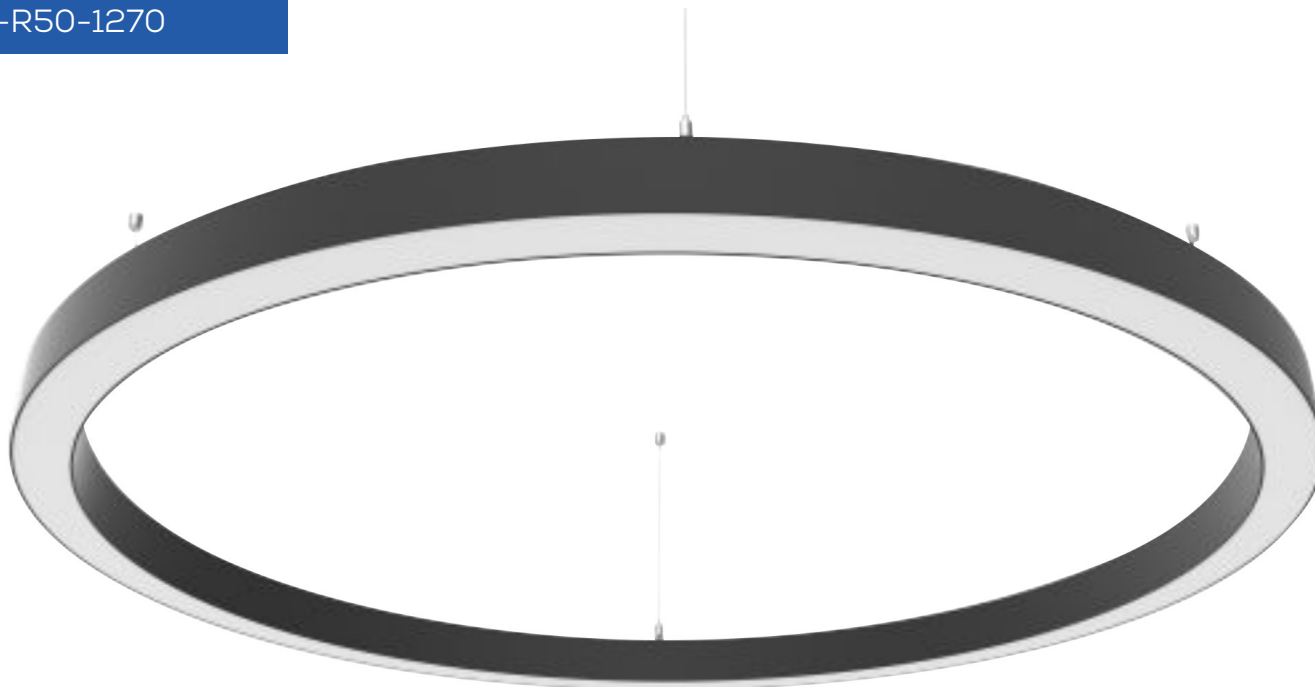

Size	53,6mm x 60,4mm x Ø 1270mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 50"
Diameter	Ø 1270mm 50"
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included



TT-R50-LED



TT-R50-SUSP



TT-R50-EXT







TT-R50-CLIP

PRODUCT CODE

TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	1270

TT-R50-1800

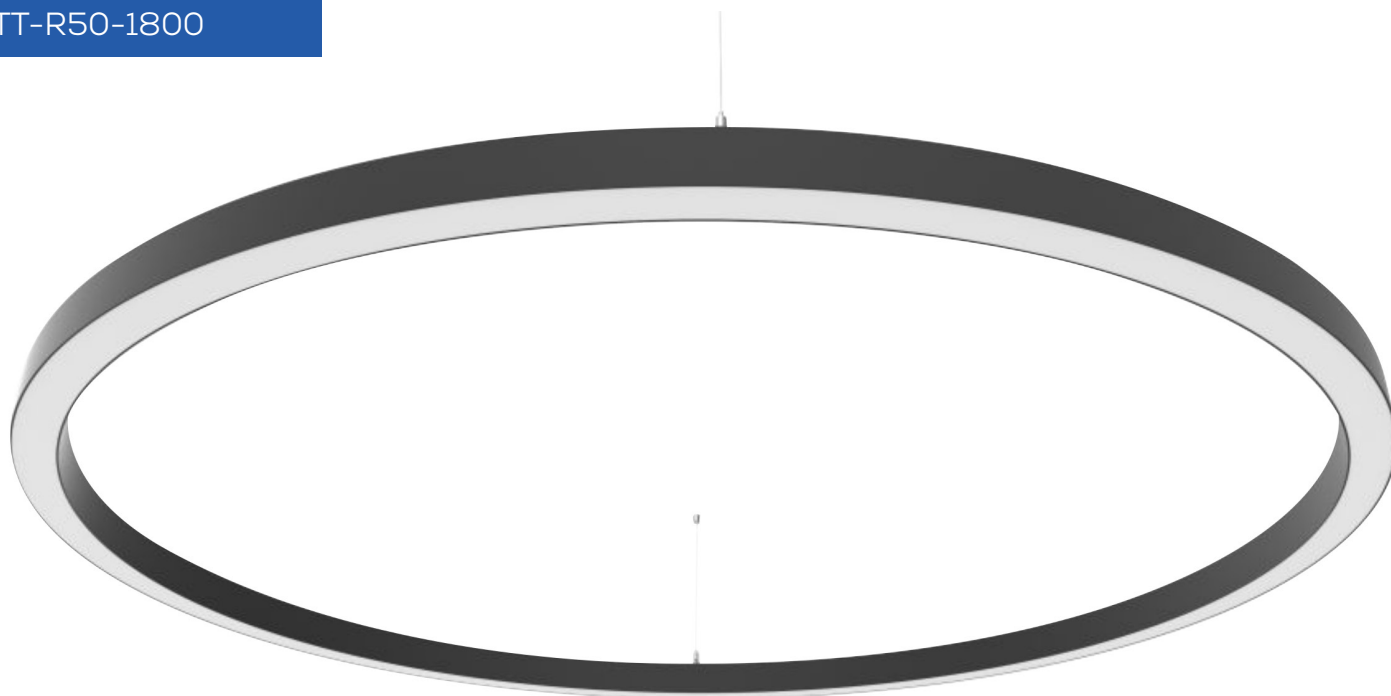



Size	53,6mm x 60,4mm x Ø 1800mm 2 ¹ / ₈ " x 2 ³ / ₈ " x 70 ⁷ / ₈ "
Diameter	Ø 1800mm 70 ⁷ / ₈ "
Internal width	41,1mm 1 ⁵ / ₈ "

Accessories and power supply included



PRODUCT CODE



TT	-	MODEL	-	DIAMETER (mm)
TT	-	R50	-	1800

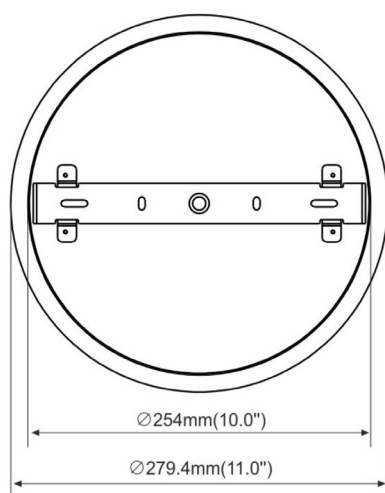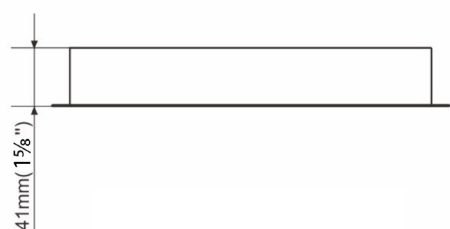

Size	41mm x Ø 279,4mm 1 ⁵ / ₈ " x 11"
Diameter	Ø 279,4mm 11"
Internal width	254mm 10"
Color	BK

PRODUCT CODE

TT	-	TYPE	-	COLOR	-	MODEL
TT	-	CANOPY	-	BK	-	01

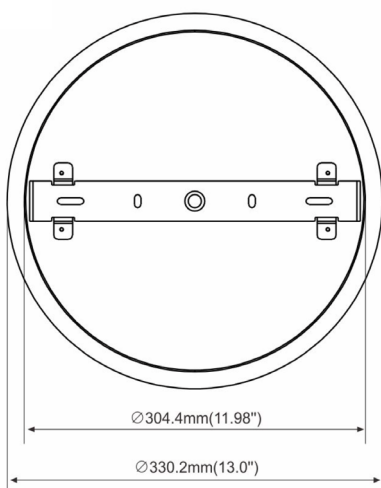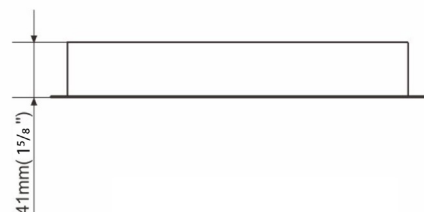

Size 41mm x Ø 330,2mm
1 5/8" x 13"

Diameter Ø 330,2mm
13"

Internal width Ø 304,4mm
12"




Color BK

PRODUCT CODE

TT	-	TYPE	-	COLOR	-	MODEL
TT	-	CANOPY	-	BK	-	02



Size	60mm x 150mm x 380mm 2 3/8" x 5 7/8" x 1'-3"
Internal width	120mm x 350mm 4 3/4" x 1'-1 3/4"
Color	BK WH

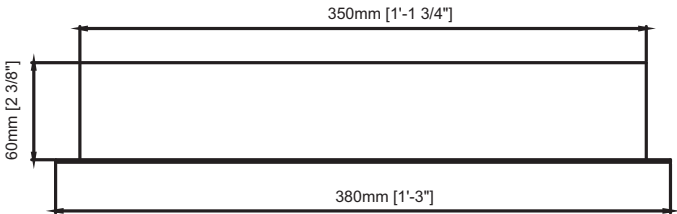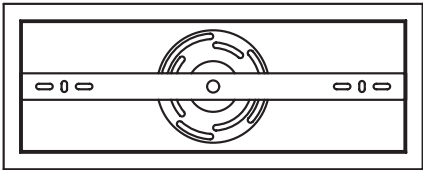

PRODUCT CODE




TT	-	TYPE	-	COLOR	-	MODEL
TT	-	CANOPY	-	BK	-	03
TT	-	CANOPY	-		-	03



Size 60mm x 150mm x 730mm
2 3/8" x 5 7/8" x 2'-4 3/4"

Internal width 120mm x 700mm
4 3/4" x 2'-3 1/2"

Color **BK**
WH

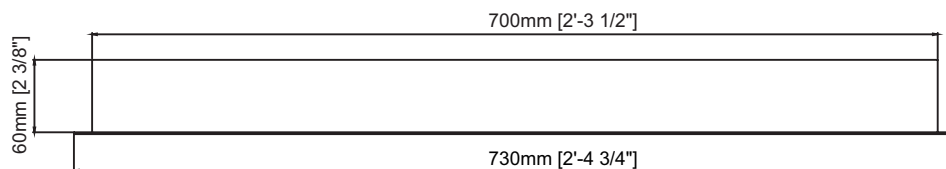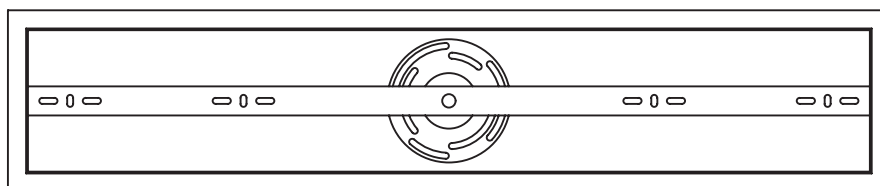

PRODUCT CODE

TT	-	TYPE	-	COLOR	-	MODEL
TT	-	CANOPY	-	BK	-	04
TT	-	CANOPY	-		-	04

BLACK SHADOW SERIES



Credit photo: Cuisines Simard



TT-55-3000-BK Page 143

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-56-3000-BK Page 144

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-57-3000-BK Page 145

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-58-3000-BK Page 146

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-59-3000-BK Page 147

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-60-3000-BK Page 148

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-61-3000-BK Page 149

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-62-3000-BK Page 150

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-63-3000-BK Page 151

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-73-3000-BK Page 152

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-74-3000-O-BK Page 153

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-75-3000-O-BK Page 154

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE


TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
TT	-		-		-		-		-		-		-		-		-		-		-	
						28/6 221 lm/feet 5W/feet		27 2700K		20		12		Hxxxx 12 inch minimum		empty No lead out		NE No end cap		NC No Clip		n/a No psu
						28/6 H 527 lm/feet 6,25W/feet *24v only		30 3000K		65		24		DCxxxx 12 inch minimum		Hxxxx 12 inch minimum DCxxxx 12 inch minimum		EC With end cap		xC x=QTE		P Plug-in CV Dimmable CV-BOX Dimmable with box
						28/12 456 lm/feet 9W/feet *24v only		40 4000K														CV67 IP67 psu 120V No dimmable 120v psu 347V No dimmable 347V PSU 010 0-10v PSU
						35/3 45 lm/feet 1,5W/feet		60 6000K														
						35/6 120 lm/feet 3W/feet		RE RED														
						22/15 425 lm/feet 9W/feet *24v only		GR GREEN														
						50/3 4,5W/feet		BL BLUE														
						DX/24 DIGITAL DMX *24V only		AM AMBER														
								PK PINK *28/6 only														
								CB CYAN *28/6 only														
								OR ORANGE *28/6 only														
								UV *28/6 only														
								RGB *50/3, 28/6 or 35/6 only														
								RGBWW *50/3 only														
								RGBNW *50/3 only														
								RGBCW *50/3 only														
								RGBCCT *50/3 only														

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

TT-55-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

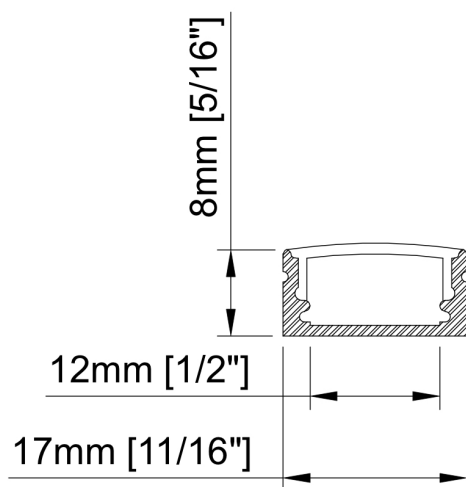

Size	17mm x 8mm x 3000mm 1 ¹ / ₁₆ " x 5 ⁵ / ₁₆ " x 118 ¹ / ₈ "
Length	3000mm 118 ¹ / ₈ "
Internal width	12mm 1 ¹ / ₂ "
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-55-CLIP




TT-55-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER	-	FINISH
TT	-	55	-	3000	-	O	-	BK

TT-56-3000-O-BK

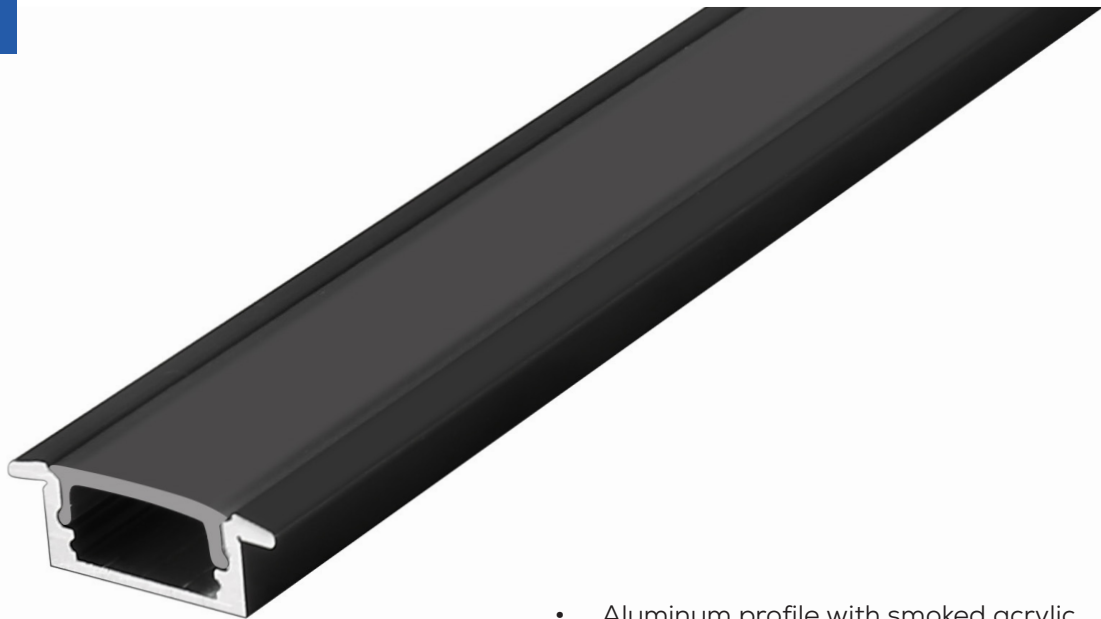

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

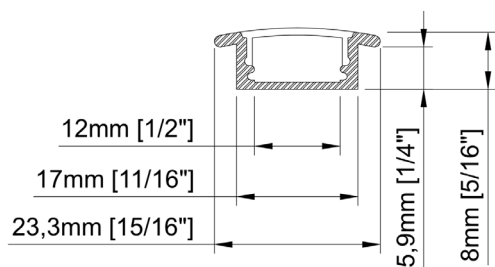

Size	23,3mm x 8mm x 3000mm 1 ⁵ / ₁₆ " x 5/ ₁₆ " x 118 ¹ / ₈ "
------	--

Lenght	3000mm 118 ¹ / ₈ "
--------	---

Internal width	12mm 1/ ₂ "
----------------	---------------------------

Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
-------	--

Finish	BK-Black
--------	----------

Accessories



TT-56-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	56	-	3000	-	O	-	BK

TT-57-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

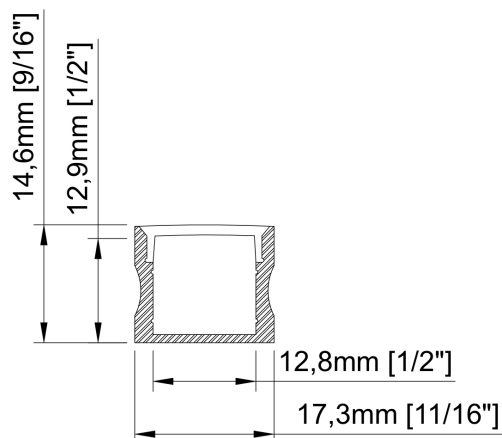

Size	17mm x 14,6mm x 3000mm $11/16" \times 9/16" \times 118^{1/8}"$
Lenght	3000mm $118^{1/8}"$
Internal width	12,8mm $1/2"$
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-57-CLIP



TT-57-END


PRODUCT CODE

TT	-	MODEL	-	LENGTH (mm)	-	COVER	-	FINISH
TT	-	57	-	3000	-	O	-	BK

TT-58-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

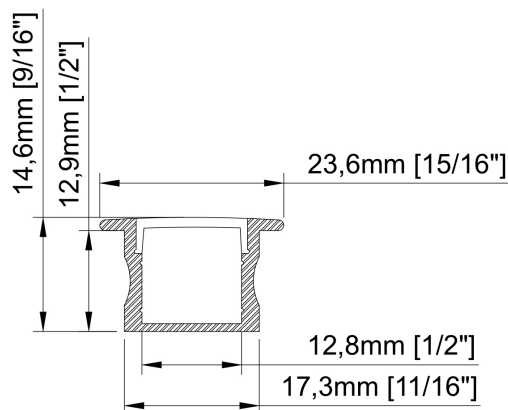

Size	23,6mm x 14,6mm x 3000mm $15/16'' \times 9/16'' \times 118^{1/8}''$
Lenght	3000mm $118^{1/8}''$
Internal width	12,8mm $1/2''$
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-58-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	58	-	3000	-	O	-	BK

TT-59-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

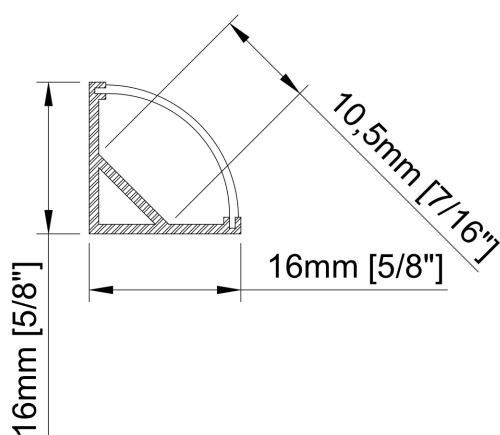

Size	16mm x 16mm x 3000mm 5/8" x 5/8" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	10,5mm 7/16"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-59-CLIP



TT-59-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	59	-	3000	-	O	-	BK

TT-60-3000-O-BK



- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

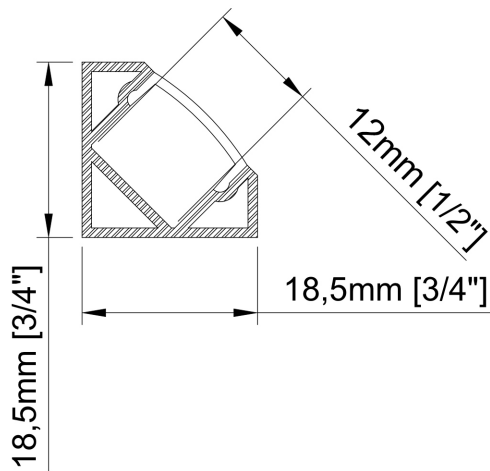


Size	18,5mm x 18,5mm x 3000mm 3/4" x 3/4" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm 1/2"
Cover	Smoked Matte opal PMMA Clear PMMA PC diffused
Finish	BK-Black

Accessories



TT-60-CLIP




TT-60-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	60	-	3000	-	O	-	BK

TT-61-3000-O-BK

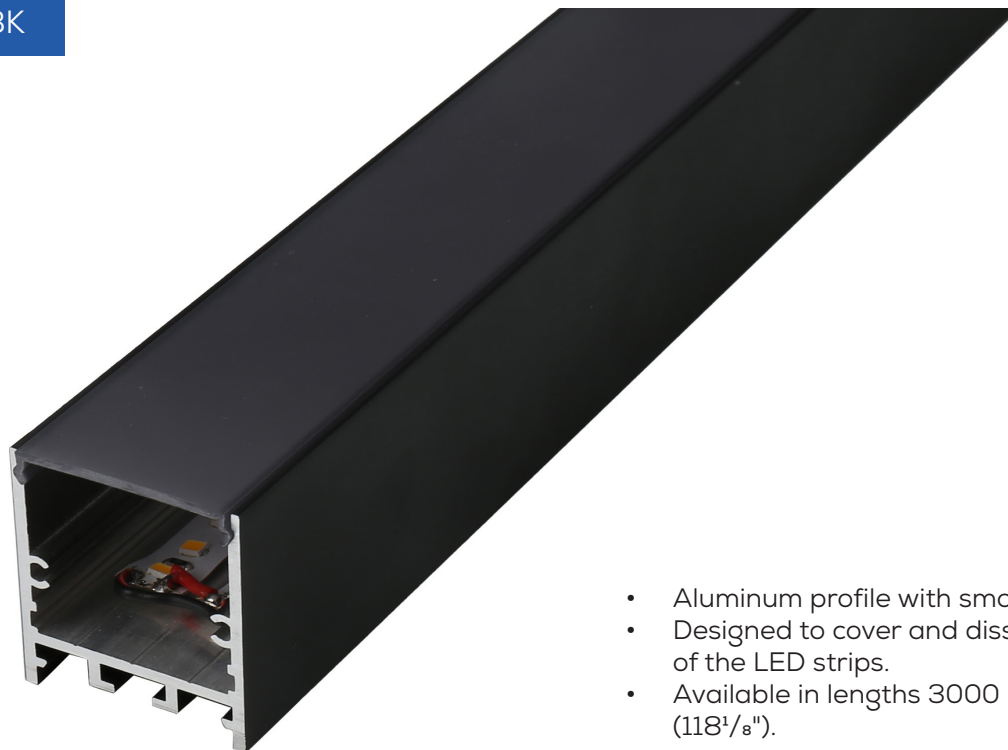

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

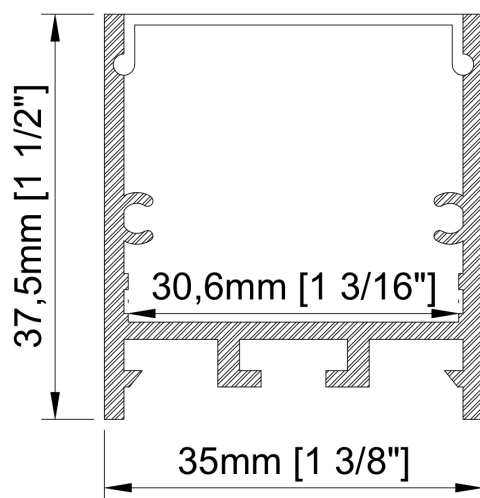

Size	35mm x 37,5mm x 3000mm 1 ³ / ₈ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black


Accessories



TT-61-CLIP



TT-61-SUSP




TT-61-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	61	-	3000	-	O	-	BK


TT-62-3000-O-BK

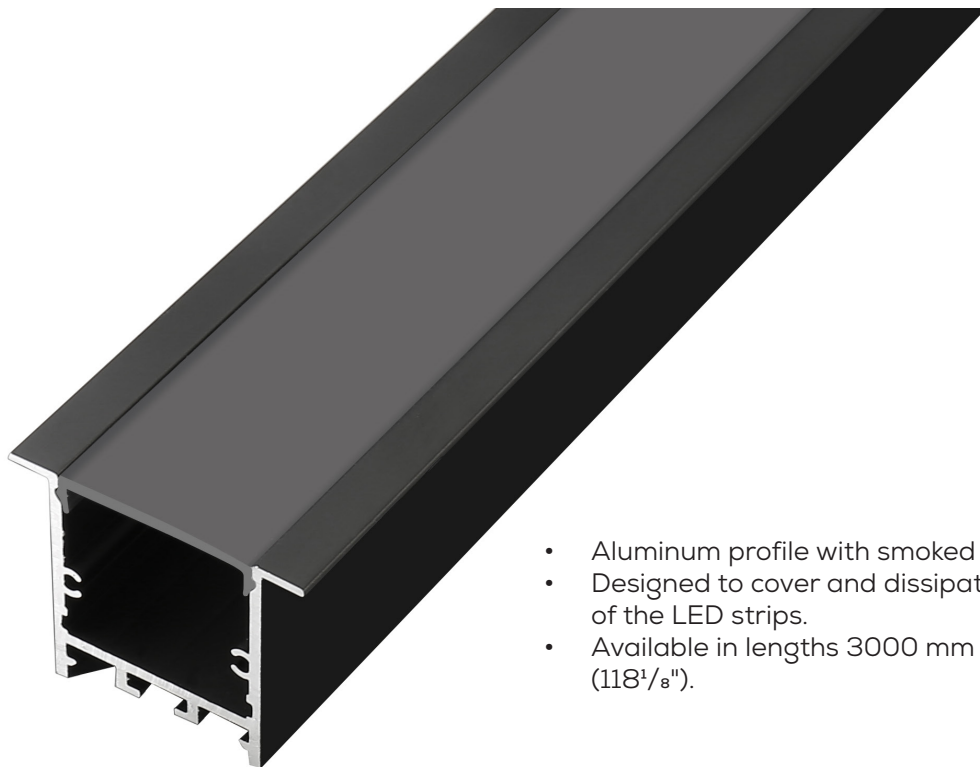

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

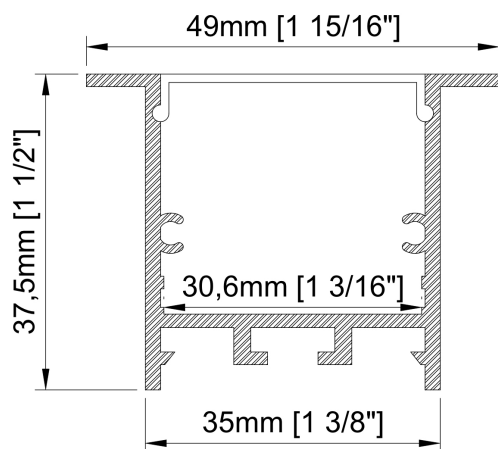

Size	49mm x 37,5mm x 3000mm 1 ¹⁵ / ₁₆ " x 1 ¹ / ₂ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	30,6mm 1 ³ / ₁₆ "
Cover	Smoked PC diffused
Finish	BK-Black

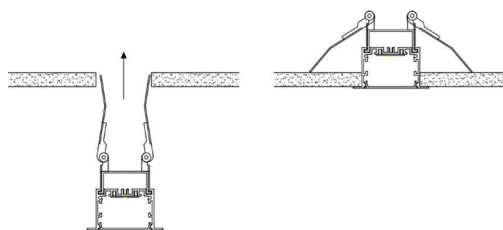

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	62	-	3000	-	O	-	BK

TT-63-3000-O-BK

- Aluminum profile with smoked acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈").

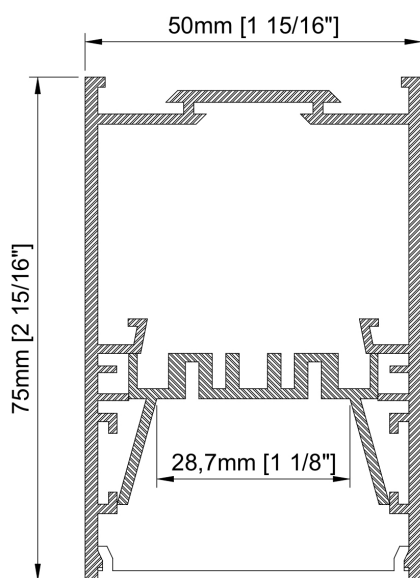

Size	50mm x 75mm x 3000mm 1 ¹⁵ / ₁₆ " x 2 ¹⁵ / ₁₆ " x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	28,7mm 1 ¹ / ₈ "
Cover	Smoked PC diffused
Finish	BK-Black

Accessories

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	63	-	3000	-	O	-	BK



TT-63-CLIP



TT-63-SUSP



TT-63-SNAP




TT-63-CABLE



TT-63-END

TT-74-3000-O-BK

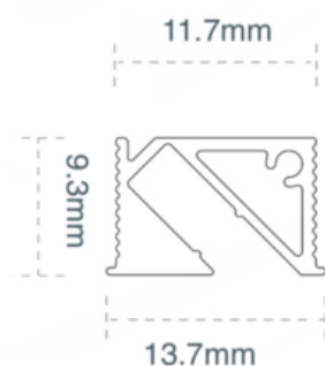

Size	13,7mm x 9,3mm x 3000mm $\frac{9}{16}'' \times \frac{3}{8}'' \times 118\frac{1}{8}''$
Lenght	3000mm $118\frac{1}{8}''$
Internal width	11,7mm $\frac{7}{16}''$
Cover	Silicone

Accessories




TT-74-END-BK

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	74	-	3000	-	O	-	BK

TT-75-3000-O-BK



Size	15mm x 10mm x 3000mm $\frac{5}{8}" \times \frac{3}{8}" \times 118\frac{1}{8}"$
Lenght	3000mm $118\frac{1}{8}"$
Internal width	10mm $\frac{3}{8}"$
Cover	PMMA

Accessories




TT-75-END-BK

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	75	-	3000	-	O	-	BK

TT-73-3000-O-BK



Size	15mm x 12,5mm x 3000mm $\frac{5}{8}" \times \frac{1}{2}" \times 78\frac{3}{4}"$
------	--

Lenght	3000mm 118 $\frac{1}{8}"$
--------	------------------------------

Internal width	13mm $\frac{1}{2}"$
----------------	------------------------

Cover	PMMA
-------	------

Accessories



TT-73-END-BK



TT-73-MAG

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER	-	FINISH
TT	-	73	-	3000	-	O	-	BK

TRIM-LESS MUD-IN




Credit photo: Godomo




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-26-3000 Page 159




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-27-3000 Page 160




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-28-3000 Page 161

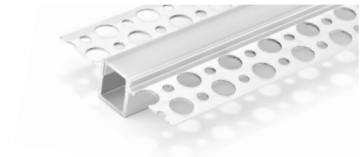

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-29-3000 Page 162



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-33-2000 Page 163



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-34-2000 Page 164



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-36-2000 Page 165




Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


TT-41-2000 Page 166



Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118

TT-72-2000 Page 167






Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118


PRODUCT BUILDER CODE

TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
TT	-		-		-		-		-		-		-		-		-		-		-	
						28/6 221 lm/foot 5W/foot		27 2700K		20		12		Hxxxx 12 inchs minimum		empty No lead out		NE No end cap		NC No Clip		n/a No psu
						28/6 H 527 lm/foot 6,25W/foot *24v only		30 3000K		65		24		DCxxxx 12 inchs minimum		Hxxxx 12 inchs minimum		EC With end cap		xC x=QTE		P Plug-in
						28/12 456 lm/foot 9W/foot *24v only		35 3500K								DCxxxx 12 inchs minimum						CV Dimmable
						35/3 45 lm/foot 1,5W/foot		40 4000K														CV-BOX Dimmable with box
						35/6 120 lm/foot 3W/foot		60 6000K														CV67 IP67 psu
						22/15 425 lm/foot 9W/foot *24v only		RE RED														120V No dimmable 120v psu
						50/3 4,5W/foot		GR GREEN														347V No dimmable 347V PSU
						DX/24 DIGITAL DMX *24V only		BL BLUE														010 0-10v PSU
								AM AMBER														
								PK PINK														
								CB CYAN														
								OR ORANGE														
								UV														
								RGB														
								*50/3, 28/6 or 35/6 only														
								RGBWW														
								*50/3 only														
								RGBNW														
								*50/3 only														
								RGBCW														
								*50/3 only														
								RGBCCT														
								*50/3 only														


For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

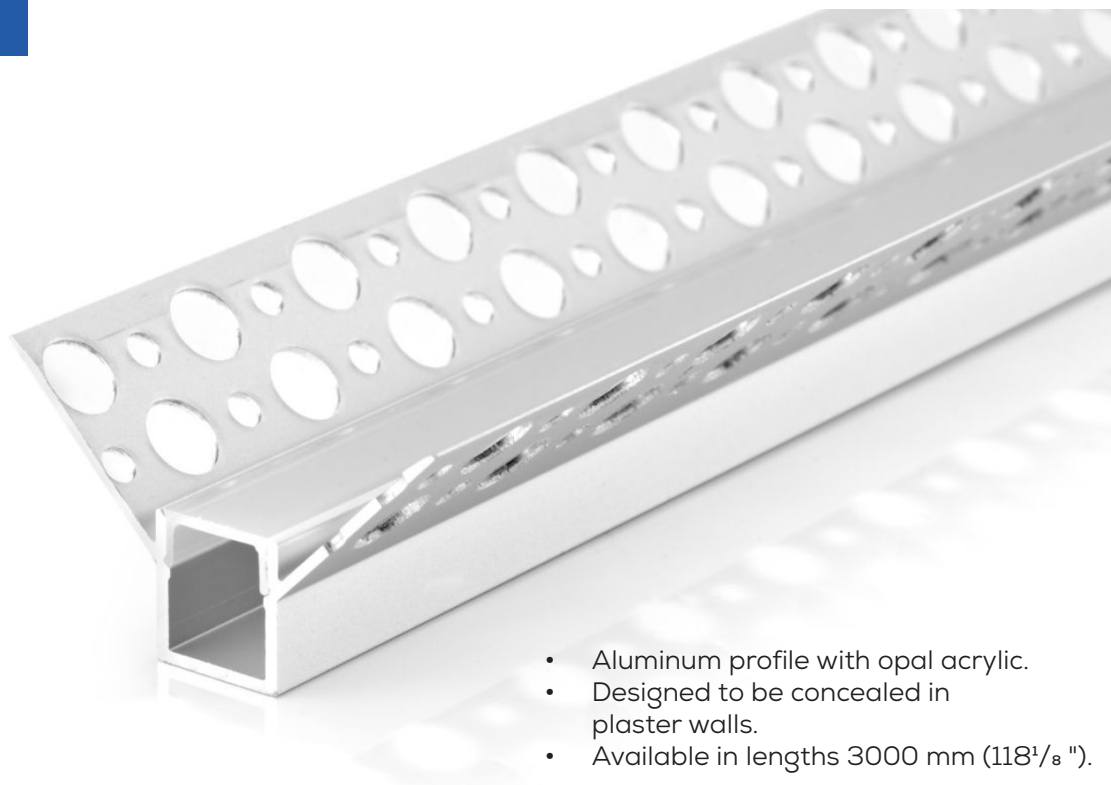

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

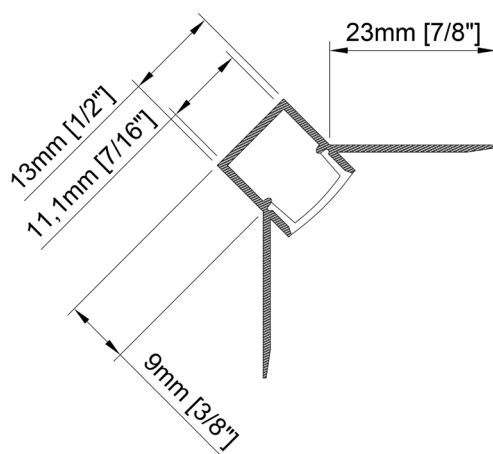

Size	13mm x 14mm x 3000mm $\frac{3}{8}" \times \frac{9}{16}" \times 118\frac{1}{8}"$
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm $\frac{7}{16}"$
Cover	PC diffused

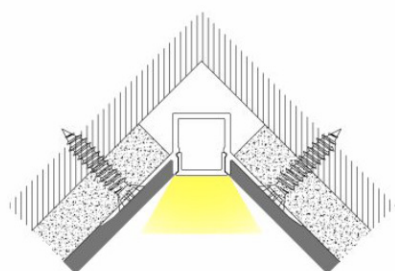

Accessories



TT-26-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	26	-	3000	-	O


TT-27-3000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

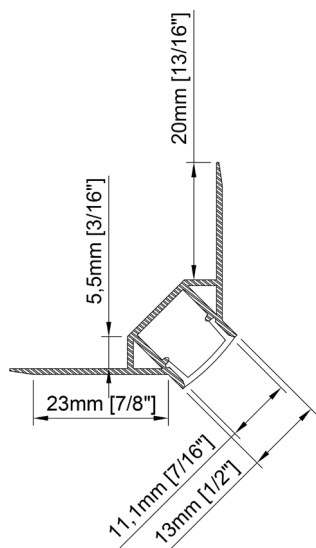

Size	13mm x 14mm x 3000mm $\frac{3}{8}$ " x $\frac{9}{16}$ " x 118 ¹ / ₈ "
Lenght	3000 mm 118 ¹ / ₈ "
Internal width	11,1mm $\frac{7}{16}$ "
Cover	PC diffused

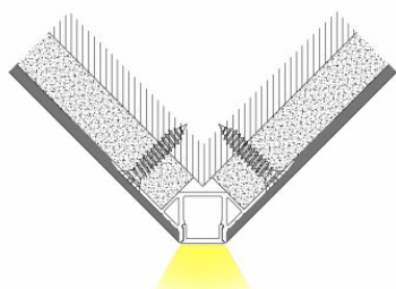


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	27	-	3000	-	O


TT-28-3000-O

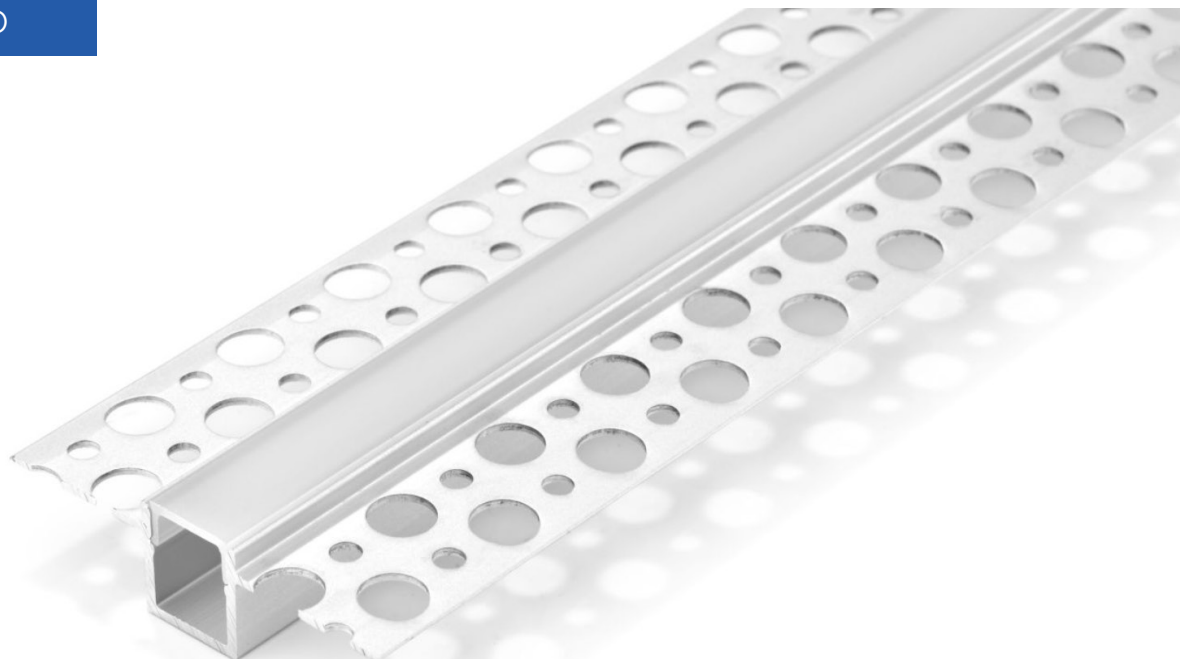

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm ($118\frac{1}{8}$ ").

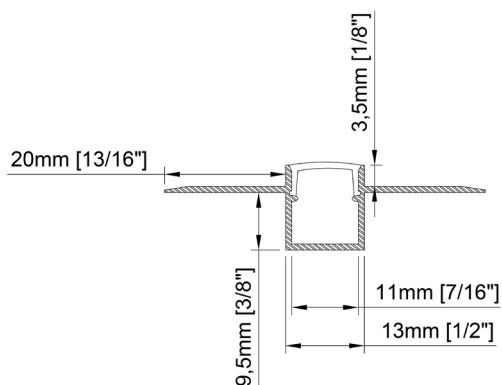

Size	13mm x 14mm x 3000mm $\frac{3}{8}$ " x $\frac{9}{16}$ " x $118\frac{1}{8}$ "
Lenght	3000 mm $118\frac{1}{8}$ "
Internal width	11,1mm $\frac{7}{16}$ "
Cover	PC diffused

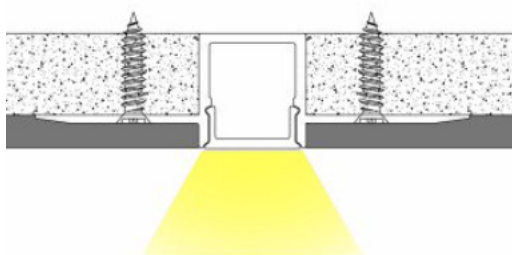

Accessories




TT-28-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	28	-	3000	-	O


TT-29-3000-O

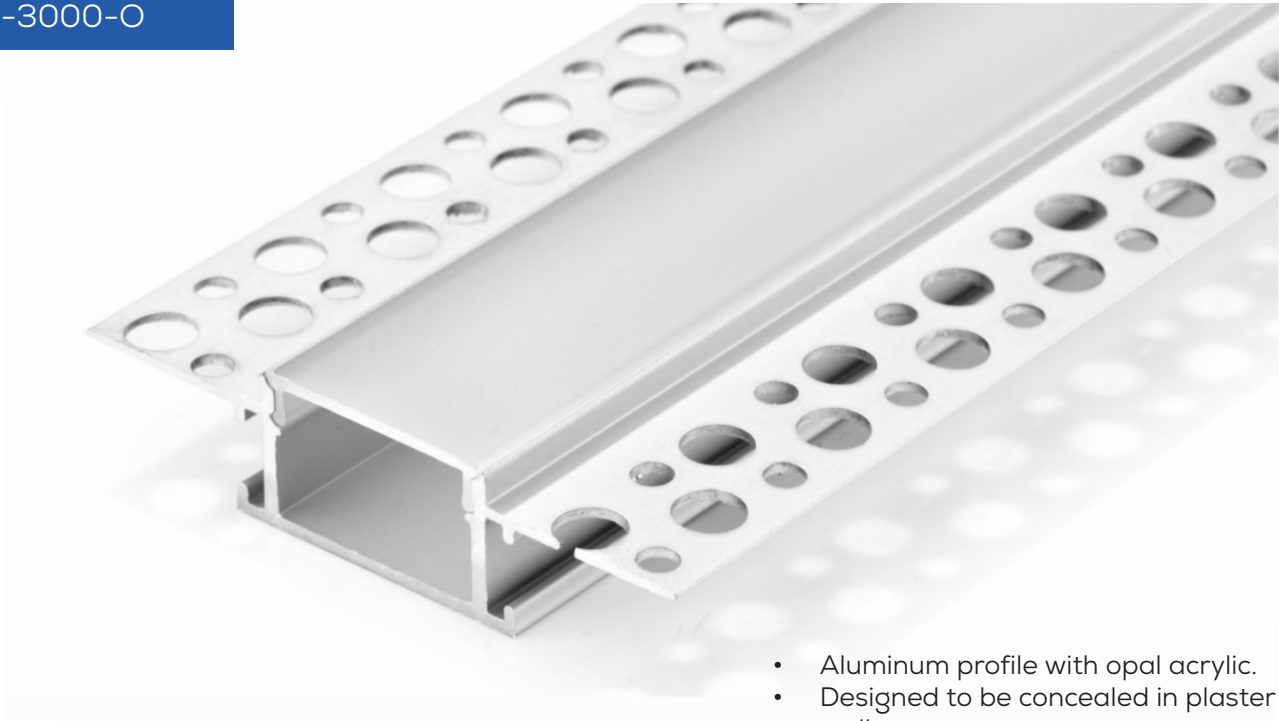

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 3000 mm (118¹/₈ ").

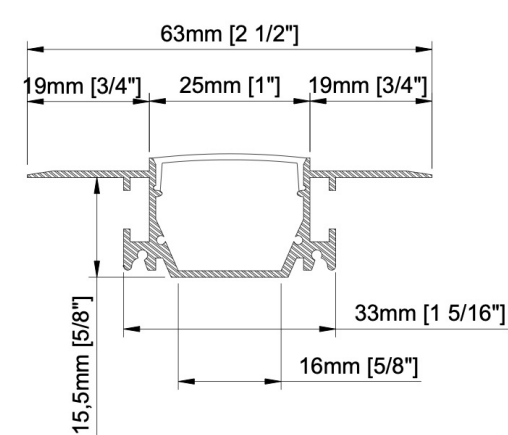

Size	25mm x 15,5mm x 3000mm $\frac{3}{8}" \times \frac{5}{8}" \times 118\frac{1}{8}"$
Lenght	3000 mm $118\frac{1}{8}"$
Internal width	16mm $\frac{5}{8}"$
Cover	PC diffused

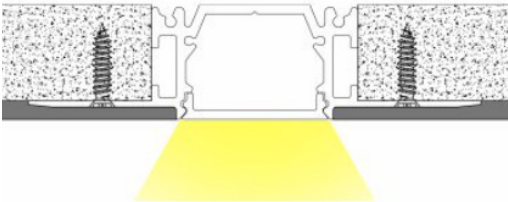

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	29	-	3000	-	O

TT-33-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

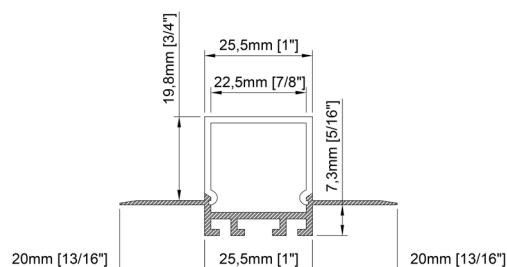


Size 25,5mm x 28mm x 2000mm
 $1" \times 1\frac{1}{8}" \times 78\frac{3}{4}"$

Lenght 2000mm
 $78\frac{3}{4}"$

Internal width 22,5mm
 $\frac{7}{8}"$

Cover PC diffused



Accessories



TT-33-END

PRODUCT CODE


TT - MODEL - LENGHT (mm) - COVER

TT - 33 - 2000 - O


TT-34-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

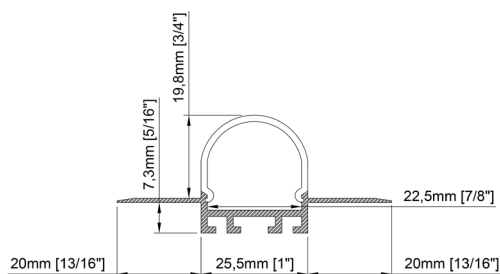

Size	25,5mm x 28mm x 2000mm 1" x 1 ¹ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	22,5mm 7/8"
Cover	PC diffused



Accessories



TT-34-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	34	-	2000	-	O


TT-36-2000-O



- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

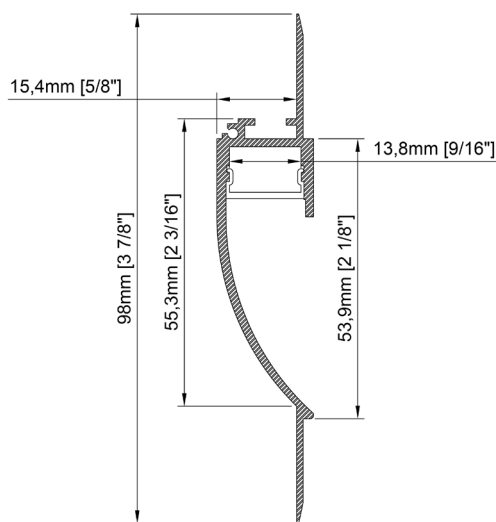

Size	98mm x 15mm x 2000mm $3\frac{7}{8}$ " x $\frac{5}{8}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	13,8mm $\frac{9}{16}$ "
Cover	PC diffused
Finish	White



Accessories



TT-36-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	36	-	2000	-	O


TT-41-2000-O




- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat the LED strips.
- Available in lengths 2000 mm (78³/₄").

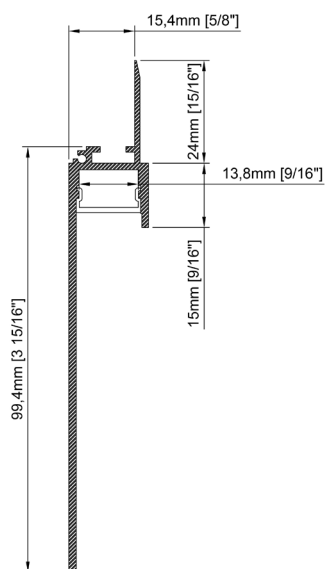

Size	99,4mm x 15,4mm x 2000mm 3 ¹⁵ / ₁₆ " x 5 ⁵ / ₈ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	13,8mm 9 ⁹ / ₁₆ "
Cover	PC diffused
Finish	White

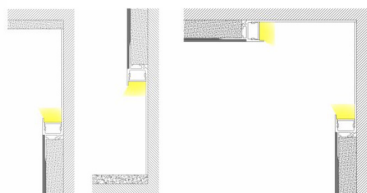


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	41	-	2000	-	O


TT-72-2000-0

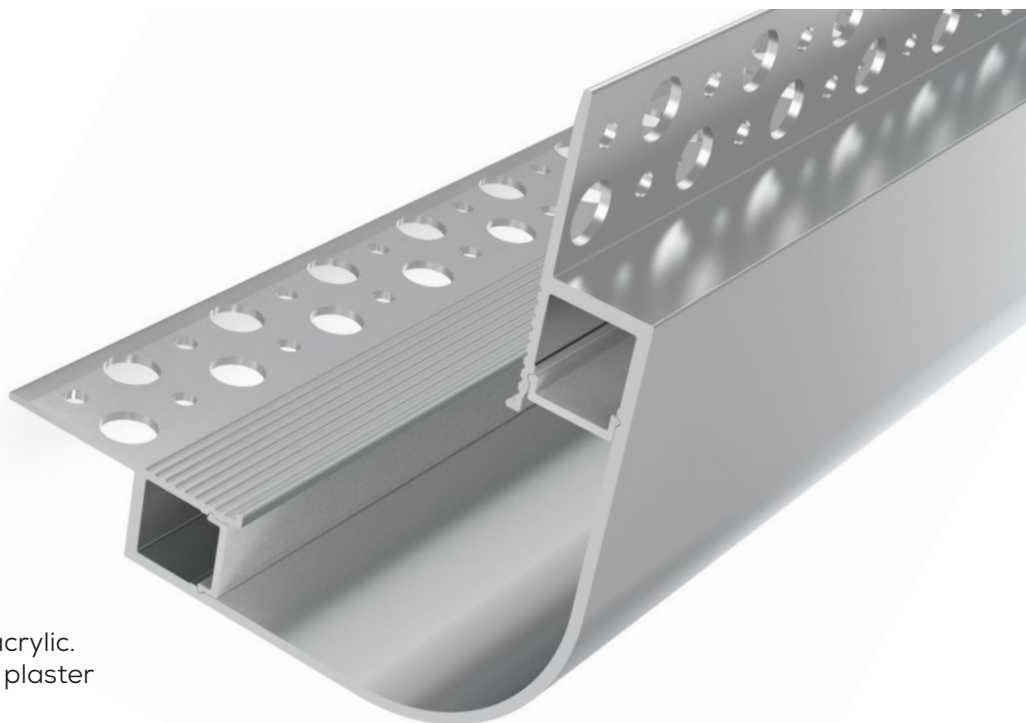

- Aluminum profile with opal acrylic.
- Designed to be concealed in plaster walls.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

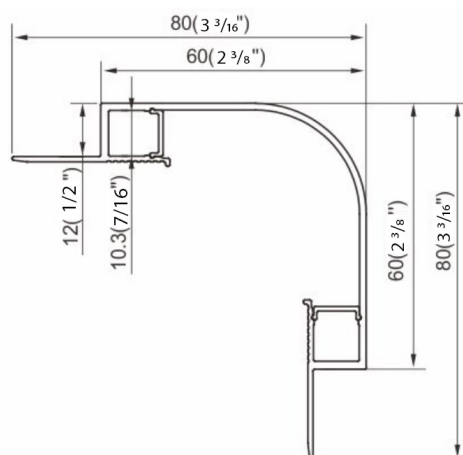

Size	80mm x 80mm x 2000mm $3\frac{3}{16}$ " x $3\frac{3}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	10,3mm X 2 $\frac{7}{16}$ "
Cover	PC diffused
Finish	White




Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	72	-	2000	-	O

TT-78-2000-O

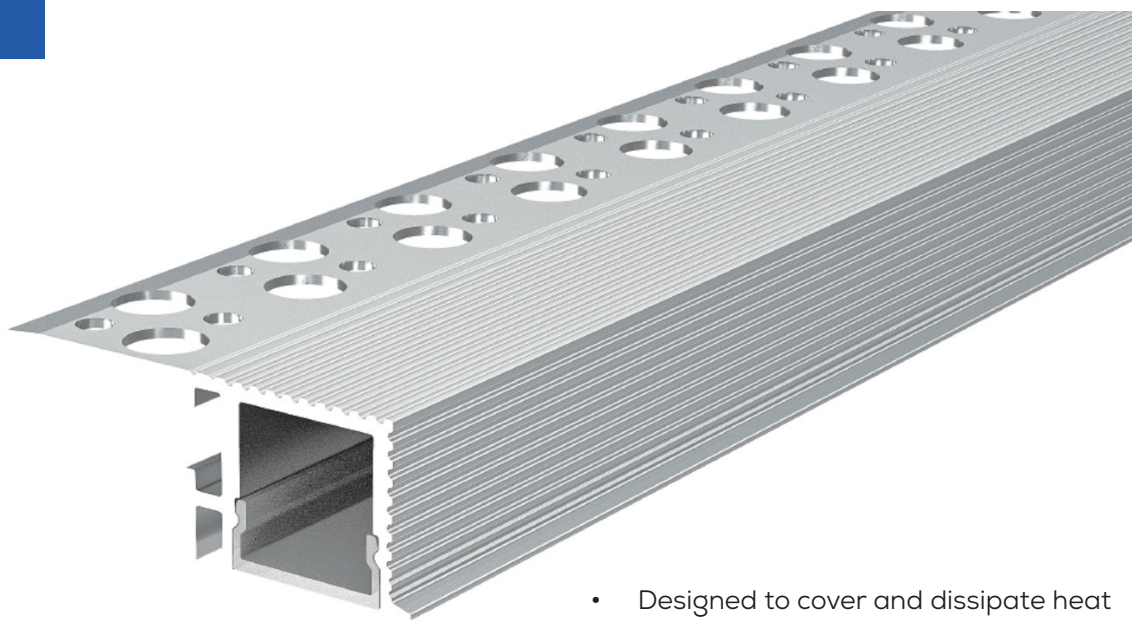

- Designed to cover and dissipate heat the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

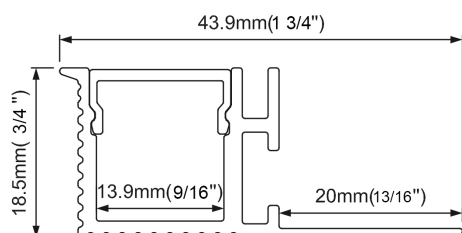

Size	43,9mm x 18,5mm x 2000mm $1\frac{3}{4}" \times \frac{3}{4}" \times 78\frac{3}{4}"$
Lenght	2000mm $78\frac{3}{4}"$
Internal width	13,9mm $\frac{9}{16}"$
Cover	PC diffused
Finish	White

Accessories



TT-78-END



TT-78-EXT



TT-78-EXT-90



TT-78-EXT-90IL

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	78	-	2000	-	O

TRIM-LESS TILES



Credit photo: Godomo


TITANIUM

TECHNOLOGY




TT-11-2000 Page 172

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118




TT-43-2000 Page 173

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-44-2000 Page 174

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-45-2000 Page 175

Power (W/m)	Luminous flux (lm/feet)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



PRODUCT BUILDER CODE

TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
TT	-		-		-		-		-		-		-		-		-		-		-	

28/6
221 lm/feet
5W/feet

28/6 H
527 lm/feet
6,25W/feet
*24v only

28/12
456 lm/feet
9W/feet
*24v only

35/3
45 lm/feet
1,5W/feet

35/6
120 lm/feet
3W/feet

22/15
425 lm/feet
9W/feet
*24v only

50/3
4,5W/feet

DX/24
DIGITAL DMX
*24V only

27
2700K

30
3000K

35
3500K

40
4000K

60
6000K

RE
RED

GR
GREEN

BL
BLUE

AM
AMBER

PK
PINK

CB
CYAN

OR
ORANGE

UV
*28/6 only

RGB
*50/3, 28/6 or 35/6 only

RGBWW
*50/3 only

RGBNW
*50/3 only

RGBCW
*50/3 only

RGBCCT
*50/3 only

20

65

12

24

Hxxxx
12 inches
minimum

DCxxxx
12 inches
minimum

DCxxxx
12 inches
minimum

empty
No lead out

Hxxxx
12 inches
minimum

DCxxxx
12 inches
minimum

NE
No end
cap

EC
With end
cap

NC
No Clip

xC
x=OTE

n/a
No psu

P
Plug-in

CV
Dimmable

CV-BOX
Dimmable with box

CV67
IP67 psu


120V
No dimmable
120v psu

347V
No dimmable
347v PSU


O10
0-10v PSU

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-11-2000-O

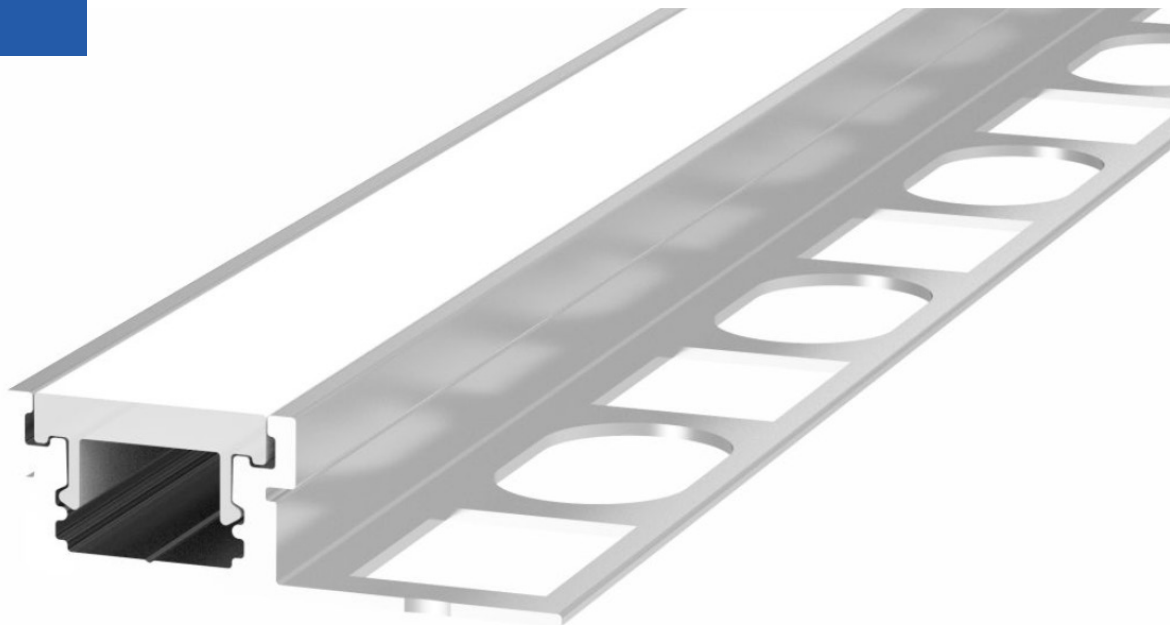

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

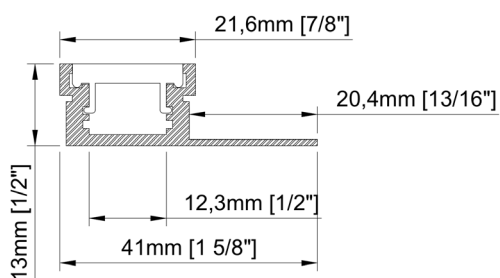

Size	41mm x 13mm x 2000mm $1\frac{5}{8}$ " x $1\frac{1}{2}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	12,3mm $\frac{1}{2}$ "
Cover	PC diffused

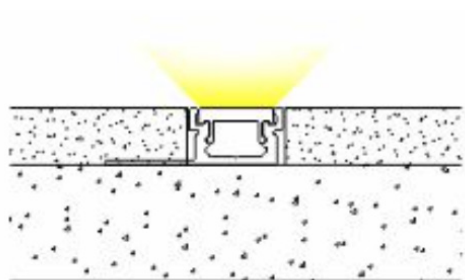

Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	11	-	2000	-	O


TT-43-2000-O



- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

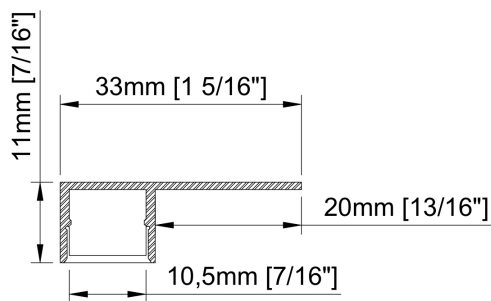

Size	33mm x 11mm x 2000mm $1\frac{5}{16}$ " x $\frac{7}{16}$ " x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	10,5mm $\frac{7}{16}$ "
Cover	PC diffused

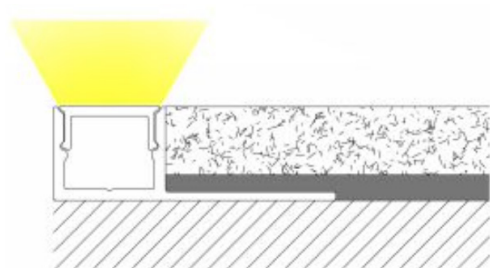


Accessories




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	43	-	2000	-	O


TT-44-2000-O

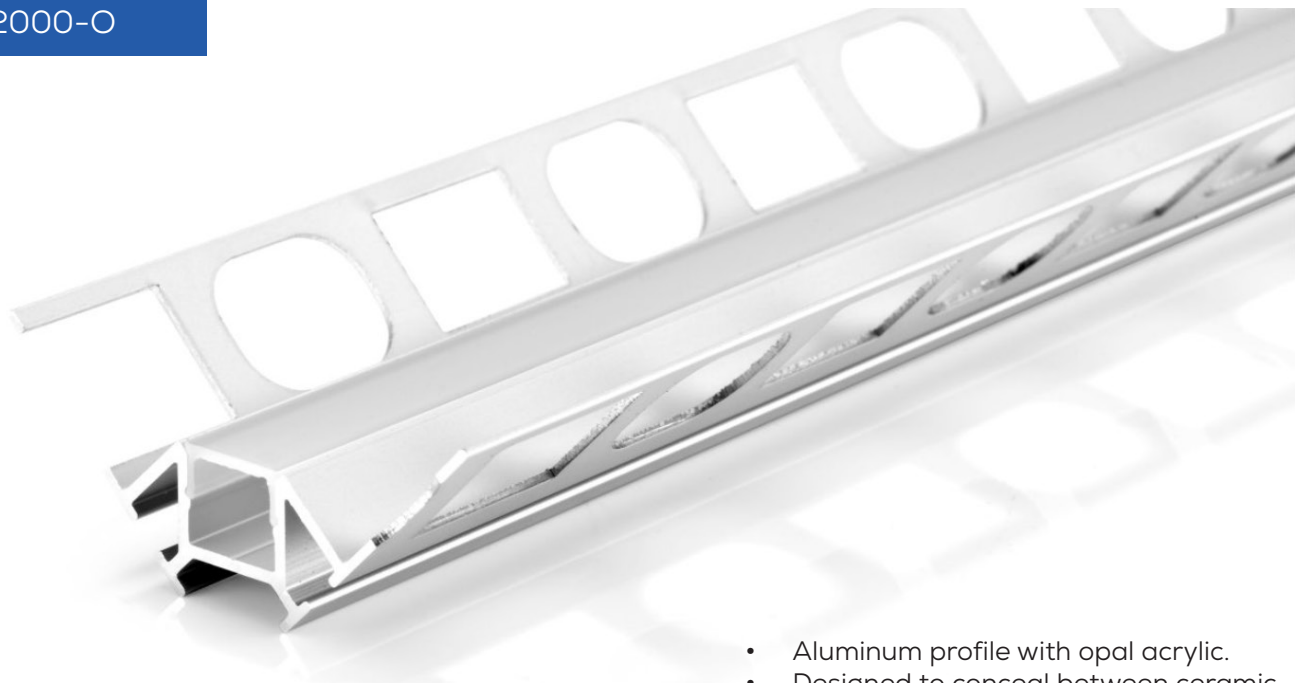

- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

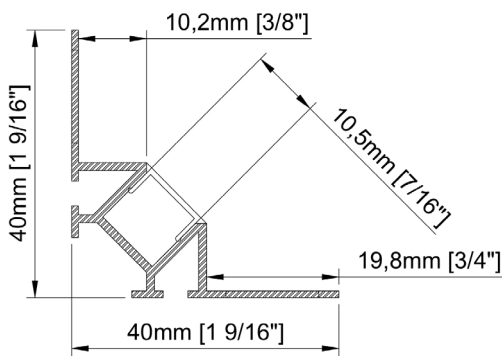

Size	40mm x 40mm x 2000mm 1 ⁹ / ₁₆ " x 1 ⁹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

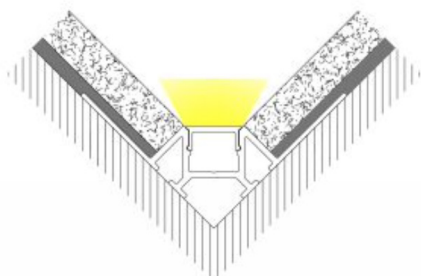

Accessories



TT-44-END


PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	44	-	2000	-	O


TT-45-2000-O



- Aluminum profile with opal acrylic.
- Designed to conceal between ceramic wall tiles.
- Available in lengths 2000 mm (78³/₄ ").

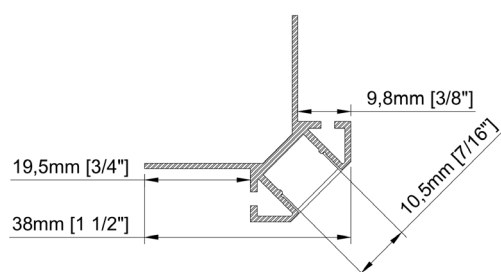

Size	38mm x 38mm x 2000mm 1 ¹ / ₂ " x 1 ¹ / ₂ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,5mm 7/ ₁₆ "
Cover	PC diffused

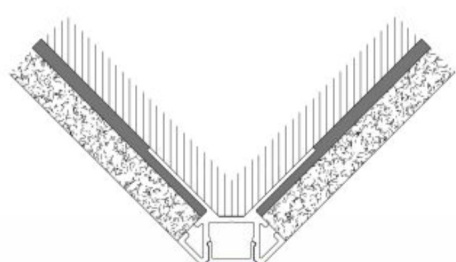

Accessories



TT-45-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	45	-	2000	-	O

BOTTOM WALL





Credit photo: Cuisines Simard


TITANIUM TECHNOLOGY - 2025 177

TT-30-2000-O

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78¾").

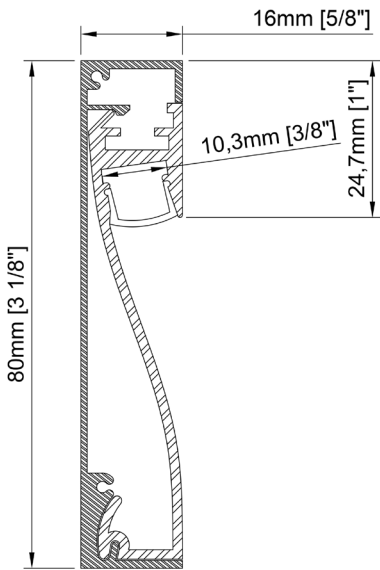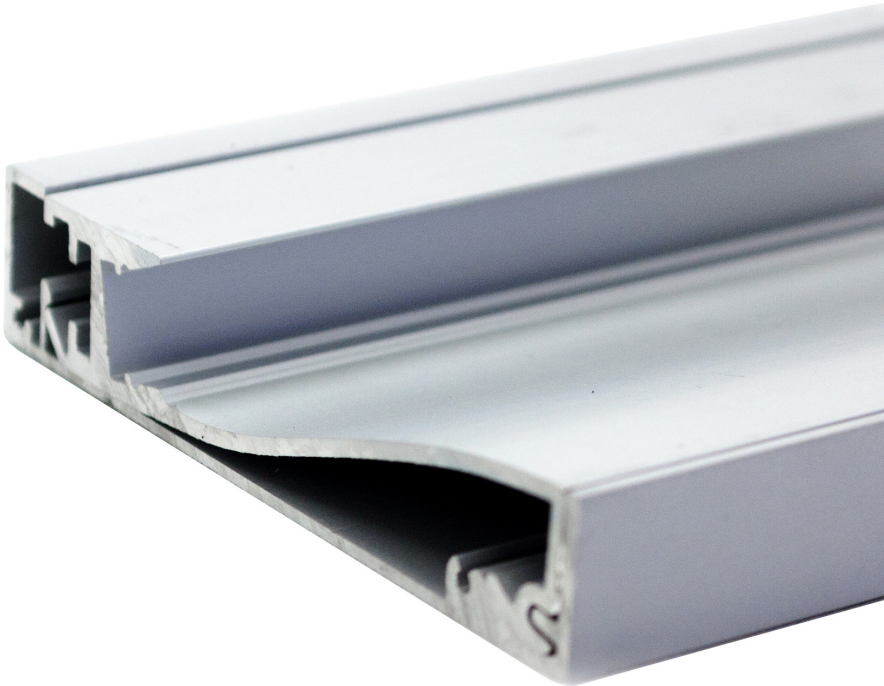

Size	80mm x 16mm x 2000mm 3 1/8" x 5/8" x 78 3/4"
Lenght	2000mm 78 3/4"
Internal width	10,3mm 3/8"
Cover	PC diffused

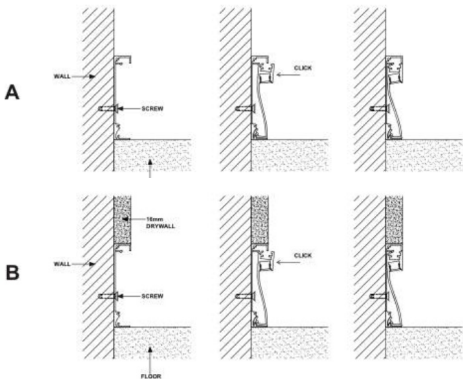

Accessories





PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	30	-	2000	-	O


TT-51-2000-O

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm (78³/₄").

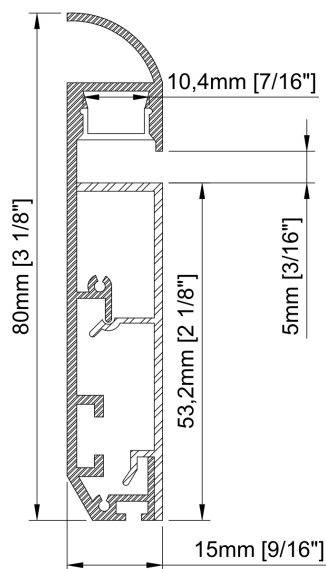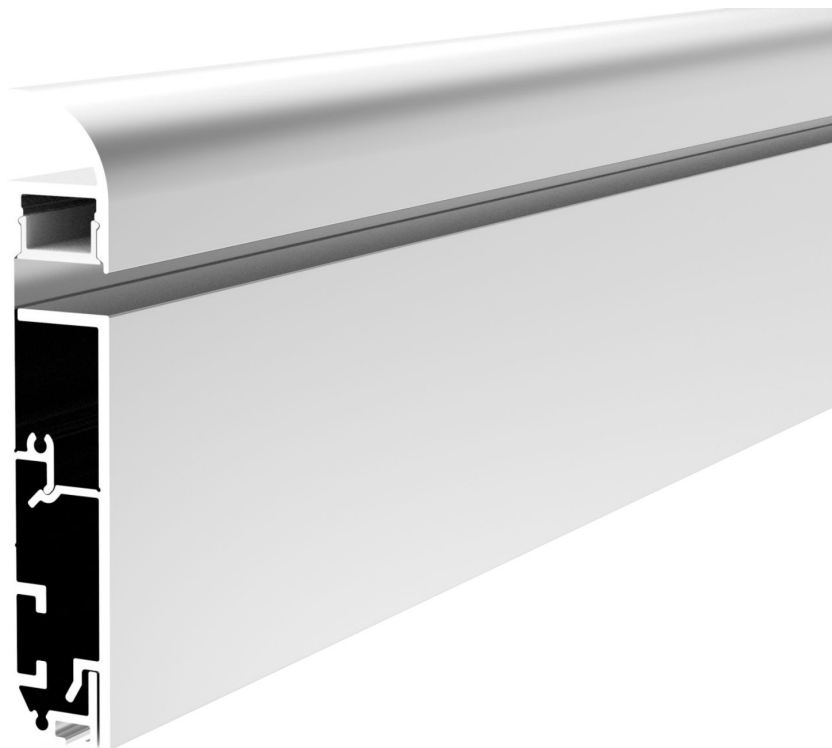

Size	80mm x 15mm x 2000mm 3 ¹ / ₈ " x 9 ⁹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	10,4mm 7 ⁷ / ₁₆ "
Cover	PC diffused

Accessories

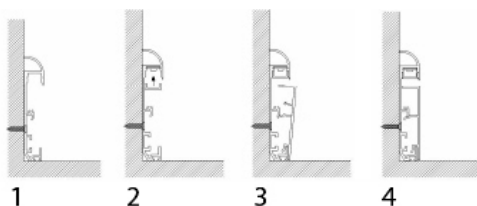

TT-51-END



TT-51-EXT

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	51	-	2000	-	O

CLOSET




Credit photo: Godomo


TT-35-2000-O



- Aluminum profile with opal acrylic.
- Designed for wardrobes.
- Available in lengths 2000 mm (78³/₄ ").

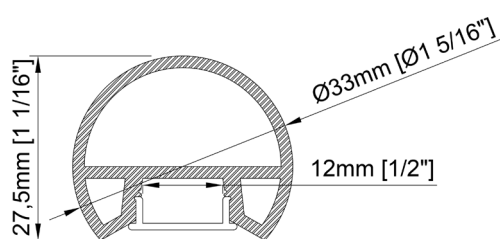

Size	27,5mm x 33mm x 2000mm 1 ¹ / ₁₆ " x 1 ⁵ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12mm 1/2"
Cover	PC diffused

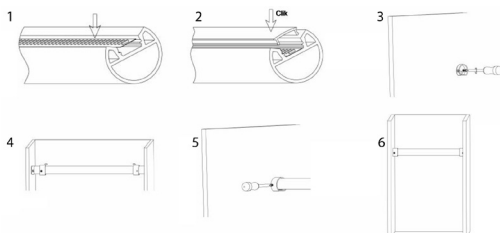

Accessories



PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	35	-	2000	-	O

STAIRS




TT-42-2000-O

- Aluminum profile with opal acrylic.
- Designed for stairs with non-slip rubber band.
- Available in lengths 2000 mm (78³/₄ ").

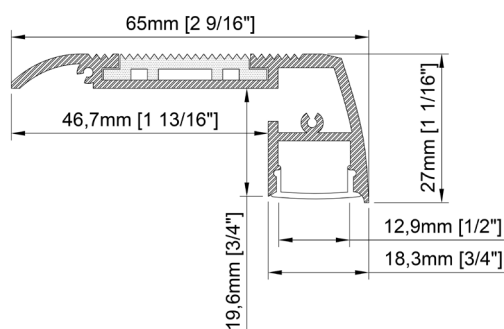

Size	65mm x 27mm x 2000mm 2 ⁹ / ₁₆ " x 1 ¹ / ₁₆ " x 78 ³ / ₄ "
Lenght	2000mm 78 ³ / ₄ "
Internal width	12,9mm 1/2"
Cover	PC diffused
Finish	Black

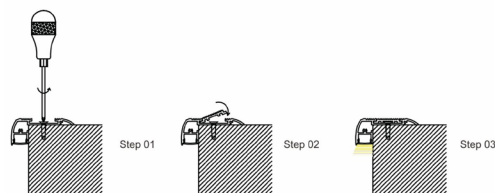

Accessories



TT-42-END

PRODUCT CODE


TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	42	-	2000	-	O

TRIM-LESS CONCRETE




Credit photo: Maison Profab

TT-12-3000-O

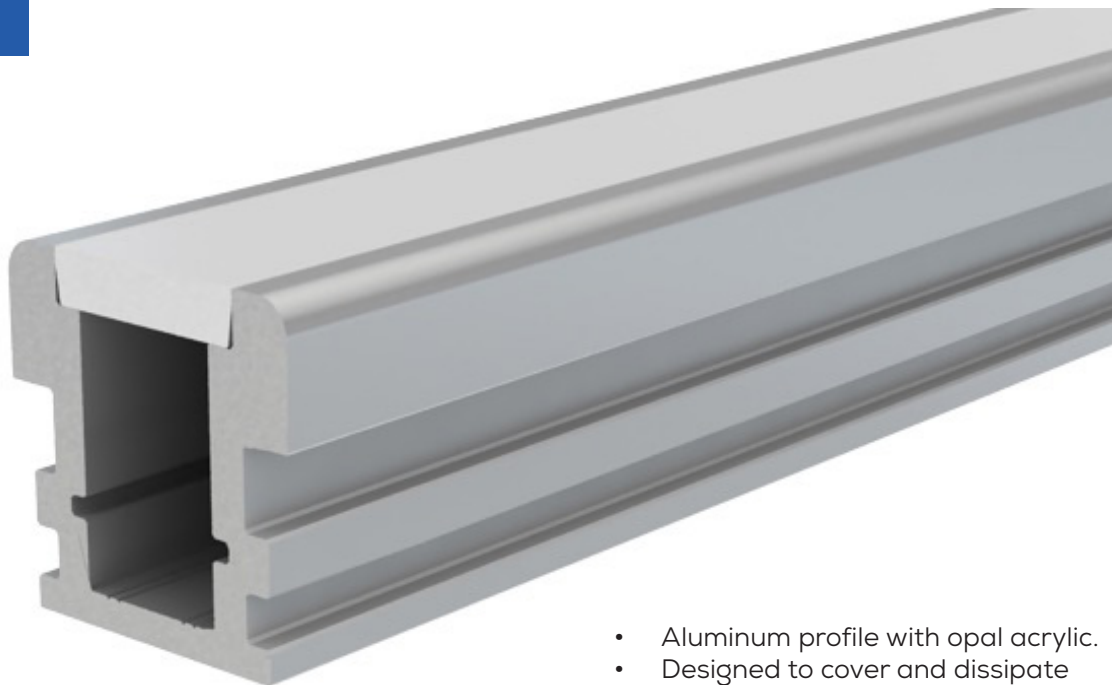

- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 3000 mm (118¹/₈"").

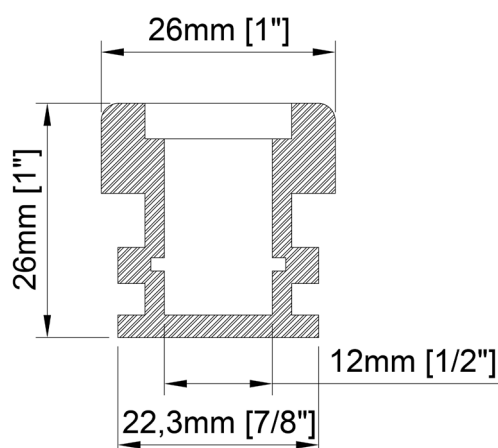

Size	26mm x 26mm x 3000mm 1" x 1" x 118 ¹ / ₈ "
Lenght	3000mm 118 ¹ / ₈ "
Internal width	12mm ¹ / ₂ "
Cover	PC diffused

Accessories



TT-12-END

PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT - 12 - 3000 - O

SUSPENDED CEILING




Credit photo: Godomo


TT-67-2000-O



- Aluminum profile with opal acrylic.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 2000 mm ($78\frac{3}{4}$ ").

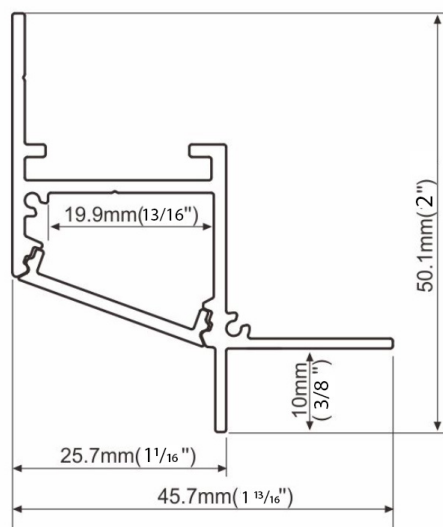

Size	45,7mm x 50,1mm x 2000mm $1\frac{13}{16}$ " x 2" x $78\frac{3}{4}$ "
Lenght	2000mm $78\frac{3}{4}$ "
Internal width	19,9mm $\frac{13}{16}$ "
Cover	PC diffused



Accessories



TT-67-END

PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	67	-	2000	-	O

EDGE



Credit photo: Groupe Dallaire



TT-70-2000 Page 190

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118



TT-71-2000 Page 191

Power (W/m)	Luminous flux (lm/foot)	CRI	CCT (Kelvin)	Length (inch)
5,9 ~ 34	38 ~ 600	90	2700 ~ 6000	1 ~ 118





PRODUCT BUILDER CODE


TT	PROFILE	LENGTH (inch)	LUMEN PACKAGE	COLOUR CCT	IP	VOLTAGE	LEAD IN (inch)	LEAD OUT (inch)	END CAP	CLIP	PSU
TT											
			28/6 221 lm/foot 5W/foot	27 2700K	20	12	Hxxxx 12 inchs minimum	empty No lead out	NE No end cap	NC No Clip	n/a No psu
			28/6 H 527 lm/foot 6,25W/foot *24v only	30 3000K	65	24	DCxxxx 12 inchs minimum	Hxxxx 12 inchs minimum	EC With end cap	xC x=QTE	P Plug-in
			28/12 456 lm/foot 9W/foot *24v only	35 3500K			DCxxxx 12 inchs minimum				CV Dimmable
			35/3 45 lm/foot 1,5W/foot	40 4000K							CV-BOX Dimmable with box
			35/6 120 lm/foot 3W/foot	60 6000K							CV67 IP67 psu
			22/15 425 lm/foot 9W/foot *24v only	RE RED							120V No dimmable 120v psu
			50/3 4,5W/foot	GR GREEN							347V No dimmable 347V PSU
			DX/24 DIGITAL DMX *24V only	BL BLUE							010 0-10v PSU
				AM AMBER							
				PK PINK *28/6 only							
				CB CYAN *28/6 only							
				OR ORANGE *28/6 only							
				UV *28/6 only							
				RGB *50/3, 28/6 or 35/6 only							
				RGBWW *50/3 only							
				RGBNW *50/3 only							
				RGBCW *50/3 only							
				RGBCCT *50/3 only							

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.

TT-70-2000-O

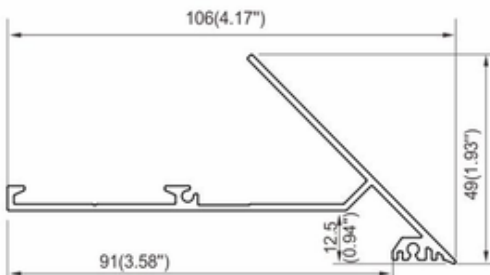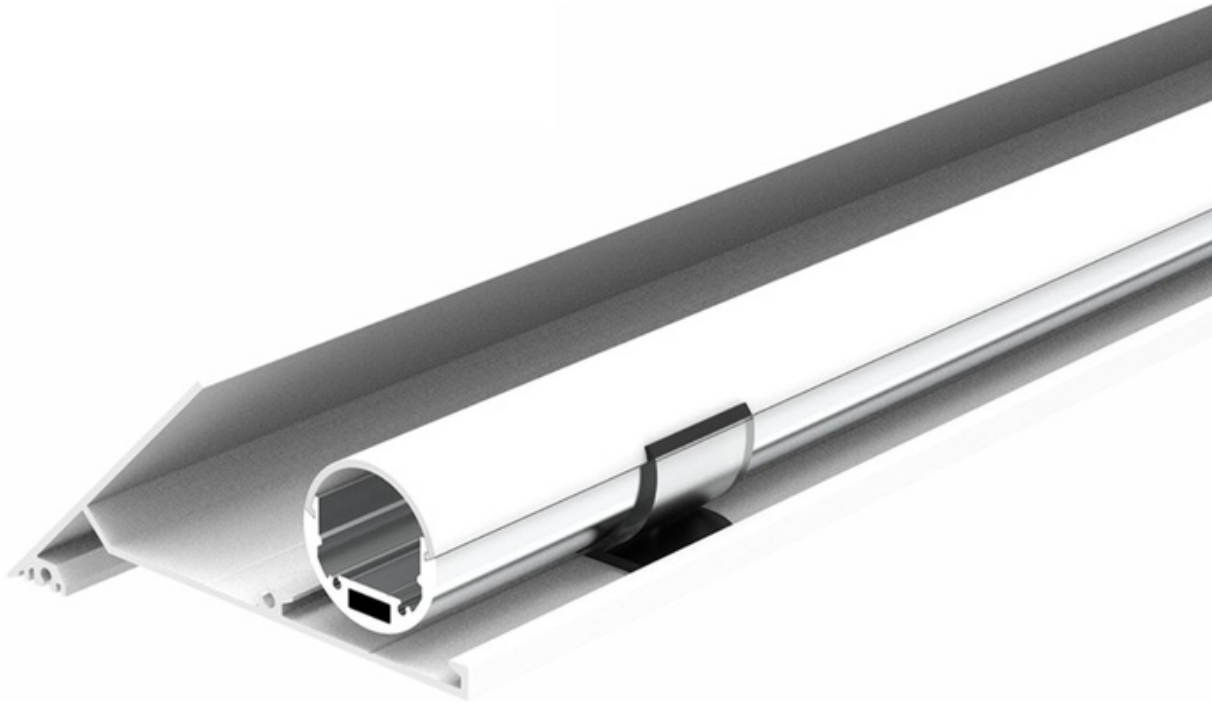

Size	2000 mm x 91 mm x 49 mm 78 ³ / ₄ " x 3 ¹ / ₂ " x 1 ⁷ / ₈ "
Lenght	2000 mm 78 ³ / ₄ "
Internal width	13 mm 1 ¹ / ₂ "
Cover	PC diffused




PRODUCT CODE

TT	-	MODEL	-	LENGHT (mm)	-	COVER
TT	-	70	-	2000	-	O

Accessories



TT-71-2000-O

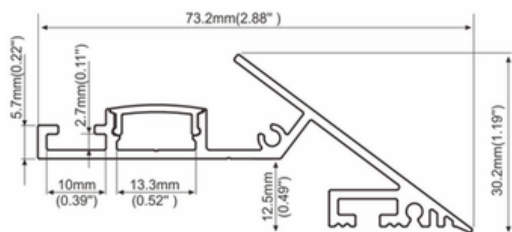

Size	73,2mm x 30,2mm x 2000mm 2 ⁷ / ₈ " x 1 ³ / ₁₆ " x 78 ³ / ₄ "
------	---

Lenght	2000mm 78 ³ / ₄ "
--------	--

Internal width	13,3mm ⁹ / ₁₆ "
----------------	--

Cover	Semi-clear PMMA
-------	-----------------



Accessories




PRODUCT CODE

TT - MODEL - LENGHT (mm) - COVER

TT	-	71	-	2000	-	O
----	---	----	---	------	---	---

FLEX

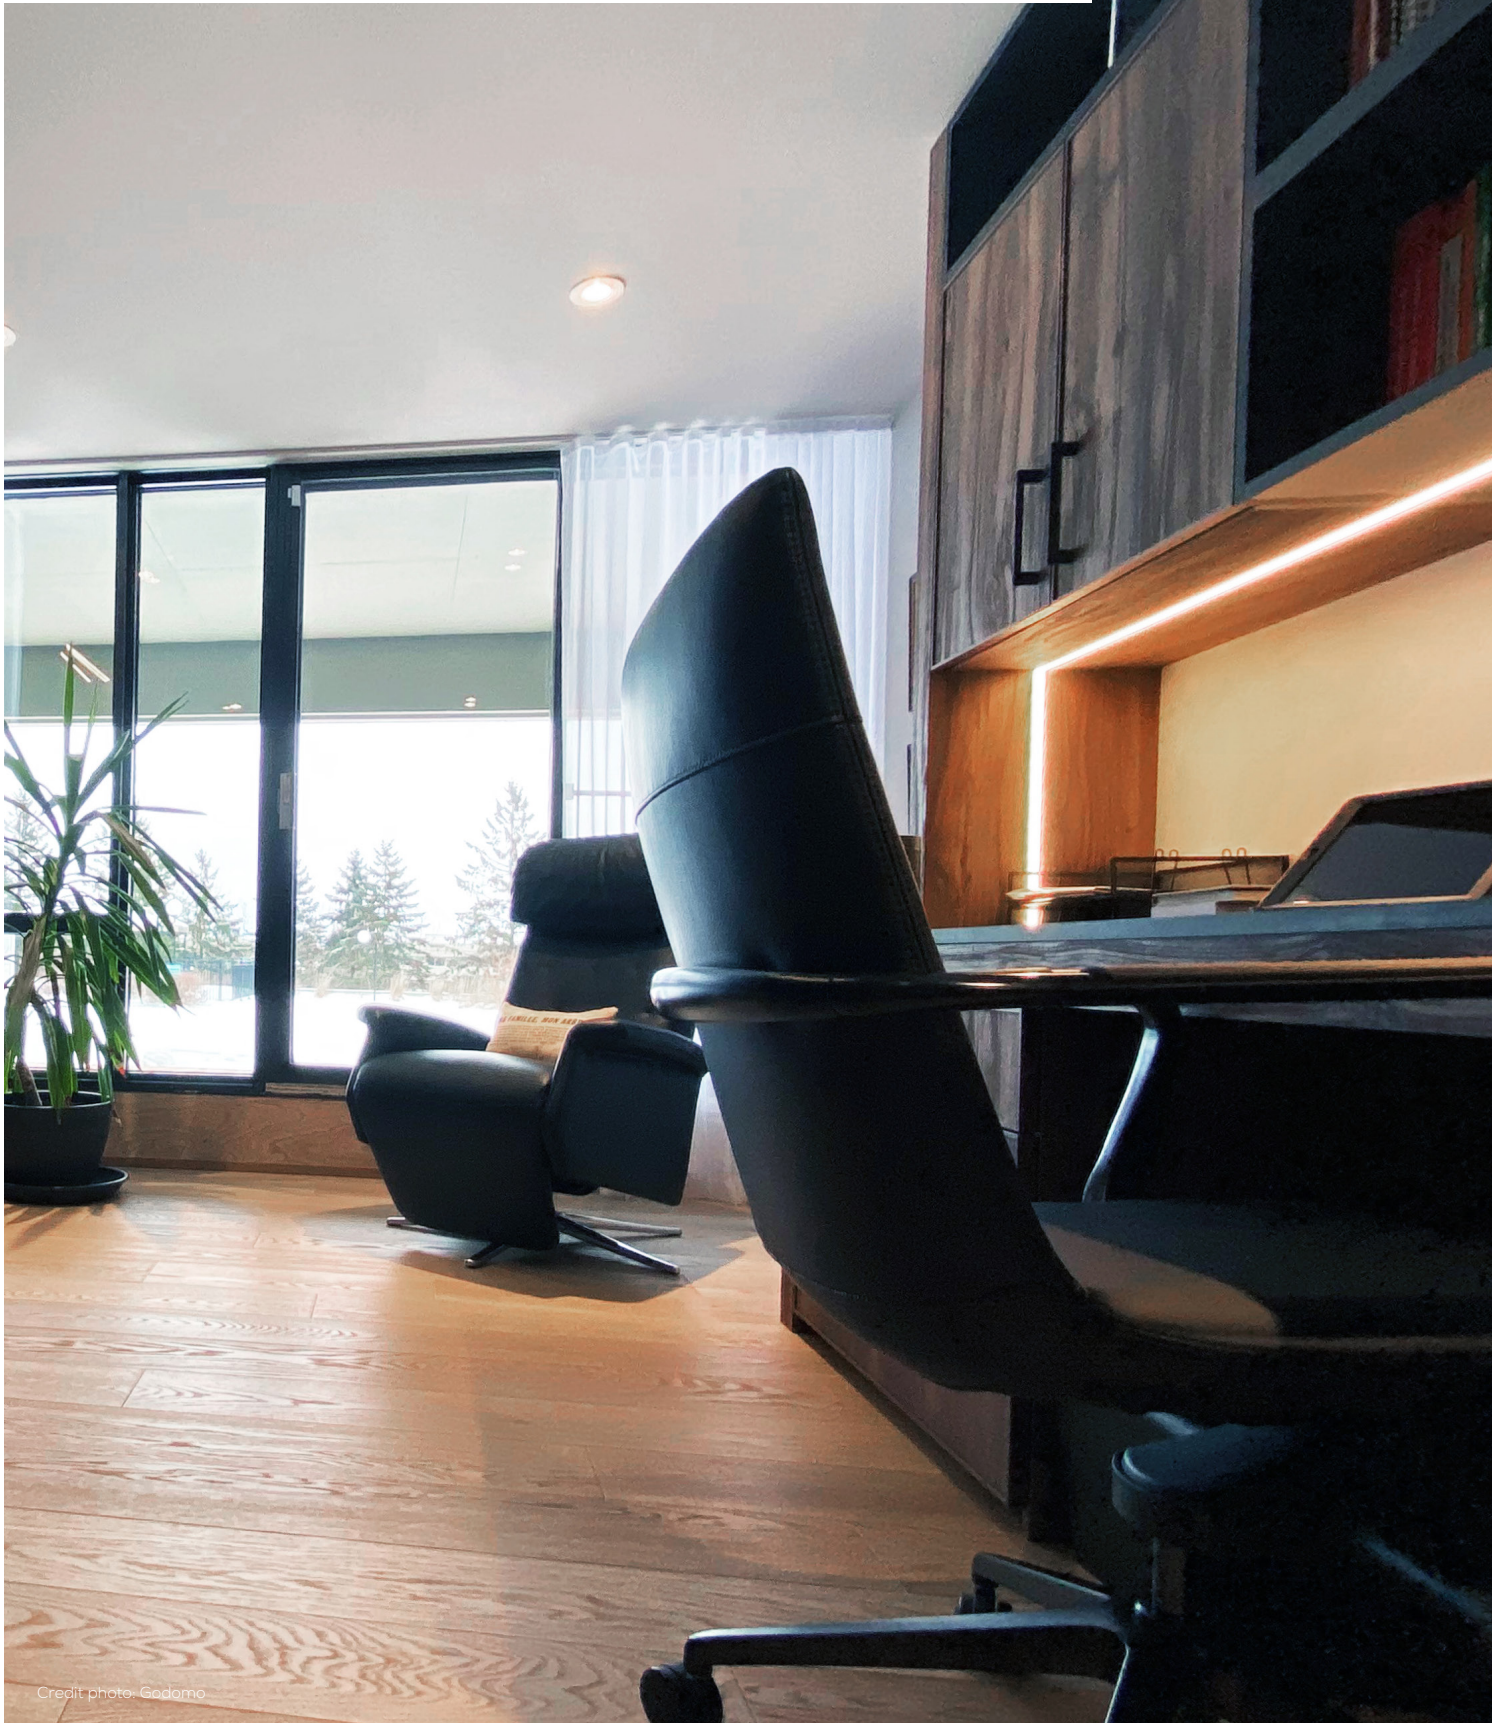


Credit photo: Godomo


TT	-	PROFILE	-	LENGTH (inch)	-	LUMEN PACKAGE	-	COLOUR CCT	-	IP	-	VOLTAGE	-	LEAD IN (inch)	-	LEAD OUT (inch)	-	END CAP	-	CLIP	-	PSU
----	---	---------	---	------------------	---	------------------	---	---------------	---	----	---	---------	---	-------------------	---	-----------------------	---	------------	---	------	---	-----

For a custom color, add at the end of the manufacturer code number COLOR RAL K7. Contact your dealer about the additional cost to a special color.


TT-FLEX-01

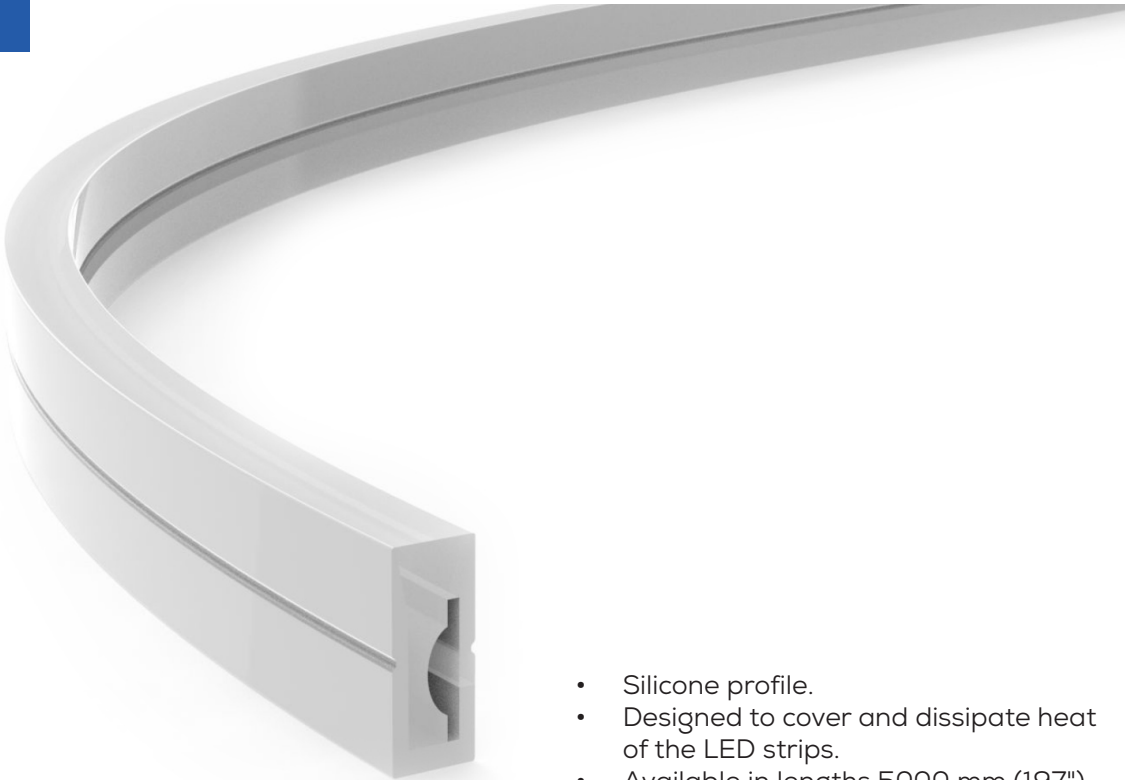

- Silicone profile.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

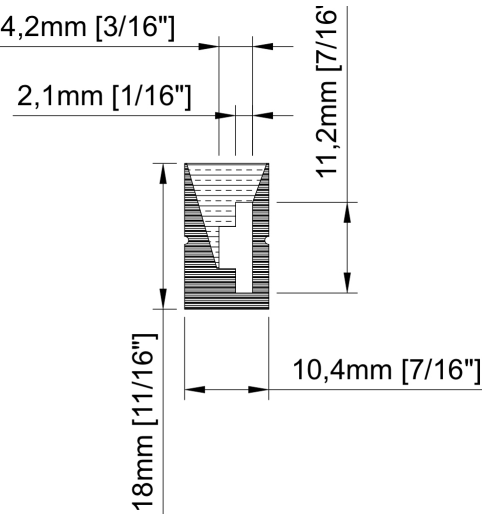

Size	10,4mm x 18mm x 5000mm 7/16" x 11/16" x 197"
Lenght	5000mm 197"
Internal width	11,2mm 7/16"
Cover	White silicone

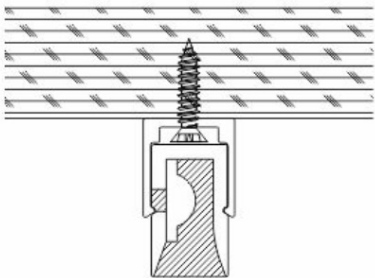

Accessories



TT-FLEX-01-CLIP



TT-FLEX-01-AC




TT-FLEX-01-END

PRODUCT CODE			
TT	-	TYPE	- MODEL
TT	-	FLEX	- 01


TT-FLEX-02



- Silicone profile.
- Designed to cover and dissipate heat of the LED strips.
- Available in lengths 5000 mm (197").

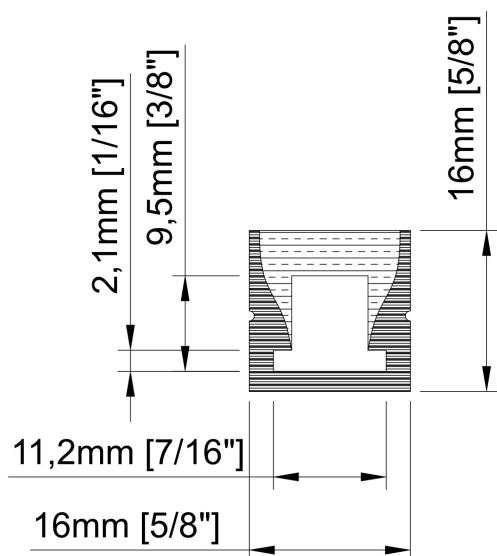


Size	16 mm x 16 mm x 5000 mm $\frac{5}{8}'' \times \frac{5}{8}'' \times 197''$
Lenght	5000mm 197"
Internal width	11,2mm $\frac{7}{16}''$
Cover	White silicone




Accessories



TT-FLEX-02-CLIP



TT-FLEX-02-AC



TT-FLEX-02-END

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	FLEX	-	02

LED ENGINES







Credit photo: Sommet V3



TT-2216-L1500 Page 202

Voltage

Luminous flux (lm/m)

Power

24vDC	27K	30K	35K	40K	60K			
	1399	1403	1438	1502	1649	34,12w /m	10,40w / feet	170,56w / roll



TT-2835-L600 Page 203

Voltage

Luminous flux (lm/m)

Power

12vDC	27K	30K	35K	40K	60K			
24vDC	800	808	810	815	817	16,4w /m	5w / feet	82w / roll



TT-2835-L600-CCT Page 204

Voltage

Luminous flux (lm/m)

Power

12vDC								
24vDC		CCT	20K-40K			15,6w /m	-	65,4w / roll



TT-2835-L600-RGB Page 205

Voltage

Luminous flux (lm/m)

Power

12vDC								
24vDC		-				40w / roll		
						62,4w / roll		



TT-2835-L1200 Page 206

Voltage

Luminous flux (lm/m)

Power

24vDC	27K	30K	35K	40K	60K			
	1493	1500	1507	1510	1512	30,4w /m	9,26w / feet	152w / roll



TT-3528-L300 Page 207

Voltage

Luminous flux (lm/m)

Power

12vDC	27K	30K	35K	40K	60K			
24vDC	125	147	148	149	154	5,8w /m	1,77w / feet	29w / roll



TT-3528-L600 Page 208

Voltage

Luminous flux (lm/m)

Power

12vDC	27K	30K	35K	40K	60K			
24vDC	383	391	399	402	405	9,84w /m	3w / feet	49,2w / roll



TT-3528-L600-5MM Page 209

Voltage

Luminous flux (lm/m)

Power

12vDC	27K	30K	35K	40K	50K			
24vDC	117	119	91	104	-	9,84w /m	3w / feet	49,2w / roll



TT-3538-L600 Page 210

Voltage

Luminous flux (lm/m)

Power

12vDC								
24vDC		-				19,2w /m		



TT-5050-L300-RGBW-4:1 Page 211

Voltage

Luminous flux (lm/m)

Power

12vDC								
24vDC		-				18,27w /m	5,57w / feet	91,35w / roll





TT-5050-L300-RGBCCT-5:1 Page 212

Voltage	Luminous flux (lm/m)					Power	
12vDC	-					12vDC	-
24vDC						10,32w /m	3,24w / feet
						13,44w /m	4,08w / feet
							51,36w / roll
							66,24w / roll



TT-DIGITAL-DMX-05V Page 213

Voltage	Luminous flux (lm/m)					Power	
5vDC	-					-	



TT-DIGITAL-DMX-24V Page 214

Voltage	Luminous flux (lm/m)					Power	
24vDC	-					-	



TT-LLS-120-14 Page 215

Voltage	Luminous flux (lm/m)					Power	
120vDC	900					10w / m	



TT-LLS-COB-12 Page 216

Voltage	Luminous flux (lm/m)					Power	
120vDC	-	-	-	-	-	15w / m	



TT-SIL-0410 Page 217

Voltage	Luminous flux (lm/m)					Power				
12vDC	-	-	-	-	-	1000	1500	2000	2500	3000
24vDC	-	-	-	-	-	12w/m	18w/m	24w/m	30w/m	36w/m



TT-COB-280 Page 218

Voltage	Luminous flux (lm/m)					Power	
12vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
24vDC	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		



TT-COB-320 Page 219

Voltage	Luminous flux (lm/m)					Power	
12vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
24vDC	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		



TT-COB-528 Page 220

Voltage	Luminous flux (lm/m)					Power	
12vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
24vDC	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		



TT-COB-576 Page 221

Voltage	Luminous flux (lm/m)					Power	
12vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
24vDC	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		





TT-COB-840

Page 222

Voltage	Luminous flux (lm/m)					Power	
12vDC	12vDC / 27K - 1040	30K - 1040	35K - 1040	40K - 1120	50K - 1120	11w / m	3,35w / feet
24vDC	24vDC / 27K - 317	30K - 317	35K - 317	40K - 342	50K - 342		



TT-2025FR-L600

Page 223

Voltage	Luminous flux (lm/m)		Power	
12vDC	-		8w / m	2,5w / feet




TT-SH-36W-24V


Page 224

Voltage	Luminous flux (lm/m)		Power
24vDC	-		36w



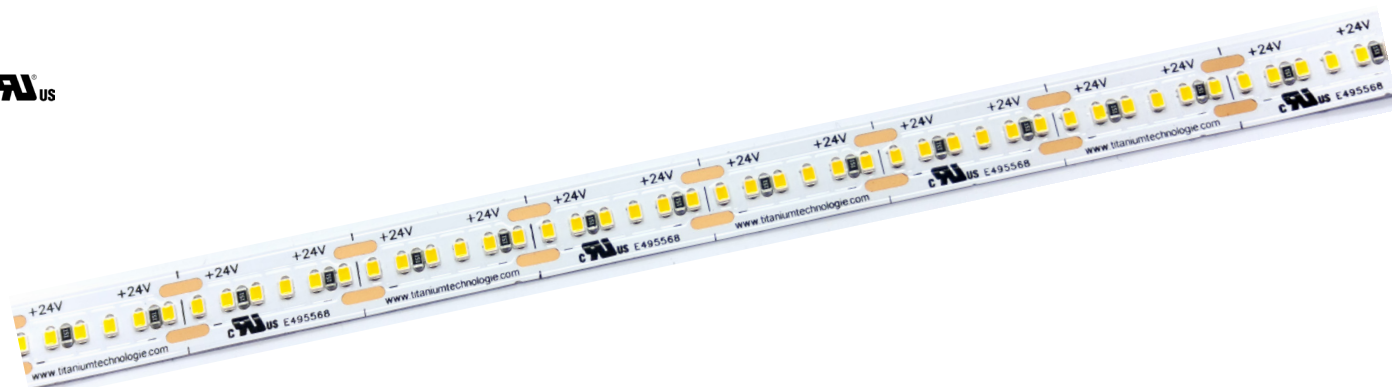



- Del SMD2216 tape in 5 meter roll.

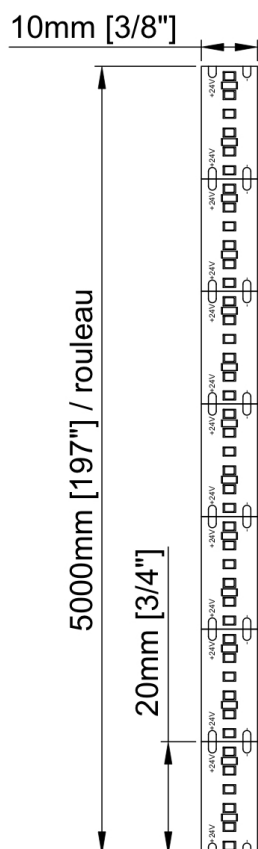

Voltage	24vDC		
LED/m	300 /m		
Power	9,84w/m	16,40w/m	22,85w/m
	3w /feet	5w /feet	6w /feet
	49,21w/roll	82,02w/roll.	114,25w/roll
Amperage	0,39 / m	0,66 / m	0,82 / m
	0,12 / feet	0,2/ feet	0,25/ feet
	1,95 / roll	3,3 / roll	4,1 / roll
Lumens	22K -	301 lm/feet	-
	27K - 193 lm/feet	341 lm/feet	483 lm/feet
	30K - 243 lm/feet	391 lm/feet	433 lm/feet
	35K - 293 lm/feet	441 lm/feet	583 lm/feet
	40K - 343 lm/feet	491 lm/feet	633 lm/feet
	60K - 393 lm/feet	541 lm/feet	683 lm/feet
CRI	90		
Angle	120°		
Size	IP20	10mm x 1,1mm x 5000mm 3⁄8" x 1⁄16" x 196 7⁄8"	
Cut line	20 mm 3⁄4"		
Finish	White		
Dimmable	Yes		
LED Colour	22K - Warm white 2200K (5W only)		
	27K - Warm white 2700K		
	30K - Warm white 3000K		
	35K - Neutral white 3500K		
	40K - Neutral white 4000K		
	50K -Cold white 5000K		
Working temp.	-40°C ~ 70°C		
IP	20		

PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	POWER	-	LED COLOR	-	VOLTAGE
TT	-	2216	-	L1500	-	20	-	3W	-	27K	-	24V
TT	-	2216	-	L1500	-	20	-		-		-	24V

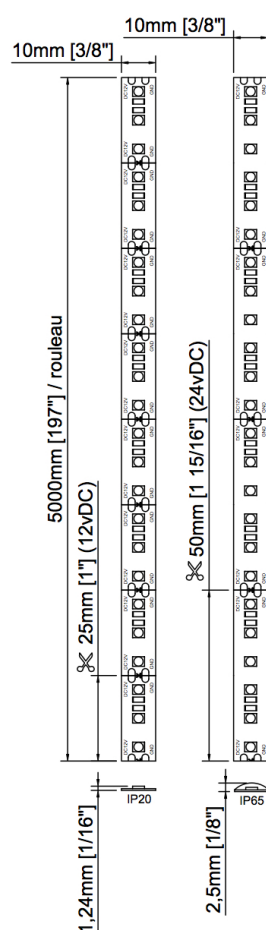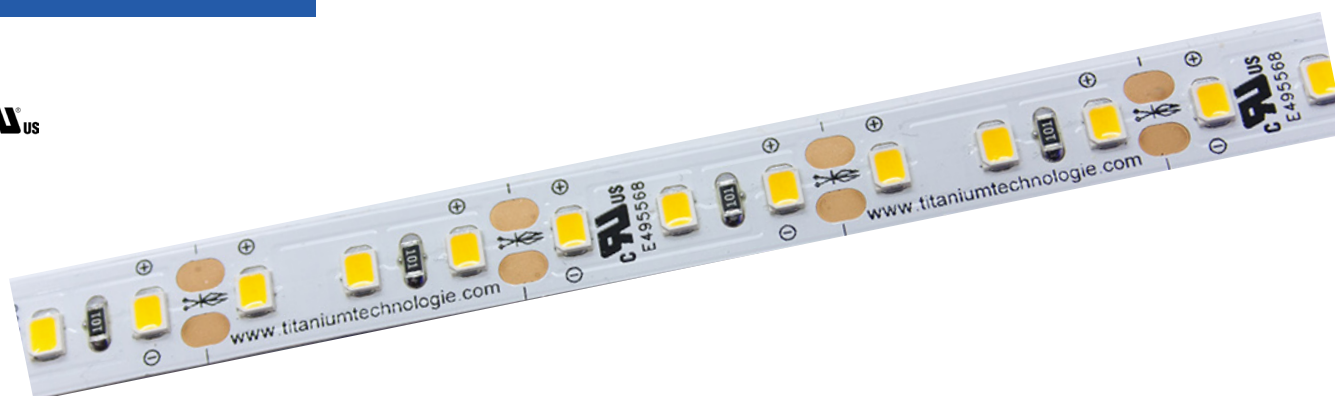


Voltage	12vDC	24vDC
LED/m	120 / m	
Power	16,4w / m 5w / feet 82w / roll	
Amperage	1,37A / m 0,42A / feet 6,84A / roll	0,69A / m 0,21A / feet 3,42A / roll
Lumen	27K - 243 lm/ feet 30K - 221 lm/ feet 35K - 246 lm/ feet 40K - 218 lm/ feet 60K - 245 lm/ feet	61 lm/ w 49 lm/ w 57 lm/ w 51 lm/ w -
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm 3/8" x 1/16" x 196 7/8"
	IP65	10mm x 2,5mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue CB - Crystal Blue A - Amber O - Orange P - Pink UV - UV 395~400nm	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	2835	L600	20	27K	24V
TT	2835	L600			



TT-2835-L600-CCT

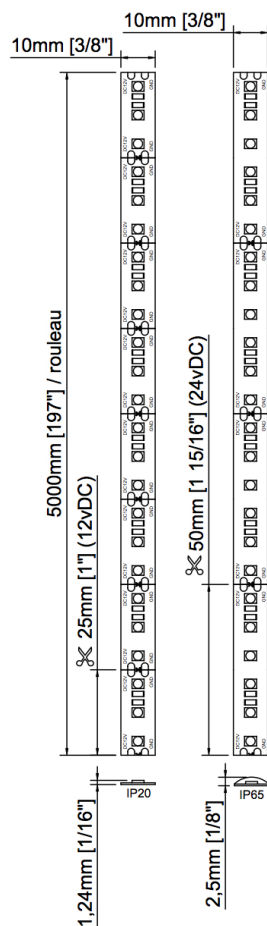

Voltage	24vDC	
LED/m	120 / m	
Power	15,6w / m 65,4w / roll	
Amperage	0,65A / m 2,7A / roll	
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 1,25mm x 5000mm 3/8" x 1/16" x 196 7/8"
	IP65	10mm x 2,5mm x 5000mm 3/8" x 1/8" x 196 7/8"
Cut line	50 mm 2"	
Finish	White	
Dimmable	Yes	
LED Colour	CCT - 2000K-4000K	
Working temp.	-40°C ~ 70°C	
IP	20	

PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2835	-	L600	-	20	-	CCT	-	24V

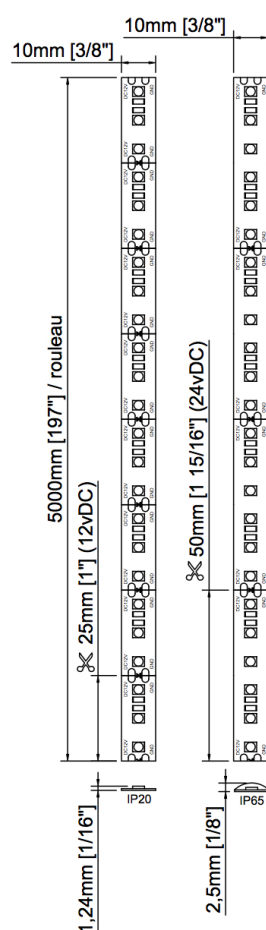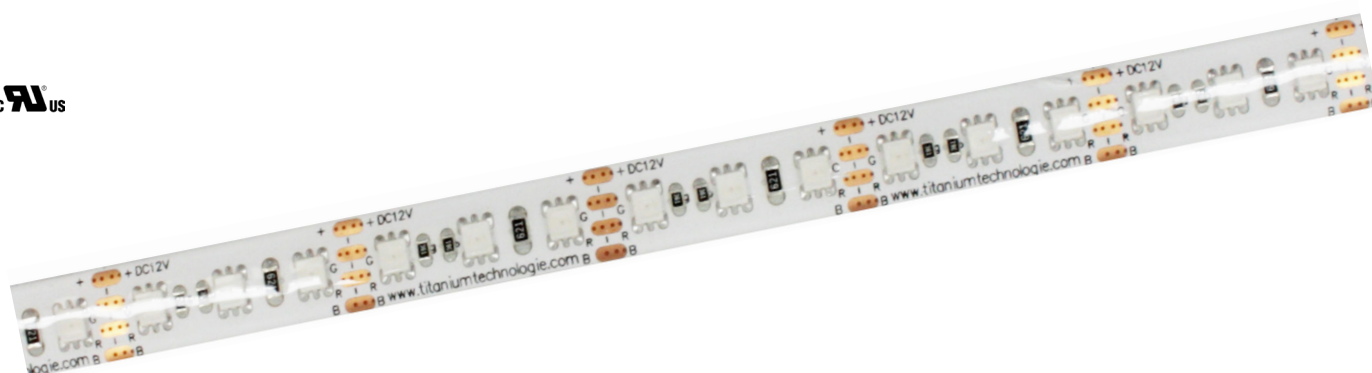


Voltage	12vDC		24vDC
LED/m	120 / m		
Power	Red: 17,62 w / roll Green: 17,63 w / roll Blue: 16,4 w / roll All: 40 w / roll		Red: 20 w / roll Green: 24,7 w / roll Blue: 23,8 w / roll All: 62,4 w / roll
Amperage	Red: 1,47 A/roll Green: 1,47 A/roll Blue: 1,38 A/roll All: 3,34 A /roll		Red: 0,84 A/roll Green: 1 A/roll Blue: 0,98 A/roll All: 2,6 A /roll
Lumen	-		-
CRI (RA)	90		
Angle	120°		
Size	IP20	10mm x 1,25mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{16}$ " x 196 $\frac{7}{8}$ "	
	IP65	10mm x 2,5mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "	
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "	
Cut line	25 mm 1"		50 mm 2"
Finish	White		
Dimmable	Yes		
LED Colour	RGB - Color mixing		
Working temp.	-40°C ~ 70°C		
IP	20, 65, 67		

PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2835	-	L600	-	20	-	RGB	-	24V
TT	-	2835	-	L600	-		-		-	24V



- 5m roll of SMD2835 LED
Strip in 5 meter roll.

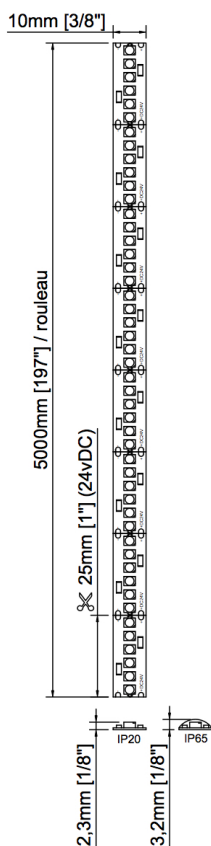


PRODUCT COLOR

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	2835	L1200	20	27K	24V
TT	2835	L1200	20		24V

Voltage	24vDC	
LED/m	240 / m	
Power	30,4 w / m 9,26 w / feet 152 w / roll	
Amperage	1,27 A / m 0,39 A / feet 6,34 A / roll	
Lumen	27K - 448 lm / feet - 30K - 456 lm / feet 55 lm / w 35K - 452 lm / feet - 40K - 422 lm / feet 64 lm / w 60K - 384 lm / feet 57 lm / w	
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP65	10mm x 3,2mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	25 mm 1"	
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20	



- 5m roll of SMD3528 LED Strip in 5 meter roll.

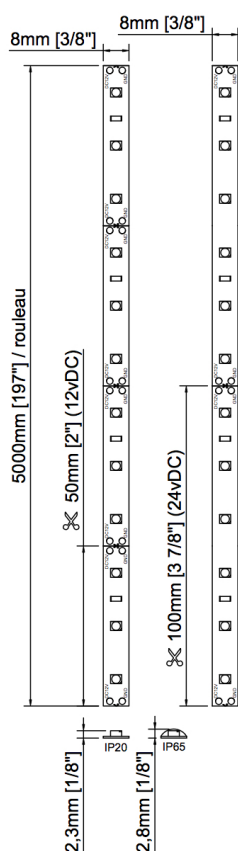


PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	3528	-	L300	-	20	-	27K	-	24V
TT	-	3528	-	L300	-		-		-	

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	5,8w / m 1,77w / feet 29w / roll	
Amperage	0,49A / m 0,15A / feet 2,42A / roll	0,25A / m 0,07A / feet 1,21A / roll
Lumen	27K - 38 lm / feet 30K - 45 lm / feet 35K - 51 lm / feet 40K - 37 lm / feet 60K - 35 lm / feet	28 lm / w 32 lm / w 35 lm / w 28 lm / w 25 lm / w
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,3mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP65	10mm x 2,8mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	50 mm 2"	100 mm 4"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	



- 5m roll of SMD3528 LED Strip in 5 meter roll.

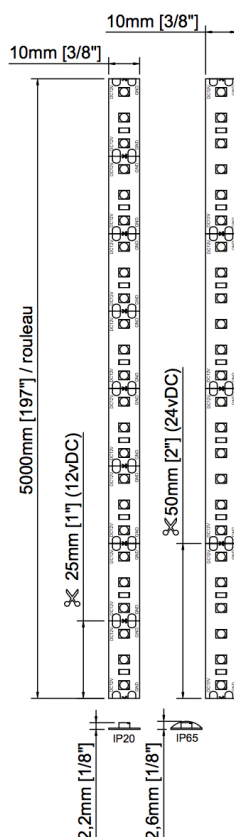

Voltage	12vDC	24vDC
LED/m	120 / m	
Power	9,84w / m 3w / feet 49,2w / roll	
Amperage	0,82A / m 0,25A / feet 4,1A / roll	0,41A / m 0,13A / feet 2,05A / roll
Lumen	27K - 117 lm / feet 30K - 119 lm / feet 35K - 91 lm / feet 40K - 104 lm / feet 60K - 88 lm / feet	45 lm / w 44 lm / w 35 lm / w 39 lm / w 33 lm / w
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,2mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP65	10mm x 2,6mm x 5000mm 3/8" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 35K - Neutral white 3500K 40K - Neutral white 4000K 60K - Cold white 6000K R - Red G - Green B - Blue A - Amber RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	

PRODUCT CODE

TT	SMD	LED PER ROLL	IP	LED COLOR	VOLTAGE
TT	3528	L600	20	27K	24V
TT	3528	L600			

TT-3528-L600-5MM



- 5 meters roll

Voltage	24vDC	
LED/m	120 / m	
Power	9,84w / m	
	3w / feet	
	49,2w / roll	
Amperage	0,82A / m	
	0,25A / feet	
	4,1A / roll	
Lumen	27K - 117 lm / feet	
	30K - 119 lm / feet	
	35K - 91 lm / feet	
	40K - 104 lm / feet	
CRI (RA)	90	
Angle	120°	
Size	IP20	5mm x 2,2mm x 5000mm
		$\frac{3}{16}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
Cut line	50 mm	
	2"	
Finish	White	
Dimmable	Yes	
LED Colour	22K - Warm white 2200K	
	27K - Warm white 2700K	
	30K - Warm white 3000K	
	35K - Neutral white 3500K	
	40K - Neutral white 4000K	
	50K - Cold white 5000K	
Working temp.	-40°C ~ 70°C	
IP	20	


PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	WIDTH	-	LED COLOUR	-	VOLTAGE
TT	-	3528	-	L600	-	20	-	5MM	-	27K	-	24V
TT	-	3528	-	L600	-	20	-	5MM	-		-	24V

TT-3538-L600



- 5 meters roll

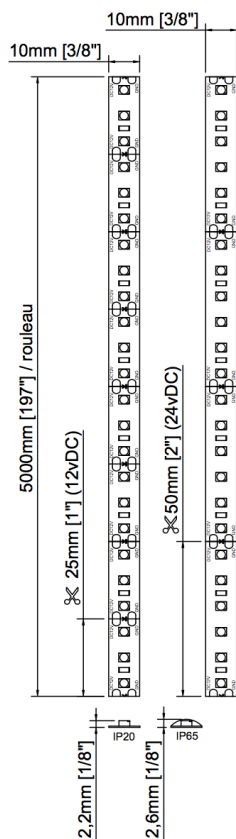


Voltage	12vDC	24vDC
LED/m	120 / m	
Power	19,2w / m	
Amperage	0,46A / ft	0,23A / ft
Lumen	77,7 lm / w	78,4 lm/w
CRI (RA)	90	
Angle	120°	
Size	IP20	10mm x 2,2mm x 5000mm 3/8" x 1/8" x 196 7/8"
Cut line	IP65	10mm x 2,6mm x 5000mm 3/8" x 1/8" x 196 7/8"
Cut line	25 mm 1"	50 mm 2"
Finish	White	
Dimmable	Yes	
LED Colour	RGBWW - RGB + Warm white 3000K RGBNW - RGB + Neutral white 4000K RGBCW - RGB + Cold white 6000K	
Working temp.	-40°C ~ 70°C	
IP	20, 65	


PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	3528	-	L600	-	20	-	RGBWW	-	24V
TT	-	3528	-	L600	-		-		-	

TT-5050-L300-RGBW 4:1

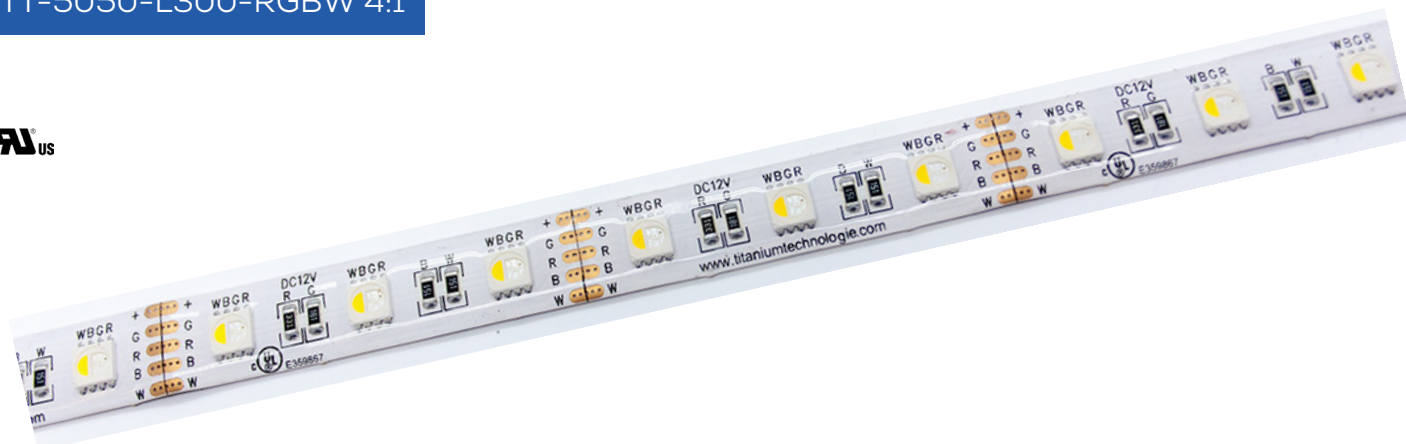

- 4 in 1 SMD5050 LED Strip.

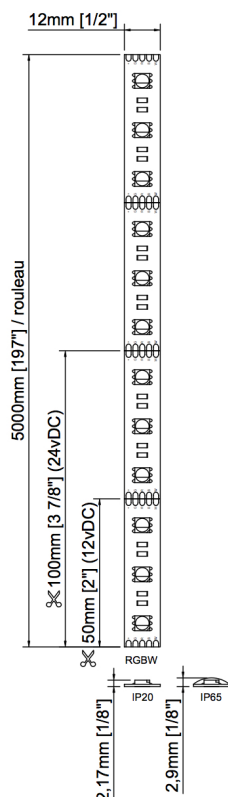


PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	5050	-	L300	-	20	-		-	24V
TT	-	5050	-	L300	-		-		-	

Voltage	12vDC	24vDC
LED/m	60 / m	
Power	18,27w / m	
	5,57w / feet	
	91,35w / roll	
Amperage	1,53A / m	0,77A / m
	0,47A / feet	0,23A / feet
	7,62A / roll	3,81A / roll
Angle	120°	
Size	IP20	12mm x 2,17mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12mm x 2,9mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	50 mm	100 mm
	2"	4"
Finish	White	
Dimmable	Yes	
LED Colour	RGBA - RGB + Amber 4:1	
	RGBWW - RGB + Warm white 3000K 4:1	
	RGBNW - RGB + Neutral white 4000K 4:1	
	RGBCW - RGB + Cold white 6000K 4:1	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	



- 5m roll of SMD3535 LED Strip in 5 meter roll.

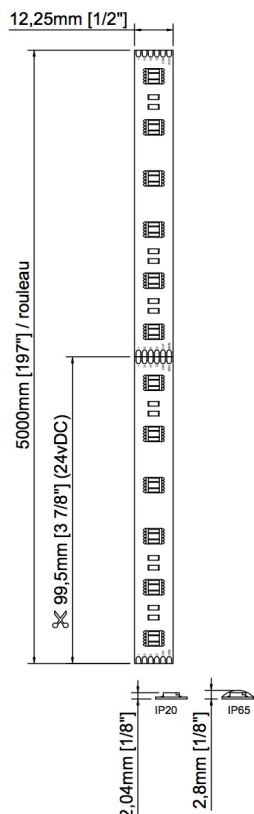


Voltage	12vDC	24vDC
LED/m	60 / m	
Power	10,32w / m	13,44w / m
	3,24w / feet	4,08w / feet
	51,36 / roll	66,24 / roll
Amperage	0,86A / m	0,56A / m
	0,27A / feet	0,17A / feet
	4,28A / roll	2,76A / roll
Angle	120°	
Size	IP20	12,25mm x 2,04mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP65	12,25mm x 2,8mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67	13mm x 5mm x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	99,5 mm 3 7/8"	
Finish	White	
Dimmable	Yes	
LED Colour	RGBCCT - RGB + Warm white 3000K + Cold white 6000K	
Working temp.	-40°C ~ 70°C	
IP	20, 65, 67	


PRODUCT CODE

TT	-	SMD	-	LED PER ROLL	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	5050	-	L300	-	20	-	RGBCCT	-	24V
TT	-	5050	-	L300	-		-	RGBCCT	-	

TT-DIGITAL-DMX-05V

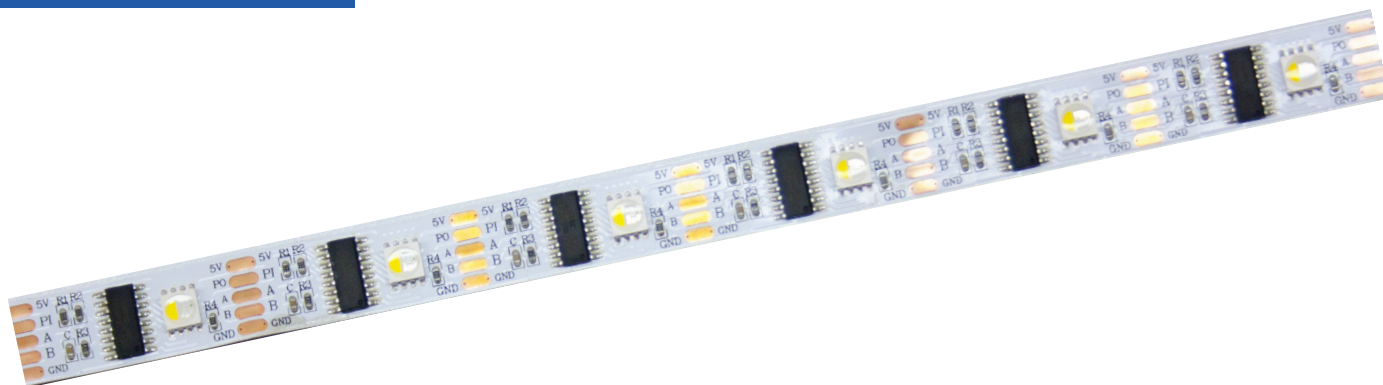

- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

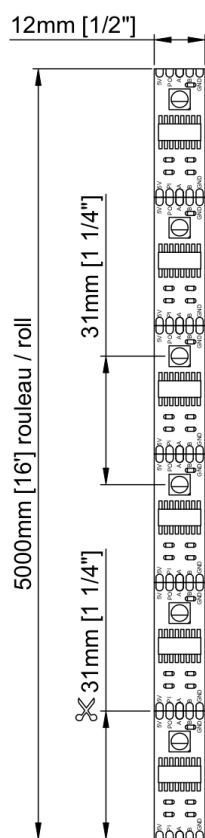

Voltage	5vDC
LED/m	32 / m
Power	w / m w / feet w / roll
Amperage	A / m A / feet A / roll
LED / pixel	1 LED / pixel
Pixel / m	32 pixels / m
Length / DMX universe	4 m (158") / DMX (RGBW) 5,3 m (209") / DMX (RGB)
Angle	120°
Size	IP20 12mm x 2,3mm x 5000mm 1/2" x 1/8" x 196 7/8"
	IP67 16mm x 5mm x 5000mm 5/8" x 3/16" x 196 7/8"
Cut line	31 mm 1 1/4"
Finish	Black
Dimmable	Yes
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 RGB - Color mixing 3:1
Working temp.	-40°C ~ 70°C
IP	20, 67

Accessories

PRODUCT CODE


TT	-	TYPE	-	SIGNAL	-	VOLTAGE	-	IP	-	LED COLOR
TT	-	DIGITAL	-	DMX	-	05V	-	20	-	RGB30K
TT	-	DIGITAL	-	DMX	-	05V	-		-	



TT-DIGITAL-DMX-24V



- Digital tape with DMX control directly on the ribbon.
- No additional controller required
- The ribbon can be addressed using an addressing module.

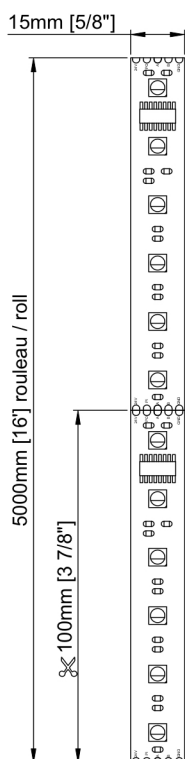

Voltage	24vDC	
LED/m	60 / m	
Power	w / m w / pied feet w / roll	
Amperage	A / m A / feet A / roll	
LED / pixel	6 LED / pixel	
Pixel / m	10 pixels / m	
Length / DMX universe	12,8 m (504") / DMX (RGBW) 17 m (670") / DMX (RGB)	
Angle	120°	
Size	IP20	15mm x 2,3mm x 5000mm 5/8" x 1/8" x 196 7/8"
	IP67	16mm x 5mm x 5000mm 5/8" x 3/16" x 196 7/8"
Cut line	100 mm 4"	
Finish	Black	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 RGB - Color mixing 3:1	
Working temp.	-40°C ~ 70°C	
IP	20, 67	

Accessories



PRODUCT CODE

TT	-	TYPE	-	SIGNAL	-	VOLTAGE	-	IP	-	LED COLOR
TT	-	DIGITAL	-	DMX	-	24V	-	20	-	RGB30K
TT	-	DIGITAL	-	DMX	-	24V	-		-	

TT-LLS-120-14



Accessories



TT-LLS-ACC-1M-AC



TT-LLS-ACC-GLU



TT-LLS-ACC-JNR



TT-LLS-ACC-PIN



TT-LLS-ACC-END



TT-LLS-ACC-PLG



TT-LLS-ACC-JMP-10

Voltage	100~130 vAC
LED/m	120 / m
Power	10w / m
Amperage	0.19A / m
Lumens	900lm / m
CRI	90
Size	14mm x 7mm x 50 000mm 9/16" x 5/16" x 1968 1/2"
Cut line	at each LED (see details)
Finish	White PCB, clear wrap
Dimmable	Yes 3%~100%
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
IP	67
Limited warranty	3 years

PRODUCT CODE

TT	-	TYPE	-	LED PER METER	-	WIDTH (mm)	-	LED COLOR	-	VOLTAGE
TT	-	LLS	-	120	-	14	-	30K	-	120V
TT	-	LLS	-	120	-	14	-		-	120V

TT-LLS-COB-12



Voltage	120V
LED/m	480 / m
Power	15w / m
Lumens	1200 lm / m
CRI	90
Size	12 x 5 x 5000mm 1/2" x 3/16" x 196 7/8"
Cut line	100 mm 4"
Dimmable	Yes
LED Colour	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K 6500 - Cold white 6500K
IP	65

Accessories



TT-LLS-COB-
END



TT-LLS-COB-
HEAD



TT-LLS-COB-
PLUG

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	WIDTH (mm)	-	LED COLOR	-	VOLTAGE
TT	-	LLS	-	COB	-	12	-	2700	-	120
TT	-	LLS	-	COB	-	12	-		-	120

TT-SIL-0410



- Flexible silicone LED strip with a cable at both ends
- Dupont connector at both ends




Voltage	12vDC		24vDC		
LED/m	144 / m				
Power	1000mm	1500mm	2000mm	2500mm	3000mm
	12w	18w	24w	30w	36w
Cable length	2m 78 ³ / ₄ "				
Size	4mm x 10mm 5/ ₃₂ " x 13/ ₃₂ "				
	1000mm 39 ³ / ₈ "	1500mm 59 ¹ / ₁₆ "	2000mm 78 ³ / ₄ "	2500mm 98 ⁷ / ₁₆ "	3000mm 118 ¹ / ₈ "
Cut line	25 mm 1"		50 mm 2"		
Finish	White silicone				
Dimmable	Yes				
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K				
IP	66				

PRODUCT CODE

TT	-	MODEL	-	VERSION	-	LENGTH (mm)	-	LED COLOR	-	VOLTAGE
TT	-	SIL	-	0410	-	1000	-	30K	-	24V
TT	-	SIL	-	0410	-		-		-	

TT-COB-L280

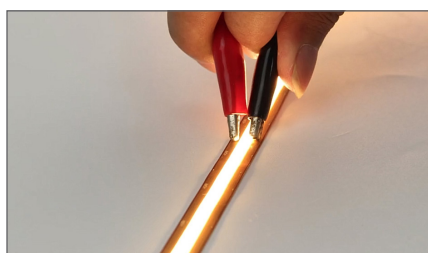




- 3M adhesive for long-lasting hold

Voltage	24vDC	
LED/m	280 / m	
Power	6 w / feet 20 w / m	
Lumens	27K - 900 lm / m	27K - 274 lm / feet
	65K - 1000 lm / m	65K - 305 lm / feet
	TOTAL - 1900 lm / m	TOTAL - 579 lm / feet
IRC	90	
Size	10mm x 5000mm 7/16" x 196 7/8"	
Cut line	50mm 2"	
Dimmable	Yes	
LED colour	CCT - 2700K to 6500K	
IP	20	

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L280	-	20	-	CCT	-	24V

TT-COB-L320

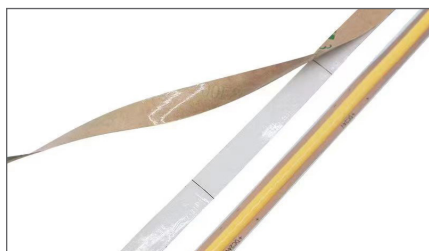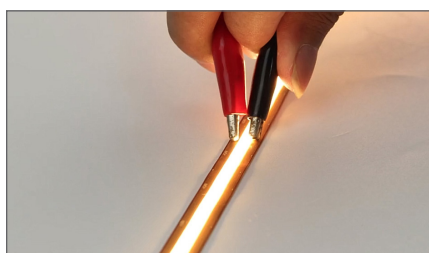
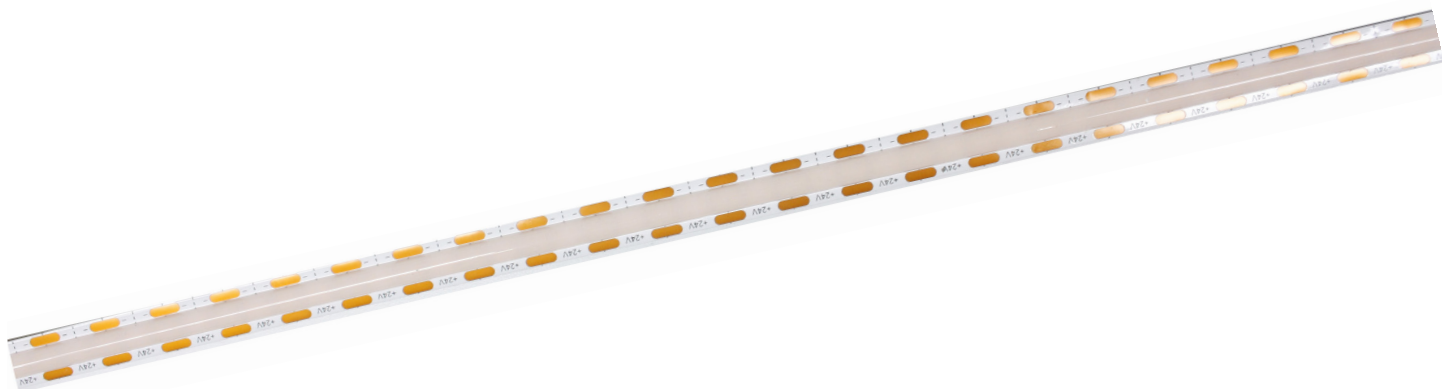


- 3M adhesive for long-lasting hold


Voltage	24vDC	
LED/m	320 / m	
Power	4,6 w / feet 15 w / m	
Lumens	27K - 1713 lm / m 30K - 1745 lm / m 35K - 1778 lm / m 40K - 1811 lm / m 50K - 1843 lm / m	522 lm / feet 532 lm / feet 542 lm / feet 552 lm / feet 562 lm / feet
IRC	90	
Size	10mm x 5000mm 7/16" x 196 7/8"	
Cut line	7mm 5/16"	
Dimmable	Yes	
LED colour	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K 5000 - Cold white 5000K	
IP	20	

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L320	-	20	-	2700	-	24V
TT	-	COB	-	L320	-	20	-		-	24V

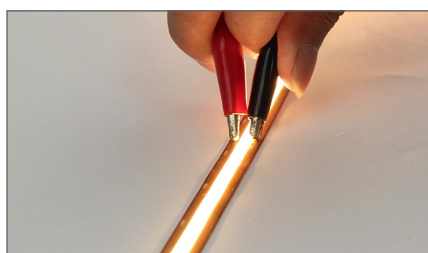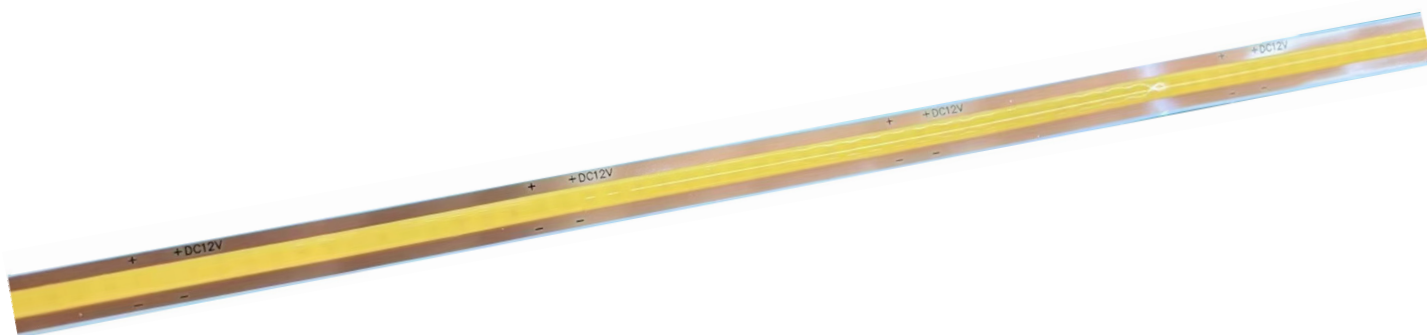

- 3M adhesive for long-lasting hold


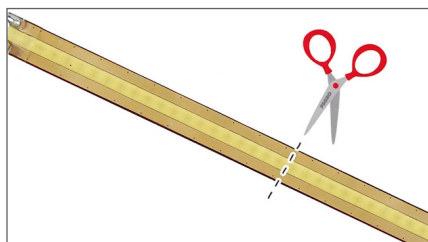


- Can be cut at any location

Voltage	12vDC	24vDC
LED/m	528 / m	
Power	3,35 w / feet 11 w / m	
Lumens	27K - 1040 lm / m 30K - 1040 lm / m 35K - 1040 lm / m 40K - 1120 lm / m 50K - 1120 lm / m	317 lm / feet 317 lm / feet 317 lm / feet 342 lm / feet 342 lm / feet
CRI	90	
size	8mm x 5000mm 5/16" x 196 7/8"	
Dimmable	Yes	
LED Colour	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K 5000 - Cold white 5000K	
IP	20, 67	

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L528	-	20	-	2700	-	24V
TT	-	COB	-	L528	-	20	-		-	

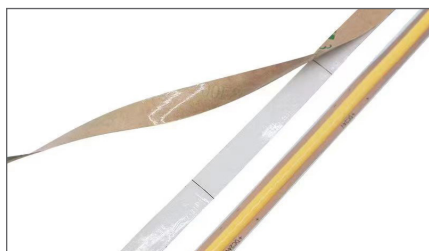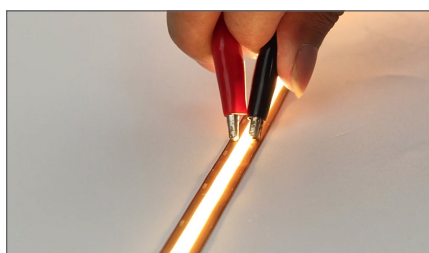


- 3M adhesive for long-lasting hold

Voltage	24vDC
LED/m	576 / m
Power	3,7 w / feet 12 w / m
CRI	90
Size	10mm x 5000mm 7/16" x 196 7/8"
Cut line	32mm 1 1/4"
Dimmable	Yes
LED Colour	RGB - Mixed Colours
IP	20

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L576	-	20	-	RGB	-	24V

TT-COB-L840

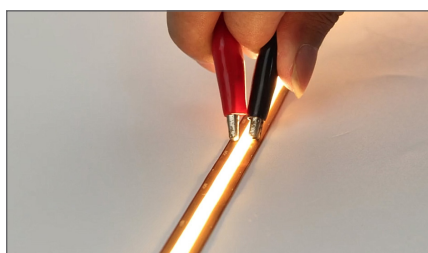

- 3M adhesive for long-lasting hold


Voltage	24vDC
LED/m	840 / m
Power	6w / feet 19 w / m
CRI	90
Size	12mm x 5000mm 1/2" x 196 7/8"
Cut line	34mm 1 5/16"
Dimmable	Yes
LED Colour	RGBWW - RGB + Warm white RGBNW - RGB + Neutral white RGBCW - RGB + Cold white
IP	20

PRODUCT CODE

TT	-	MODEL	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	COB	-	L840	-	20	-	RGBWW	-	24V
TT	-	COB	-	L840	-	20	-		-	24V



- LED strip available in 6 meter roll and 100 meter roll.
- The last LED will not light if the cut is between the last LED and the end of the last resistor.

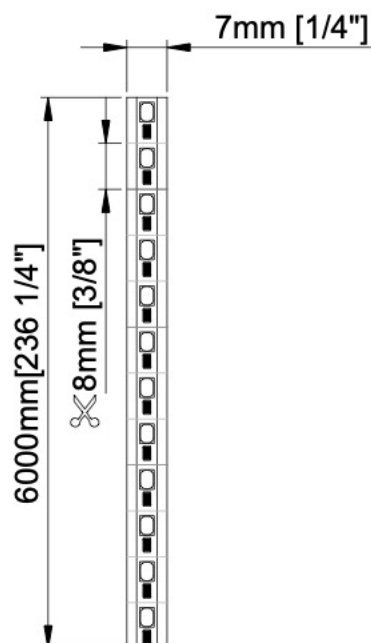


Voltage	12vDC	24vDC
LED/m	120 / m	
Power	2,5w / feet 8w / m	
Amperage	0,21A / feet	0,1A / feet
Lumens	301 lm / feet	308 lm / feet
CRI	90	
Size	6,7mm x 6000mm 1/4" x 236 1/4"	
Cut line	Can be cut at any location (see note)	
Dimmable	Yes	
Couleur LED	2700 - Warm white 2700K 3000 - Warm white 3000K 3500 - Neutral white 3500K 4000 - Neutral white 4000K	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	LED PER METER	-	IP	-	LED COLOR	-	VOLTAGE
TT	-	2025FR	-	L600	-	IP20	-	2700	-	12V
TT	-	2025FR	-	L600	-	IP20	-		-	

TT-SH-36W-24V

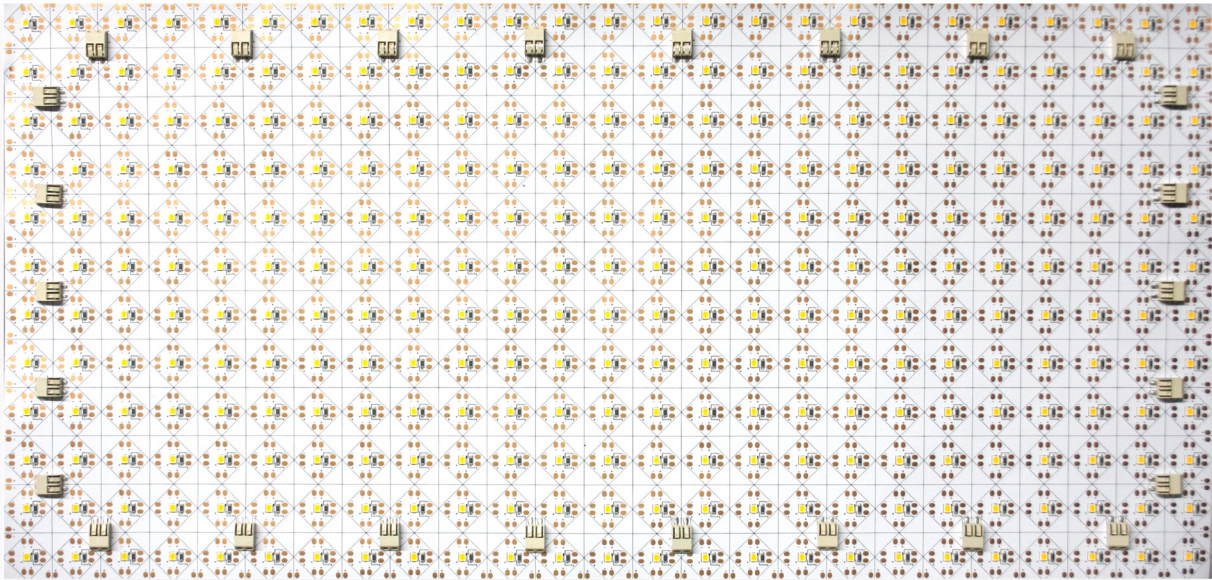

- Sheet with LED for backlighting.
- Can be cut to size following the black lines provided for this purpose.

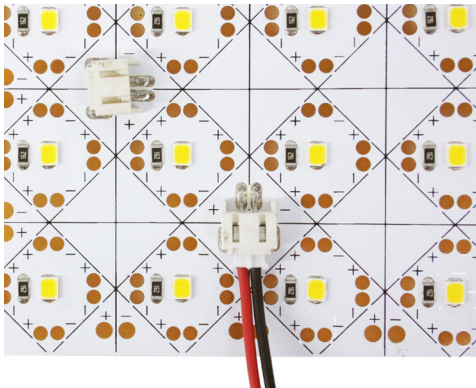

Voltage	24vAC
Power	36w
Size	500mm x 240mm 19 11⁄16" x 9 7⁄16"
LED Color	30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
IP	20

PRODUCT CODE

TT	-	MODEL	-	POWER	-	VOLTAGE	-	LED COLOR
TT	-	SH	-	36W	-	24V	-	30K
TT	-	SH	-	36W	-	24V	-	

CABINETS AND MILLWORK



Credit photo: Christian Marcoux






Credit photo: Christian Marcoux



TT-PUCK-3W Page 230

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K 230	40K 240	60K 260	63




TT-PUCK-400-V4 Page 231

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)			Cut hole (mm)
12	3	30K 330	40K 350	60K 360	63



TT-PUCK-2.2W Page 232

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Cut hole (mm)
12	2.2	175	56



TT-ACC-RELAY-CONTACTOR Page 233



Voltage (VAC)	Power (W/m)	Luminous flux (lm/m)	Cut hole (mm)
120	2000	-	-



TT-PUCK-3W



- Puck for kitchen cabinets.

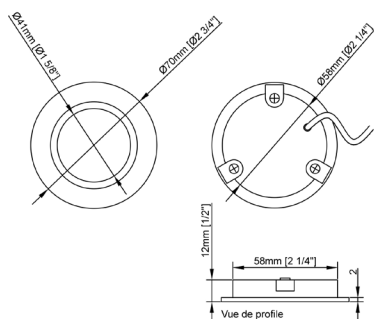

Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	120°
CRI	90
Lumen	230 (30K) 240 (40K) 260 (60K)
Size	Ø70mm x 13mm Ø2 3/4" x 1/2"
Cut hole	63 mm 2 1/2"
Finish	W - White BK - Black C - Silver BR - Nickel Brush
Dimmable	Yes
Couleur DEL / LED Colour	27K - Warm white 2700K CCT - Warm white 3000K (W and BK finition) Neutral white 4000K
IP	20

PRODUCT CODE

TT	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	PUCK	-	3W	-	BK	-	27K
TT	-	PUCK	-	3W	-		-	



TT-PUCK-400-V4



- Puck for kitchen cabinets.



CCT VERSION

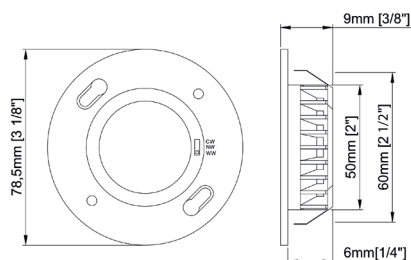

Voltage	12vDC	24vDC
Power	3,5w	
Amperage	0,25A	0.125A
Angle	120°	
Lumen	330 (30K) 350 (40K) 360 (60K)	
CRI	90	
Size	Ø78,5mm x 9mm Ø3 1/8" x 3/8"	
Cut hole	63 mm 2 1/2"	
Finish	W - White BK - Black C - Silver BR - Nickel Brush OR - Gold GM - Matte gold	
Dimmable	Yes	
LED Colour	CCT - Warm white 3000K Neutral white 4000K Cold white 5000K	
IP	20	

Accessories



TT-PUCK-400-WH



TT-PUCK-400-C



TT-PUCK-400-BR



TT-PUCK-400-BK



TT-PUCK-400-OR




TT-PUCK-400-GM


PRODUCT CODE

TT	-	MODEL	-	TYPE	-	VOLTAGE	-	FINISH
TT	-	PUCK	-	400-V4	-	12V	-	BK
TT	-	PUCK	-	400-V4	-		-	

TT-PUCK-2.2W

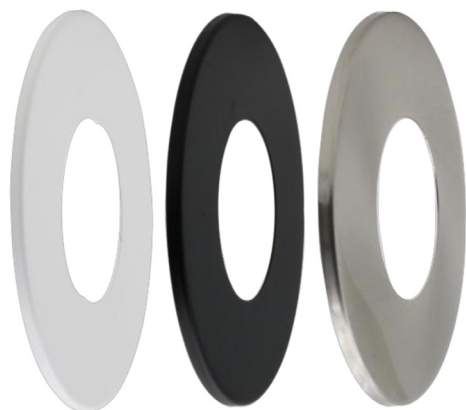

- Thin puck for kitchen cabinets.
- Three choice of finishing rings.

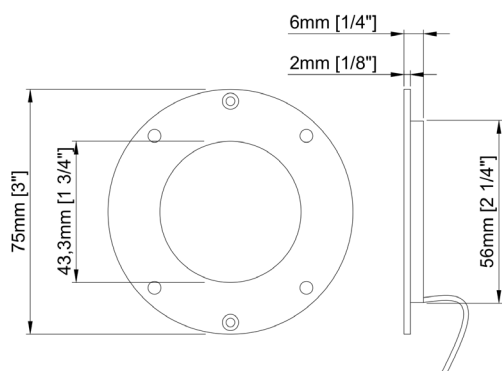

Voltage	12vDC
Power	2,2w
Amperage	0,183A
Angle	110°
Lumen	175 lm
CRI	90
Size	Ø75mm x 6mm Ø3" x 1/4"
Cut hole	56 mm 2 1/4"
Dimmable	Yes
LED Colour	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
IP	20

Accessories




TT-PUCK-2.2W-WH



TT-PUCK-2.2W-BN




TT-PUCK-2.2W-BK



TT-PUCK-2.2W-WH-A



TT-PUCK-2.2W-BN-A



TT-PUCK-2.2W-BK-A

PRODUCT CODE



TT	-	MODEL	-	POWER	-	LED COLOR
TT	-	PUCK	-	2.2W	-	27K
TT	-	PUCK	-	2.2W	-	

TT-ACC-RELAY-
CONTACTOR



- Enhance your kitchen’s safety with our innovative electric relay, designed for cabinet installations. This smart device automatically cuts power to outlets when the drawer closed, ensuring appliances stop generating heat. The result? Reduced risks of overheating and potential damage. ETL-certified and compliant with building code safety standards, this relay offers peace of mind and reliability. Perfect for modern kitchens, it combines energy efficiency with robust protection. Upgrade your space with this simple, dependable solution!

Voltage	120 vAC
Power	2000 w
Amperage	20 A
Wire length of the IR detector	1m 39 3/8"
Finish	White
Model	Decora

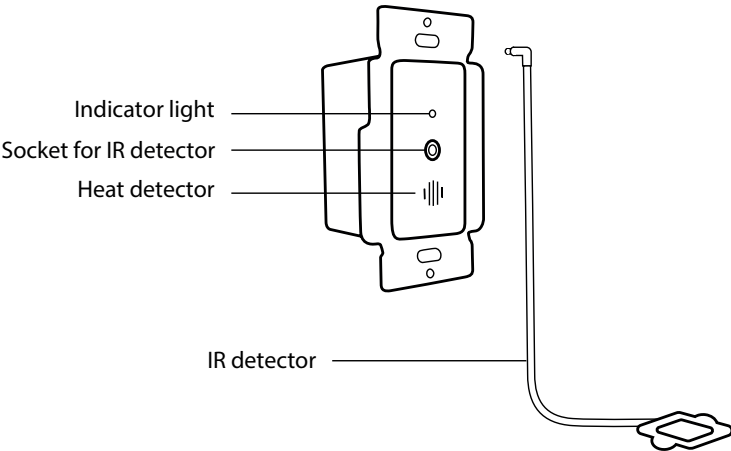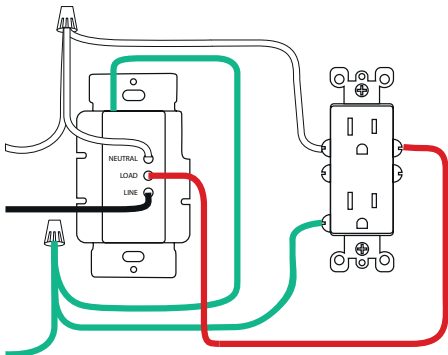




PRODUCT CODE

TT	-	MODEL	-	TYPE
TT	-	ACC	-	RELAY-CONTACTOR

TT-ACC-IR-02






- Surface mount IR detector.

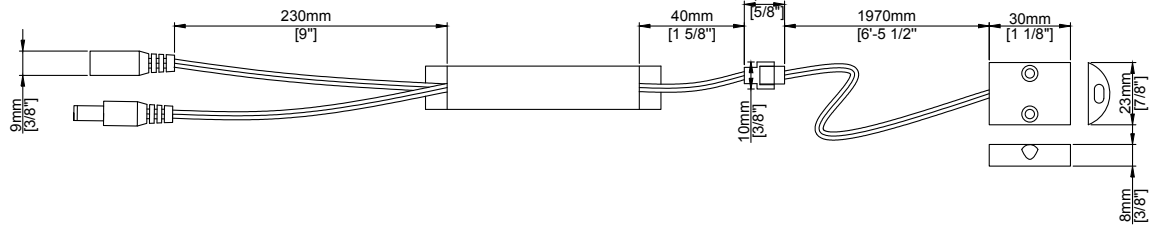

TT-ACC-IR-06



- Double surface mount IR detector.

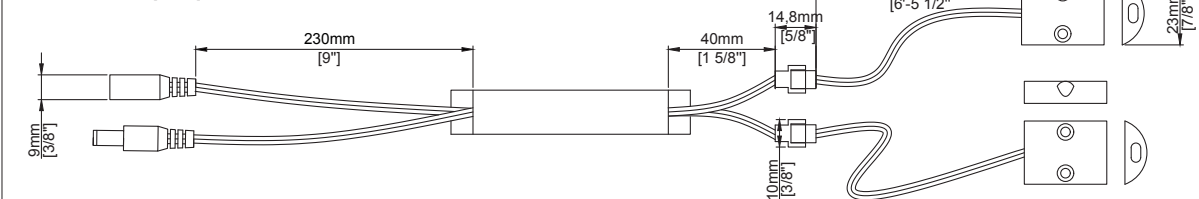

TT-ACC-IR-11



- Recessed IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	8mm 3/8"

TT-ACC-IR-12



- Surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC 3
Power	6w-72w
Output input connector	2,1mm

TT-ACC-IR-15



- Double recessed IR detector.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	8mm 3/8"

TT-ACC-IR-16



- Double surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm

TT-U-13



- Touch dimmer.

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	14mm 1/2"

TT-U-14



- Touch switch.
- Pass on the surface of wood board

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	32mm 15/16"

TT-ACC-MOV-01



- Recessed motion detector.

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	16mm 5/8"

ARCHITECTURAL







Credit photo: Salle Dussault



TT-FL02-6W Page 245

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
24	6	15	Whites - Triac RGBW - DMX



TT-FL02-18W Page 246

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
24	18	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-24W Page 247

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
24	24	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-36W Page 248

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
120	36	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL05-60W Page 249

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
120	60	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-65W Page 250

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
120	65	8, 15, 25, 45, 60, 10 x 30°	Whites - Triac RGBW - DMX



TT-FL07-100W Page 251

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
120	100	One color - 8,15,30,45 RGBW - 12,24,36	Whites - Triac RGBW - DMX



TT-FL02-192W Page 252

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
120	192	One color - 8 RGBW - 15, 10 x 30°	Whites - Triac RGBW - DMX



TT-FL04-24W-RGBW Page 253

Voltage (vDC)	Power (W/m)	Angle beam (")	Control
24	24	15, 30	DMX





TT-FL04-24W Page 254

Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
24	24	15, 30	DMX



TT-FL04-12W Page 255

Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
24	12	15, 30	DMX



TT-FL10-150W Page 256

Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
100 ~ 277	150	One color - 8, 30, 40, 60 RGBW - 25	Whites - Triac RGBW - DMX



TT-UGD-001-3W Page 257

Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
24	3	15	Triac



TT-UGD-001-6W Page 258

Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
24	6	15	Triac



TT-STEP Page 259


Voltage (VDC)	Power (W/m)	Angle beam (°)	Control
12	0,7 0,8 RGB	-	Whites - Triac RGBW - PMW



TECHNOLOGY



- [illegible]

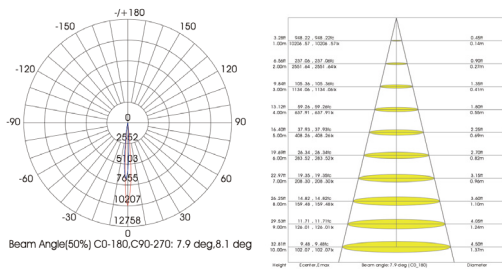


TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL02	-	6W	-	15	-	RGB30K	-	BK
TT	-	FL02	-	6W	-	15	-		-	

TT-FL02-18W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

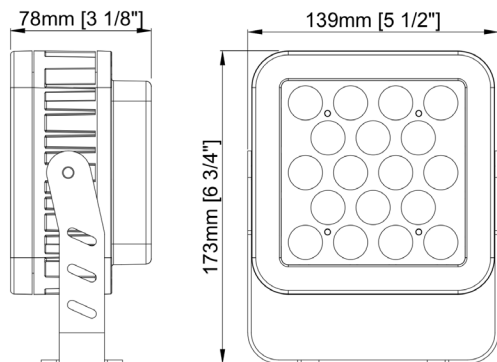

Voltage	24vDC	
Power	18w	
Amperage	0,75A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	173 x 139 x 78 mm 6 ³ / ₄ " x 5 ¹ / ₂ " x 3 ¹ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	30K - Warm white 3000K	
	40K - Neutral white 4000K	
IP	65	
	65	
Weight	1,94 Kg	
Operating temperature	-40°C ~ 50°C	


PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL02	-	18W	-	8	-	RGB30K	-	BK
TT	-	FL02	-	18W	-		-		-	

TT-FL02-24W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

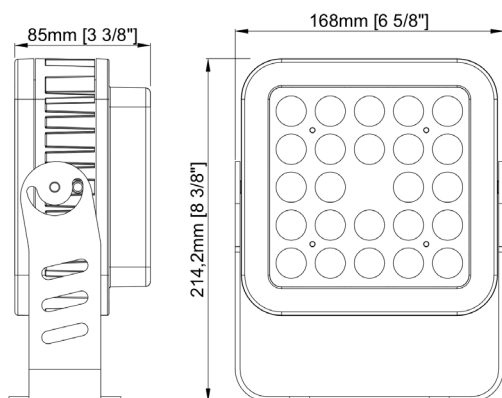

Voltage	24vDC	
Power	24w	
Amperage	1A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	214 x 168 x 85 mm 8 ³ / ₈ " x 6 ⁵ / ₈ " x 3 ³ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	30K - Warm white 3000K	
	40K - Neutral white 4000K	
IP	65	
	Operating temperature	
	-40°C ~ 50°C	


PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL02	-	24W	-	8	-	RGB30K	-	BK
TT	-	FL02	-	24W	-		-		-	

TT-FL02-36W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

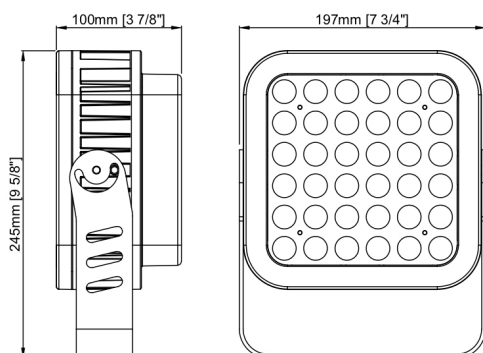

Voltage	120vAC	
Power	36w	
Amperage	0,3A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	245 x 197 x 100 mm 9 ⁵ / ₈ " x 7 ³ / ₄ " x 3 ⁷ / ₈ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	30K - Warm white 3000K	
	40K - Neutral white 4000K	
	60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	



PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL02	-	36W	-	8	-	RGB30K	-	BK
TT	-	FL02	-	36W	-		-		-	

TT-FL05-60W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

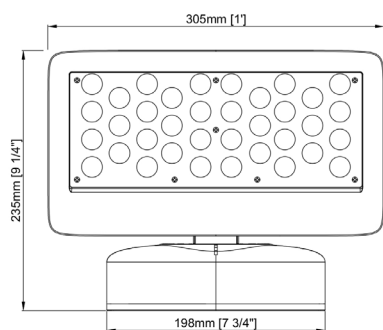

Voltage	120vAC	
Power	60w	
Amperage	0,5A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	235 x 305 x 130 mm 9 1/4" x 1" x 5 1/8"	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	30K - Warm white 3000K	
	40K - Neutral white 4000K	
IP	65	
	Operating temperature	
	-40°C ~ 50°C	



PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL05	60W	8	RGB30K	BK
TT	FL05	60W			

TT-FL02-65W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

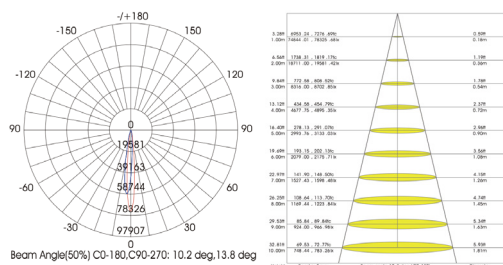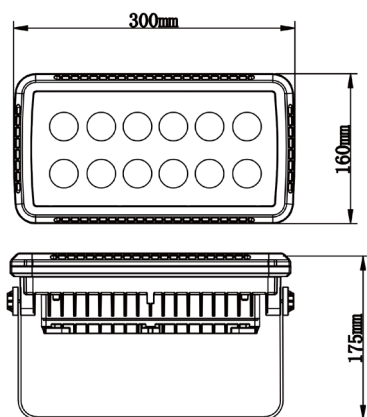

Voltage	120vAC
Power	65w
Amperage	0.83A
Angle	8°, 15°, 25°, 45°, 60°, 10 x 30°
Size	300 x 160 x 175 mm 15" x 9 1/8" x 4 3/4"
Finish	BK - Black WH - White GR - Grey
Dimmable	Yes
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K
IP	66
Operating temperature	-30°C ~ 45°C



PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL02	65W	8	RGB30K	BK
TT	FL02	65W			

TT-FL07-100W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

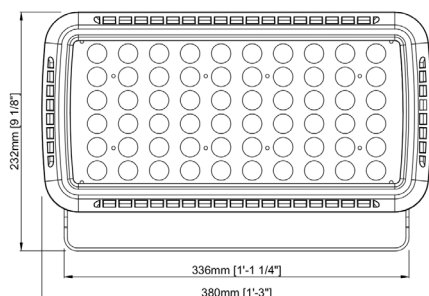

Voltage	120vAC	
Power	100w	
Amperage	0,83A	
Angle	one colour	8°, 15°, 30°, 45°
	RGBW	12°, 24°, 36°
Size	380x 232 x 122 mm 15" x 9 1/8" x 4 3/4"	
Finish	BK - Black WH - White GR - Grey	
Dimmable	Yes	
LED Colour	RGB30K - RGB + Warm white 3000K 4:1	
	RGB40K - RGB + Neutral white 4000K 4:1	
	RGB60K - RGB + Cold white 6000K 4:1	
	30K - Warm white 3000K	
	40K - Neutral white 4000K	
	60K - Cold white 6000K	
IP	65	
Operating temperature	-40°C ~ 50°C	



PRODUCT CODE

TT	MODEL	POWER	ANGLE	LED COLOR	FINISH
TT	FL07	100W	8	RGB30K	BK
TT	FL07	100W			

TT-FL02-192W



- Architectural projector with fixed or variable colors. Controlled by DMX signal (RGBW) or by triac (one color).

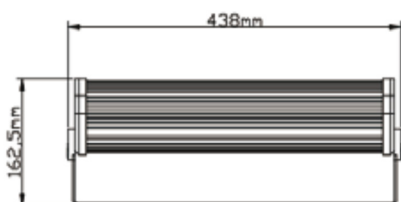

Voltage	120vAC	
Power	192w	
Amperage	1,6A	
Angle	one colour	8°
	RGBW	15°, 10 x 30°
Size	438 x 182 x 163mm 17 ¹ / ₄ " x 7 ⁵ / ₁₆ " x 6 ⁷ / ₁₆ "	
Finish	BK - Black WH - White GR - Grey	
Dimmable	30K, 40K, 60K	Yes via Triac
	RGBW	Yes via DMX
LED Colour	RGB30K - RGB + Warm white 3000K 4:1 RGB40K - RGB + Neutral white 4000K 4:1 RGB60K - RGB + Cold white 6000K 4:1 30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 6000K	
IP	65	
Operating temperature	-30°C ~ 45°C	

PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL02	-	192W	-	8	-	RGB30K	-	BK
TT	-	FL02	-	192W	-		-		-	



TITANIUM

TECHNOLOGY


TT-FL04-36W-RGBW



- RGBW quad bar.
- Twelve channels DMX.
- Waterproof connector



Voltage	24vDC
Power	36w
Amperage	1,5A
Angle	15°, 30°
Size	1000mm x 45mm x 75mm 39 ³ / ₈ " x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (12 channels)
LED Colour	RGB30K - RGB + Warm white 3000K
	RGB40K - RGB + Neutral white 4000K
	RGB50K - RGB + Cold white 5000K
IP	65

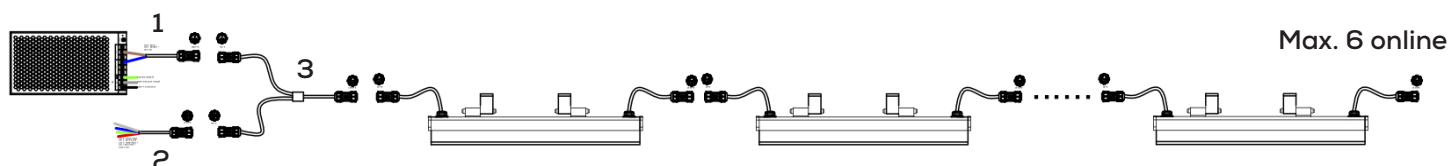

Accessories



PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR
TT	-	FL04	-	36W	-	15	-	RGB30K
TT	-	FL04	-	36W	-		-	



TITANIUM

TECHNOLOGY


TT-FL04-36W




- Whites quad bar.
- Twelve channels DMX.
- Waterproof connector



Voltage	24vDC
Power	36w
Amperage	1,5A
Angle	15°, 30°
Size	1000mm x 45mm x 75mm 39 ³ / ₈ " x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (12 channels)
LED Colour	30K - Warm white 3000K
	40K - Neutral white 4000K
	50K - Neutral white 5000K
IP	65



Accessories






PRODUCT COLOR

TT	MODEL	POWER	ANGLE	LED COLOR
TT	FL04	36W	15	30K
TT	FL04	36W		

TT-FL04-15W



- RGBW quad bar.
- Four channels DMX.
- Waterproof connector

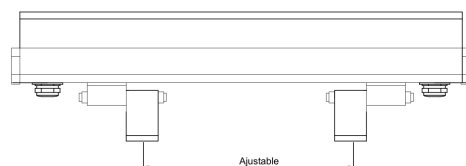

Voltage	24vDC
Power	12w
Amperage	0,5A
Angle	15°, 30°
Size	330mm x 45mm x 75mm 13" x 1 ³ / ₄ " x 3"
Finish	Black
Control	DMX (4 channels)
LED Colour	RGB30K - RGB + Warm white 3000K
	RGB40K - RGB + Neutral white 4000K
	RGB50K - RGB + Cold white 5000K
	30K - Warm white 3000K
	40K - Neutral white 4000K
	50K - Neutral white 5000K
IP	65



PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR
TT	-	FL04	-	12W	-	15	-	RGB30K
TT	-	FL04	-	12W	-		-	

TT-FL10-150W



- Tough strong design, IP66 wallwasher light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of led fixtures. The light body adopts #6063 aluminium alloy molding, surface with anodizing treatment, lampshade adopts imported tempered glass, has excellent rainwater clean ability.

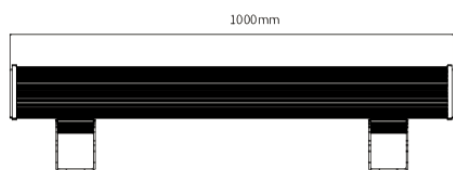


Voltage	100~277vAC	
Power	150w	
Amperage	1,25A	
Angle	one colour	8°, 30°, 40°, 60°
	RGBW	25°
Size	1000x 236 x 136 mm 39" x 9 1/4" x 5 3/8"	
Finish	BK - Black	
	WH - White	
	GR - Grey	
Dimmable	30K, 40K, 60K	No
	RGBW	Yes via DMX
LED Colour	RGB50K - RGB + Cold white 5000K 4:1 50K - Cold white 5000K	
IP	66	
Operating temperature	-40°C ~ 50°C	


PRODUCT CODE

TT	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	FL10	-	150W	-	8	-	RGB30K	-	BK
TT	-	FL10	-	150W	-		-		-	

TT-UGD-001-3W

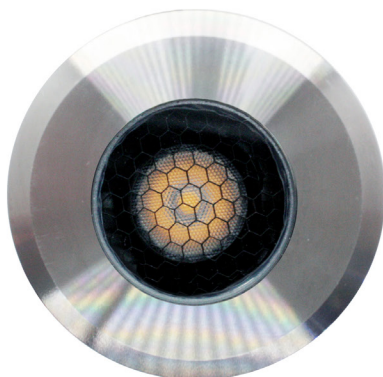

- IP67 light, water resistant, for indoor use, outdoor and humid place.

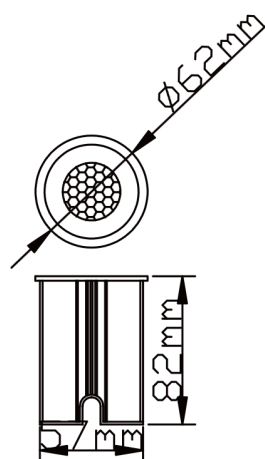


Voltage	24vDC
Power	3w
Amperage	0,125A
Angle	15°
Size	Ø62 X 82mm Ø2 7/16" x 3 1/4"
Cut hole	56 mm 2 1/4"
Finish	Nickel brush
Dimmable	Yes
LED Colour	27K - Warm white 2700K
	30K - Warm white 3000K
	40K - Neutral white 4000K
	60K - Cold white 5 0000K
IP	67
Operating temperature	-30°C ~ 45°C

PRODUCT CODE

TT	-	MODEL	-	TYPE	-	POWER	-	ANGLE	-	LED COLOR
TT	-	UGD	-	001	-	3W	-	15	-	30K
TT	-	UGD	-	001	-	3W	-	15	-	



- IP67 light, water resistant, for indoor use, outdoor and humid place.

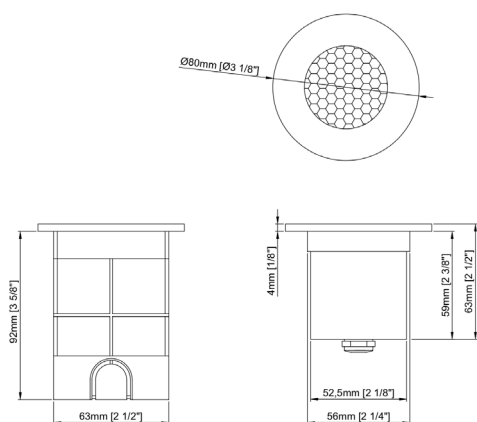


Voltage	24vDC
Power	6w
Amperage	0,25A
Angle	15°
Size	Ø80 mm x 63 mm Ø3 1/8" x 2 1/2"
Cut hole	56 mm 2 1/4"
Finish	Nickel brush
Dimmable	Yes
LED Colour	30K - Warm white 3000K 40K - Neutral white 4000K 60K - Cold white 5 0000K
IP	67
Operating temperature	-40°C ~ 50°C

PRODUCT CODE

TT	MODEL	TYPE	POWER	ANGLE	LED COLOR
TT	UGD	001	6W	15	30K
TT	UGD	001	6W	15	



- IP65 light, water resistant, for indoor use, outdoor and humid place.
- Ideal for stairs.

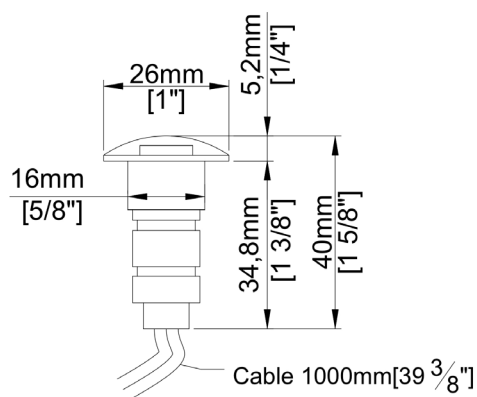

Voltage	12vDC
Power	0,7W RGB 0.8W
Amperage	0,06A
Lumen	17 lm (30K) 20 lm (40K) 22 lm (50K)
Size	Ø26mm x 40mm Ø1" x 1 ⁵ / ₈ "
Cut hole	16mm 5/ ₈ "
Finish	SA - Silver
Dimmable	Yes
LED Colour	30K - Warm white 3000K
IP	65


PRODUCT CODE

TT	-	MODEL	-	FINISH	-	LED COLOR
TT	-	STEP	-	SA	-	30K
TT	-	STEP	-	SA	-	

RECESSED SPOTLIGHT



Credit photo: Dualtech

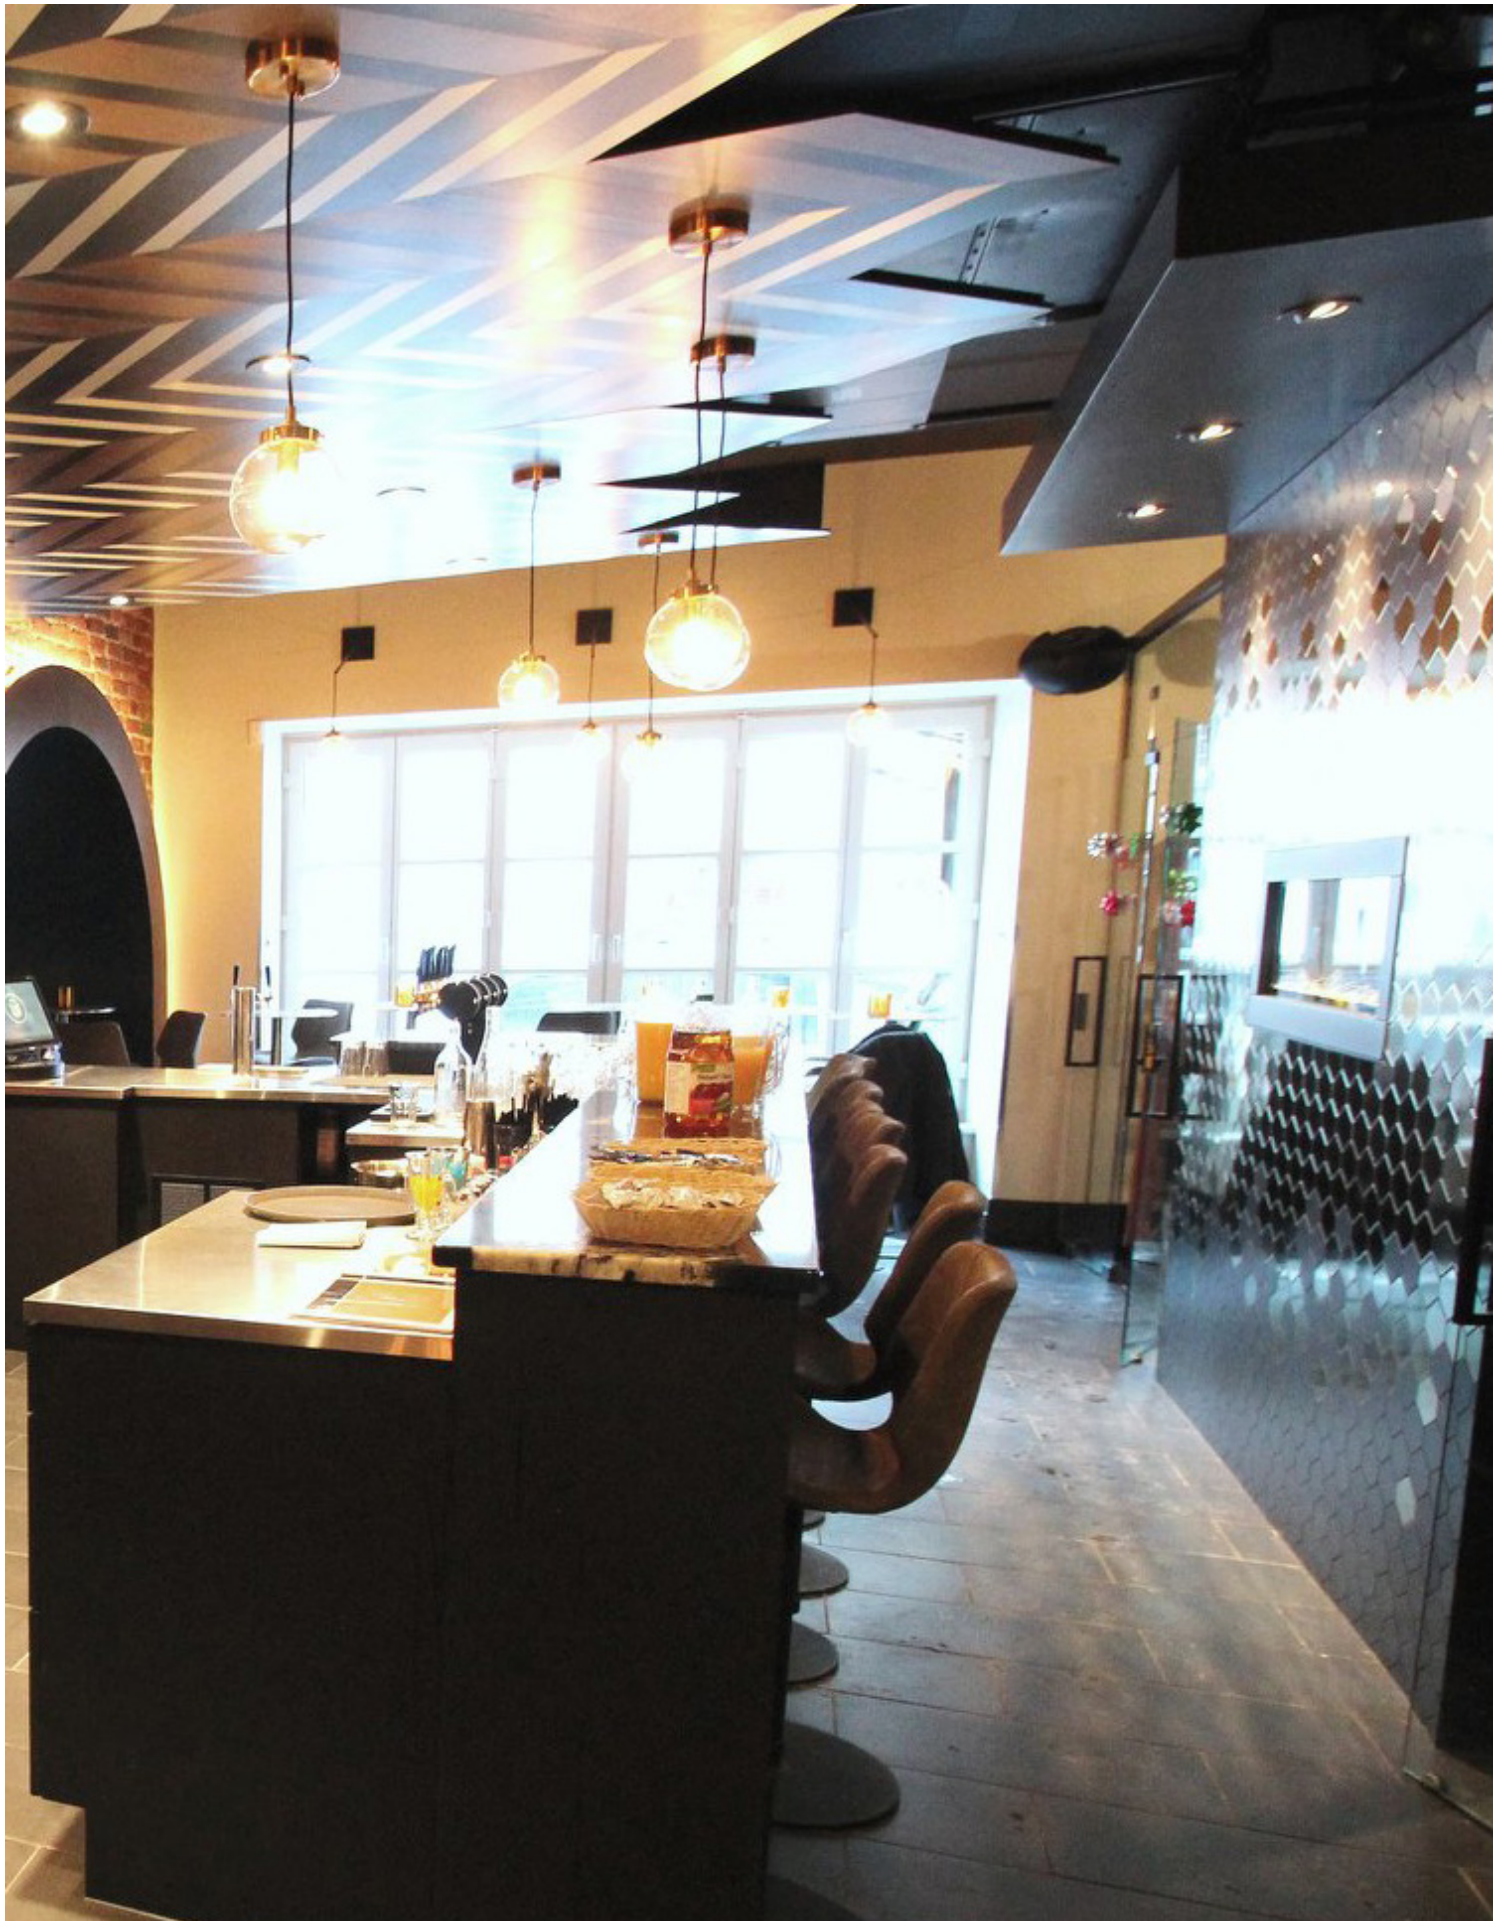



Credit photo: Armoire Passion



TT-DOWN-007-3W Page 264

Voltage (vDC)	Power (W/m)	Luminous flux			Cut hole (mm)	Dimmable
12	3	30K 150	40K 165	60K 180	45	Yes



TT-DOWN-008-3W Page 265

Voltage (vDC)	Power (W/m)	Luminous flux			Cut hole (mm)	Dimmable
12	3	30K 150	40K 165	60K 180	50	Yes



TT-DOWN-016 Page 266

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)		Cut hole (mm)	Dimmable
120, 12	12	72		86	Yes with app



TT-P120D-9W-120V Page 267

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)		Cut hole (mm)	Dimmable
120	9	800 ~ 850		102	Yes



TT-P120D-9W-12V Page 268

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)		Cut hole (mm)	Dimmable
12	9	800 ~ 850		102	Yes



TT-P120S Page 269

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)		Cut hole (mm)	Dimmable
120	7-9-12	690 ~ 1000		85-134	Yes




TT-P120 Page 270

Voltage (vDC)	Power (W/m)	Luminous flux (L/W)		Cut hole (mm)	Dimmable
120	7-9-12	680 ~ 1000		70-156	Yes






- Recessed spotlight with adjustable beam.

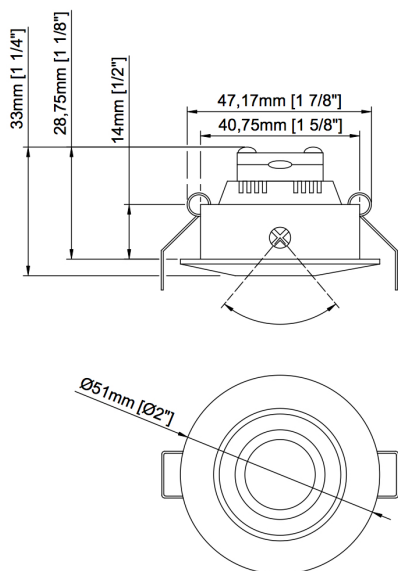


Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	15°, 30°, 45°, 60°
Lumen	150 (30K) 165 (40K) 180 (60K)
Size	Ø51 mm x 32 mm Ø2" x 1 1/4"
Cut hole	45 mm 1 3/4"
Finish	WH - White C - Silver BK - Black
Dimmable	Yes
LED Colour	30K - Warm white 2800~3200K 40K - Neutral white 4000~4500K 60K - Cold white 6000~6500K
IP	44

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	DOWN	-	007	-	3W	-	45	-	30K	-	BK
TT	-	DOWN	-	007	-	3W	-		-		-	

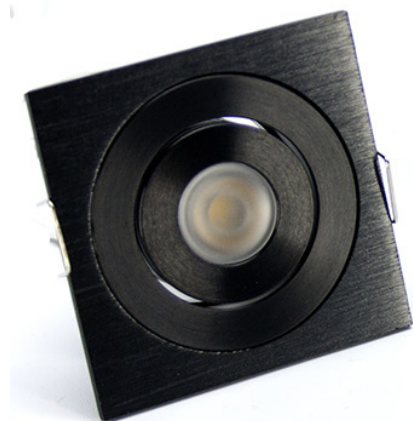

- Recessed spotlight with adjustable beam.

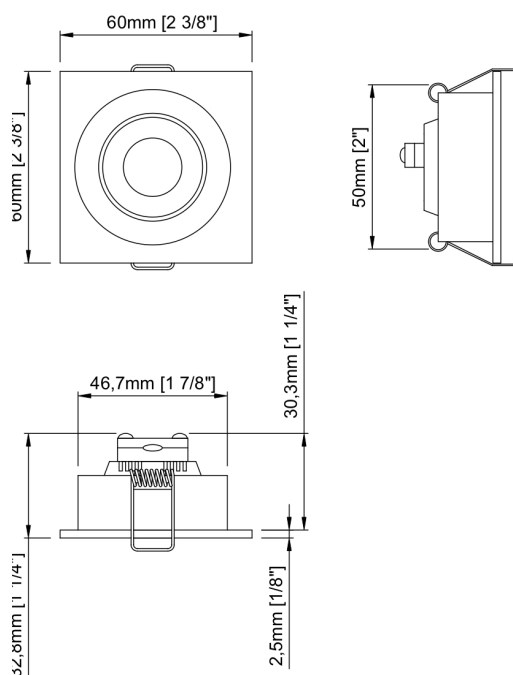

Voltage	12vDC
Power	3w
Amperage	0,25A
Angle	15°, 30°, 45°, 60°
Lumen	150 (30K) 165 (40K) 180 (60K)
Size	60 mm x 60 mm x 32 mm 2 ³ / ₈ " x 2 ³ / ₈ " x 1 ¹ / ₄ "
Cut hole	50 mm 2"
Finish	WH - White C - Silver BK - Black
Dimmable	Yes
LED Colour	30K - Warm white 2800~3200K 40K - Neutral white 4000~4500K 60K - Cold white 6000~6500K
IP	44


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	ANGLE	-	LED COLOR	-	FINISH
TT	-	DOWN	-	008	-	3W	-	45	-	30K	-	BK
TT	-	DOWN	-	008	-	3W	-		-		-	


TT-DOWN-016



- This light fixture features a RGB +Tunable white COB that communicated through Hue/ Echo Plus hub
- Suitable for damp location.
- 120vAC junction box include.

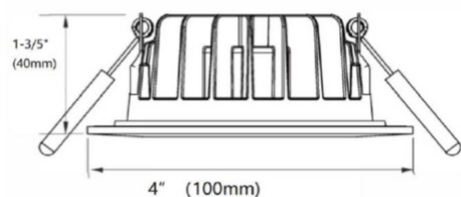

Voltage	120vAC, 12vDC
Power	12W
Amperage	1A
Angle	60°
Lumen	72lm/w
Size	Ø100mm x 40mm Ø4" x 1 ⁵ / ₈ "
Cut hole	86mm 3 ³ / ₈ "
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes with app
LED Colour	RGBCCT - RGB + Warm white 2700K + Cold white 5000K
IP	44

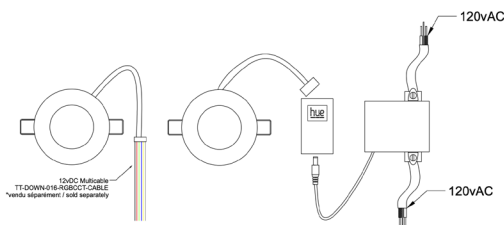

Accessories





PRODUCT CODE

TT	-	TYPE	-	MODEL	-	LED COLOR	-	FINISH
TT	-	DOWN	-	016	-	RGBCCT	-	BK
TT	-	DOWN	-	016	-	RGBCCT	-	

TT-P120D-9W



- Recessed with 120vAC junction box.
- Ideal for suspended ceilings and restricted place in clearance.
- Adjustable beam.
- Color temperature selector for the CCT version.
- Color temperature dimmable according to intensity for DW version (100% -3000K to 10% -2000K)

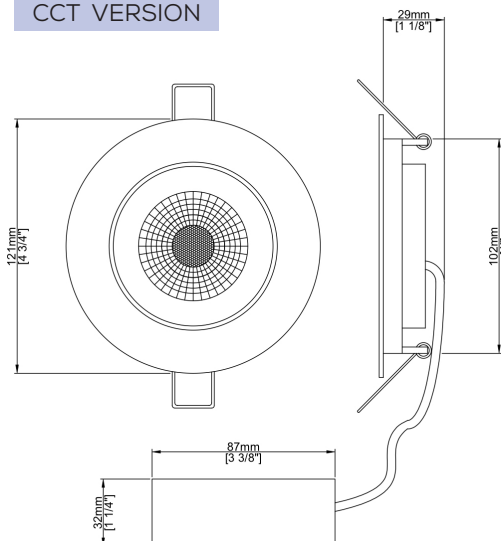

Voltage	120vAC
Power	9W
Amperage	0,06A
Angle	40°
Lumen	800~850
CRI	90
Size	Ø121 mm x 30mm Ø 4 ³ / ₄ " x 1 ¹ / ₈ "
Cut hole	102mm 4"
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes
LED Colour	CCT - White 3000K-4000K-5000K DIM - Dim to warm (3000K when at 100%) (2000K when at 10%)
IP	44


PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOR
TT	P120D	9W	BK	CCT
TT	P120D	9W		

TT-P120D-9W-12V



- Ideal for suspended ceilings and restricted place in clearance..
- Adjustable beam.

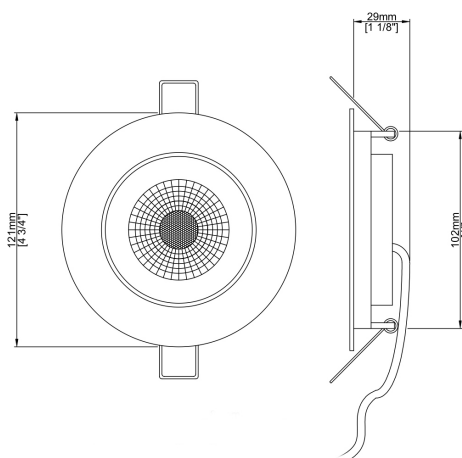

Voltage	12vDC
Power	9W
Amperage	0,75A
Angle	40°
Lumen	800
Size	Ø121 mm x 30mm Ø 4 ³ / ₄ " x 1 ¹ / ₈ "
Cut hole	102mm 4"
Finish	WH - White BR - Brush nickel BK - Black
Dimmable	Yes
LED Colour	2700 - Warm white 2700K WW - Warm white 3000K NW - Neutral white 4000K CW - Cold white 5000K
IP	44


PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOR	VOLTAGE
TT	P120D	9W	BK	WW	12V
TT	P120D	9W			12V


TT-P120S



- Slim recessed.
- Ideal for suspended ceilings and places with limited clearance.
- Adjustable beam.
- Single-point rotation module and 90° tilt

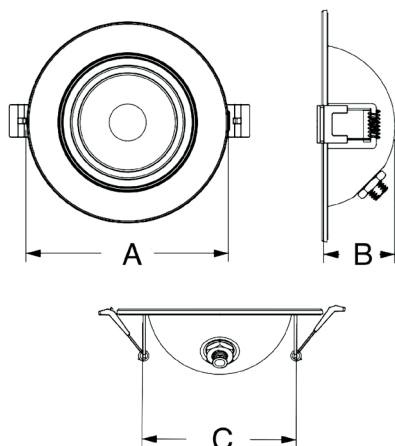

Voltage	120vAC		
Power	7W	9W	12W
Amperage	0,07A	0,08A	0,11A
Angle	40°		
Lumen	690lm	850lm	1000lm
CRI	90		
Size	A - Ø111 mm Ø 4 ³ / ₈ "	A - Ø 125 mm Ø 4 ¹⁵ / ₁₆ "	A - Ø 191 mm Ø 7 ¹ / ₂ "
	B - 35 mm 1 ³ / ₈ "	B - 39.5 mm 1 ¹ / ₂ "	B - 51 mm 2"
Cut hole	C - 85 mm 3 ¹ / ₂ "	C - 95 mm 3 ³ / ₄ "	C - 153 mm 6"
Finish	WH - White BR - Brush nickel BK - Black		
Dimmable	Yes		
LED Colour	CCT - White 2700K-3000K-3500K-4000K-5000K		
Operating temperature	-40°C~40°C		
IP	44 (damp location)		

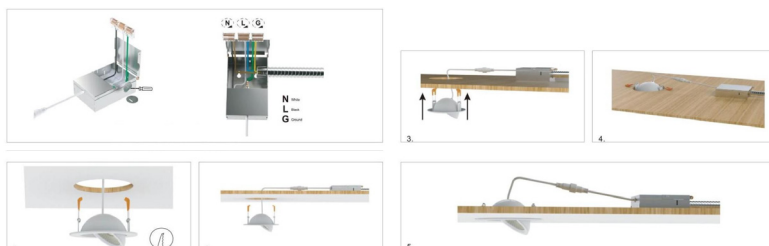

PRODUCT CODE

TT	MODEL	POWER	FINISH	LED COLOR
TT	P120S	9W	BK	CCT
TT	P120S			CCT


TITANIUM

TECHNOLOGY



TT-P120



- Ideal for suspended ceilings and restricted place in clearance.

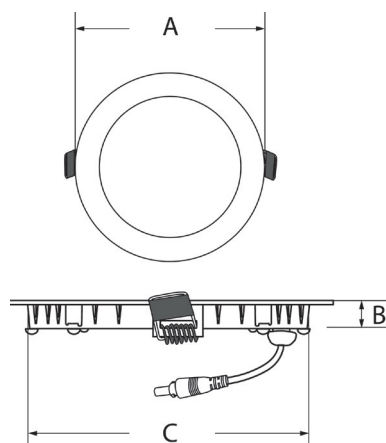

Voltage	120vAC		
Power	7W	9W	12W
Amperage	0,05A	0,08A	0,11A
Angle	120°		
Lumen	680lm	800lm	1000lm
Size	A - Ø 88mm Ø 3 7/16" B - 8mm 5/16"	A - Ø 119mm Ø 4 11/16" B - 8mm 5/16"	A - Ø 168mm Ø 6 5/8" B - 8mm 5/16"
Cut hole	C - 70mm 2 3/4"	C - 105mm 4 1/8"	C - 156mm 6 1/8"
CRI	80		
Finish	WH - White BK - Black		
Dimmable	Yes		
LED Colour	CCT - White 2700K-3000K-3500K- 4000K-5000K		
Operating temperature	-40°C~40°C		
IP	65 (wet location)		



PRODUCT CODE

TT	-	MODEL	-	POWER	-	FINISH	-	LED COLOUR
TT	-	P120	-	9W	-	BK	-	CCT
TT	-	P120	-		-		-	CCT

TRACK LIGHTING SYSTEM







TT-TRK-TRACK Page 281

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	-	-	-



TT-TRK-TRACK-PL Page 282

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	-	-	-



TT-TRK-1X1 Page 283

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	2	120	34



TT-TRK-3X1 Page 284

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	380	34



TT-TRK-6X1 Page 285

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-12X1 Page 286

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	1550	34



TT-TRK-3X1D Page 287

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	380	34



TT-TRK-6X1D Page 288

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-12X1D Page 289

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	1550	34





TT-TRK-322 Page 290

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	13	980	120




TT-TRK-640 Page 291

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	26	1900	120



TT-TRK-958 Page 292

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	39	2850	120



TT-TRK-84D Page 293

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	4	280	120



TT-TRK-164D Page 294

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	500	120



TT-TRK-323D Page 295

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	980	120



TT-TRK-BALL Page 296

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	360



TT-TRK-15 Page 297

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	380	120



TT-TRK-30 Page 298

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	16	880	120





TT-TRK-5W-1 Page 299

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	440	40



TT-TRK-5W-2 Page 300

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	2 x 5W	880	40



TT-TRK-8W-1 Page 301

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	20



TT-TRK-10W-1 Page 302

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	24



TT-TRK-15W-1 Page 303

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	15	905	30



TT-TRK-20W-1 Page 304

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	20	1450	24



TT-TRK-10W-1Z Page 305

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	200



TT-TRK-120C Page 306

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	650	Diffuse



TT-TRK-164C Page 307

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	650	Diffuse





TT-TRK-12X1W-C Page 308

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	12	1150	34



TT-TRK-18X1W-C Page 309

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	18	1750	34



TT-TRK-SUSP-BALL Page 310

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	-



TT-TRK-SUSP-8W Page 311

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	24



TT-TRK-SUSP-5W Page 312

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	450	30



TT-TRK-SUSP-5W-10 Page 313

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	450	30





TT-TRK-SUSP-10W Page 314

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	36



TT-TRK-SUSP-CONE Page 315

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	480	Diffuse



TT-TRK-TRACK-R Page 316

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/2 Page 317

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/4 Page 318

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-TRACK-R1/8 Page 319

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	200 max.	-	-



TT-TRK-8W-1R Page 320

Voltage (VDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	405	30





TT-TRK-SUSP-10W-R Page 321

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	36



TT-TRK-15W-1R Page 322

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	15	905	30



TT-TRK-6X1R Page 323

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	790	34



TT-TRK-163R Page 324

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	8	500	Diffuse



TT-TRK-5W-1R Page 325

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	440	90



TT-TRK-10W-1R Page 326

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	10	780	24



TT-TRK-BALL-R Page 327

Voltage (vDC)	Power (W/m)	Luminous flux (lm/m)	Angle beam (°)
24	5	290	220





TT-TRK-TRACK





PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	TRACK	-	BK
TT	-	TRK	-	TRACK	-	

Voltage	24vDC	
Size	1000mm x 40mm x 76mm	3000mm x 40mm x 76mm
	39 ³ / ₈ " x 1 ⁹ / ₁₆ " x 3"	118 ¹ / ₄ " x 1 ⁹ / ₁₆ " x 3"
Cut hole	40mm 1 ⁹ / ₁₆ "	
Finish	BK - Black	
	WH - White	
	WOOD - Wood	
IP	20	



TT-TRK-TRACK-PL

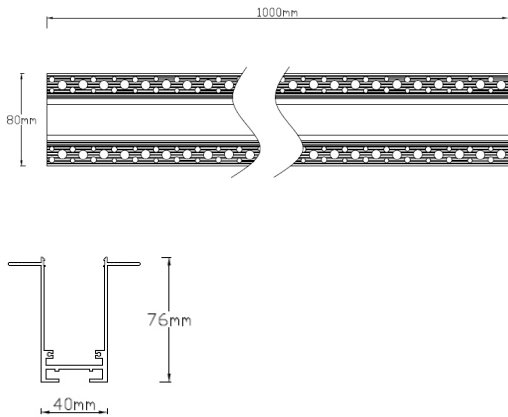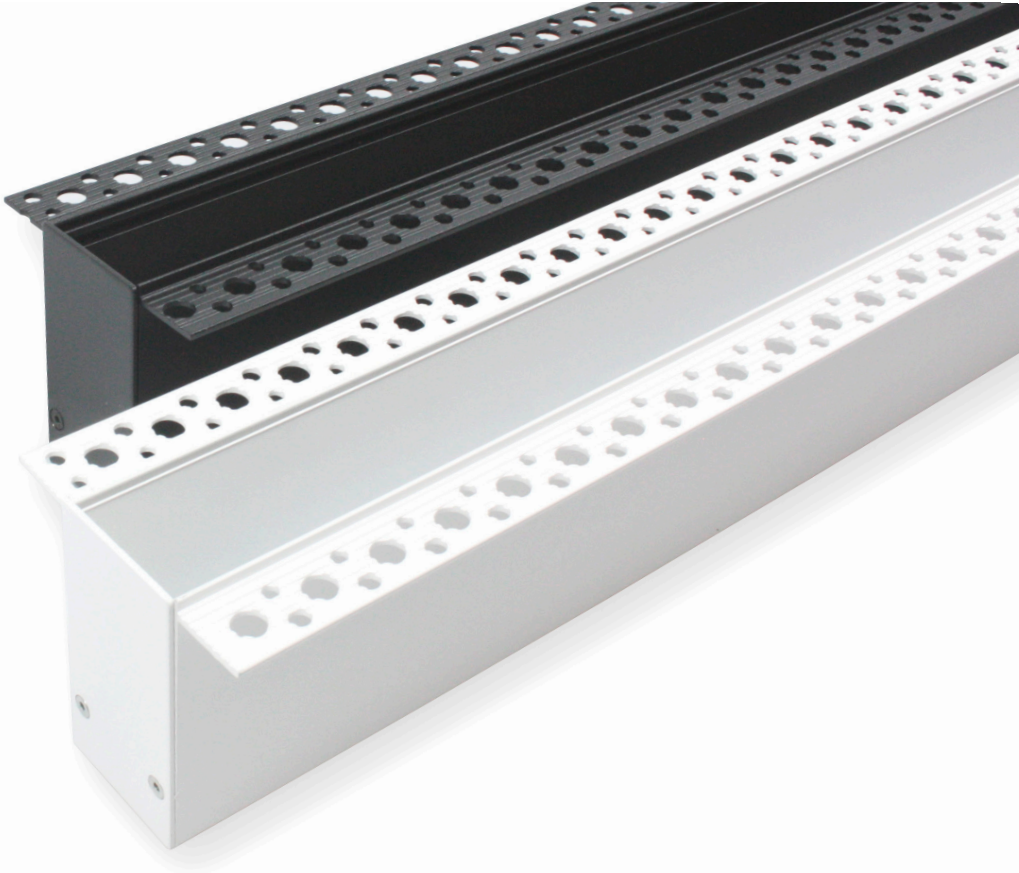

Voltage	24vDC
Size	1000mm x 40mm x 76mm 39 ³ / ₈ " x 1 ⁹ / ₁₆ " x 3"
Cut hole	40mm 1 ⁹ / ₁₆ "
Finish	WH - White BK - Black
IP	20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	PL	-	BK
TT	-	TRK	-	TRACK	-	PL	-	


TT-TRK-1X1



34mm




34mm



34mm



34°



h(m)	E(lx)	Φ(m)
1	429	Φ0.71
2	107	Φ1.43
3	47	Φ2.15
4	26	Φ2.87
5	17	Φ3.59

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	1X1	-	BK	-	27K
TT	-	TRK	-	1X1	-		-	

Voltage 24vDC

Amperage 0,09A

Power LED 2,16W

Lumens 120 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K




Dimmable Yes

Size 34 x 34 x 56 mm
1⁵/₁₆" x 1⁵/₁₆" x 2³/₁₆"

Finish **BK** - Black
WH - White

IP 20

TT-TRK-3X1

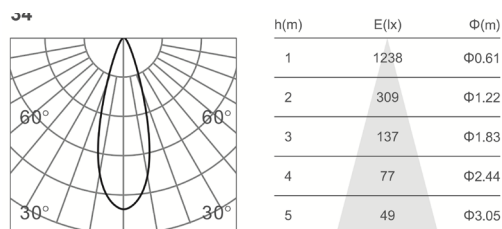

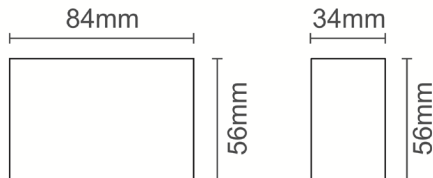


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	3X1	-	BK	-	27K
TT	-	TRK	-	3X1	-		-	

Voltage	24vDC
Amperage	0,19A
Power LED	4,56W
Lumens	380 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	84 x 34 x 56 mm 3 ¹ / ₄ " x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20

TT-TRK-6X1

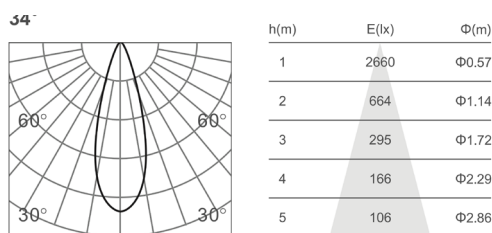




PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	6X1	-	BK	-	27K
TT	-	TRK	-	6X1	-		-	

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	790 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	164 x 34 x 56 mm 6 ⁷ / ₁₆ x 1 ⁵ / ₁₆ " x 2 ³ / ₁₆ "
Finish	BK - Black WH - White
IP	20

TT-TRK-12X1



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1	-	BK	-	27K
TT	-	TRK	-	12X1	-		-	

Voltage 24vDC

Amperage 0,72A

Power LED 17,28W

Lumens 1550 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 320 x 34 x 56 mm
12¹/₂ x 1⁵/₁₆" x 2³/₁₆"

Finish
BK - Black
WH - White

IP 20

TT-TRK-3X1D

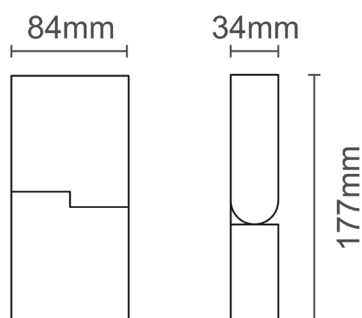

h(m)	E(lx)	Φ(m)
1	1238	Φ0.61
2	309	Φ1.22
3	137	Φ1.83
4	77	Φ2.44
5	49	Φ3.05

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	3X1D	-	BK	-	27K
TT	-	TRK	-	3X1D	-		-	

Voltage 24vDC

Amperage 0,19A

Power LED 4,56W

Lumens 380 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 84 x 34 x 177 mm
3 1/4" x 1 5/16" x 7"

Finish
BK - Black
WH - White

IP 20

TT-TRK-6X1D

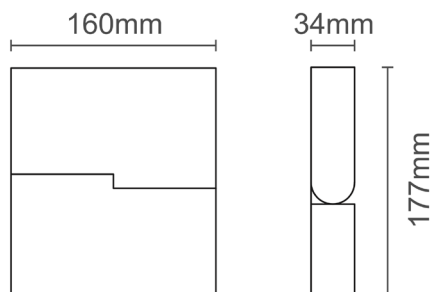



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	6X1D	-	BK	-	27K
TT	-	TRK	-	6X1D	-		-	

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	790 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	160 x 34 x 177 mm 6 ¹ / ₄ " x 1 ³ / ₈ " x 7"
Finish	BK - Black WH - White
IP	20

TT-TRK-12X1D

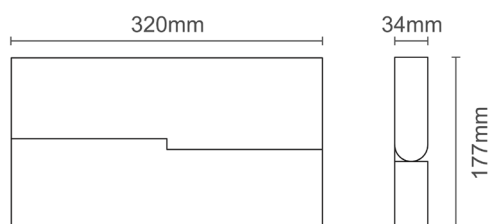


h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1D	-	BK	-	27K
TT	-	TRK	-	12X1D	-		-	

Voltage	24vDC
Amperage	0,72A
Power LED	17,28W
Lumens	1550 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	320 x 34 x 177 mm 12 ¹ / ₂ " x 1 ⁵ / ₁₆ " x 7"
Finish	BK - Black WH - White
IP	20

TT-TRK-322

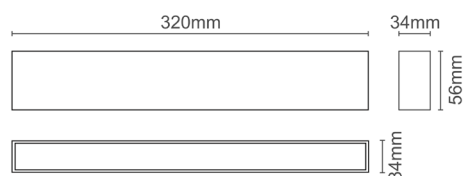

Diffuse



h(m)	E(lx)	Φ(m)
1	426	Φ2.51
2	106	Φ5.02
3	47	Φ7.53
4	26	Φ10.04
5	17	Φ12.55

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	322	-	BK	-	27K
TT	-	TRK	-	322	-		-	

Voltage 24vDC

Amperage 0,7A

Power LED 16,8W

Lumens 980 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 320 x 34 x 56 mm
12⁵/₈" x 1⁵/₁₆" x 2³/₁₆"


Finish
BK - Black
WH - White

IP 20

TT-TRK-640

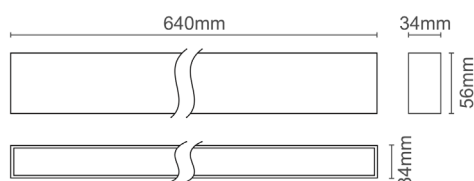

Diffuse



h(m)	E(lx)	Φ(m)
1	479	Φ2.65
2	119	Φ5.30
3	53	Φ7.95
4	29	Φ10.60
5	19	Φ13.25

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	640	-	BK	-	27K
TT	-	TRK	-	640	-		-	

Voltage 24vDC

Amperage 1,08A

Power LED 26W

Lumens 1900 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 640 x 34 x 56 mm
 25¹/₄" x 1⁵/₁₆" x 2³/₁₆"


Finish
BK - Black
WH - White

IP 20

TT-TRK-958

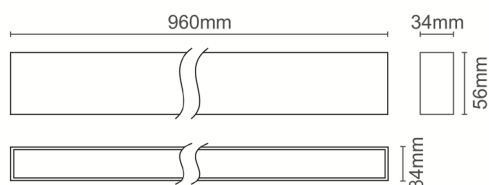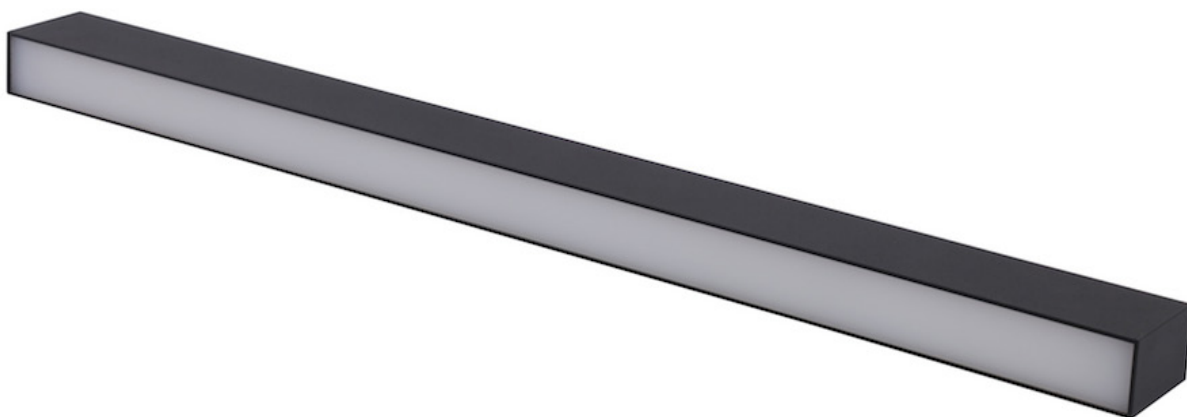

Diffuse



h(m)	E(lx)	Φ(m)
1	889	Φ2.23
2	222	Φ4.46
3	98	Φ6.69
4	55	Φ8.92
5	35	Φ11.15

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	958	-	BK	-	27K
TT	-	TRK	-	958	-		-	

Voltage 24vDC

Amperage 1,625A

Power LED 39W

Lumens 2850 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 960 x 34 x 56 mm
 37¹³/₁₆" x 1⁵/₁₆" x 2³/₁₆"


Finish **BK** - Black
WH - White

IP 20

TT-TRK-84D

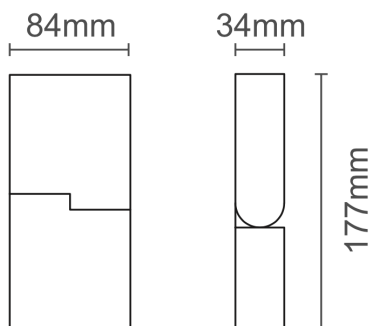

Diffuse




h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	84D	-	BK	-	27K
TT	-	TRK	-	84D	-		-	

Voltage	24vDC
Amperage	0,18A
Power LED	4,32W
Lumens	280 lm
CRI	90
Angle	120°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	84 x 34 x 177 mm 3 ¹ / ₄ " x 1 ⁵ / ₁₆ " x 6 ¹⁵ / ₁₆ "
Finish	BK - Black WH - White
IP	20

TT-TRK-164D

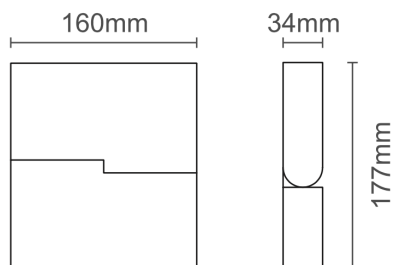

Diffuse



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	164D	-	BK	-	27K
TT	-	TRK	-	164D	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 500 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 160 x 34 x 177 mm
6⁵/₁₆" x 1⁵/₁₆" x 6¹⁵/₁₆"


Finish
BK - Black
WH - White

IP 20

TT-TRK-323D

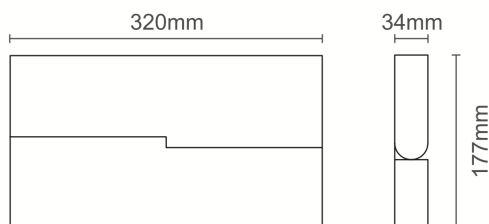

Diffuse



h(m)	E(lx)	Φ(m)
1	234	Φ2.47
2	58	Φ4.95
3	26	Φ7.43
4	14	Φ9.90
5	9	Φ12.38

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	323D	-	BK	-	27K
TT	-	TRK	-	323D	-		-	

Voltage 24vDC

Amperage 0,7A

Power LED 16,8W

Lumens 980 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 320 x 34 x 177 mm
12⁵/₈" x 1⁵/₁₆" x 6¹⁵/₁₆"


Finish **BK** - Black
WH - White

IP 20

TT-TRK-BALL

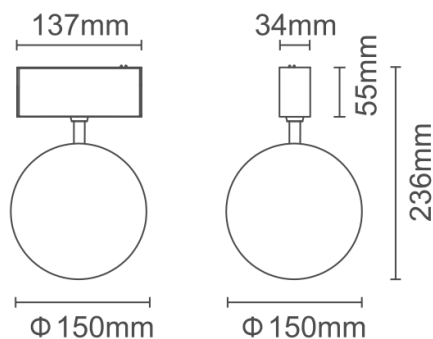

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PRODUCT CODE

TT	-	TYPE	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	BALL	-	BK	-	27K
TT	-	TRK	-	BALL	-		-	

Voltage 24vDC

Amperage 0,30A

Power LED 7,2W

Lumens 290 lm

CRI 90

Angle 360°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 137 x 34 x 55 mm Ø140mm
5³/₈ " x 1⁵/₁₆ " x 2³/₁₆ " Ø5¹/₂ "


Finish
BK - Black
WH - White

IP 20

TT-TRK-15

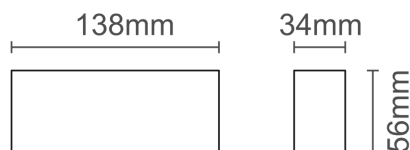

Wallwasher



h(m)	E(lx)	Φ(m)
1	137	Φ0.97
2	34	Φ1.94
3	15	Φ2.91
4	8	Φ3.88
5	5	Φ4.85

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	15	-	BK	-	27K
TT	-	TRK	-	15	-		-	

Voltage 24vDC

Amperage 0,29A

Power LED 6,96W

Lumens 380 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 138 x 34 x 56 mm
5⁷/₁₆" x 1⁵/₁₆" x 2³/₁₆"


Finish **BK** - Black
WH - White

IP 20

TT-TRK-30

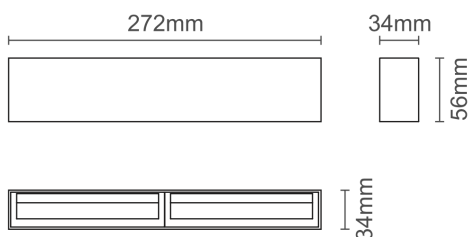

Wallwasher



h(m)	E(lx)	Φ(m)
1	344	Φ0.90
2	86	Φ1.80
3	38	Φ2.70
4	21	Φ3.59
5	13	Φ4.49

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	30	-	BK	-	27K
TT	-	TRK	-	3X1	-		-	

Voltage 24vDC

Amperage 0,58A

Power LED 13,92W

Lumens 880 lm

CRI 90

Angle 120°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 272 x 34 x 56 mm
 10¹¹/₁₆ " x 1⁵/₁₆ " x 2³/₁₆ "

Finish **BK** - Black
WH - White

IP 20

TT-TRK-5W-1

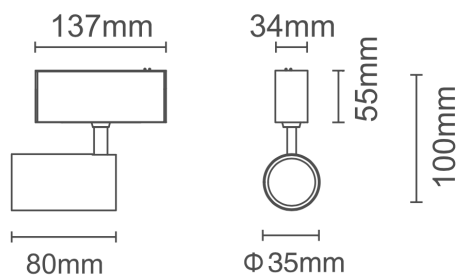

h(m)	E(lx)	Φ(m)
2	278	Φ0.96
3	124	Φ1.44
3.5	91	Φ1.68
4	69	Φ1.92
5	44	Φ2.40

PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	1	-	BK	-	27K
TT	-	TRK	-	5W	-	1	-		-	

Voltage 24vDC

Amperage 0,24A

Power LED 5,76W

Lumens 440 lm

CRI 90

Angle 40°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size
 Ø35 x 80 mm
 Ø1³/₈" x 3¹/₈"



Finish
BK - Black
WH - White

IP 20

TITANIUM

TECHNOLOGY

TT-TRK-5W-2

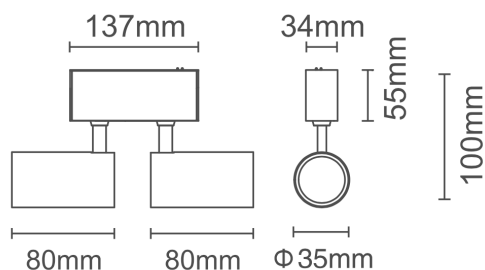




h(m)	E(lx)	Φ(m)
2	278	Φ0.96
3	124	Φ1.44
3.5	91	Φ1.68
4	69	Φ1.92
5	44	Φ2.40

PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	2	-	BK	-	27K
TT	-	TRK	-	5W	-	2	-		-	

Voltage	24vDC
Amperage	0,48A
Power LED	11,52W
Lumens	880 lm
CRI	90
Angle	40°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	2 x Ø35 x 80 mm 2 x Ø1 ³ / ₈ " x 3 ¹ / ₈ "
Finish	BK - Black WH - White
IP	20

TT-TRK-8W-1



h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33

PRODUCT CODE



TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	8W	-	1	-	BK	-	27K
TT	-	TRK	-	8W	-	1	-		-	

Voltage	24vDC
Amperage	0,36A
Power LED	8,64W
Lumens	405 lm
CRI	90
Angle	20°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø65 mm Ø2 1/2"
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-10W-1

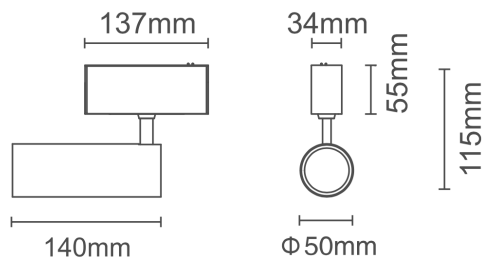

h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03

PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	10W	-	1	-	BK	-	27K
TT	-	TRK	-	10W	-	1	-		-	

Voltage 24vDC

Amperage 0,44A

Power LED 10,56W

Lumens 780 lm

CRI 90

Angle 24°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size
 Ø50 x 140 mm
 Ø2" x 5 1/2"

Finish
BK - Black
WH - White

IP 20

TT-TRK-15W-1

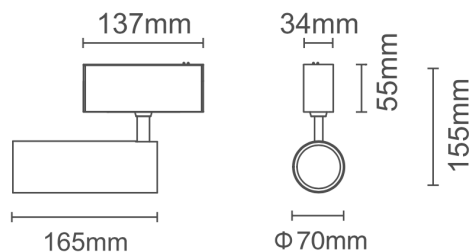


h(m)	E(lx)	Φ(m)
1	4847	Φ 0.30
2	1212	Φ 0.60
3	538	Φ 0.90
4	302	Φ 1.20
5	193	Φ 1.51

PRODUCT CODE


TT	TYPE	POWER	PROJECTOR	FINISH	LED COLOR
TT	TRK	15W	1	BK	27K
TT	TRK	15W	1		

Voltage	24vDC
Amperage	0,68A
Power LED	16,32W
Lumens	905 lm
CRI	90
Angle	30°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø92 mm Ø3 ⁵ / ₈ "
Finish	BK - Black WH - White
IP	20

TT-TRK-20W-1

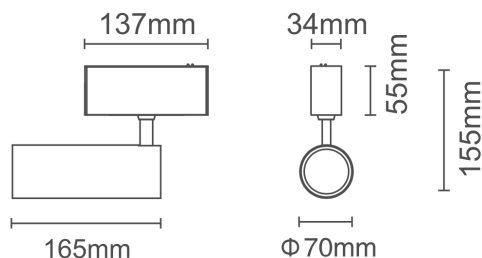

24°



h(m)	E(lx)	Φ(m)
1	5787	Φ0.47
2	1447	Φ0.95
3	643	Φ1.42
4	361	Φ1.90
5	231	Φ2.37

PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	20W	-	1	-	BK	-	27K
TT	-	TRK	-	20W	-	1	-		-	

Voltage 24vDC

Amperage 0,9A

Power LED 21,6W

Lumens 1450 lm

CRI 90

Angle 24°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size
 Ø70 x 165 mm
 Ø2³/₄" x 6¹/₂"

Finish
BK - Black
WH - White

IP 20



TT-TRK-10W-1Z

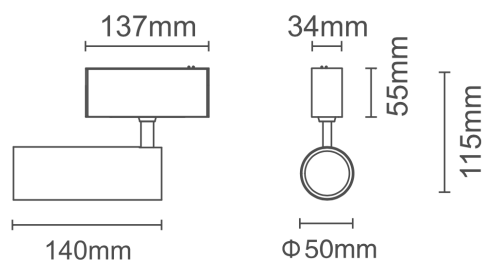

Voltage	24vDC
Amperage	0,43A
Power LED	10,32W
Lumens	780 lm
CRI	90
Angle	10° to 50°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø50 x 140 mm Ø2" x 5½"
Finish	BK - Black WH - White
IP	20

PRODUCT CODE

TT	TYPE	POWER	PROJECTOR	FINISH	LED COLOR
TT	TRK	10W	1Z	BK	27K
TT	TRK	10W	1Z		

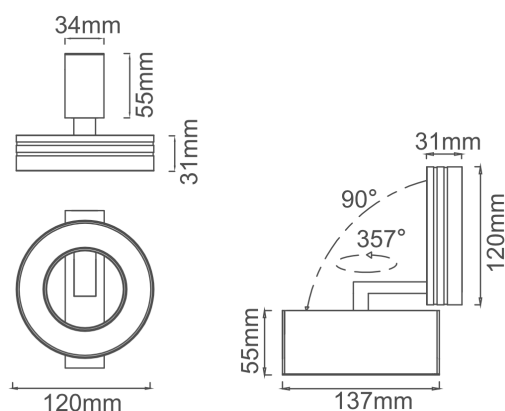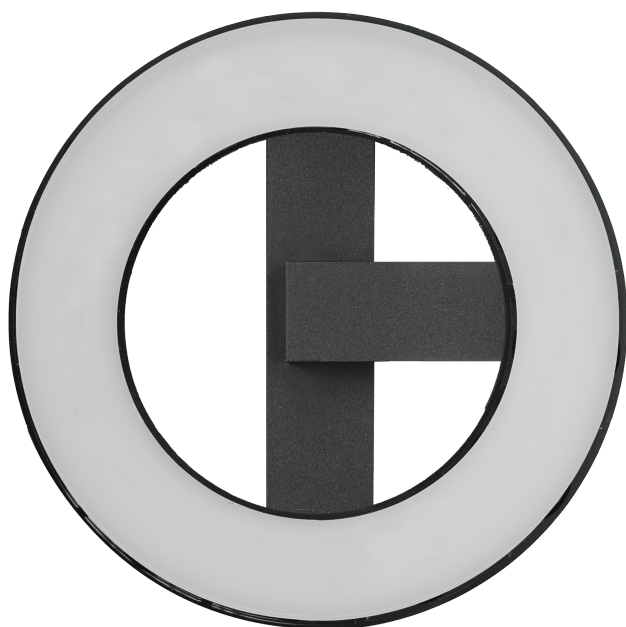

Voltage 24vDC

Amperage 0,5A

Power LED 12W

Lumens 650 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size 137 mm x 34 mm x 56 mm x Ø120 mm
 $5\frac{3}{8}'' \times 1\frac{3}{8}'' \times 2\frac{3}{16}'' \times \text{Ø}4\frac{3}{4}''$


Finish
BK - Black
WH - White

IP 20

PRODUCT CODE

TT	TYPE	MODEL	CURVE	FINISH	LED COLOR
TT	TRK	120	C	BK	27K
TT	TRK	120	C		

TT-TRK-164-C

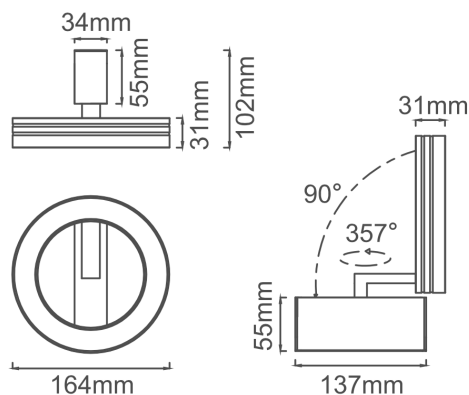

Voltage 24vDC

Amperage 0,75A

Power LED 18W

Lumens 650 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes



Size 137 mm x 34 mm x 55 mm x Ø164 mm
 $5\frac{3}{8}" \times 1\frac{3}{8}" \times 2\frac{3}{16}" \times \text{Ø}6\frac{7}{16}"$

Finish
BK - Black
WH - White

IP 20

PRODUCT CODE

TT	TYPE	MODEL	CURVE	FINISH	LED COLOR
TT	TRK	164	C	BK	27K
TT	TRK	164	C		

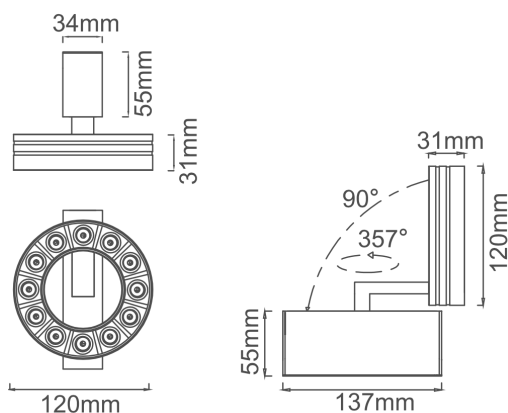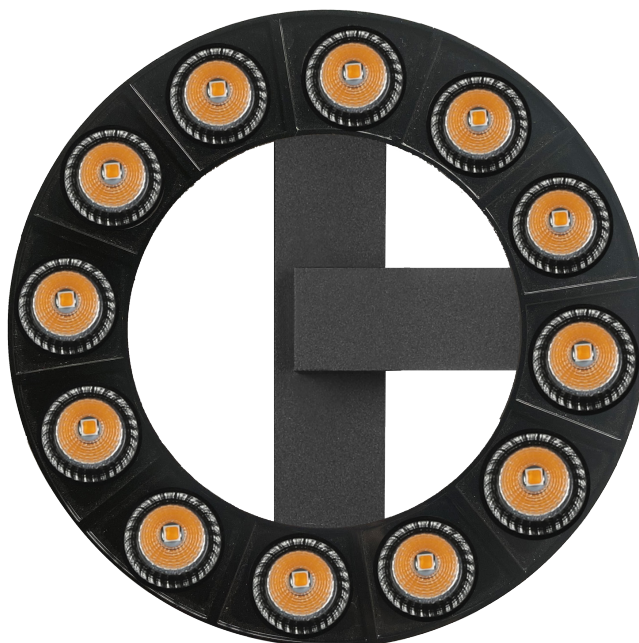

Voltage 24vDC

Amperage 0,52A

Power LED 12,48W

Lumens 1150 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes


Size 137 mm x 34 mm x 55 mm x Ø120 mm
5³/₈" x 1³/₈" x 2³/₁₆" x Ø4³/₄"

Finish **BK** - Black
WH - White

IP 20

PRODUCT CODE

TT	-	TYPE	-	POWER	-	CURVE	-	FINISH	-	LED COLOR
TT	-	TRK	-	12X1W	-	C	-	BK	-	27K
TT	-	TRK	-	12X1W	-	C	-		-	

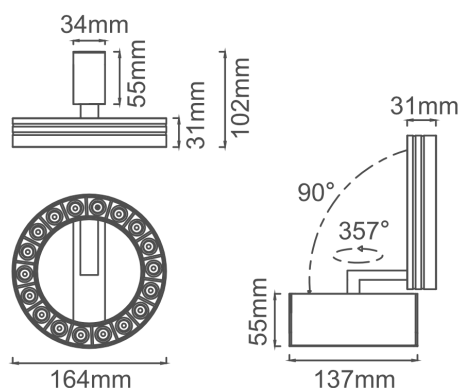


Voltage	24vDC
Amperage	0,75A
Power LED	18W
Lumens	1750 lm
CRI	90
Angle	34°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	137 mm x 34 mm x 55 mm x Ø164 mm $5\frac{3}{8}" \times 1\frac{3}{8}" \times 2\frac{3}{16}" \times \text{Ø}6\frac{7}{16}"$
Finish	BK - Black WH - White
IP	20


PRODUCT CODE

TT	TYPE	POWER	CURVE	FINISH	LED COLOR
TT	TRK	18X1W	C	BK	27K
TT	TRK	18X1W	C		

TT-TRK-SUSP-BALL

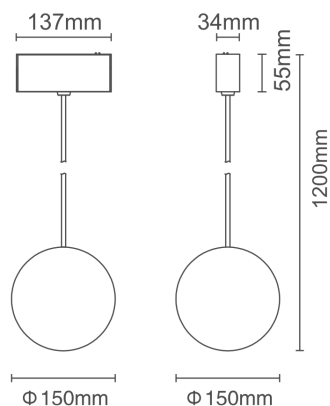

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	BALL	-	BK	-	27K
TT	-	TRK	-	SUSP	-	BALL	-		-	

Voltage 24vDC

Amperage 0,30A

Power LED 7,2W

Lumens 290 lm

CRI 90

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size 137 x 34 x 55 mm Ø1200mm
 $5\frac{3}{8}$ " x $1\frac{5}{16}$ " x $2\frac{3}{16}$ " x Ø47 $\frac{1}{4}$ "

Finish **BK** - Black
WH - White

IP 20

TT-TRK-SUSP-8W

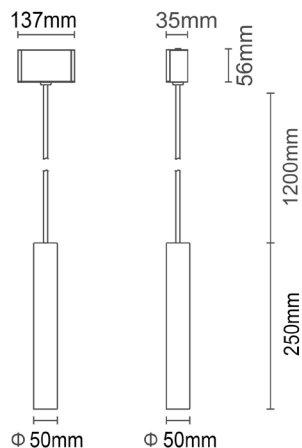

Voltage	24vDC
Amperage	0,33A
Power LED	8W
Lumens	405 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Dimmable	Yes
Size	Ø50 x 250 mm Ø2" x 9 ⁷ / ₈ "
Finish	BK - Black WH - White
IP	20



PRODUCT CODE

TT	TYPE	MODEL	POWER	FINISH	LED COLOR
TT	TRK	SUSP	8W	BK	27K
TT	TRK	SUSP	8W		

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-5W

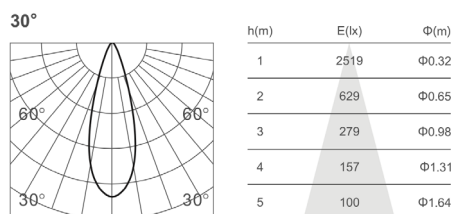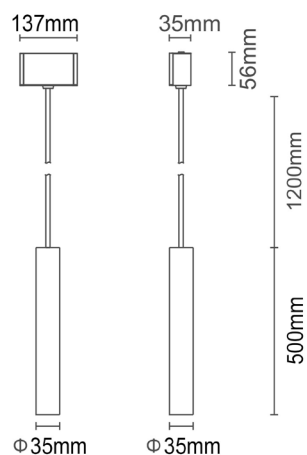

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	5W	-	BK	-	27K
TT	-	TRK	-	SUSP	-	5W	-		-	

Voltage 24vDC

Amperage 0,29A

Power LED 6,96W

Lumens 450 lm

CRI 90

Angle 30°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K

Dimmable Yes

Size
 Ø35 mm x 500mm
 Ø3⁵/₈" x 19¹¹/₁₆"

Finish
BK - Black
WH - White

IP 20

TT-TRK-SUSP-5W-10





Voltage	24vDC
Amperage	0,29A
Power LED	6,96W
Lumens	450 lm
CRI	90
Angle	30°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K 50K - Cold white 5000K
Acrylic length (cm)	10 20 30 40
Dimmable	Yes
Size	Ø35 mm x 500mm Ø3 ⁵ / ₈ " x 19 ¹¹ / ₁₆ "
Finish	BK - Black WH - White
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	ACRYLIC LENGTH (CM)	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	5W	-	10	-	BK	-	27K
TT	-	TRK	-	SUSP	-	5W	-		-		-	

TT-TRK-SUSP-10W

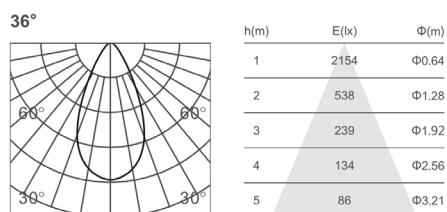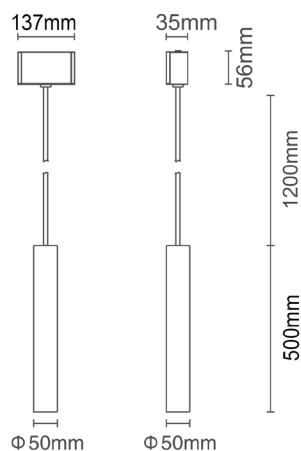

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	10W	-	BK	-	27K
TT	-	TRK	-	SUSP	-	10W	-		-	

Voltage 24vDC

Amperage 0,46A

Power LED 11,04W

Lumens 780 lm

CRI 90

Angle 36°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K


Dimmable Yes

Size
 Ø50 x 500 mm
 Ø2" x 19¹¹/₁₆"


Finish
BK - Black
WH - White

IP 20

TT-TRK-SUSP-CONE

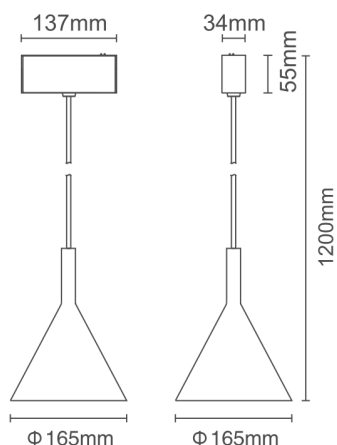

Diffuse



h(m)	E(lx)	Φ(m)
1	500	Φ1.20
2	125	Φ2.40
3	55.6	Φ3.60
4	31.2	Φ4.80
5	20	Φ6.00

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	CONE	-	BK	-	27K
TT	-	TRK	-	SUSP	-	CONE	-		-	

Voltage 24vDC

Amperage 0,43A

Power LED 10,32W

Lumens 480 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K
50K - Cold white 5000K



Dimmable Yes

Size 137 x 34 x 55 x 1200mm
 $5\frac{3}{8}$ " x $1\frac{5}{16}$ " x $2\frac{3}{16}$ " x $47\frac{1}{4}$ "

Finish
BK - Black
WH - White

IP 20

TT-TRK-TRACK-R

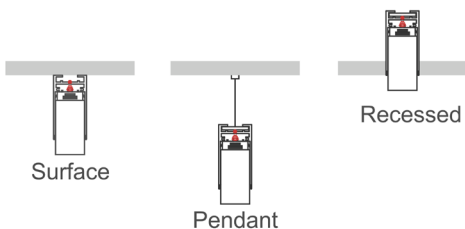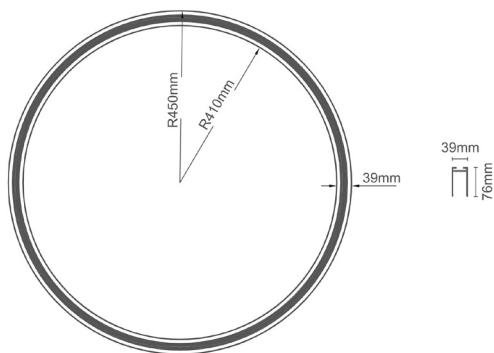

Voltage 24vDC

Size 900mm x 39mm x 76mm
35³/₈" x 1¹/₂" x 3"

Power 200w max.

Finish **BK** - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R	-	BK
TT	-	TRK	-	TRACK	-	R	-	

Accessories



TT-TRACK-SUSP





TT-TRK-R-PL

TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R1/2

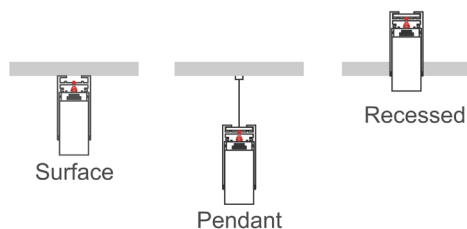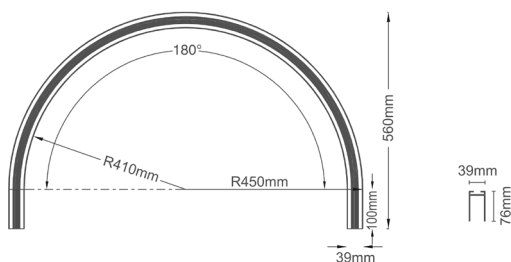

Voltage 24vDC

Size 906mm x 39mm x 76mm
35⁵/₈" x 1¹/₂" x 3"

Power 200w max.

Cut hole 40mm
1⁹/₁₆"


Finish **BK** - Black
WH - White

IP 20

Accessories



TT-TRACK-SUSP




TT-TRK-R-PL

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/2	-	BK
TT	-	TRK	-	TRACK	-	R1/2	-	

TT-TRK-TRACK-R1/4

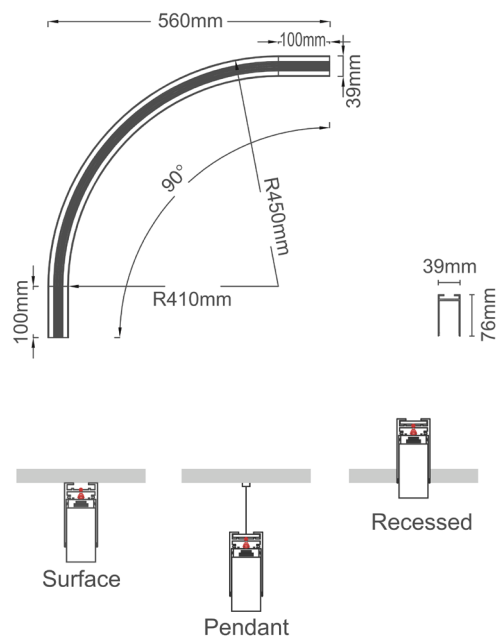


Voltage	24vDC
Size	560mm x 39mm x 76mm 22" x 1½" x 3"
Power	200w max.
Finish	BK - Black WH - White
IP	20

Accessories



TT-TRACK-SUSP



TT-TRK-R-PL



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/4	-	BK
TT	-	TRK	-	TRACK	-	R1/4	-	

TITANIUM

TECHNOLOGY

TT-TRK-TRACK-R1/8

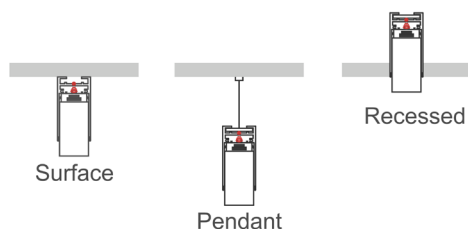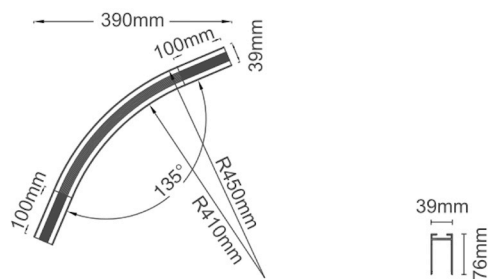

Voltage 24vDC

Size 390mm x 39mm x 76mm
15³/₈" x 1¹/₂" x 3"

Power 200w max.


Finish **BK** - Black
WH - White

IP 20

Accessories



TT-TRACK-SUSP




TT-TRK-R-PL


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	UTILITY	-	FINISH
TT	-	TRK	-	TRACK	-	R1/8	-	BK
TT	-	TRK	-	TRACK	-	R1/8	-	

TT-TRK-8W-1R

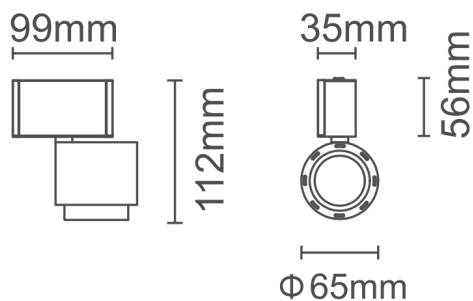

20°



h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33

PRODUCT CODE

TT	-	TYPE	-	PWOER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	8W	-	1R	-	BK	-	27K
TT	-	TRK	-	8W	-	1R	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 405 lm

CRI 90

Angle 30°


LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size 137 x 125 x 34 mm
5³/₈" x 4⁷/₈" x 1³/₈"


Finish
BK - Black
WH - White

IP 20

TT-TRK-SUSP-10W-R

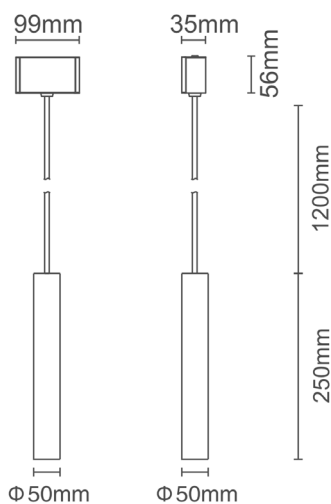

36°



h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	SUSP	-	10W	-	R	-	BK	-	27K
TT	-	TRK	-	SUSP	-	10W	-	R	-		-	

Voltage 24vDC

Amperage 0,46A

Power LED 11,04W

Lumens 780 lm

CRI 90

Angle 36°


LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size
 99 x 38 x 1450 mm
 3 7/8" x 1 3/8" x 57 1/8"


Finish
BK - Black
WH - White

IP 20

TT-TRK-15W-1R

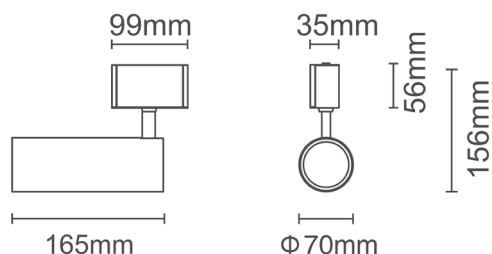

20°



h(m)	E(lx)	Φ(m)
1	4847	Φ 0.30
2	1212	Φ 0.60
3	538	Φ 0.90
4	302	Φ 1.20
5	193	Φ 1.51

Voltage 24vDC

Amperage 0,68A

Power LED 16,32W

Lumens 905 lm

CRI 90

Angle 30°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size
 99 x 35 x 156 mm
 3 7/8" x 1 3/8" x 6 1/8"



Finish
BK - Black
WH - White

IP 20


PRODUCT CODE

TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	15W	-	1R	-	BK	-	27K
TT	-	TRK	-	15W	-	1R	-		-	

TT-TRK-6X1R



34°



h(m)	E(lx)	Φ(m)
1	2800	Φ 0.53
2	700	Φ 1.07
3	311	Φ 1.60
4	175	Φ 2.14
5	112	Φ 2.67

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	6X1R	-	BK	-	27K
TT	-	TRK	-	6X1R	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 790 lm

CRI 90

Angle 34°

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K


Dimmable Yes

Size 190 mm x 42 mm x 56 mm
 $7\frac{1}{2}'' \times 1\frac{5}{16}'' \times 2\frac{3}{16}''$


Finish
BK - Black
WH - White

IP 20

TT-TRK-163R



Diffuse



h(m)	E(lx)	Φ(m)
1	119	Φ 2.56
2	29	Φ 5.12
3	13	Φ 7.68
4	7	Φ 10.24
5	4	Φ 12.81

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH	-	LED COLOR
TT	-	TRK	-	163R	-	BK	-	27K
TT	-	TRK	-	163R	-		-	

Voltage 24vDC

Amperage 0,36A

Power LED 8,64W

Lumens 500 lm

CRI 90

Angle Diffuse

LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K



Dimmable Yes

Size 190 mm x 42 mm x 56 mm
 $7\frac{1}{2}'' \times 1\frac{5}{16}'' \times 2\frac{3}{16}''$

Finish
BK - Black
WH - White

IP 20

TT-TRK-5W-1R

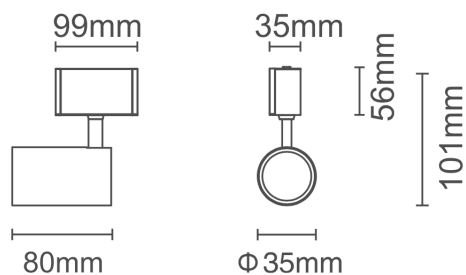

h(m)	E(lx)	Φ(m)
2	278	Φ0.96
3	124	Φ1.44
3.5	91	Φ1.68
4	69	Φ1.92
5	44	Φ2.40

PRODUCT CODE



TT	-	TYPE	-	POWER	-	PROJECTOR	-	FINISH	-	LED COLOR
TT	-	TRK	-	5W	-	1R	-	BK	-	27K
TT	-	TRK	-	5W	-	1R	-		-	

Voltage	24vDC
Amperage	0,24A
Power LED	5,76W
Lumens	440 lm
CRI	90
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	99 mm x 35 mm x 101 3 ⁷ / ₈ " x 1 ³ / ₈ " x 4"
Finish	BK - Black WH - White
IP	20

TITANIUM

TECHNOLOGY

TT-TRK-10W-1R

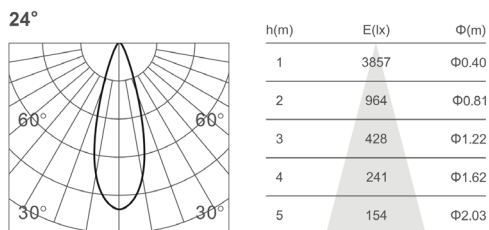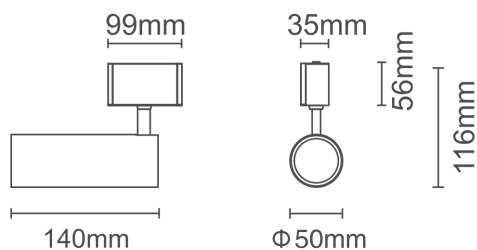


PRODUCT CODE


TT	TYPE	POWER	PROJECTOR	FINISH	LED COLOR
TT	TRK	10W	1R	BK	27K
TT	TRK	10W	1R		

Voltage	24vDC
Amperage	0,44A
Power LED	10,56W
Lumens	780 lm
CRI	90
Angle	24°
LED Color	27K - Warm white 2700K 30K - Warm white 3000K 40K - Neutral white 4000K
Dimmable	Yes
Size	99 mm x 35 mm x 116 3 ⁷ / ₈ " x 1 ³ / ₈ " x 3 ⁹ / ₁₆ "
Finish	BK - Black WH - White
IP	20

TT-TRK-BALL-R

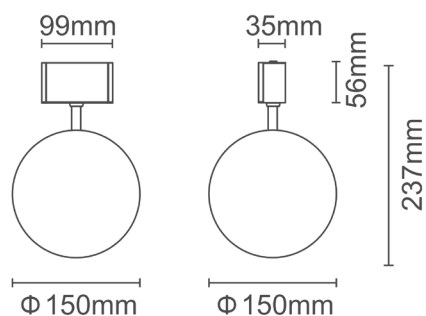

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PRODUCT CODE

TT	-	TYPE	-	FORM	-	FINISH	-	LED COLOR
TT	-	TRK	-	BALL-R	-	BK	-	27K
TT	-	TRK	-	BALL-R	-		-	

Voltage 24vDC

Amperage 0,30A

Power LED 7,2W

Lumens 290 lm

CRI 90

Angle 220°


LED Color
27K - Warm white 2700K
30K - Warm white 3000K
40K - Neutral white 4000K

Size 99 x 35 x 237 mm
 3⁷/₈" x 1³/₈" x 9³/₈"

Finish
BK - Black
WH - White

IP 20

TT-TRK-L

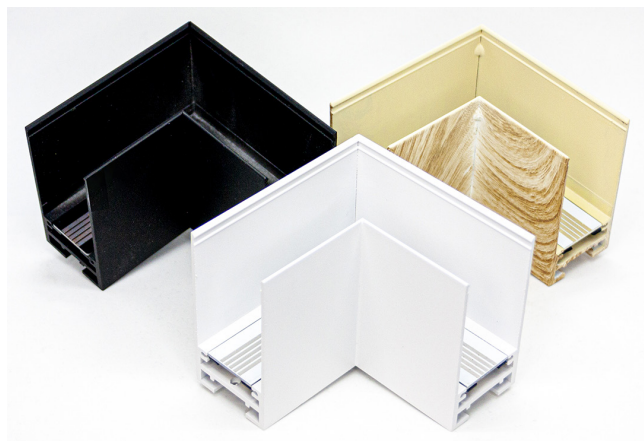


- Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	L	-	BK
TT	-	TRK	-	L	-	

Dimension	39 x 76 x 90 mm
	1 9/16" x 3" x 3 9/16"
Finish	BK - Black
	WH - White
	WOOD - Wood

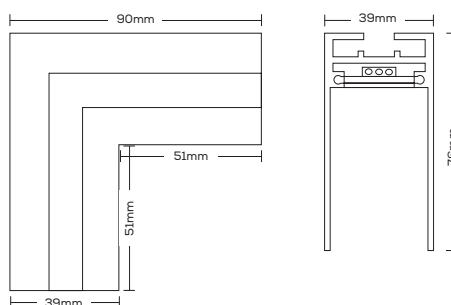

TT-TRK-Lo




- Outside corner union


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Lo	-	BK
TT	-	TRK	-	Lo	-	

Dimension	39 x 76 x 123 mm
	1 9/16" x 3" x 4 7/8"
Finish	BK - Black
	WH - White

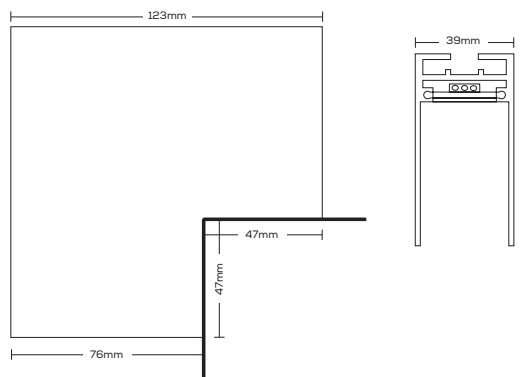

TT-TRK-Li

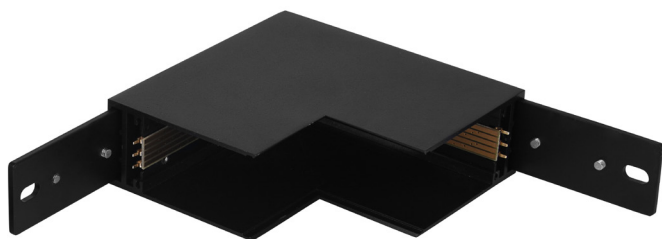


- Union interior corner


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Li	-	BK
TT	-	TRK	-	Li	-	

Dimension	39 x 76 x 123 mm
	1 9/16" x 3" x 4 7/8"
Finish	BK - Black
	WH - White

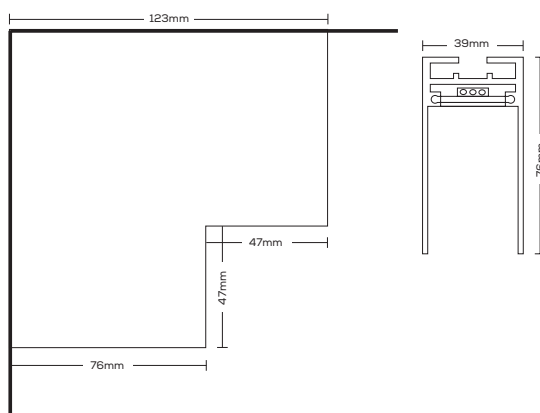

TT-TRK-T

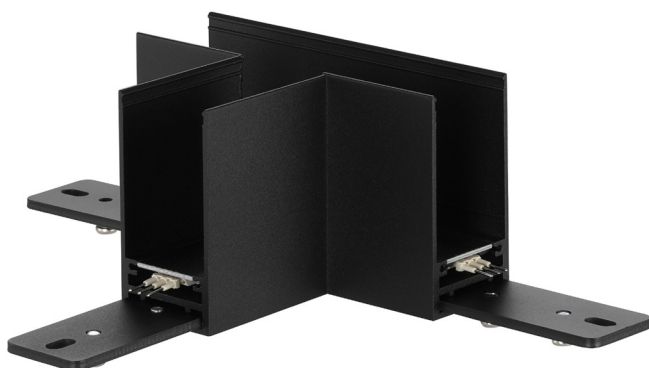


- T Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	T	-	BK
TT	-	TRK	-	T	-	

Dimension	39 x 76 x 141 mm
	1 9/16" x 3" x 5 9/16"
Finish	BK - Black
	WH - White

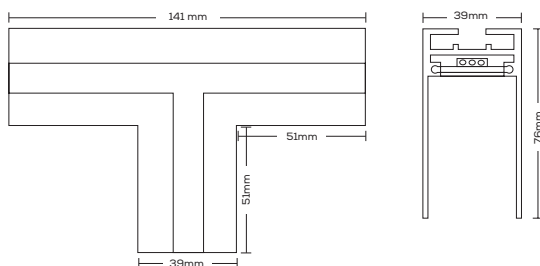

TT-TRK-X




- X Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	X	-	BK
TT	-	TRK	-	X	-	

Dimension	39 x 76 x 141 mm 1 9/16" x 3" x 5 9/16"
Finish	BK - Black WH - White

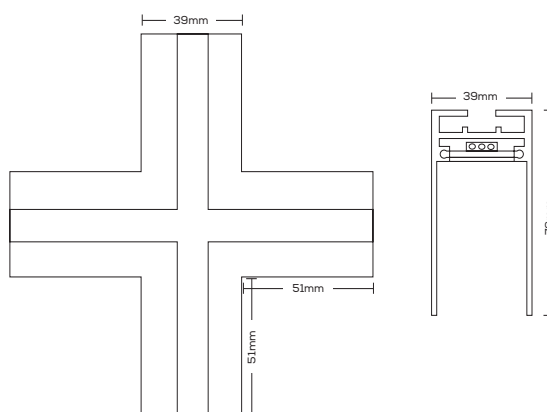

TT-TRK-V




- V Corner


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	V	-	BK
TT	-	TRK	-	V	-	

Dimension	39 x 76 x 110 mm 1 9/16" x 3" x 5 9/16"
Finish	BK - Black WH - White

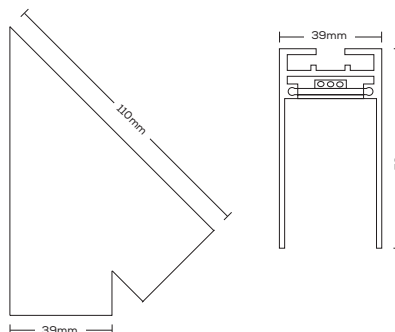

TT-TRK-L-PL

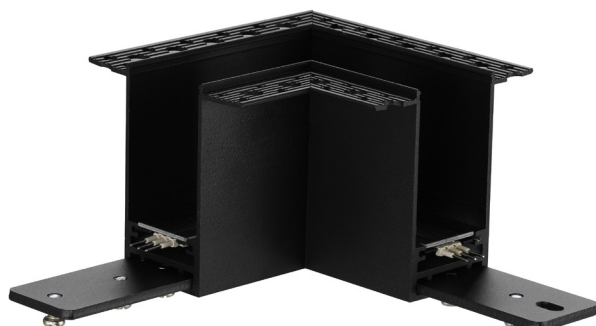


- Corner


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	L-PL	-	BK
TT	-	TRK	-	L-PL	-	

Dimension	39 x 76 x 90 mm
	1 9/16" x 3" x 3 9/16"
Finish	BK - Black
	WH - White

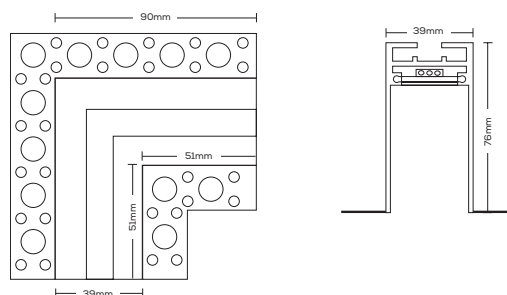

TT-TRK-Lo-PL

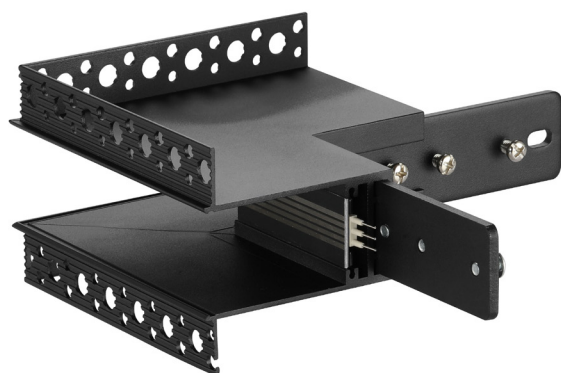


- Outside corner union

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Lo-PL	-	BK
TT	-	TRK	-	Lo-PL	-	

Dimension	39 x 76 x 90 mm
	1 9/16" x 3" x 3 9/16"
Finish	BK - Black
	WH - White

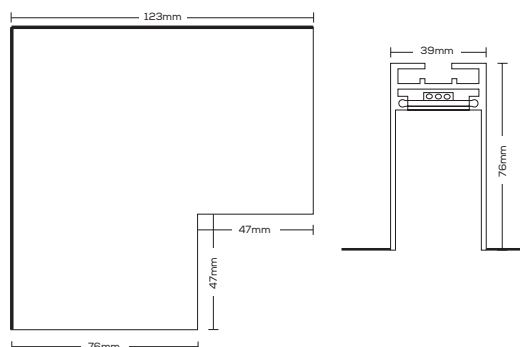

TT-TRK-Li-PL




- Union interior corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	Li-PL	-	BK
TT	-	TRK	-	Li-PL	-	

Dimension	39 x 76 x 90 mm $1\frac{9}{16}" \times 3" \times 3\frac{9}{16}"$
Finish	BK - Black WH - White

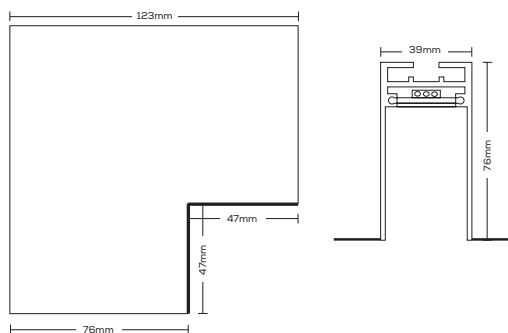

TT-TRK-T-PL




- T Corner

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	T-PL	-	BK
TT	-	TRK	-	T-PL	-	

Dimension	39 x 76 x 141 mm $1\frac{9}{16}" \times 3" \times 5\frac{9}{16}"$
Finish	BK - Black WH - White

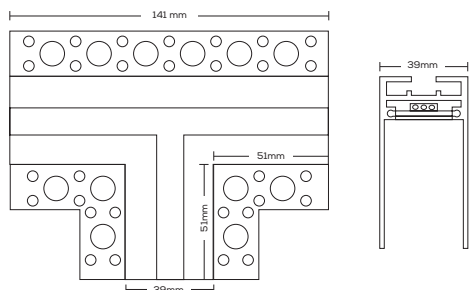

TT-TRK-END




- End cap.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	END	-	BK
TT	-	TRK	-	END	-	

Dimension	39 x 76 x 2.5mm 1 9/16" x 3" x 1/8"
Finish	BK - Black WH - White WOOD - Wood

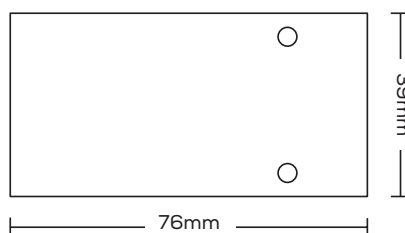

TT-TRK-CLIP




- Clip

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CLIP	-	BK
TT	-	TRK	-	CLIP	-	

Dimension	43 x 67 x 39 mm 1 11/16" x 2 5/8" x 1 9/16"
Finish	BK - Black WH - White

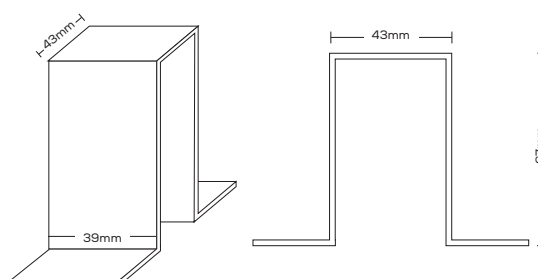


TT-TRK-COVER



Dimension	36 x 1000 mm x 2.5mm $1\frac{7}{16}" \times 39\frac{3}{8}" \times \frac{1}{8}"$
Finish	BK - Black WH - White WOOD - Wood

- Blank cover



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	COVER	-	BK
TT	-	TRK	-	COVER	-	

TT-TRK-EXT




Dimension	130 x 33 x 4 mm $5\frac{1}{8}" \times 1\frac{5}{16}" \times \frac{3}{16}"$
Finish	BK - Black WH - White WOOD - Wood


- Junction bar

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	EXT	-	BK
TT	-	TRK	-	EXT	-	

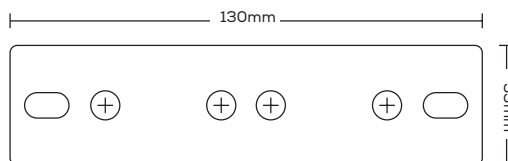

TT-TRK-O

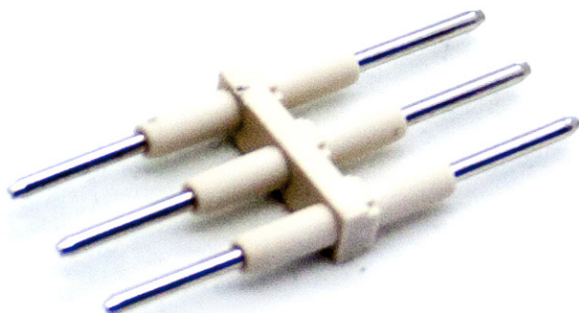


- Pin for electrical conductor

Dimension

26 x 11 x 3 mm


1" x $\frac{7}{16}$ " x $\frac{1}{8}$ "



PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	TRK	-	O
TT	-	TRK	-	O

TT-TRK-I

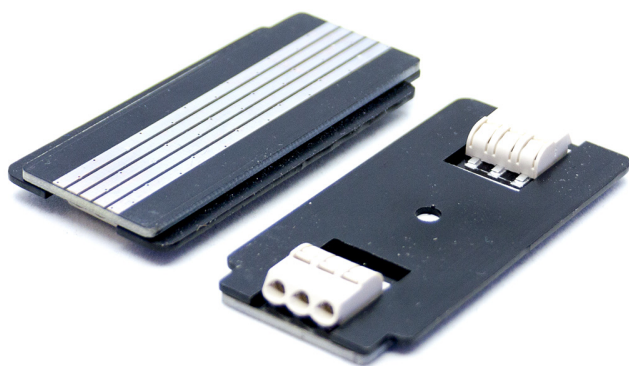

- Electrical conductor


Dimension

65 x 31 x 3 mm

2 $\frac{9}{16}$ " x 1 $\frac{1}{4}$ " x $\frac{1}{8}$ "

Finish

BK - Black

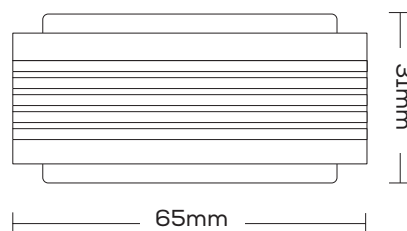

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	I	-	BK
TT	-	TRK	-	I	-	

TT-TRK-SUSP-A



- Suspension kit with power cord.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-A	-	BK
TT	-	TRK	-	SUSP-A	-	

TT-TRK-SUSP-B



- Suspension kit


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-B	-	BK
TT	-	TRK	-	SUSP-B	-	

Dimension $\varnothing 80 \times 30 \text{ mm}$
 $\varnothing 3 \frac{3}{16}'' \times 1 \frac{3}{16}''$

Cable length 1,5 M


Finish **BK** - Black
WH - White

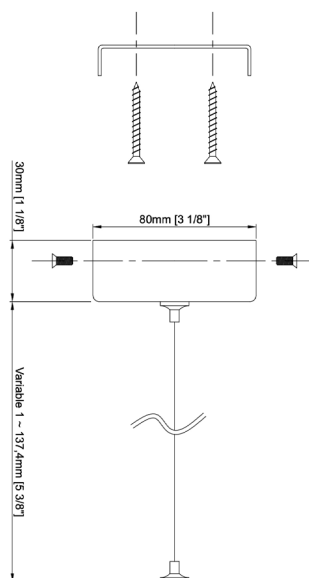

Dimension $\varnothing 80 \times 30 \text{ mm}$
 $\varnothing 3 \frac{3}{16}'' \times 1 \frac{3}{16}''$

Cable length 1,5 M

Finish **BK** - Black
WH - White

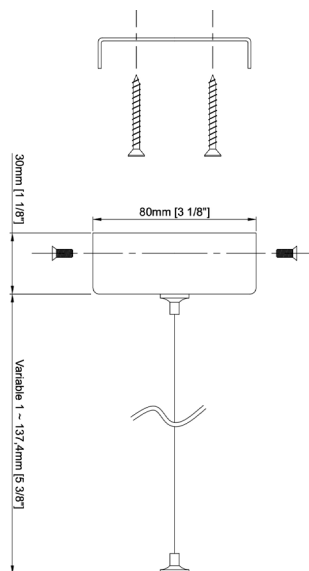

TITANIUM

TECHNOLOGY

TT-TRK-SUSP-C




- Suspension kit with power cord.


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-C	-	BK
TT	-	TRK	-	SUSP-C	-	

Dimension	Ø110 x 25 mm Ø4 5/8" x 1"
Cable length	1,5 M
Finish	BK - Black WH - White

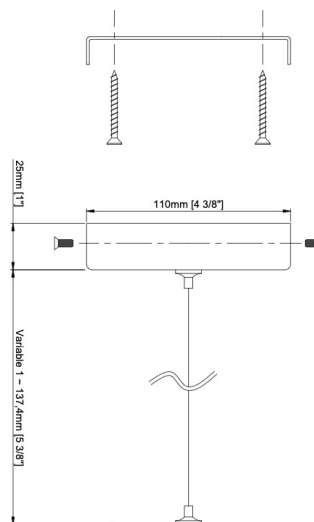

TT-TRK-SUSP-D

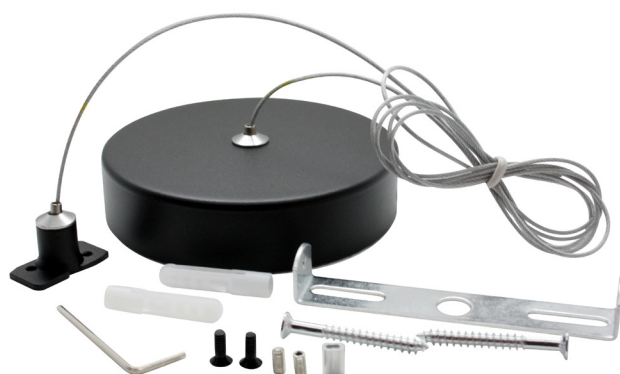


- Suspension kit

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	SUSP-D	-	BK
TT	-	TRK	-	SUSP-D	-	

Dimension	Ø100 x 25 mm Ø4 5/8" x 1"
Cable length	1,5 M
Finish	BK - Black WH - White

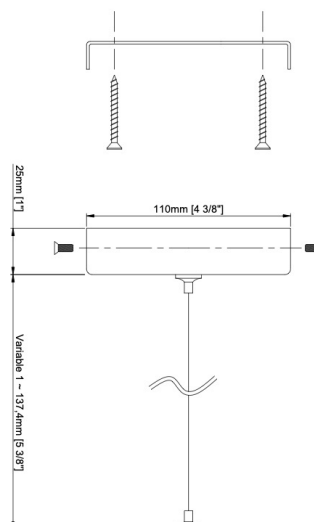

TT-TRK-CONNECT-PL




- Power junction.

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CONNECT-PL	-	BK
TT	-	TRK	-	CONNECT-PL	-	

Dimension	39 x 76 x 47 mm $1\frac{9}{16}" \times 3" \times 1\frac{7}{8}"$
Finish	BK - Black WH - White

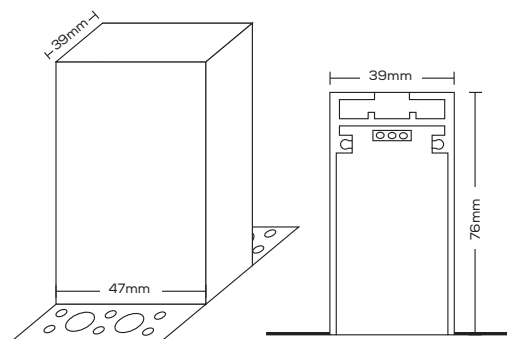

TT-TRK-CONNECT




- Power junction.


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FINISH
TT	-	TRK	-	CONNECT	-	BK
TT	-	TRK	-	CONNECT	-	

Dimension	39 x 76 x 47 mm $1\frac{9}{16}" \times 3" \times 1\frac{7}{8}"$
Finish	BK - Black WH - White WOOD - Wood

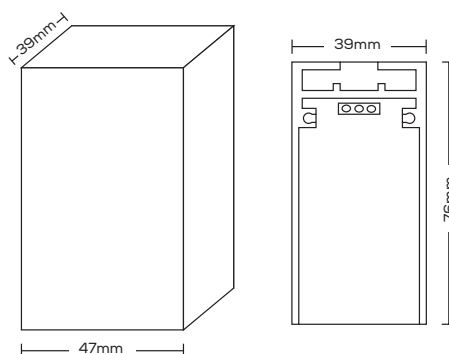

POWER SUPPLY

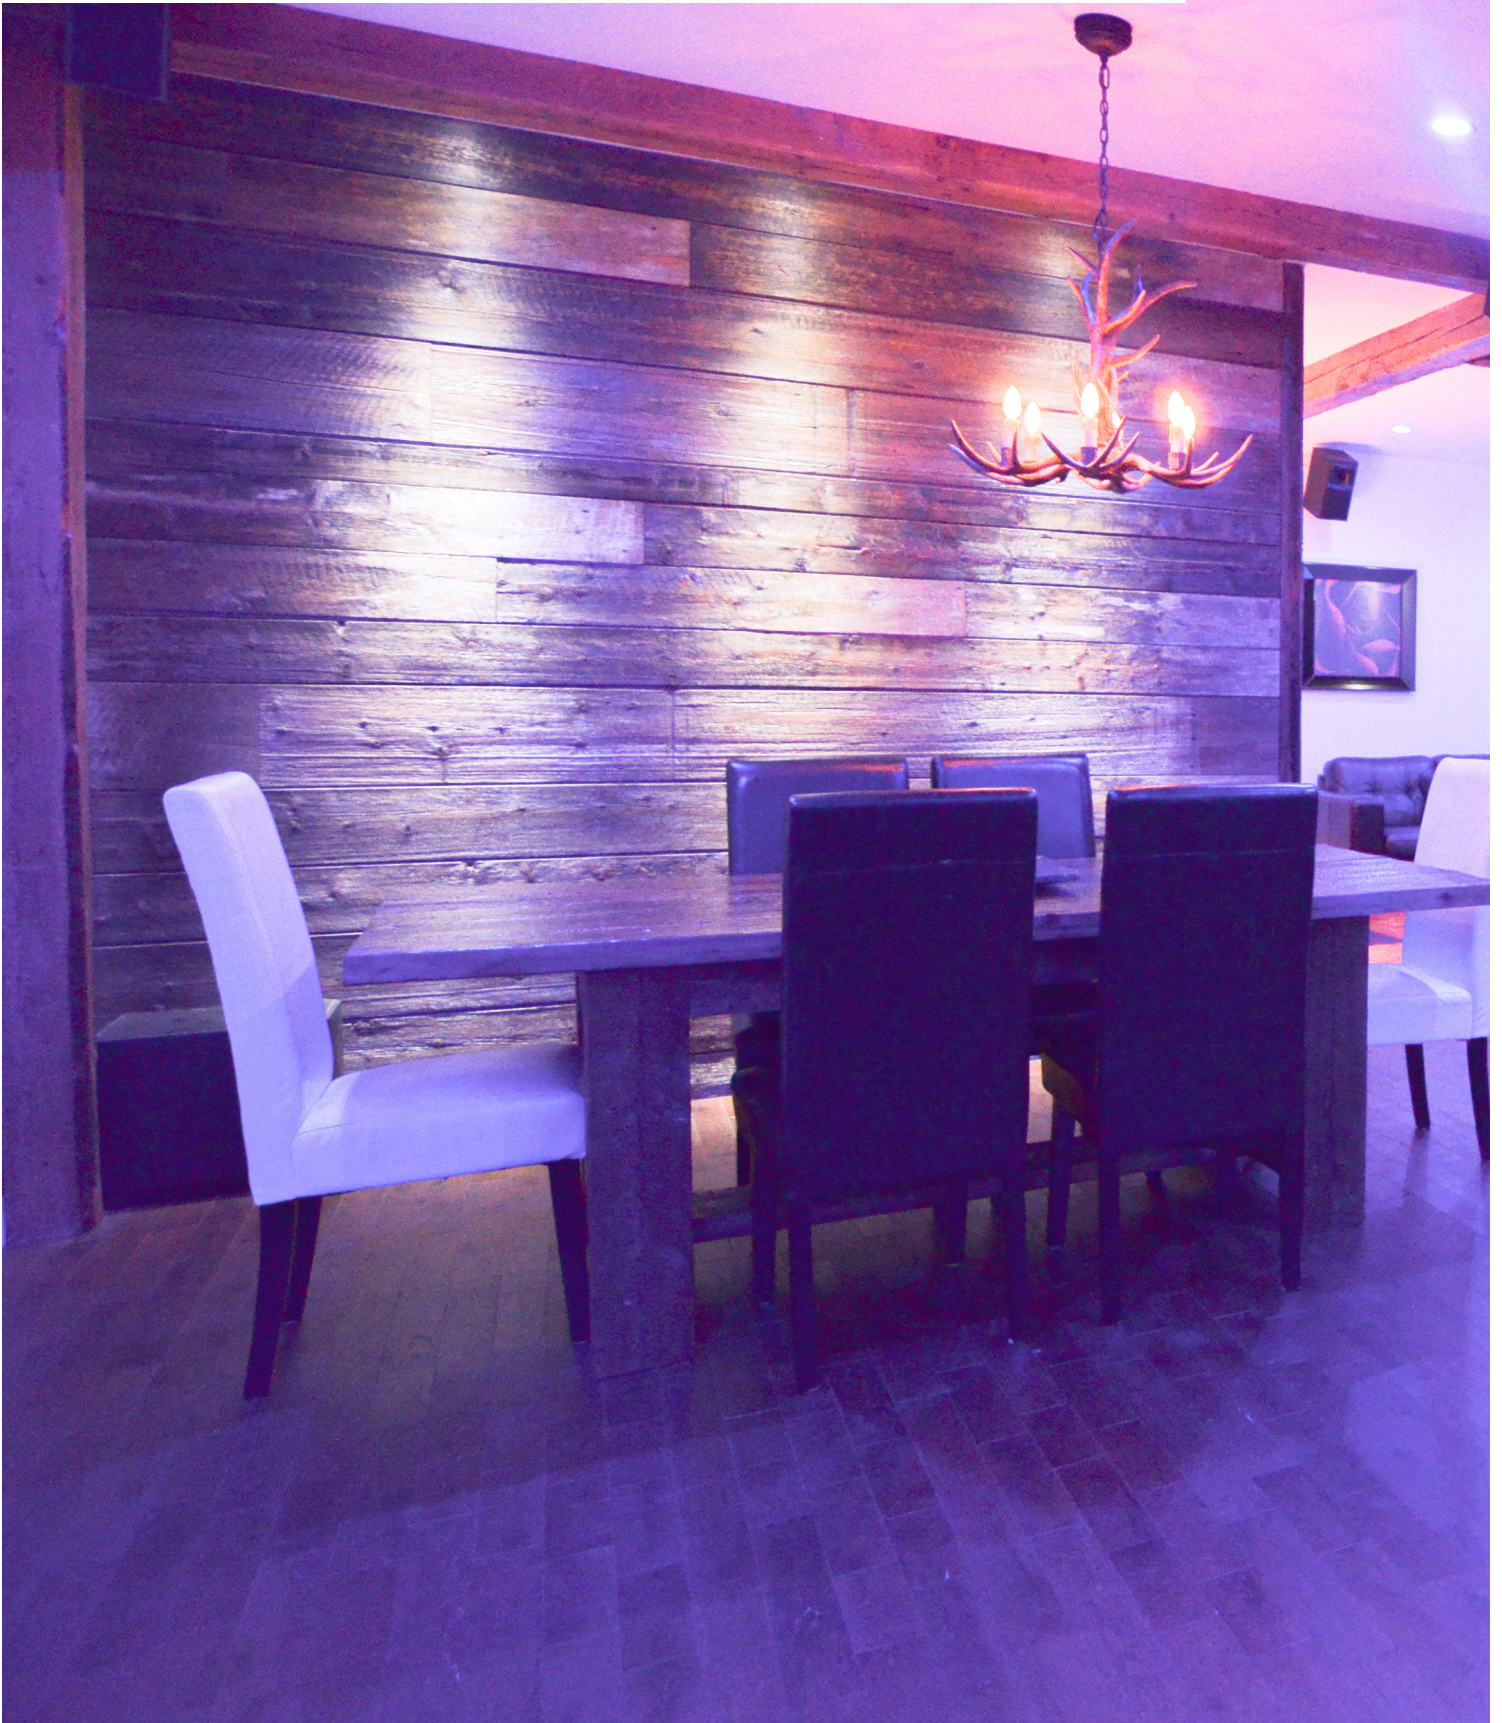





TT-DR-CV-020 Page 349

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,24A	1600mA	19,2	Yes 5% ~ 100% Triac
	24	0,22A	830mA		



TT-DR-CV-030 Page 350

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CV-040 Page 351

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CV-060 Page 352

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CV-080 Page 353

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3300mA		



TT-DR-CV-025-BOX Page 354

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,9A	2,1A	25	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	0,9A	1,05A		



TT-DR-CV-050-BOX Page 355

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,6A	4,16A	50	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	1,6A	2,1A		




TT-DR-CV-096-BOX Page 356

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	10,4 mm	Dimmable
120	12	1,7A	8,33A	96	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase
	24 Class 2	1,6A	4A		



TT-DR-CV-200-BOX Page 357

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	3,2A	16,6A	200	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage
	24	3,2A	8,3A		



TT-DR-CV-096-24V-BOX-TRK Page 358

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	1,6A	4A	96	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase



TT-DR-CV-200-24V-BOX-TRK Page 359

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	3,2A	8,3A	200	Yes 5% ~ 100% Triac Forward phase, Magnetic low voltage



TT-DR-CV-384-24V-BOX-5IN1 Page 360

Voltage in (vDC)	Voltage out (vDC)	Amperage in	17,538 mm	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - 0-10V - Potentiometer - 10V PWM



TT-DR-CV-384-24V-BOX Page 361

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	4,8A	4 x 4A	4 x 96 Class 2	Yes 5% ~ 100% Triac - ELV - MLV Forward and reverse phase



TT-DR-CVB-030 Page 362

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,27A	2000mA	30	Yes 5% ~ 100% Triac
	24	0,35A	1250mA		



TT-DR-CVB-040 Page 363

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,47A	3300mA	39,6	Yes 5% ~ 100% Triac
	24	0,47A	1700mA		



TT-DR-CVB-060 Page 364

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	0,54A	4000mA	60	Yes 5% ~ 100% Triac
	24	0,7A	2500mA		



TT-DR-CVB-080 Page 365

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,1A	6000mA	72	Yes 5% ~ 100% Triac
	24	1A	3400mA		



TT-DR-CVB-100 Page 366

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	12	1,2A	8A	96	Yes 5% ~ 100% Triac
	24 Class 2	1,2A	4A		



TT-DR-CVB65-DMX Page 367

Voltage in (vAC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
110 ~ 277	24	-	-	300	Yes 0,1% ~ 100%



TT-DR-CVZ-022 Page 368

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Power (W)	Dimmable
100 ~ 240	12	1,8A	22	Yes 5% ~ 100% Triac
	24 Class 2	0,92A		



TT-DR-CVZ-060 Page 369

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	12	5A	2,5A	60	Yes 5% ~ 100% Triac



TT-DR-CVZ-090 Page 370

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	24	7,5A	2,5A	90	Yes 5% ~ 100% Triac



TT-DR-CVZD-020 Page 371

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	0,22A	0,83A	19,9	Yes 5% ~ 100% Triac



TT-DR-CVZD-030 Page 372

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	0,35A	1,25A	30	Yes 5% ~ 100% Triac



TT-DR-CVZD-040 Page 373

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	0,47A	1,7A	40	Yes 5% ~ 100% Triac



TT-DR-CVZD-060 Page 374

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	0,7A	2,5A	60	Yes 5% ~ 100% Triac



TT-DR-CVZD-080 Page 375

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
120	24	1A	3,3A	80	Yes 5% ~ 100% Triac



TT-PSU-PWM-060 Page 376

Voltage in (vAC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
90 ~ 305	24	0,8A ~ 0,32A	2,5A	60	Yes 0-10V 0% ~ 100%



TT-PSU-PWM-120 Page 377

Voltage in (vAC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
90 ~ 305	12	1,3A ~ 55A	10A	120	Yes 0-10V 0% ~ 100%
	24		5A		



TT-PSU-PWM-200 Page 378

Voltage in (vAC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 305	24	2,2A ~ 0,9A	8,3A	200	Yes 0-10V 0% ~ 100%



TT-PSU-IP20-015W Page 379

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,35A	1,3A	15	No
	24	0,35A	0,7A		



TT-PSU-IP20-025W Page 380

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,55A	2,1A	25	No
	24	0,55A	1,1A		



TT-PSU-IP20-050W Page 381

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	0,95A	4,2A	50	No
	24	0,95A	2,2A		



TT-PSU-IP20-075W Page 382

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	1,4A	6A	75	No
	24	1,4A	3,2A		



TT-PSU-IP20-100W Page 383

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	1,4A	8,5A	100	No
	24	1,4A	4,5A		



TT-PSU-IP20-200W Page 384

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	4A	17A	200	No
	24	4A	8,8A		



TT-PSU-IP20-500W Page 385

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
85 ~ 264	12	4,85A	41,7A	500	No
	24	4,85A	20,9A		



TT-RSD-60 Page 386

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
9 ~ 36	12	3A	5A	60	No



TT-PSU-IP65-150W Page 387

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
347	24	0,5A	6,25A	150	No



TT-PSU-IP67-150W Page 388

Voltage in (vDC)	Voltage out (vDC)	Amperage in	Amperage out	Power (W)	Dimmable
90 ~ 132	12	3A	10A	120	No
	24	6,3A	10A	150	




TT-PSU-IP67-240W-120V/24V-B Page 389

Voltage in (VDC)	Voltage out (VDC)	Amperage in	Amperage out	Power (W)	Dimmable
100 ~ 240	24	4A	10A	240	0 - 10V






- Transformers dimmable to the primary 120vAC.
- 16 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

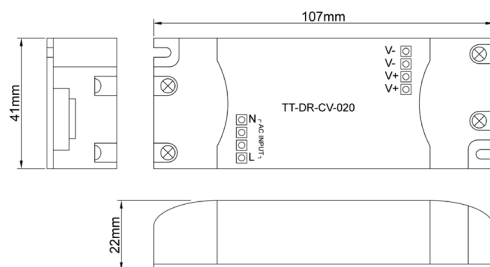


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,24A	0,22A
Amperage out	1600mA	830mA
Power	19,2w	19,9w
Size	107mm x 41mm x 22mm 4 1/4" x 1 5/8" x 7/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	020	-	12V
TT	-	DR	-	CV	-	020	-	

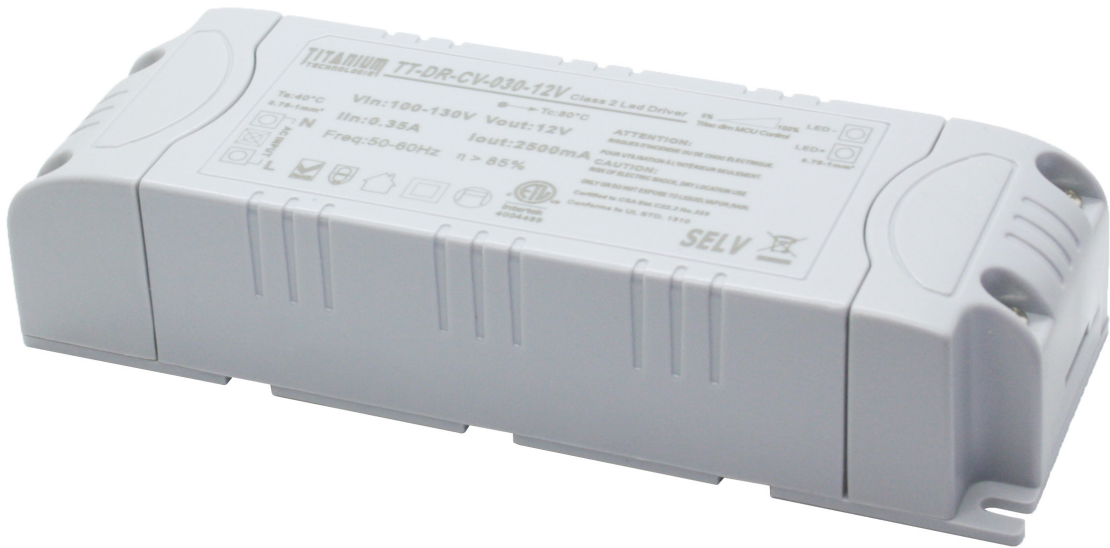

- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

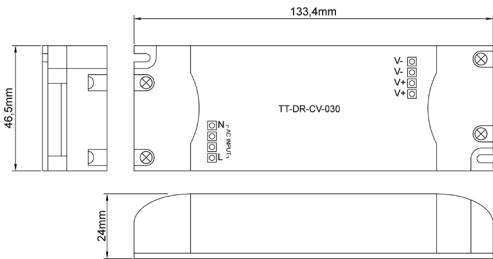


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2500mA	1250mA
Power	30w	
Size	133mm x 46,5mm x 24mm 5 1/4" x 1 7/8" x 1"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	030	-	12V
TT	-	DR	-	CV	-	030	-	




- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

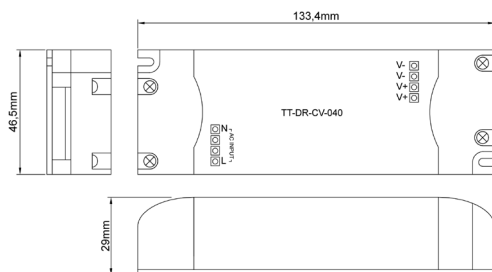


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	40,8w
Size	133mm x 46,5mm x 29mm 5 1/4" x 1 7/8" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	040	-	12V
TT	-	DR	-	CV	-	040	-	

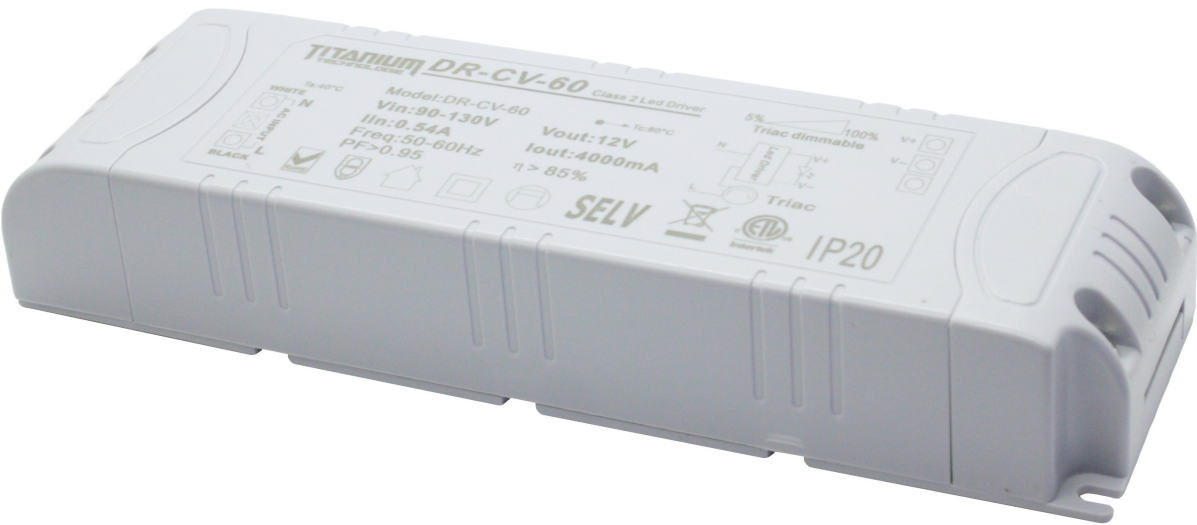

- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

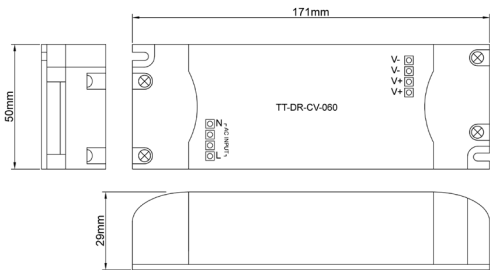


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	5000mA	2500mA
Power	60w	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	060	-	12V
TT	-	DR	-	CV	-	060	-	



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

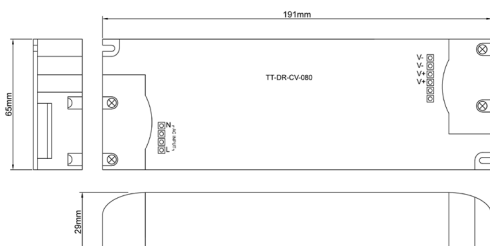


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,1A	1A
Amperage out	5500mA	3300mA
Power	66w	79,2w
Size	191mm x 65mm x 29mm 7 1/2" x 2 1/2" x 1 1/8"	
Dimmable	Yes 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CV	-	080	-	12V
TT	-	DR	-	CV	-	080	-	



- Transformers dimmable to the primary 120vAC.
- 20 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

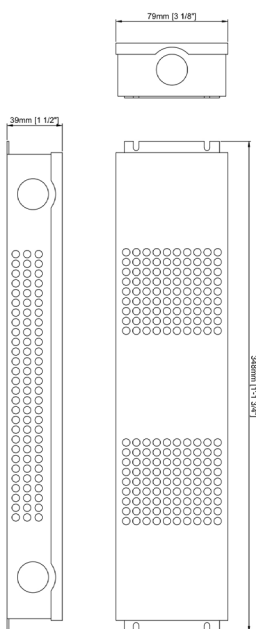


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,9 A	0,9 A
Amperage out	2,1A	1,05A
Power	25w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	025	-	12V	-	BOX
TT	-	DR	-	CV	-	025	-		-	BOX



- Transformers dimmable to the primary 120vAC.
- 40 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

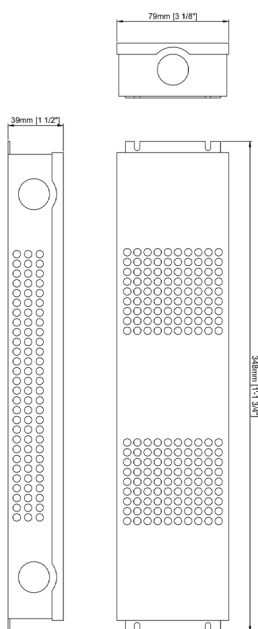

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	1,6 A	1,6 A
Amperage out	4,16 A	2,1 A
Power	50w	
Minimum load	1w	
Size	350 mm x 77 mm x 37 mm 13 ³ / ₄ " x 3" x 1 ⁷ / ₁₆ "	
Dimmable	Yes - Foward phase, magnetic low voltage 5% ~100% Triac	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	050	-	12v	-	BOX
TT	-	DR	-	CV	-	050	-		-	BOX

TT-DR-CV-096-BOX



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2

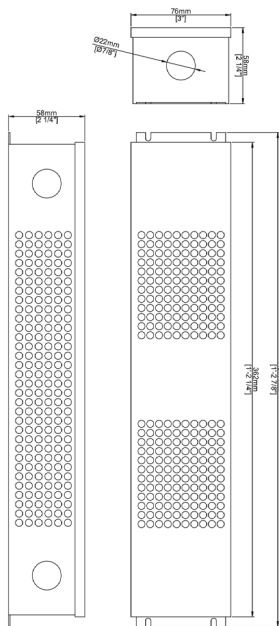


Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,7A	1,6A
Amperage out	8,33A	4A
Power	100w	96w
Minimum load	1w	
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "	
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV	
IP	66	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	096	-	12V	-	BOX
TT	-	DR	-	CV	-	096	-		-	BOX



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%

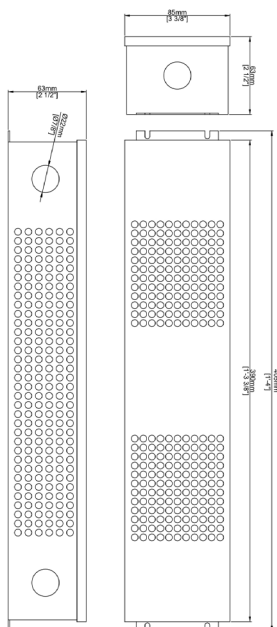

Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	3,2A	3,2A
Amperage out	16,6A	8,3A
Power	200w	
Minimum Load	1w	
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"	
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac	
IP	66	


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	200	-	12V	-	BOX
TT	-	DR	-	CV	-	200	-		-	BOX

TT-DR-CV-096-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 80 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Class 2
- Frequency of 2000Hz
- Optimized for TT-TRK serie

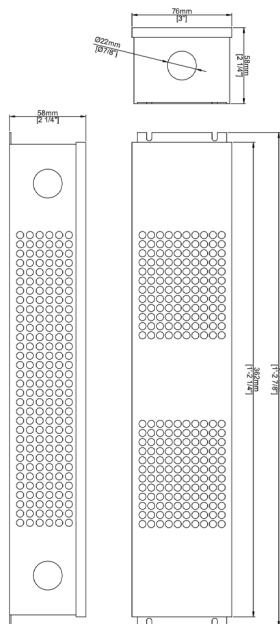

Voltage in	120vAC
Voltage out	24vDC Classe 2
Amperage in	1,6A
Amperage out	4A
Power	96w
Minimum load	1w
Size	377mm x 76mm x 58mm 14 ⁷ / ₈ " x 3" x 2 ¹ / ₄ "
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	096	-	24V	-	BOX	-	TRK


TITANIUM

TECHNOLOGY

TT-DR-CV-200-24V-
BOX-TRK



- Transformers dimmable to the primary 120vAC.
- 160 watts maximum load.
- Minimum load of 1 watts.
- Triac dimmable from 5% to 100%
- Frequency of 2000Hz
- Optimized for TT-TRK serie

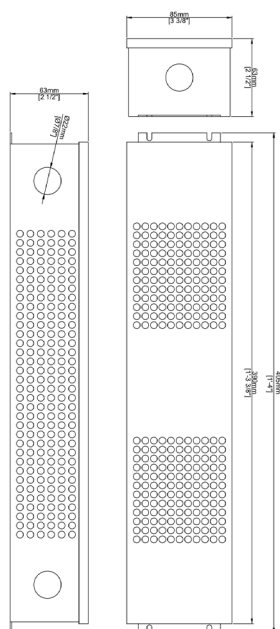

Voltage in	120vAC
Voltage out	24vDC
Amperage in	3,2A
Amperage out	8,3A
Power	200w
Minimum Load	1w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase, Magnetic low volage 5% ~100% Triac
IP	66


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX	-	SERIE
TT	-	DR	-	CV	-	200	-	24V	-	BOX	-	TRK

TT-DR-CV-384-
24V-BOX- 5 IN 1



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- 5 in 1
- Class 2

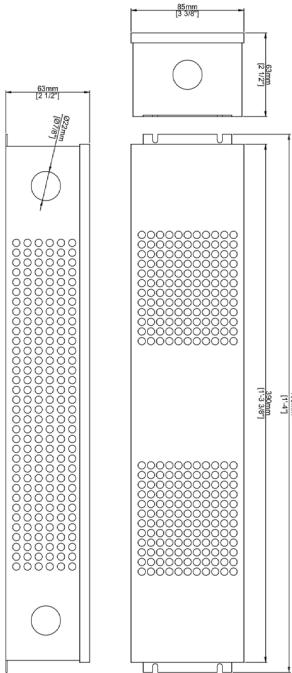

Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes 5% ~100% Triac - 0-10V - Potentiometer - 10V PWM
IP	66
Dimming	Triac 0-10V Potentiometer 10V pwm Phase


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-5IN1

TT-DR-CV-384-
24V-BOX



- Transformers dimmable to the primary 120vAC.
- 4 x out 96w.
- ELV dimming
- Class 2

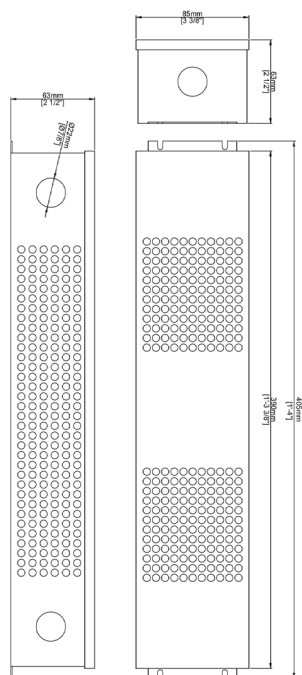


Voltage in	120vAC
Voltage out	24vDC Class 2
Amperage in	4,8A
Amperage out	4 x 4A
Power	4 x 96w
Size	405mm x 85mm x 63mm 16" x 3 3/8" x 2 1/2"
Dimmable	Yes - Foward phase and reverse phase. 5% ~100% Triac - ELV - MLV
IP	66
Dimming	Foward phase Reverse phase ELV MLV Triac

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT	-	BOX
TT	-	DR	-	CV	-	384	-	24V	-	BOX-ELV



- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

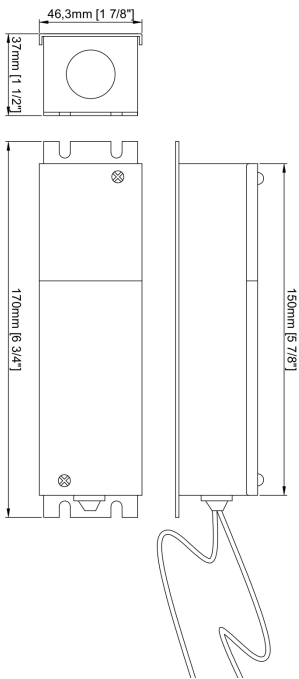


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,27A	0,35A
Amperage out	2500mA	1250mA
Power	30w	
Size	170mm x 46,3mm x 37mm 6 ³ / ₄ " x 1 ⁷ / ₈ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	030	-	12V
TT	-	DR	-	CVB	-	030	-	



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

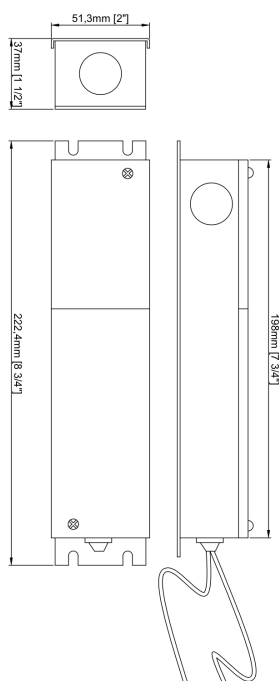


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,47A	0,47A
Amperage out	3300mA	1700mA
Power	39,6w	40,8w
Size	222,3mm x 51,3mm x 37mm 8 3/4" x 2" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	040	-	12V
TT	-	DR	-	CVB	-	040	-	



- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

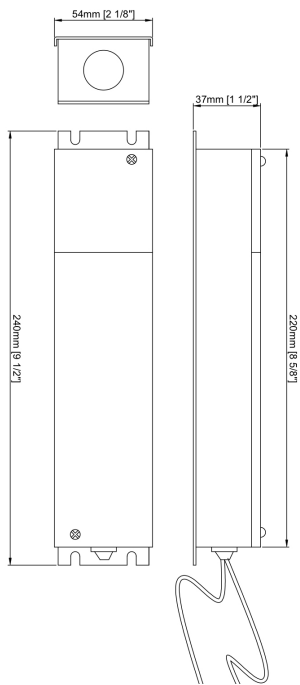


Voltage in	120vAC	
Voltage out	12vDC	24vDC
Amperage in	0,54A	0,7A
Amperage out	5000mA	2500mA
Power	60w	
Size	240mm x 54mm x 37mm 9 1/2" x 2 1/8" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	060	-	12V
TT	-	DR	-	CVB	-	060	-	



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

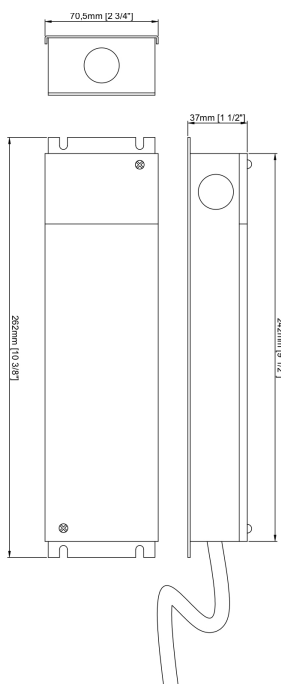


Voltage in	120vAC	
Voltage out	12vDC	24vDC Class 2
Amperage in	1,1A	1A
Amperage out	6000mA	3300mA
Power	72w	79,2w
Size	262mm x 70,5mm x 37mm 10 3/8" x 2 3/4" x 1 1/2"	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	080	-	12V
TT	-	DR	-	CVB	-	080	-	



- Transformers dimmable to the primary 120vAC.
- 77 watts maximum load.
- Triac dimmable from 5% to 100%
- Class 2

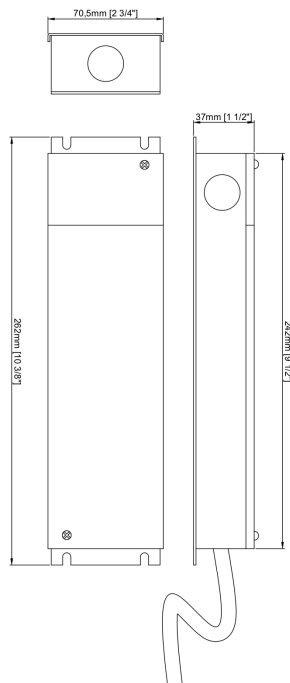

Voltage in	120vAC	
Voltage out	12vDC	24vDC Clase 2
Amperage in	1,2A	1,2A
Amperage out	7A	4,2A
Power	84w	100,2w
Size	262mm x 70,5mm x 37mm 10 ³ / ₈ " x 2 ³ / ₄ " x 1 ¹ / ₂ "	
Dimmable	Yes 5% ~100% Triac	
IP	65	

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVB	-	100	-	12V
TT	-	DR	-	CVB	-	100	-	

TT-DR-CVB65-DMX



- Triac dimmable from 5% to 100%
- Class 2
- For dry and wet location.

Voltage in	110~277vAC
Voltage out	24vDC
Amperage in	?
Amperage by color	DW : 12,5 A CCT : 6,25 A RGB : 4,17 A RGBW : 3,13 A RGBCW : 2,5 A
Power	300w
Number of channels	3C - 3 Channels 4C - 4 Channels 5C - 5 Channels
Size	316mm x 125mm x 42,7mm 12 7/16" x 4 15/16" x 1 11/16"
Dimmable	Yes 0,1% ~100%
Working temperature	-40°C ~ 60°C
IP	65

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	CHANNELS	-	POWER	-	VOLTAGE OUT
TT	-	DR	-	CVB65	-	DMX	-	3C	-	300	-	24V
TT	-	DR	-	CVB65	-	DMX	-		-	300	-	24V

TT-DR-CVZ-022




- 22 watts maximum load.
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector



The control port only uses the output ports next to it. It does not control the ports at the end of the power supply.

Voltage in	100-240 vAC	
Voltage out	12vDC Class 2	24vDC Class 2
Amperage	1,8A	0,92A
Power	22w	
Size	120mm x 60mm x 16mm	
Dimmable	Yes	
IP	20	

Accessories

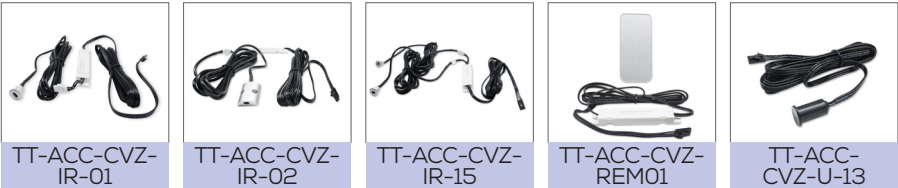

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	022	-	12V
TT	-	DR	-	CVZ	-	022	-	

TT-DR-CVZ-060



- 60 watts maximum load.
- Maximum of 30 watts per output
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector



The control port only uses the output ports next to it. It does not control the ports at the end of the power supply.

Voltage in	100-240 vAC
Voltage out	12vDC Class 2
Amperage out total	5A
Amperage out	2,5A per output
Power	60w
Size	254mm x 60mm x 16mm
Dimmable	Yes
IP	20

Accessories



TT-ACC-CVZ-IR-01



TT-ACC-CVZ-IR-02



TT-ACC-CVZ-IR-15



TT-ACC-CVZ-REM01



TT-ACC-CVZ-U-13

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	060	-	12V

TT-DR-CVZ-090




- 90 watts maximum load.
- Maximum of 30 watts per output
- Dimmable by remote via the control port
- Not dimmable by triac
- Class 2
- Dupont connector



The control port only uses the output ports next to it. It does not control the ports at the end of the power supply.

Voltage in	100-240 vAC
Voltage out	24vDC Class 2
Amperage out total	4,15A
Amperage out	2,5A per output
Power	99,6w
Size	308mm x 61,5mm x 16mm
Dimmable	Yes
IP	20

Accessories

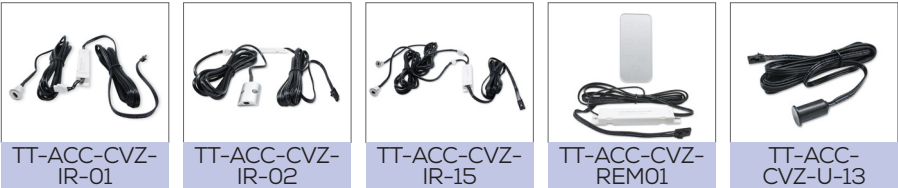


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZ	-	090	-	24V



- Transformers dimmable to the primary 120vAC.
- 16 watts maximum load (80%).
- Triac dimmable from 5% to 100%
- Class 2
- Equipped with a power cord with plug.
- Connector with 6 dupont outputs.

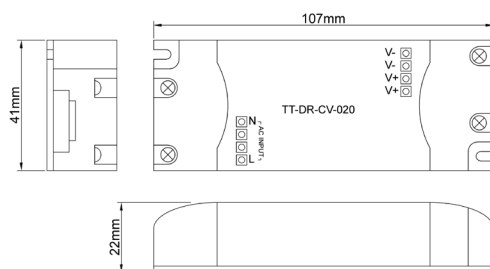


Voltage in	120vAC
Voltage out	24vDC
Amperage in	0,22A
Amperage out	0,83A
Power	19,9w
Output	6 dupont connectors
Size	107mm x 41mm x 22mm 4 1/4" x 1 5/8" x 7/8"
Dimmable	Yes 5% ~100% Triac
IP	20

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZD	-	020	-	24V



- Transformers dimmable to the primary 120vAC.
- 24 watts maximum load (80%).
- Triac dimmable from 5% to 100%
- Class 2
- Equipped with a power cord with plug.
- Connector with 6 dupont outputs.

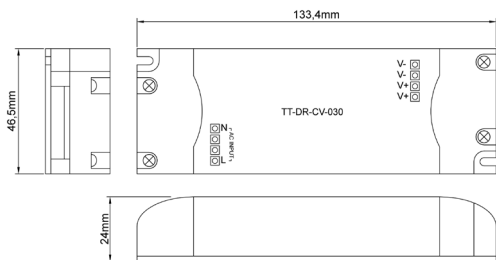

Voltage in	120vAC
Voltage out	24vDC
Amperage in	0,35A
Amperage out	1,25A
Power	30w
Output	6 dupont connectors
Size	133mm x 46,5mm x 24mm 5 1/4" x 1 7/8" x 1"
Dimmable	Yes 5% ~100% Triac
IP	20

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZD	-	030	-	24V


TITANIUM

TECHNOLOGY

TT-DR-CVZD-040



- Transformers dimmable to the primary 120vAC.
- 32 watts maximum load (80%).
- Triac dimmable from 5% to 100%
- Class 2
- Equipped with a power cord with plug.
- Connector with 6 dupont outputs.

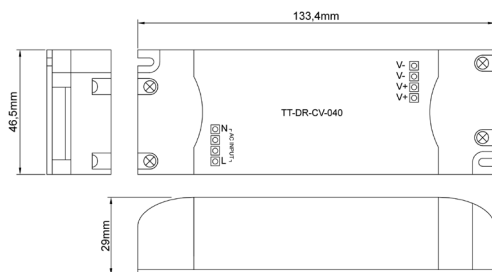


Voltage in	120vAC
Voltage out	24vDC
Amperage in	0,47A
Amperage out	1,7A
Power	40,8w
Output	6 dupont connectors
Size	133mm x 46,5mm x 29mm 5 1/4" x 1 7/8" x 1 1/8"
Dimmable	Yes 5% ~100% Triac
IP	20


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZD	-	040	-	24V

TT-DR-CVZD-060

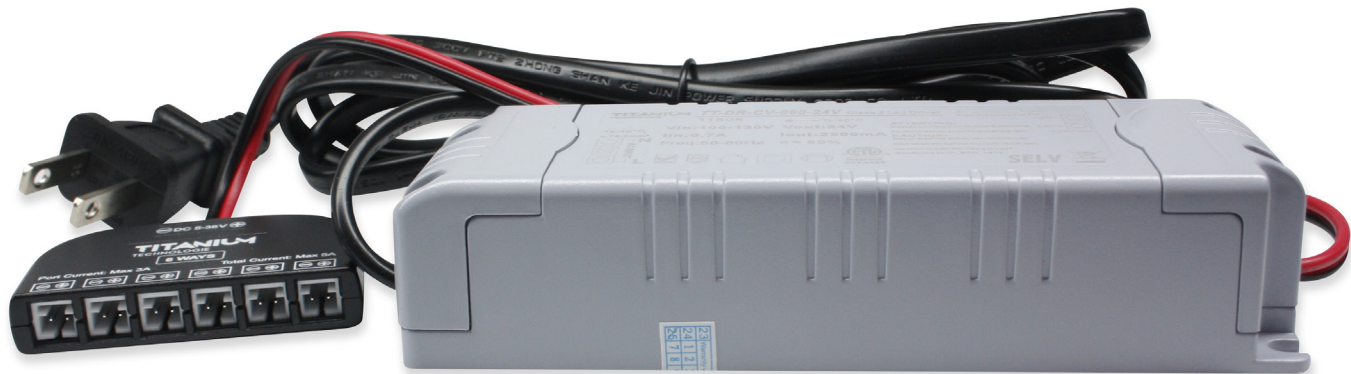

- Transformers dimmable to the primary 120vAC.
- 48 watts maximum load (80%).
- Triac dimmable from 5% to 100%
- Class 2
- Equipped with a power cord with plug.
- Connector with 6 dupont outputs.

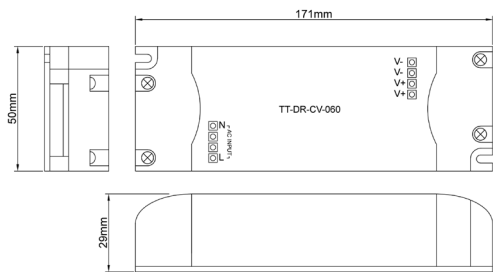


Voltage in	120vAC
Voltage out	24vDC
Amperage in	0,7A
Amperage out	2,5A
Power	60w
Output	6 dupont connectors
Dimmable	Yes 5% ~100% Triac
IP	20

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZD	-	060	-	24V



- Transformers dimmable to the primary 120vAC.
- 64 watts maximum load (80%).
- Triac dimmable from 5% to 100%
- Class 2
- Equipped with a power cord with plug.
- Connector with 6 dupont outputs.

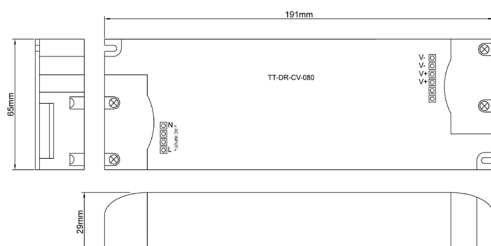

Voltage in	120vAC
Voltage out	24vDC
Amperage in	1A
Amperage out	3A per dupont output 3,3A total
Power	79,2w
Output	6 dupont connectors
Size	191mm x 65mm x 29mm 7 1/2" x 2 1/2" x 1 1/8"
Dimmable	Yes 5% ~100% Triac
IP	20


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	VOLTAGE OUT
TT	-	DR	-	CVZD	-	080	-	24V



- Constant voltage PWM style output with frequency 1,47kHz
- Class 2 power unit
- Fully encapsulated with IP67 level
- Built-in active PFC function
- No load power consumptions <0,5W

Voltage in	90~305vAC		
Voltage out	24vDC		
Amperage in	0,8A / 115vAC	0,4A / 230vAC	0,32A / 277vAC
Amperage out	2,5A		
Power	60w		
Size	150mm x 53mm x 35mm 5 ⁷ / ₈ " x 2 ¹ / ₁₆ " x 1 ³ / ₈ "		
Dimmable	Yes on 0-10 volts 0% ~100%		
IP	67		

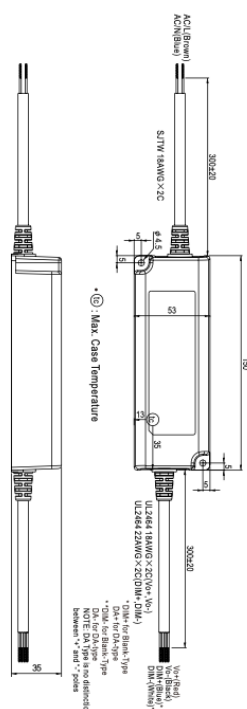


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	PWM	-	060	-	24
TT	-	PSU	-	PWM	-	060	-	24



- Constant voltage PWM style output with frequency 1,47kHz
- Class 2 power unit
- Fully encapsulated with IP67 level
- Built-in active PFC function
- No load power consumptions <0,5W

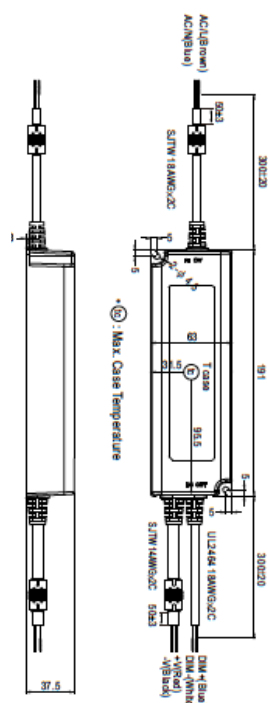


Voltage in	90~305vAC		
Voltage out	12vDC		24vDC
Amperage in	1,3A / 115vAC	0,65A / 230vAC	0,55A / 277vAC
Amperage out	10A		5A
Power	120w		
Size	191mm x 63mm x 37mm 7 ¹ / ₂ " x 2 ¹ / ₂ " x 1 ¹ / ₂ "		
Dimmable	Yes on 0-10 volts 0% ~100%		
IP	67		

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	PWM	-	120	-	24
TT	-	PSU	-	PWM	-	120	-	



- Constant voltage PWM style output with frequency 1,47kHz
- Class 2 power unit
- Fully encapsulated with IP67 level
- Built-in active PFC function
- No load power consumptions <0,5W

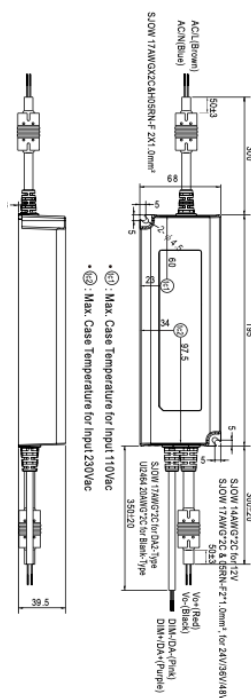



Voltage in	100~305vAC		
Voltage out	24vDC		
Amperage in	2,2A / 115vAC	1,1A / 230vAC	0,9A / 277vAC
Amperage out	8,3A		
Power	199,2w		
Size	195mm x 68mm x 39,5mm 7 ¹¹ / ₁₆ " x 2 ¹¹ / ₁₆ " x 1 ⁹ / ₁₆ "		
Dimmable	Yes on 0-10 volts 0% ~100%		
IP	67		

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	PWM	-	200	-	24
TT	-	PSU	-	PWM	-	200	-	24



- 120 vAC transformer 15 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

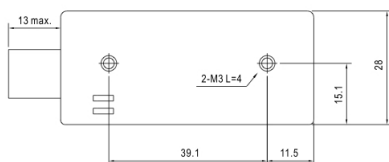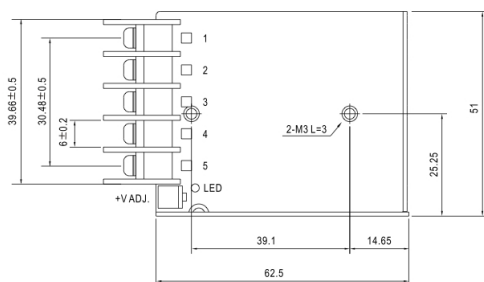

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,35A	0,35A
Amperage out	1,3A	0,7A
Power	15w	
Size	63mm x 51mm x 28mm 2 1/2" x 2" x 1 1/8"	
Dimmable	No	
IP	20	

Accessories




TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	015W	-	12V
TT	-	PSU	-	IP20	-	015W	-	



- 120 VAC transformer 25 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

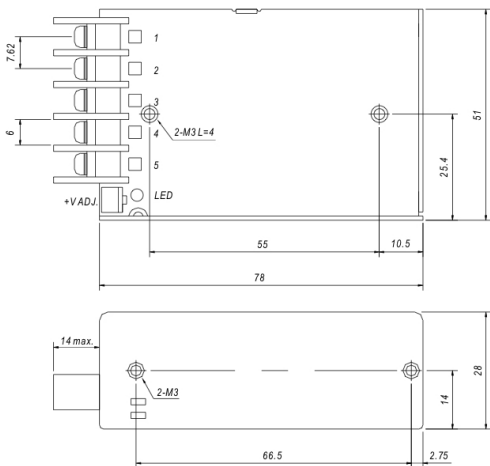

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,55A	0,55A
Amperage out	2,1A	1,1A
Power	25w	
Size	67mm x 51mm x 28mm 2 ⁵ / ₈ " x 2" x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

Accessories




TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	025W	-	12V
TT	-	PSU	-	IP20	-	025W	-	



- 120 VAC transformer 50 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

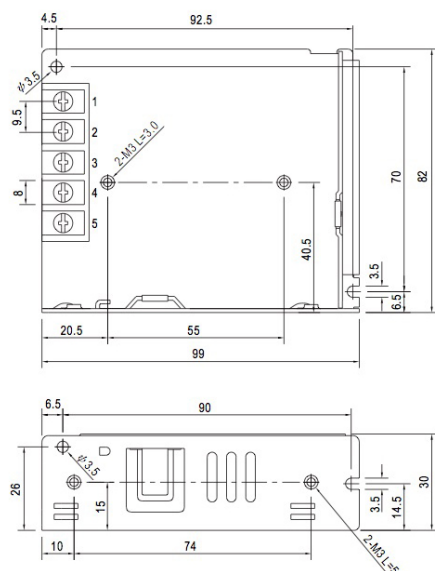

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	0,95A	0,95A
Amperage out	4,2A	2,2A
Power	50w	
Size	99mm x 82mm x 30mm 3 ⁷ / ₈ " x 3 ¹ / ₄ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

Accessories




TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	050W	-	12V
TT	-	PSU	-	IP20	-	050W	-	



- 120 VAC transformer 75 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

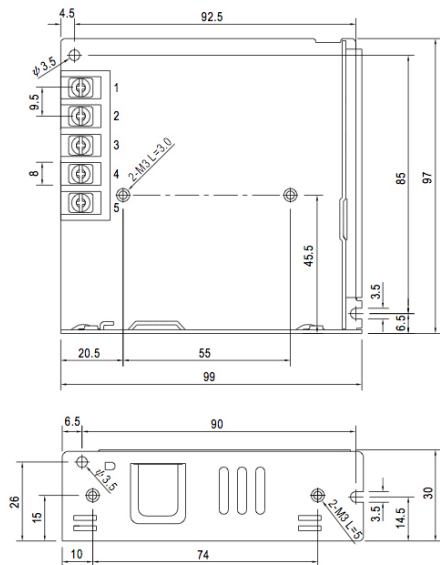

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	1,4A	1,4A
Amperage out	6A	3,2A
Power	75w	
Size	99mm x 97mm x 30mm 3 ⁷ / ₈ " x 3 ⁷ / ₈ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

Accessories




TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	075W	-	12V
TT	-	PSU	-	IP20	-	075W	-	



- 120 VAC transformer 100w.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

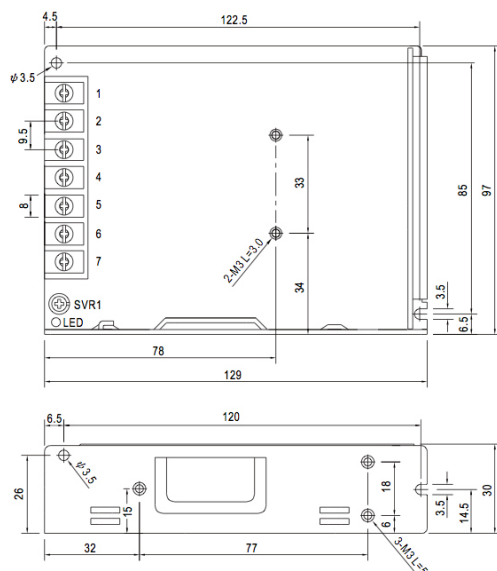

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	1,4A	1,4A
Amperage out	8,5A	4,5A
Power	100w	
Size	129mm x 97mm x 30mm 5 ¹ / ₈ " x 3 ⁷ / ₈ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

Accessories



TT-BOX-05


PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	100W	-	12V
TT	-	PSU	-	IP20	-	100W	-	

TT-PSU-IP20-200W



- 120 VAC transformer 200 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by free air convection.

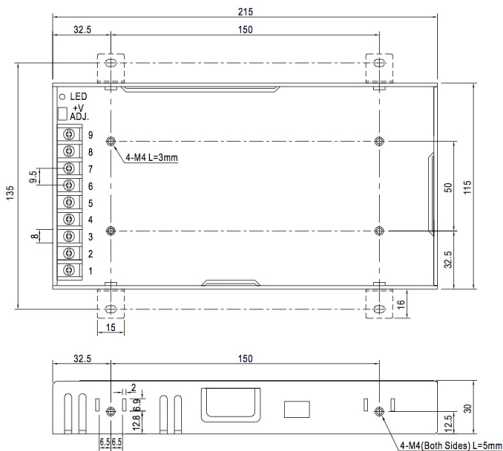

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	4A	4A
Amperage out	17A	8,8A
Power	200w	
Size	215mm x 115mm x 30mm 8 ¹ / ₂ " x 4 ¹ / ₂ " x 1 ¹ / ₈ "	
Dimmable	No	
IP	20	

Accessories




TT-BOX-05

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	200W	-	12V
TT	-	PSU	-	IP20	-	200W	-	



- 120 VAC transformer 500 watts.
- Protection against short circuit, over load, over voltage and over heating.
- Screw voltage adjustment +10% -10%.
- Cooling by fan.

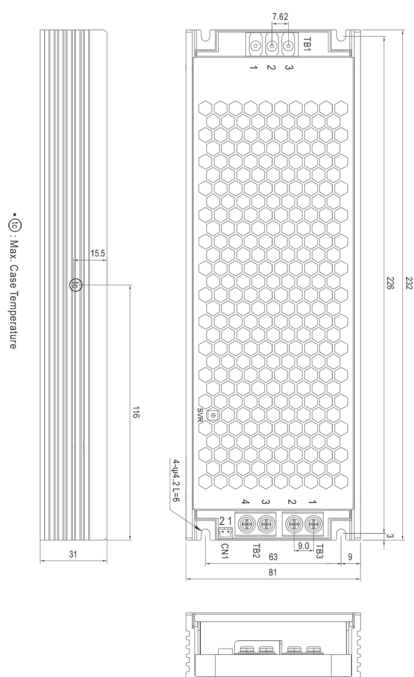

Voltage in	85~264vAC	
Voltage out	12vDC	24vDC
Amperage in	4,85A	4,85A
Amperage out	41,7A	20,9A
Power	500w	
Size	232mm x 81mm x 31mm 9 ¹ / ₈ " x 3 ¹ / ₄ " x 1 ¹ / ₄ "	
Dimmable	No	
IP	20	
Weight	0,905 Kg	



PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP20	-	500W	-	12V
TT	-	PSU	-	IP20	-	500W	-	

TT-RSD-60G-12



- 12 VDC 60 watts voltage regulator.
- Protected against short circuits, overloads, overvoltages, and reverse input polarity.
- Convection cooling.
- Compatible only with non-dimmable transformers or direct battery power.

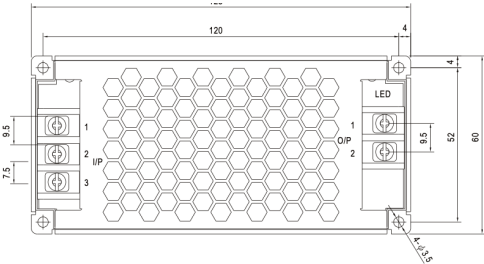


Voltage in	9~36vDC
Voltage out	12vDC
Amperage in	3A
Amperage out	5A
Power	60w
Size	128mm x 60mm x 25mm 5 ¹ / ₃₂ " x 2 ³ / ₈ " x 1"
Dimmable	No
IP	20

PRODUCT CODE

TT	-	TYPE	-	POWER	-	VOLTAGE OUT
TT	-	RSD	-	60G	-	12



- 347 VAC transformer 150w.
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP65.
- Cooling by free air convection.

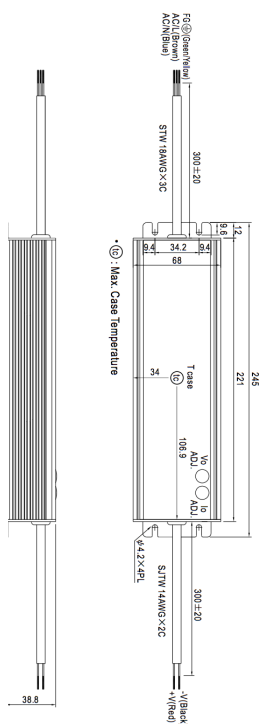

Voltage in	347vAC
Voltage out	24vDC
Amperage in	0.5A
Amperage out	6.25A
Power	150w
Size	245mm x 68mm x 39mm 9 ⁵ / ₈ " x 2 ⁵ / ₈ " x 1 ¹ / ₂ "
Dimmable	No
IP	65


PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP65	-	150W	-	24V

TT-PSU-IP67



- 120 VAC transformer 150w for 24 VDC.
- 120 VAC transformer 120w for 12 VDC.
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP67.
- Cooling by free air convection.

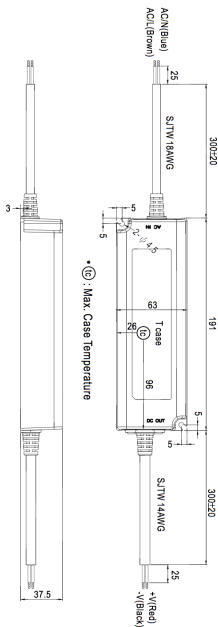

Voltage in	90~132vAC	
Voltage out	12vDC	24vDC
Amperage in	3A	6,3A
Amperage out	10A	10A
Power	120w	150w
Size	191mm x 63mm x 38mm 7 1/2" x 2 1/2" x 1 1/2"	
Dimmable	No	
IP	67	


PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER	-	VOLTAGE OUT
TT	-	PSU	-	IP67	-	150W	-	12V
TT	-	PSU	-	IP67	-		-	

TT-PSU-IP67-
240W-120V/24V-B



- 120 VAC transformer 240w.
- 0-10V dimming
- Protection against short circuit, over load, over voltage and over heating.
- Water resistant to IP67.
- Cooling by free air convection.

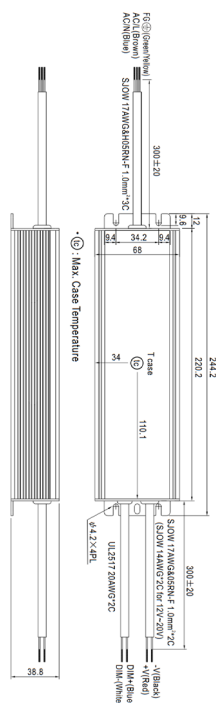

Voltage in	100~240vAC
Voltage out	24vDC
Amperage in	4A
Amperage out	10A
Power	240w
Size	244,2mm x 68mm x 38,8mm 9 ⁵ / ₈ " x 2 ⁵ / ₈ " x 1 ¹ / ₂ "
Dimmable	0 - 10V
IP	67

PRODUCT CODE

TT	-	TYPE	-	IP	-	POWER /VOLTAGE	/	VOLTAGE OUT
TT	-	PSU	-	IP67	-	240W-120V	/	24V-B

CONTROLS







Credit photo: Pub universitaire

TT-U-E4S Page 398

Voltage (VDC)	Power (W)	Description
12	36	Touch panel
24	72	



TT-U-E5S Page 399

Voltage (VDC)	Power (W)	Description
12	36	Touch panel
24	72	



TT-UB1 Page 400

Voltage (VDC)	Power (W)	Description
12, 24	-	Touch panel



TT-UB4 Page 401

Voltage (VDC)	Power (W)	Description
12, 24	-	Touch panel



TT-UB5 Page 402

Voltage (VDC)	Power (W)	Description
12, 24	-	Touch panel



TT-Q4 Page 403

Voltage (VDC)	Power (W)	Description
-	-	Remote



TT-Q5 Page 403

Voltage (VDC)	Power (W)	Description
-	-	Remote



TT-RC4 Page 404

Voltage (VDC)	Power (W)	Description
-	-	Remote



TT-U-M1 Page 405

Voltage (VDC)	Power (W)	Description
12	60	Remote
24	120	



TT-U-M1-MINI Page 406

Voltage (VDC)	Power (W)	Description
12	36	Remote
24	72	



TT-U-M3-MINI Page 407

Voltage (VDC)	Power (W)	Description
12	36	Remote
24	72	



TT-U-M4 Page 408

Voltage (VDC)	Power (W)	Description
12	60	Remote
24	120	



TT-U-M5-MINI Page 409

Voltage (VDC)	Power (W)	Description
12	36	Remote
24	72	



TT-Y-5C-4A Page 410

Voltage (VDC)	Power (W)	Description
12	48	Receiver
24	96	



TT-Y-5C-6A Page 411

Voltage (VDC)	Power (W)	Description
12	96	Receiver
48	192	



TT-Y-R-CCT Page 412

Voltage (VDC)	Power (W)	Description
-	-	Remote



TT-Y-R-M Page 413

Voltage (VDC)	Power (W)	Description
-	-	Remote



TT-Y-R-RGBCCT Page 414

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-Y-R-RGBW Page 415

Voltage (vDC)	Power (W)	Description
-	-	Remote



TT-SDD-24096-DIM Page 416

Tension (vDC)	Puissance (W)	Description
24	96 Classe 2	Interrupteur gradateur



TT-SDD-24096-DIM Page 417

Tension (vDC)	Puissance (W)	Description
24	96 Classe 2	Interrupteur gradateur



TT-Y-W1-CCT Page 418

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote



TT-Y-W1-M Page 419

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote



TT-Y-W1-RGBW Page 420

Voltage (vDC)	Power (W)	Description
-	-	Wall Remote




TT-STICK-GU2 Page 427

Voltage (vDC)	Power (W)	Description
5 ~ 12	-	Touch panel



TT-STICK-GA2 Page 427

Voltage (vDC)	Power (W)	Description
5 ~ 12	-	Touch panel



TT-STICK-CW4 Page 427

Voltage (vDC)	Power (W)	Description
5 ~ 15	-	Touch panel



TT-STICK-DE3 Page 427

Voltage (vDC)	Power (W)	Description
5 ~ 6	-	Touch panel



TT-STICK-KE2 Page 427

Voltage (vDC)	Power (W)	Description
5 ~ 6	-	Touch panel



TT-SUITE3-BC Page 428

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SUITE3-EC Page 428

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U11 Page 429

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U10 Page 429

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-SLESA-U9 Page 429

Voltage (vDC)	Power (W)	Description
5	-	Sunlite



TT-DMX-4C Page 430

Voltage (vDC)	Power (W)	Description
5	30	DMX
12	72	
24	144	



TT-DMX-5C Page 431

Voltage (vDC)	Power (W)	Description
12	60	DMX
24	120	



TT-DMX-32C Page 432

Voltage (vDC)	Power (W)	Description
12	36	DMX
24	72	



TT-AMP-4-32 Page 433

Voltage (vDC)	Power (W)	Description
5	40	Amplifier
12	96	
24	192	



TT-AMP-5-50 Page 434

Voltage (vDC)	Power (W)	Description
5	50	Amplifier
12	120	
24	240	



TT-DMX-OPTO Page 435

Voltage (vDC)	Power (W)	Description
12	8	DMX
24		



TT-DR-CVB65-DMX-100 Page 436

Voltage (vAC)	Power (W)	Description
110 ~ 277	100	DMX




TT-DR-CVB65-DMX-300 Page 437

Voltage (vAC)	Power (W)	Description
110 ~ 277	300	DMX





- One RGBW zone touch panel Controller.
- Connects directly to 12dDC or 24vDC.
- 4A per channel, 16A maximum.
- Install to the wall with a Euro-pean-style connection box T T-BOX-03.

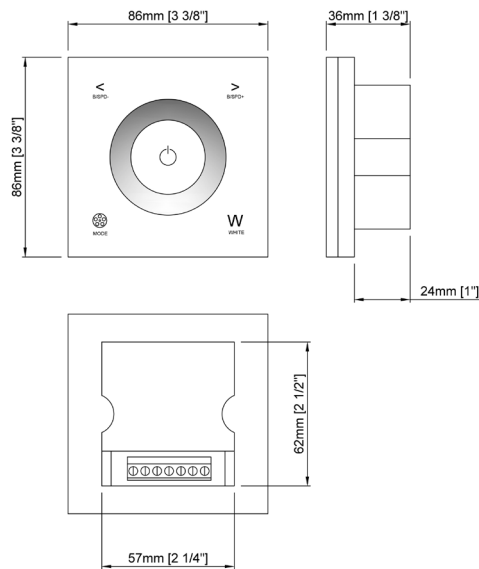

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	86mm x 86mm x 36mm 3 ³ / ₈ " x 3 ³ / ₈ " x 1 ³ / ₈ "	
IP	20	

Accessories



TT-BOX-03




TT-Q4

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	E4S



- One RGB+CCT zone touch panel Controller.
- Connects directly to 12vDC or 24vDC.
- 3A per channel, 12A maximum.
- Install to the wall with a Euro-pean-style connection box TT-BOX-03.

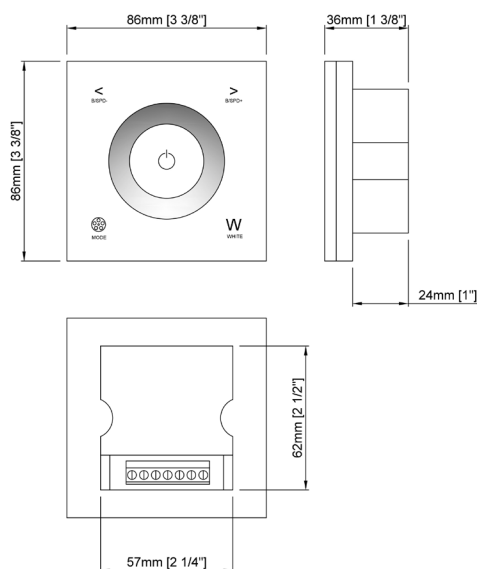

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	5	
Finish	White	
Dimmable	Yes	
Size	86mm x 86mm x 36mm 3 ³ / ₈ " x 3 ³ / ₈ " x 1 ³ / ₈ "	
IP	20	

Accessories



TT-BOX-03



TT-Q5

PRODUCT CODE


TT	-	TYPE	-	MODEL
TT	-	U	-	E5S

TT-UB1



- Touch panel
- Control 1 color
- 4 Zones
- 4 Scene keys
- Control by app

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "

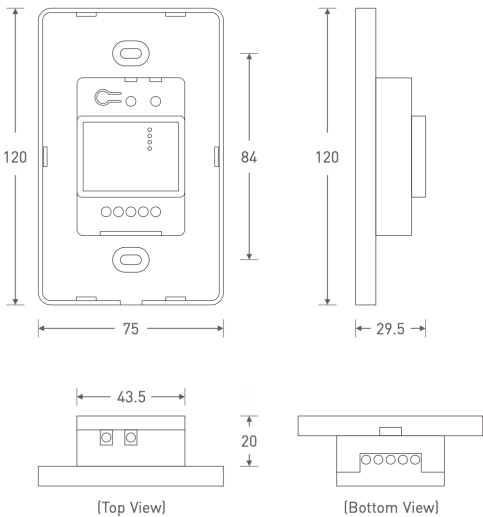



PRODUCT CODE

TT	-	MODEL
TT	-	UB1

TT-UB4



- Touch panel
- Control RGBW
- 4 Zones
- 4 Scene keys
- Control by app

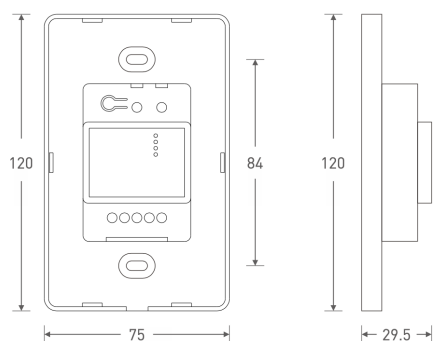

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "

Accessories




PRODUCT CODE

TT	-	MODEL
TT	-	UB4

TT-UB5



- Touch panel
- Control RGB CCT
- 4 Zones
- 4 Scene keys
- Control by app

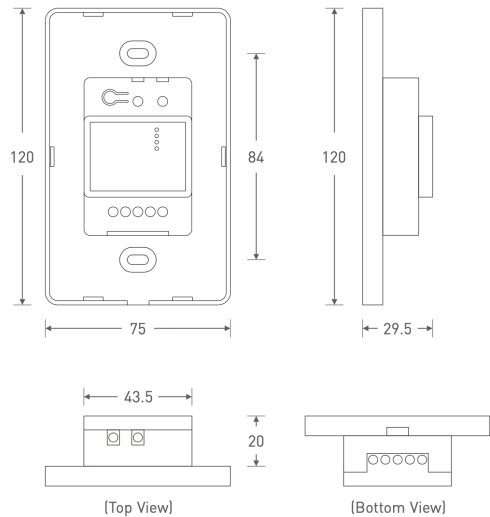

Voltage	12vDC, 24vDC
Wireless protocol	Bluetooth 5.0 Sig Mesh
Output signal	DMX
Zones	4
Size	120 mm X 75 mm X 30 mm 4 ³ / ₄ " X 2 ¹⁵ / ₁₆ " X 1 ³ / ₁₆ "


PRODUCT CODE

TT	-	MODEL
TT	-	UB5


TT-Q4



- 4 zones control RGBW
- RF 2,4 GHz
- Work with TT-U-E4S



Q series remote



Remote holder

Accessories



TT-U-E4S


PRODUCT CODE

TT	-	MODEL
TT	-	Q4


TT-Q5



- 4 zones control RGBCCCT
- RF 2,4 GHz
- Work with TT-U-E5S



Q series remote



Remote holder

Accessories



TT-U-E5S

PRODUCT CODE

TT	-	MODEL
TT	-	Q5

TT-RC4



- Control TT-UB4
- 4 zones
- Bluetooth led remote

Accessories




TT-UB4

PRODUCT CODE

TT	-	MODEL
TT	-	RC4



- The M series is a remote receiver set all-in-one.
- The remote can control four outputs channel of the receiver simultaneously.
- The set includes a wall bracket for remote control.

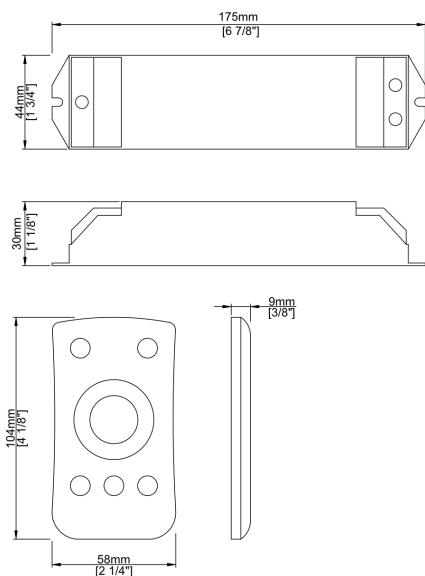

Voltage	12vDC	24vDC
Power per channel	60w	120w
Amperage per channel	5A	5A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ "	
	Receiver 175mm X 44mm X 30mm 6 ⁷ / ₈ " x 1 ³ / ₄ " x 1 ¹ / ₈ "	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M1

TT-U-M1-MINI



- The M series is a remote receiver set all-in-one.
- The remote can control four outputs channel of the receiver simultaneously.
- The set includes a wall bracket for remote control.

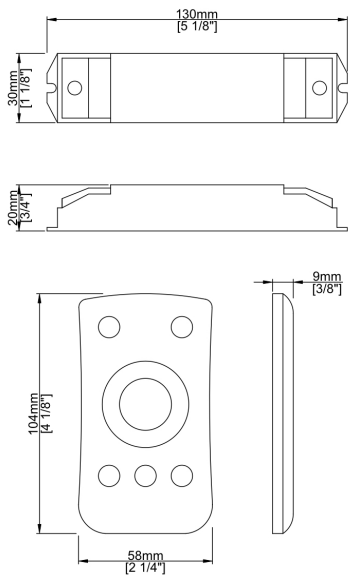

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	3	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x ³ / ₈ "	
	Receiver 130mm X 30mm X 20mm 5 ¹ / ₈ " x 1 ¹ / ₈ " x ³ / ₄ "	
IP	20	


PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M1-MINI

TT-U-M3-MINI



- The M series is a remote receiver set all-in-one.
- The three-channel remote can controls each receiver outputs independently in mode RGB.
- The set includes a wall bracket for remote control.

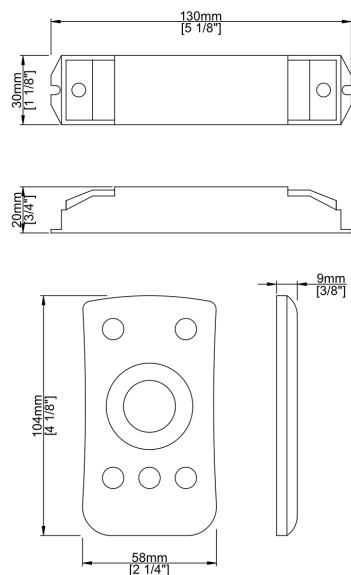

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	3	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " x 2 ¹ / ₄ " x 3 ³ / ₈ " Receiver 130mm X 30mm X 20mm 5 ¹ / ₈ " x 1 ¹ / ₈ " x 3 ³ / ₄ "	
IP	20	


PRODUCT CODE

TT - TYPE - MODEL

TT - U - M3-MINI



- The M series is a remote receiver set all-in-one.
- The four-channel remote can controls each receiver outputs independently in mode RGBW.
- The set includes a wall bracket for remote control.

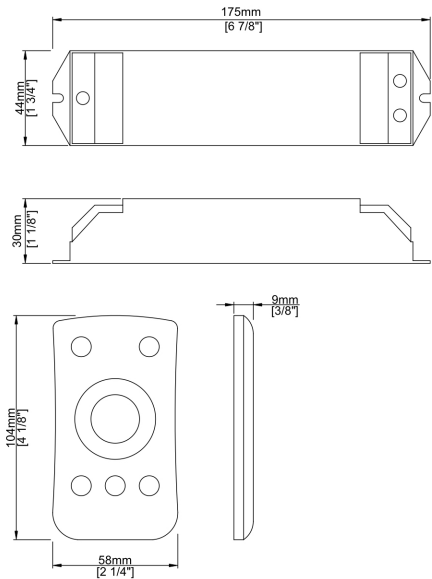

Voltage	12vDC	24vDC
Power per channel	60w	120w
Amperage per channel	5A	5A
Channel	4	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm 4 ¹ / ₈ " X 2 ¹ / ₄ " X ³ / ₈ "	
	Receiver 175mm X 44mm X 30mm 6 ⁷ / ₈ " X 1 ³ / ₄ " X 1 ¹ / ₈ "	
IP	20	


PRODUCT CODE

TT - TYPE - MODEL

TT - U - M4



- The M series is a remote receiver set all-in-one.
- The three-channel remote can controls each receiver outputs independently in mode CCT.
- The set includes a wall bracket for remote control.

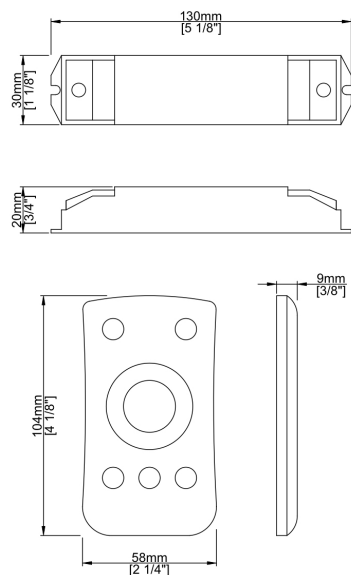

Voltage	12vDC	24vDC
Power per channel	36w	72w
Amperage per channel	3A	3A
Channel	2	
Finish	White	
Dimmable	Yes	
Size	Remote 104mm X 58mm X 9mm $4\frac{1}{8}'' \times 2\frac{1}{4}'' \times \frac{3}{8}''$ Receiver 130mm X 30mm X 20mm $5\frac{1}{8}'' \times 1\frac{1}{8}'' \times \frac{3}{4}''$	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	U	-	M5-MINI

TT-Y-5C-4A



- Multi mode WiFi RF receiver for the TT-Y series.

Voltage	12vDC	24vDC
Power per channel	48w	96w
Amperage per channel	4A	4A
Channel	5	
Finish	White	
Size	145mm x 46.5mm x 16mm 5 ¹¹ / ₁₆ " x 1 ¹³ / ₁₆ " x 5 ⁵ / ₈ "	
IP	20	

PRODUCT CODE


TT - TYPE - MODEL

TT - Y - 5C-4A

TT-Y-5C-6A



- Multi mode WiFi RF receiver for the TT-Y series.

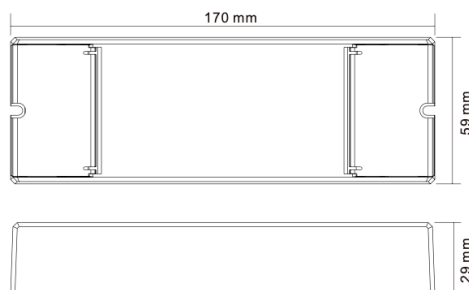

Voltage	12vDC	48vDC
Power per channel	96w	192w
Amperage per channel	8A	8A
Channel	5	
Finish	White	
Size	170mm x 59mm x 29mm 6 ¹¹ / ₁₆ " x 2 ⁵ / ₁₆ " x 1 ¹ / ₈ "	
IP	20	

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	Y	-	5C-6A

TT-Y-R-CCT



- RF remote control for TT-Y series.

Channel	2
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " X 2 ³ / ₁₆ " X 1 ¹ / ₁₆ "
CCT	CCT 2 whites
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT	-	Y	-	R	-	CCT
----	---	---	---	---	---	-----

TT-Y-R-M



- RF remote control for TT-Y series.

Channel	1
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " X 2 ³ / ₁₆ " X 1 ¹ / ₁₆ "
CCT	Mono 1 white
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	R	-	M

TT-Y-R-RGBCCT



- RF remote control for TT-Y series.


Channel	5
Finish	Black
Size	153mm X 52mm X 19mm 6 ¹ / ₃₂ " X 2 ¹ / ₁₆ " X 3 ³ / ₄ "
CCT	RGBCCT
IP	20

PRODUCT CODE

TT - TYPE - MODEL - MODE

TT	-	Y	-	R	-	RGBCCT
----	---	---	---	---	---	--------

TT-Y-R-RGBW

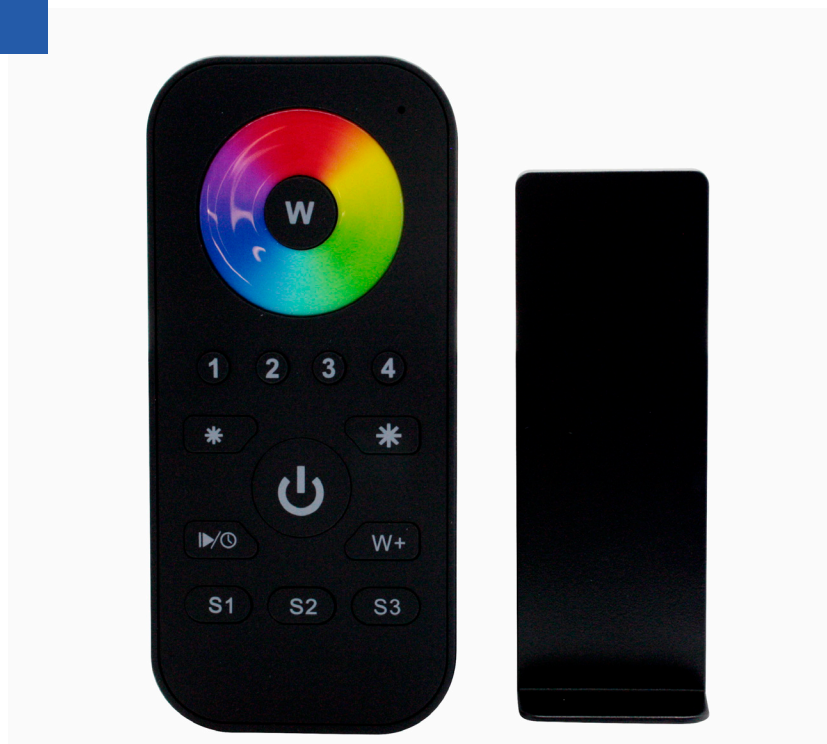

- RF remote control for TT-Y series.

Channel	4
Finish	Black
Size	120mm X 55mm X 17mm 4 ³ / ₄ " x 2 ³ / ₁₆ " x 11/ ₁₆ "
CCT	RGBW
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	R	-	RGBW

TT-SDD-24096-DIM



- Dimmer with integrated 24vDC transformer.
- Divider plate included allowing the two voltages (120vAC and 24vDC) to be separated.
- Dimming range from 0.3% to 100%.

Input voltage	120 VAC
Output voltage	24 V
Output power	96 w (class 2)
Amperage	4 A
Size	105mm X 54mm X 51mm 4 1/8" x 2 1/8" x 2"
Finish	WH - White BK - Black

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FUNCTION	-	FINISH
TT	-	SDD	-	24096	-	DIM	-	WH
TT	-	SDD	-	24096	-	DIM	-	



- Dimmer with integrated 24vDC transformer and 2-channel CCT control.
- Divider plate included allowing the two voltages (120vAC and 24vDC) to be separated.
- Dimming range from 0.3% to 100%.

Input voltage	120 VAC
Output voltage	24 vDC
Output power	96 w (class 2)
Amperage	4 A
Size	105mm X 54mm X 51mm 4 1/8" x 2 1/8" x 2"
Finish	WH - White BK - Black

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	FUNCTION	-	FINISH
TT	-	SDD	-	24096	-	CCT	-	WH
TT	-	SDD	-	24096	-	CCT	-	

TT-Y-W1-CCT



- Decora style RF wall remote control for the TT-Y series.

Channel	2
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " X 1 ⁵ / ₁₆ " X 3/ ₈ "
CCT	CCT 2 whites
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	W1	-	CCT

TT-Y-W1-M



- Decora style RF wall remote control for the TT-Y series.

Channel	1
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " x 1 ⁵ / ₁₆ " x 3 ³ / ₈ "
CCT	Mono 1 white
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	W1	-	M

TT-Y-W1-RGBW



- Decora style RF wall remote control for the TT-Y series.

Channel	4
Finish	White
Size	66mm X 32.5mm X 8.9mm 2 ⁵ / ₈ " X 1 ⁵ / ₁₆ " X 3 ³ / ₈ "
CCT	RGBW
IP	20


PRODUCT CODE

TT - TYPE - MODEL - MODE


TT	-	Y	-	W1	-	RGBW
----	---	---	---	----	---	------



- Universal RF and Bluetooth dimmer.
- Frequency: 2.4 GHz.
- Cloud control available for remote access.
- Compatible with Alexa and Google Home.

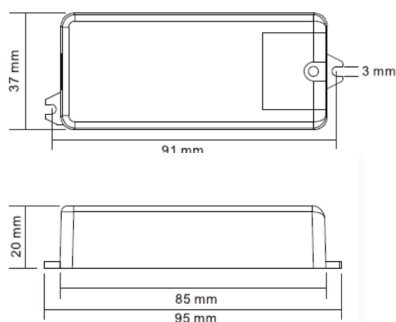

Input voltage	12-36 vDC	48vDC
Output amperage	1 x 8 A	1 x 4 A
Output power	96-288 W	192 W
Finish	White	
Size	95mm X 37mm X 20mm 3 3/4" X 1 7/16" X 13/16"	
IP	20	

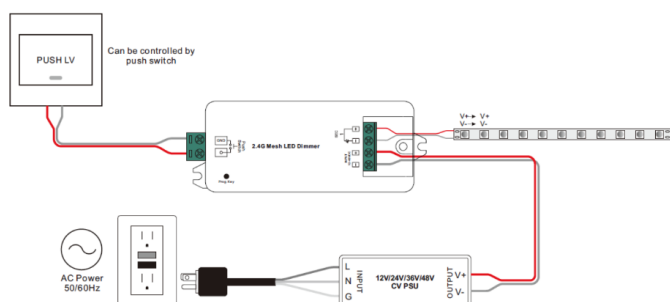

PRODUCT CODE


TT - TYPE - MODEL - MODE

TT - Y - SR - 1C-8A

TT-Y-SR-5C-8A




- 4-in-1 Controller based on RF and Bluetooth.
- 4 different modes available: DIM, CCT, RGBW, and RGBCCT.
- Selectable by switch.
- Frequency: 2.4 GHz.
- Cloud control available for remote access.
- Compatible with Alexa and Google Home.

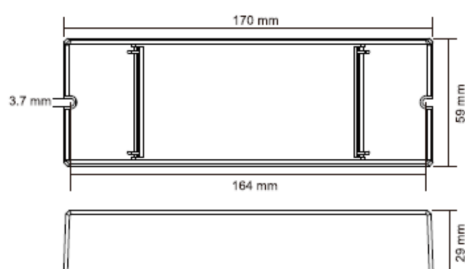


Input voltage	12vDC	24vDC	36vDC	48vDC
Output amperage	8 A max.	8 A max.	6 A max.	4 A max.
Output power	96 W	192 W	216 W	192 W
Finish	White			
Size	170mm X 59mm X 29mm 6 11/16" X 2 5/16" X 1 1/8"			
Device mode	DIM, CCT, RGBW, RGBCCT			
IP	20			


DIM




CCT



RGBW



RGBCCT

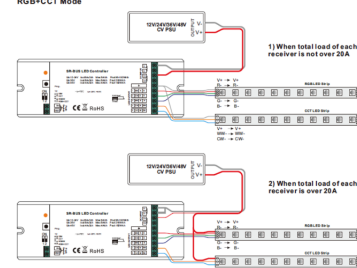


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	SR	-	5C-8A



- Wall-mounted CCT Controller based on RF and Bluetooth.
- Frequency: 2.4 GHz.
- Kinetic switch, does not use electricity or battery.

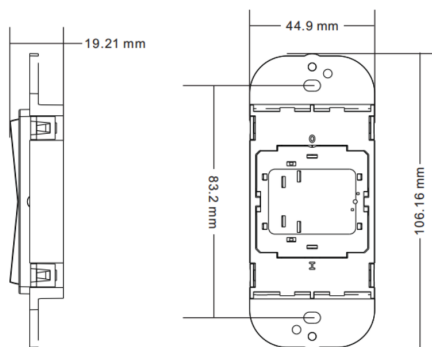

Zone	1
Finish	White
Size	45mm X 106mm X 19mm $1\frac{3}{4}'' \times 4\frac{3}{16}'' \times \frac{3}{4}''$
IP	20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	SR	-	CCT

TT-Y-SR-M



- Wall-mounted DIM Controller based on RF and Bluetooth.
- Frequency: 2.4 GHz.
- Kinetic switch, does not use electricity or battery.

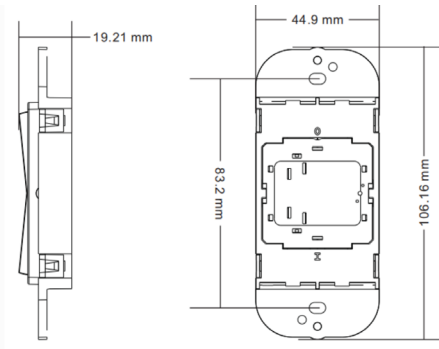

Zone	1
Finish	White
Size	45mm X 106mm X 19mm 1 ³ / ₄ " X 4 ³ / ₁₆ " X 3 ³ / ₄ "
IP	20


PRODUCT CODE

TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	SR	-	M

TT-Y-SR-M2



- Wall-mounted DIM Controller based on RF and Bluetooth.
- Frequency: 2.4 GHz.
- Kinetic switch, does not use electricity or battery.

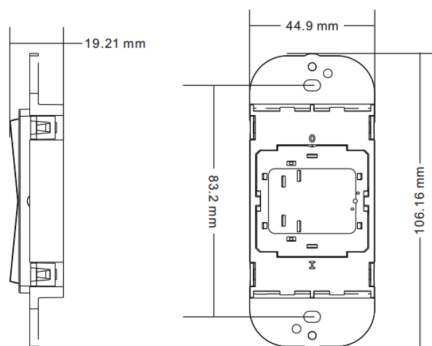

Zones	2
Finish	White
Size	45mm X 106mm X 19mm $1\frac{3}{4}'' \times 4\frac{3}{16}'' \times \frac{3}{4}''$
IP	20

PRODUCT CODE


TT	-	TYPE	-	MODEL	-	MODE
TT	-	Y	-	SR	-	M2

TT-Y-SR-RGBCCT



- 3-in-1 Controller based on RF and Bluetooth.
- 3 different modes available: DIM, CCT, RGB.
- Selectable by switch.
- Frequency: 2.4 GHz.
- Kinetic switch, does not use electricity or battery.

Zone	1
Finish	White
Size	45mm X 106mm X 19mm 1 ³ / ₄ " X 4 ³ / ₁₆ " X 3 ³ / ₄ "
IP	20

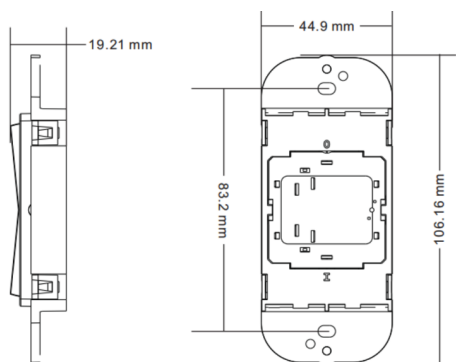


CODE PRODUIT

TT - TYPE - MODÈLE - MODE

TT - Y - SR - RGBCCT

STICK CONTROLLER SERIES

- Wall touch lighting controller.
- Computer programming and operates in standalone mode thereafter.
- Can be controlled by mobile application.



Product code	TT-STICK-GU2	TT-STICK-GA2	TT-STICK-CW4	TT-STICK-DE3	TT-STICK-KE2
USB connection	•	•	•	•	•
Ethernet connection		•	•	•	•
DMX channels	128	512	1024	1024	1024
Easy Stand Alone 2 (PC/MAC)	•	•	•	•	•
Easy Stand Alone Pro	•	•	•	•	•
Stick Remote App			•	•	•
Arcolis app			•	•	•
Number of scenes	24	99	36	500	200
Number of zone	1	1	1	10	5
Stand alone memory	12K	79K	76K	microSD	microSD
Live control	Color and dimmer	Color and dimmer	Color and dimmer	Color, dimmer, speed	Color, dimmer, speed
Touch-sensitive buttons	3	4	12 + wheel	10 + wheel	12 + cursor
Port triggering	1	8	8	8	8
Clock triggering			100	100	40
RS232 triggering				•	•
Size	86 x 86 x 11 mm 3 ³ / ₈ " x 3 ³ / ₈ " x 3 ³ / ₈ "	86 x 110 x 11 mm 3 ³ / ₈ " x 3 ³ / ₈ " x 3 ³ / ₈ "	106 x 146 x 11 mm 4 ¹ / ₈ " x 5 ³ / ₄ " x 3 ³ / ₈ "	106 x 146 x 11 mm 4 ¹ / ₈ " x 5 ³ / ₄ " x 3 ³ / ₈ "	130 x 170 x 11 mm 5 ¹ / ₈ " x 6 ³ / ₄ " x 3 ³ / ₈ "
Power	5~12vDC 300mA	5~12vDC 300mA	5~15vDC 300mA	5~6vDC 300mA	5~6vDC 300mA

SUNLITE SUITE 3 SERIES

- Computer lighting control module.
- Can be controlled remotely by mobile application.



Product code	TT-SUITE3-BC	TT-SUITE3-EC
USB connection	•	•
Ethernet connection		
ArtNet connection	*option	*option
DMX channels	256	1024
Easy Stand Alone		
Easy Stand Alone 2	*option	
Sunlite Suite 3	Express	Full
Sunlite Suite 2	Express	Full
Easy Remote App		
Number of zone		
Stand alone memory	64K	100K
Buttons		3
Port triggering		8
Clock triggering		
MIDI triggering		
RDM	*option	*option
Size	88 x 50 x 38 mm 3 1/2" x 2" x 1 1/2"	79 x 92 x 43 mm 3 1/8" x 3 5/8" x 1 3/4"
Power	5vDC via USB-C	5vDC via USB-C

SLESA CONTROLLER SERIES

- Full range of standalone DMX interfaces.
- For architectural applications or installations
- Each DMX interface corresponds to a well-identified use and its association with one of the software of the range allows to control the lighting of places as diverse as houses, hotels, restaurants, offices, monuments, fountains, gardens ...




Product code	TT-SLESA-U11	TT-SLESA-U10	TT-SLESA-U9
USB connection	•	•	•
Ethernet connection	•		
WiFi connection		•	
DMX channels	1024	512	256
Easy Stand Alone		•	•
Easy Stand Alone 2	•	•	•
Easy Stand Alone Pro			
Easy Stand Alone Pro 2	•	•	•
Arcolis	•		
Number of scenes	99	99	20
Number of zone	5	1	1
Stand alone memory	microSD	100K	20K
Buttons		3	3
Port triggering	16	8	8
Clock triggering			
Infrared triggering			
Size	160 x 90 x 45 mm 6 ⁵ / ₁₆ " x 3 ⁹ / ₁₆ " x 1 ³ / ₄ "	79 x 92 x 43 mm 3 ¹ / ₈ " x 3 ⁵ / ₈ " x 1 ³ / ₄ "	79 x 92 x 43 mm 3 ¹ / ₈ " x 3 ⁵ / ₈ " x 1 ³ / ₄ "
Power	5vDC 300mA USB-C	5vDC 300mA USB-C	5vDC 300mA mini USB

TT-DMX-4C



- LT-840-6A communication, achieves remote management of reading and writing DMX address(DMXmastercontrollermust recognize the RDM protocol). Equipped with DMX standard 3-pin XLR, RJ45, green terminal interface.
- Realize 0-100% dimming or different lighting effect; workable with single color, bi-color, RGB or RGBW LED lamps.ith the standard RDM remote device management protocol, supports DMX512 signal bi-directional

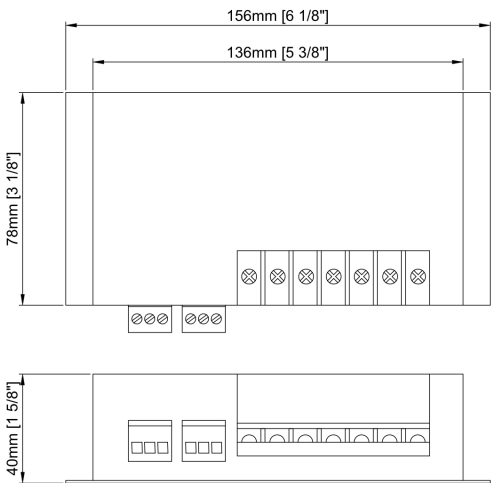

Voltage	5vDC	12vDC	24vDC
Power per channel	30w	72w	144w
Amperage per channel	6A	6A	6A
Channel	4		
Finish	Black		
Dimmable	Yes		
Size	156mm X 78mm X 40mm 6 ¹ / ₈ " x 3 ¹ / ₈ " x 1 ⁵ / ₈ "		
IP	20		


PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DMX	-	4C

TT-DMX-5C



- Designed for Hi-power multiple channels application, 5 channels output, and Max. 5A current per channel, up to 600W output power.
- Five kinds of mode optional: single color, color temperature, RGB, RGBW or RGB CCT
- Support 2 kinds of DMX ports with signal isolation function: XLR-5 or RJ45.
- With RDM remote management protocol the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting,

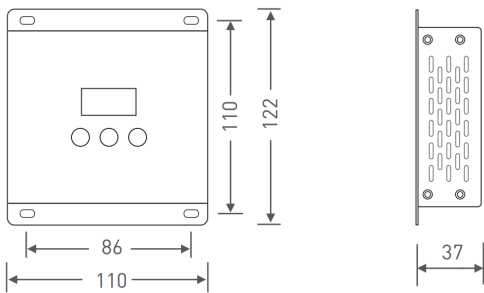

Voltage	12vDC	24vDC
Power per channel	60W	120w
Amperage per channel	5A	5A
Maximum amperage	25A	
Channel	5	
Finish	Black	
Dimmable	Yes	
Size	110mm X 122mm X 37mm 4 ³ / ₈ " x 4 ³ / ₄ " x 1 ¹ / ₂ "	
IP	20	

PRODUCT CODE


TT	-	TYPE	-	MODEL
TT	-	DMX	-	5C

TT-DMX-32C



- Designed for Hi-power multiple channels application, 32 channels output, and Max. 3A current per channel, up to 2304W output power.
- 4 kinds of mode optional: single color, color temperature, RGB, RGBW
- Support 4 kinds of DMX ports with signal isolation function: XLR-3, XLR-5, RJ45 and green terminal (with signal amplifier function).
- With RDM remote management protocol the operations can be completed via the RDM master console, such as parameters browsing & setting, DMX address setting.


Voltage	12vDC	24vDC
Power per channel	36W	72W
Amperage per channel	3A	3A
Maximum amperage	96A	
Channel	32	
Finish	Black	
Dimmable	Yes	
Size	300mm X 122mm X 38mm 11 ³ / ₄ " x 4 ³ / ₄ " x 1 ¹ / ₂ "	
IP	20	

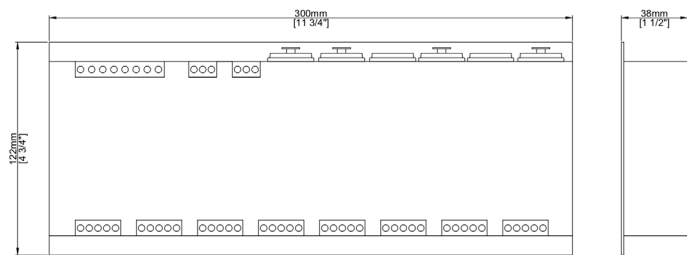

PRODUCT CODE			
TT	-	TYPE	MODEL
TT	-	DMX	32C




- Amplifier four channels.
- Reproduces and amplifies an RGBW signal.
- 8A maximum each channel

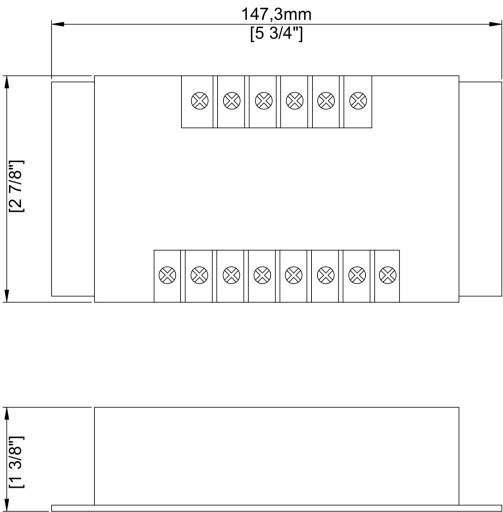


Voltage	5vDC	12vDC	24vDC
Power per channel	40w	96w	192w
Amperage per channel	8A	8A	8A
Channel	4		
Finish	Black		
Dimmable	Yes		
Size	147,3mm X 74mm X 34mm 5 ³ / ₄ " x 2 ⁷ / ₈ " x 1 ³ / ₈ "		
IP	20		

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	AMP	-	4-32

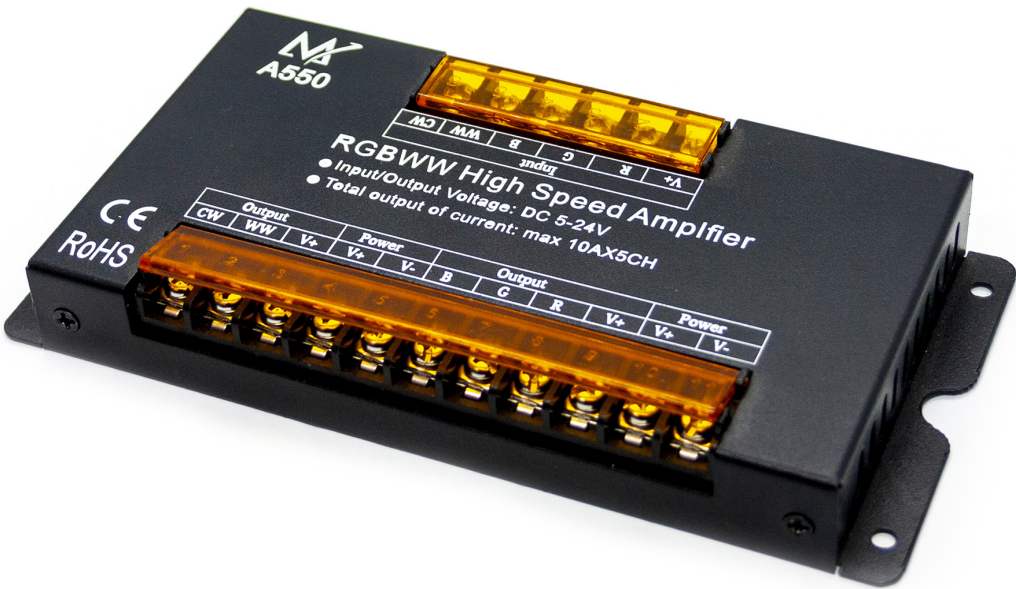

- Amplifier five channels.
- Reproduces and amplifies an RGBCCT signal.
- 10A mximum each channel

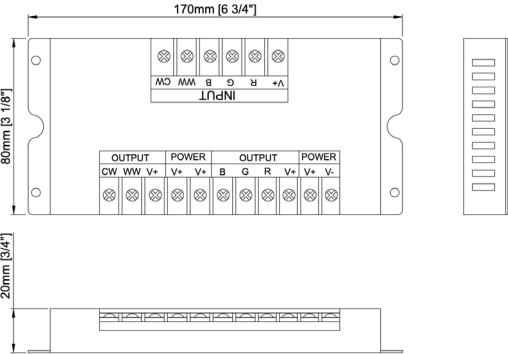

Voltage	5vDC	12vDC	24vDC
Power per channel	50w	120w	240w
Amperage per channel	10A	10A	10A
Channel	5		
Finish	Black		
Dimmable	Yes		
Size	170mm X 80mm X 20mm 6 ³ / ₄ " x 3 ¹ / ₈ " x 3 ³ / ₄ "		
IP	20		

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	AMP	-	5-50



- DMX signal distribution.
- Eight amplified and isolated outputs.
- Terminal block connector.

Voltage	12vDC / 24vDC
Consumption	4,5 w
DMX output	8
Finish	Black
Dimmable	No
Size	215mm X 109mm X 21mm 8 ¹ / ₂ " X 4 ⁵ / ₁₆ " X 7 ⁷ / ₈ "
IP	20

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DMX	-	OPTO

TT-DR-CVB65-DMX-100



- Addressable via RDM
- Dimmable from 0.1% to 100% by DMX
- For dry and damp locations
- Class 2

Input voltage	110~277vAC
Output voltage	24vDC (class 2)
Output amperage	12,5 A max.
Amperage by color	RGBW : 4 x 3,13 A
Power	100w
Channel	4 channels
Size	316mm x 125mm x 42,7mm 12 7/16" x 4 15/16" x 1 11/16"
Dimmable	Yes 0,1% ~100% by DMX
Working temp.	-40°C ~ 60°C
IP	66

PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	CHANNEL	-	POWER	-	OUTPUT VOLTAGE
TT	-	DR	-	CVB65	-	DMX	-	4C	-	100	-	24V
TT	-	DR	-	CVB65	-	DMX	-	4C	-	100	-	24V

TT-DR-CVB65-DMX-300



- Addressable via RDM
- Dimmable from 0.1% to 100% by DMX
- For dry and damp locations

Input voltage	110~277vAC
Output voltage	24vDC
Output amperage	12,5 A max.
Amperage by color	RGB : 3 x 4,17 A RGBW : 4 x 3,13 A RGCW : 5 x 2,5 A
Power	300w
Channel	3C - 3 channels 4C - 4 channels 5C - 5 channels
Size	316mm x 125mm x 42,7mm 12 7/16" x 4 15/16" x 1 11/16"
Dimmable	Yes 0,1% ~100% by DMX
Working temp.	-40°C ~ 60°C
IP	66


PRODUCT CODE

TT	-	TYPE	-	GROUP	-	MODEL	-	CHANNEL	-	POWER	-	OUTPUT VOLTAGE
TT	-	DR	-	CVB65	-	DMX	-	3C	-	300	-	24V
TT	-	DR	-	CVB65	-	DMX	-		-	300	-	24V


ACCESSORIES





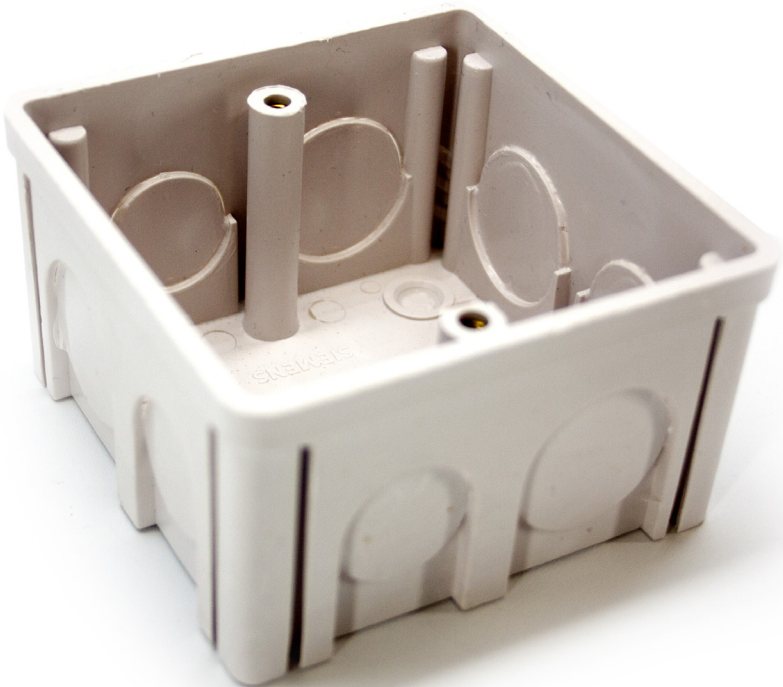

- PVC casing for controllers.
- Enables wall mounting for controllers:
TT-U-D4, TT-DX-1/4/5/8,
TT-U-E4S and TT-U-E5S.
- Requires two screws M4 x 50
format.

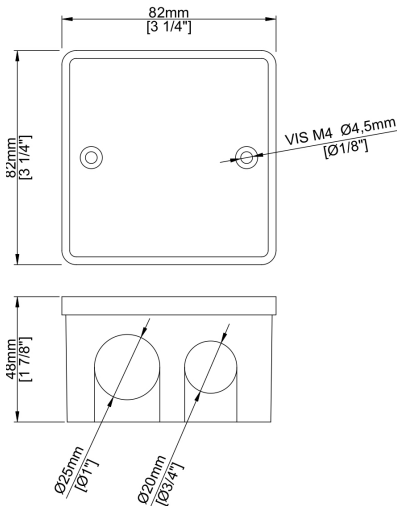


Material	Plastic
Finish	Beige
Size	82mm X 82mm X 48mm 3 1/4" x 3 1/4" x 1 7/8"
Screw	2 x M4x50mm

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	BOX	-	03



- Metal housing for transformer.
- Pre-punched for transformer mounting TT-PSU-IP20-025 / 050/075/100/200/350.
- Cut in the case to maximize ventilation.

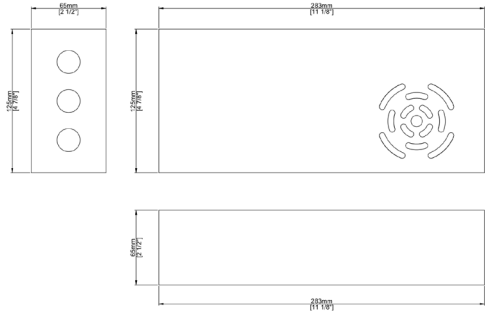

Material	Steel
Finish	Black
Size	283mm X 125mm X 65mm 11 ¹ / ₈ " x 4 ⁷ / ₈ " x 2 ¹ / ₂ "
Screw	4 x M3x5mm

Accessories



TT-FIL-IEC

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	BOX	-	05

TT-DIS-TRK



- This magnetic rail is designed to be cut at any point along its length

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	VOLTAGE	-	COLOUR
TT	-	DIS	-	TRK	-	12V	-	BK
TT	-	DIS	-	TRK	-		-	

Voltage	12vDC	24vDC
Power	60w max.	120w max.
Amperage	5A max.	5A max.
Colour	BK - black WH - white	
Length	2000mm 78 3/4"	

TT-DIS-CONNECT



- This connector powers the magnetic rail from a transformer fitted with a dupont connector

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	VOLTAGE	-	COLOUR
TT	-	DIS	-	CONNECT	-	12V	-	BK
TT	-	DIS	-	CONNECT	-		-	

Voltage	12vDC	24vDC
Power	36w max.	72w max.
Amperage	3A max.	3A max.
Colour	BK - black WH - white	
Cable length	1000mm 39 3/8"	

TT-DIS-PLUG




- This connector powers the product (puck, LED strip) from a transformer fitted with a dupont connector

PRODUCT CODE

TT	-	TYPE	-	MODEL	-	VOLTAGE	-	COLOUR
TT	-	DIS	-	PLUG	-	12V	-	BK
TT	-	DIS	-	PLUG	-		-	

Voltage	12vDC	24vDC
Power	36w max.	72w max.
Amperage	3A max.	3A max.
Colour	BK - black WH - white	
Cable length	1000mm 39 3/8"	

TT-DIS-EXT



- Magnetic exVoltages are used to connect 2 magnetic rails (TT-DIS-TRK) together.

PRODUCT CODE

TT	-	TYPE	-	MODEL
TT	-	DIS	-	EXT

TT-DIS-END



- End cap for magnetic rails (TT-DIS-TRK)
- Available in black or white



PRODUCT CODE

TT	-	TYPE	-	MODEL	-	COLOR
TT	-	DIS	-	END	-	BK
TT	-	DIS	-	END	-	

TT-ACC-IR-02



- Surface mount IR detector.

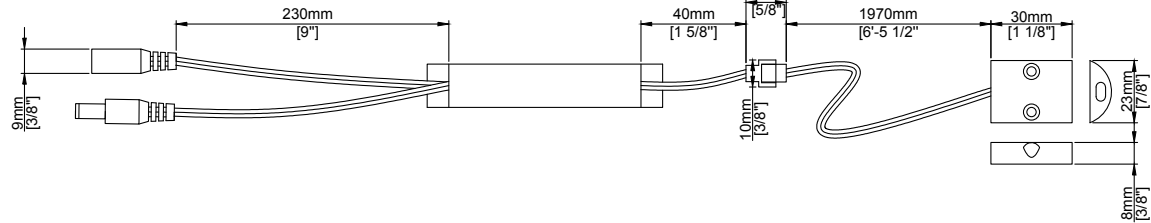



Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm

TT-ACC-IR-06



- Double surface mount IR detector.

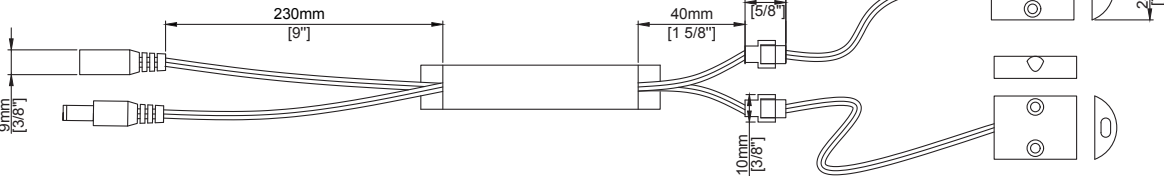

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm

TT-ACC-IR-11



- Recessed IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
----------	------------

Power	36w-72w
-------	---------

Output input connector	2,1mm
------------------------	-------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-12



- Surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC 3
----------	--------------

Power	6w-72w
-------	--------

Output input connector	2,1mm
------------------------	-------

TT-ACC-IR-15



- Double recessed IR detector.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	8mm 3/8"

TT-ACC-IR-16



- Double surface mount IR detector.
- Fade in Fade out.

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm

TT-ACC-IR-21



- Recessed IR detector.
- Fade in Fade out.
- Dupont connector

Voltage	12 ~ 24vDC
---------	------------

Power	36w-72w
-------	---------

Amperage	3A max.
----------	---------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-22



- Surface IR detector.
- Fade in Fade out.
- Dupont connector

Voltage	12 ~ 24vDC
---------	------------

Power	36w-72w
-------	---------

Amperage	3A max.
----------	---------

TT-ACC-IR-25



- Double recessed IR detector.
- Fade in Fade out.
- Dupont connector

Voltage	12 ~ 24vDC
---------	------------

Power	36w-72w
-------	---------

Amperage	3A max.
----------	---------

Cut hole	8mm 3/8"
----------	-------------

TT-ACC-IR-26



- Double surface IR detector.
- Fade in Fade out.
- Dupont connector

Voltage	12 ~ 24vDC
---------	------------

Power	36w-72w
-------	---------

Amperage	3A max.
----------	---------

TT-U-13



- Touch dimmer.

Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	14mm 1/2"

TT-U-14



- Touch switch.
- Pass on the surface of wood board

Amperage	12 ~ 24vCC
Power	36w-72w
Output input connector	2,1mm
Cut hole	32mm 15/16"

TT-ACC-MOV-01



- Recessed motion detector.


Amperage	12 ~ 24vCC
Power	30w-60w
Output input connector	2,1mm
Cut hole	16mm 5/8"

TT-ACC-CVZ-IR-01



- Recessed motion detector.
- Compatible with DR-CVZ power supply via control port
- Voltage, power and amperage are determinated by the power supply used.

Output input connector	dupont 3 pins
------------------------	---------------

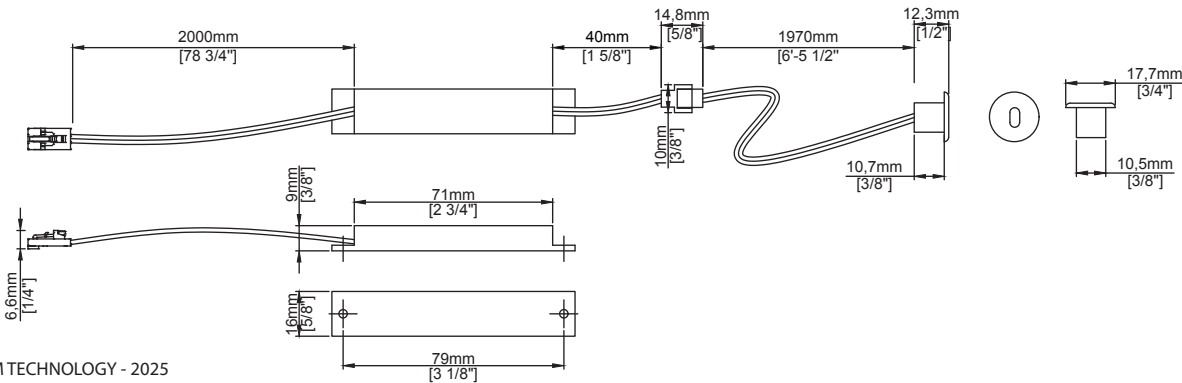


TT-ACC-CVZ-IR-02



- Surface IR detector.
- Compatible with DR-CVZ power supply via control port
- Voltage, power and amperage are determined by the power supply used.

Output input
connector dupont 3 pins

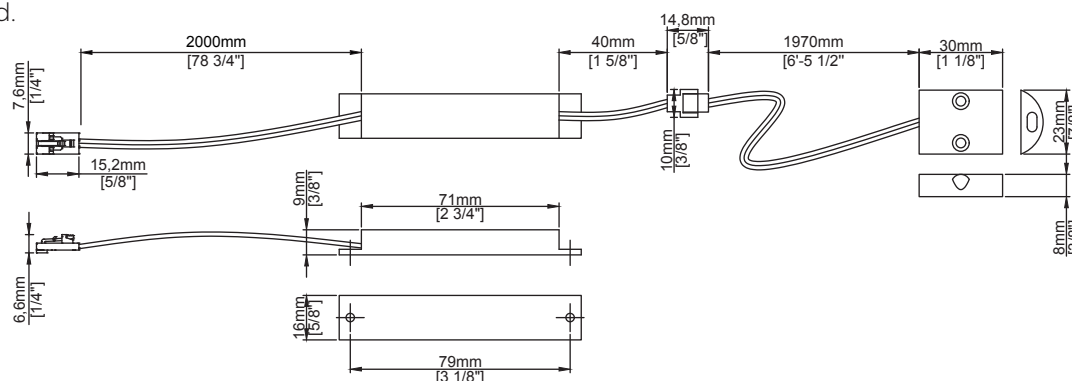


TT-ACC-CVZ-IR-15



- Double recessed motion detector.
- Compatible with DR-CVZ power supply via control port
- Voltage, power and amperage are determined by the power supply used.

Output input
connector dupont 3 pins

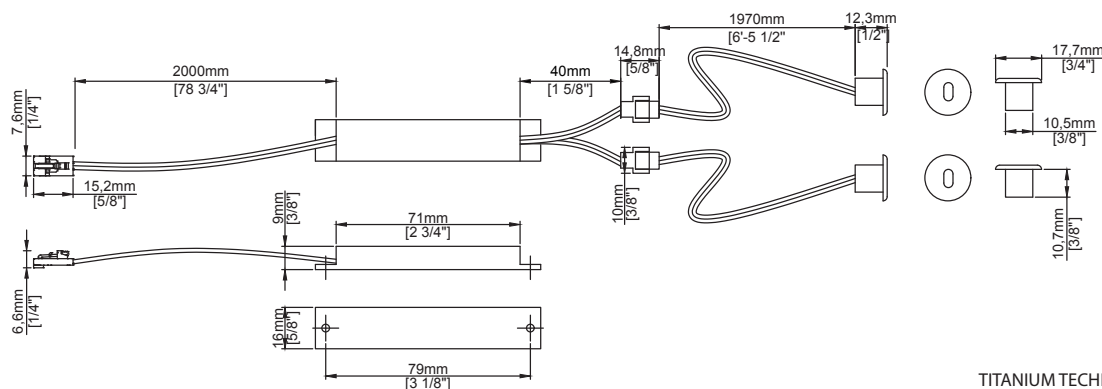


TT-ACC-CVZ-REM01



- 2.4GHz Remote control and receiver set
- Allows remote control of the intensity of DR-CVZ series power supply via the control port.

Output input
connector dupont 3 pins

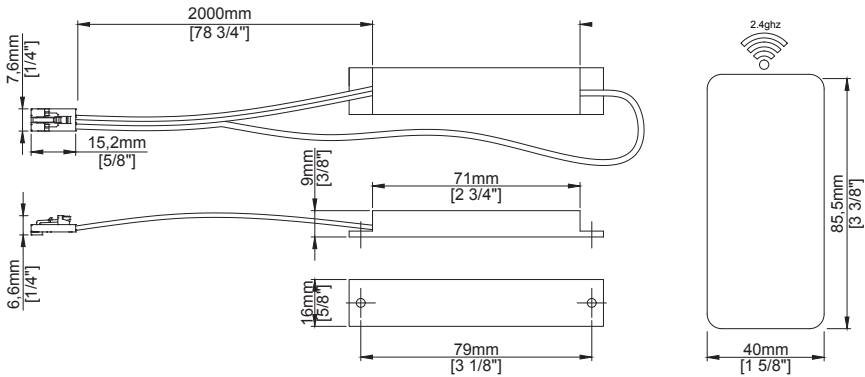


TT-ACC-CVZ-U-13



- Touche dimmer.
- Compatible with DR-CVZ power supply via control port
- Voltage, power and amperage are determined by the power supply used.

Output input
connector dupont 3 pins

Color WH - white
 BK - Black

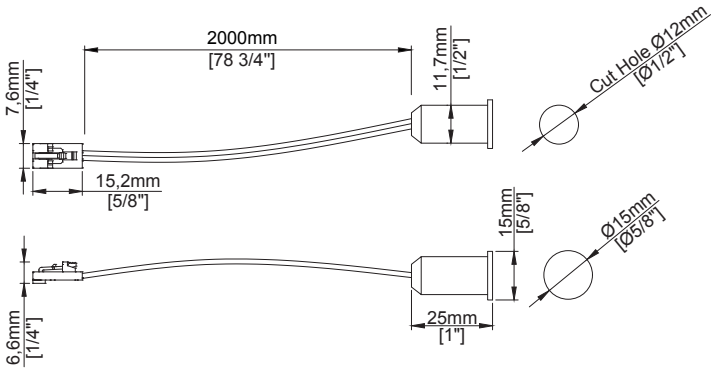

TT-ACC-CONNECT-SPLIT1X2



- Connecting one to two 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X3



- Connecting one to three 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X4



- Connecting one to four 2.1mm connectors AWG16

TT-ACC-CONNECT-SPLIT1X8



- Connecting one to eight 2.1mm connectors AWG16

TT-ACC-CONNECT-2.1-M



- Connect the terminal to 2.1mm male.

TT-ACC-CONNECT-2.1-F



- Connect the terminal to 2.1mm female.

TT-ACC-CONNECT-2.1-1M



- 1 meter cable with 2.1mm connect.. AWG16

TT-ACC-CONNECT-2.1-M2



- Cable section to male 2.1mm connector.

TT-ACC-CONNECT-2.1-F2



- Cable section to female 2.1mm connector.

TT-ACC-CONNECT-D



- ExVoltage cable with Dupont connector.
- Available in lengths of 500mm, 1000mm, 1500mm, 2000mm and 5000mm
- Available in lengths of 20in, 39in, 59in, 78in and 196in
- Maximum 3A

TT-ACC-CONNECT-D-SPLIT1X3



- Splitter 3 to 1 with Dupont connector.
- Maximum 3A


TT-ACC-CONNECT-D-SPLIT1X6



- Splitter 6 to 1 with Dupont connector.
- Maximum 3A

TT-FL00-2P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DC +
PIN 2 : DC -



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DC +
PIN 2 : DC -



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-3P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.



PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-3P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-F-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DC +
PIN 2 : DC -
PIN 3 : DATA +
PIN 4 : DATA -
PIN 5 : GND
PIN 6 : PGM



Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-M-X

- Solder connector.
- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- * "S" marking is screw crimp, suitable for field installation.
- International standard M16×1.0 thread design.




PIN 1 : DC +
PIN 2 : DC -
PIN 3 : DATA +
PIN 4 : DATA -
PIN 5 : GND
PIN 6 : PGM



Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P-F

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.




PIN 1 : BROWN (DC +)
PIN 2 : BLUE (DC -)



Amperage	15A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-F

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.




PIN 1 : BROWN (N/A)
PIN 2 : BLACK (N/A)
PIN 3 : RED (DATA +)
PIN 4 : GREEN (DATA -)
PIN 5 : WHITE (GND)
PIN 6 : BLUE (PGM)



Amperage	15A + 3A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-F


- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

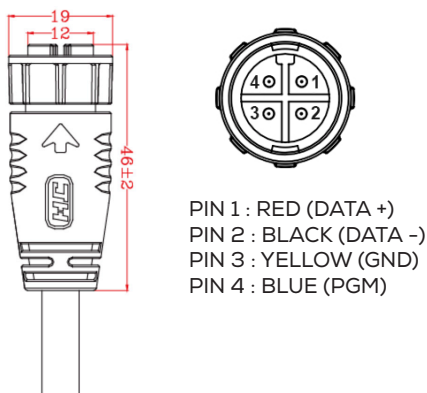

Amperage	15A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-M


- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.

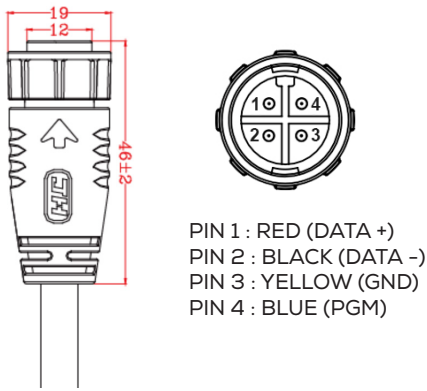

Amperage	15A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-M

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.




PIN 1 : BROWN (DC +)
 PIN 2 : BLACK (DC -)
 PIN 3 : RED (DATA +)
 PIN 4 : GREEN (DATA -)
 PIN 5 : WHITE (GND)
 PIN 6 : BLUE (PGM)



Amperage	15A + 3A
Voltage	500 vDC
Cable lenght	500 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-MF

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.



PIN 1 : N/A
 PIN 2 : N/A
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM




PIN 1 : DC +
 PIN 2 : DC -
 PIN 3 : DATA +
 PIN 4 : DATA -
 PIN 5 : GND
 PIN 6 : PGM



Amperage	15A + 3A
Voltage	500 vDC
Cable lenght	1000 mm
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-4P-MF

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.



PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



PIN 1 : DATA +
PIN 2 : DATA -
PIN 3 : GND
PIN 4 : PGM



Amperage	15A
Voltage	500 vDC
Cable lenght	1000 mm
Cable	1.5mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67

TT-FL00-2P4P-Y

- Gold plated contacts, corrosion resistance and high strength conductivity. Respond effectively to changes in temperature rise caused by electrical current
- Nylon material, stable electrical performance. high resistance of the anti-pressure
- International standard M16×1.0 thread design.



PIN 1 : DC +
PIN 2 : DC -

PIN 1 : DC +
PIN 2 : DC -
PIN 3 : DATA +
PIN 4 : DATA -
PIN 5 : GND
PIN 6 : PGM



500mm



PIN 1 : N/A
PIN 2 : N/A
PIN 3 : DATA +
PIN 4 : DATA -
PIN 5 : GND
PIN 6 : PGM



Amperage	15A + 3A
Voltage	500 vDC
Cable	1.5mm + 0.3mm ²
Cable assembly diameter	4.5 - 9.2mm
Operating temperature	-40°C - 105°C
Operating cycles	2000 times
IP	67


TT-FIL-14/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	14
Conductors	2
Lenght	0.3m/1 ft 300m/982ft with code TT-FIL-14/2-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-16/2

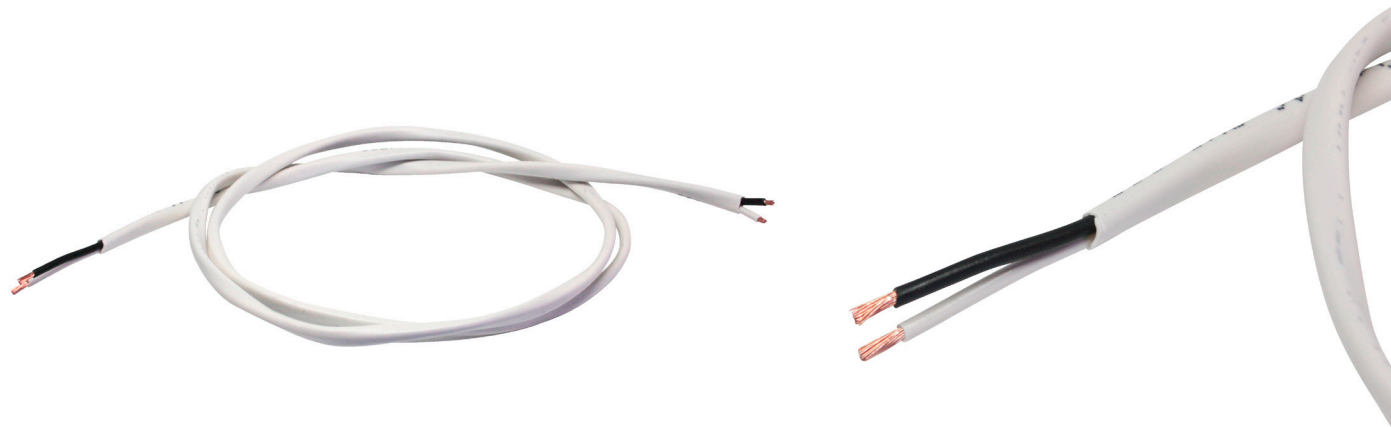

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	16
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-16/2-BOX
Operating temperature	-20 ° C + 75 ° C


TT-FIL-18/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	18
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/2-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-18/2C

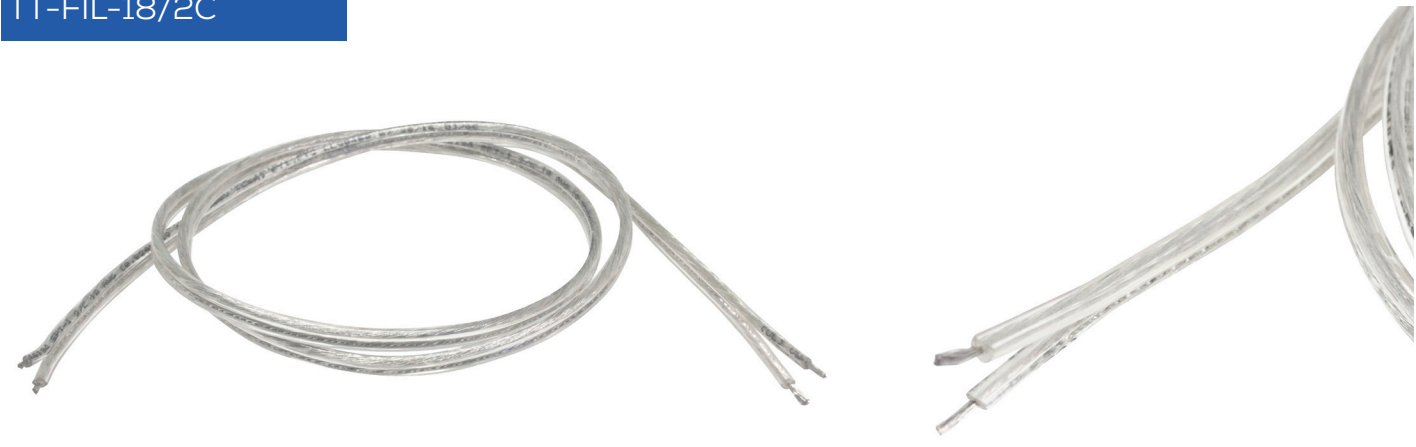

- Twisted tinned copper conductors
- Insulation: Clear PVC
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	18
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/2C-BOX
Operating temperature	-20 ° C + 105 ° C


TT-FIL-20/2



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: White PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	20
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/2-BOX


TT-FIL-22/2S

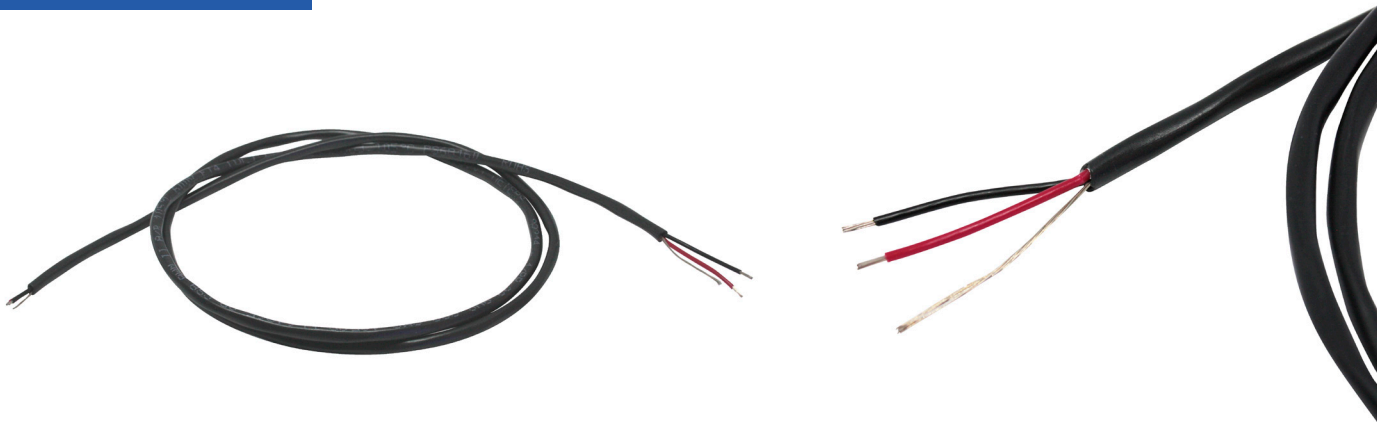

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid black PVC Riser FT4.
- 100% aluminum foil shielding.
- Tinned copper drain wire.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	22
Conductors	2
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/2S-BOX
Operating temperature	-20 ° C + 75 ° C

TT-FIL-16/4

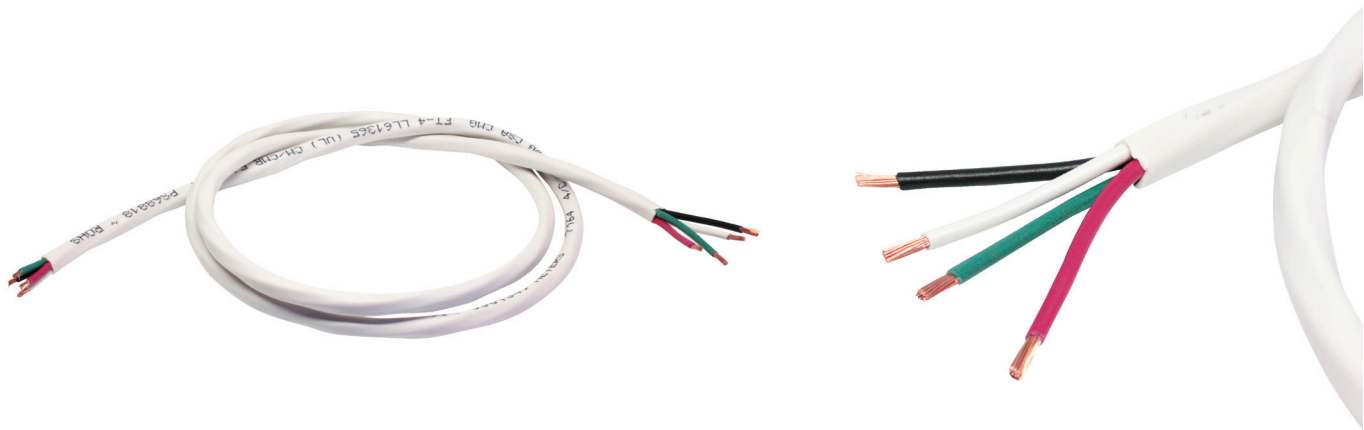

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	16
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-16/4-BOX
Operating temperature	-20 ° C + 75 ° C


TT-FIL-18/4



- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	18
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-18/4-BOX
Operating temperature	-20 ° C + 75 ° C


TT-FIL-20/4

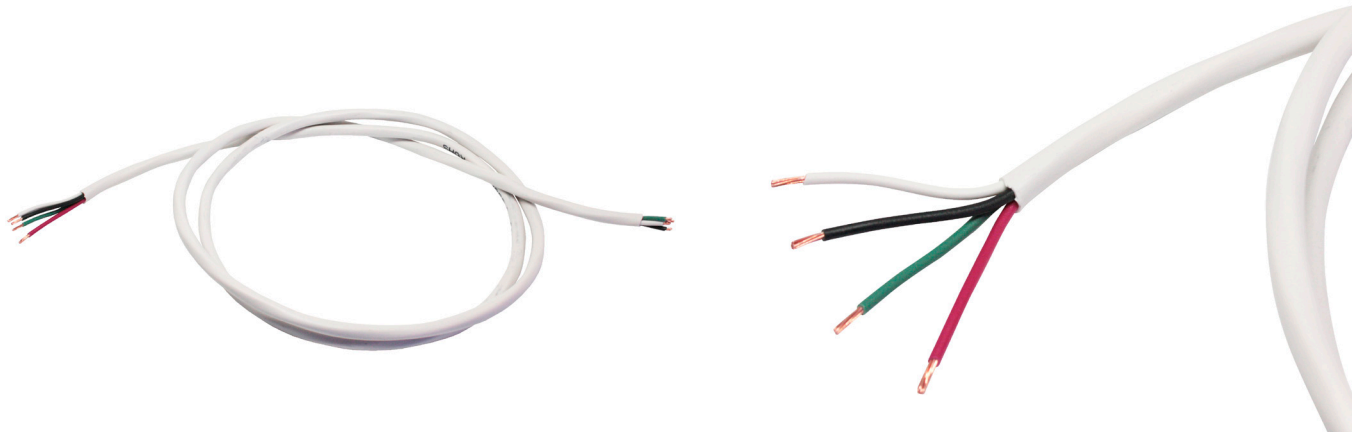

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: White PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	20
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/4-BOX


TT-FIL-22/4

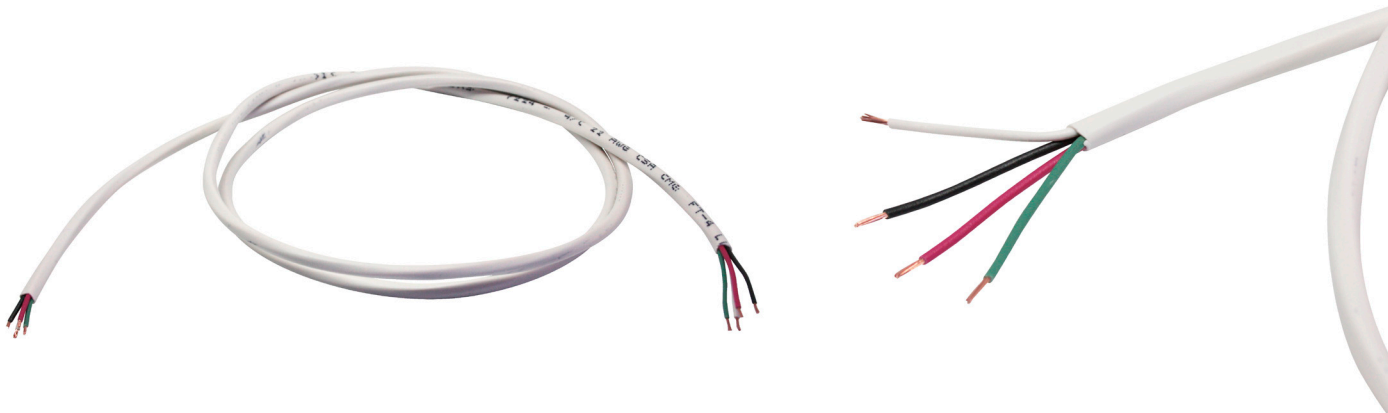

- Multi-conductor cable.
- Twisted bare copper conductors.
- Insulation: Semi-rigid white PVC Riser FT4.
- Compatible with 12V and 24V lighting.

Voltage	300 vDC
Caliber	22
Conductors	4
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/4-BOX
Operating temperature	-20 ° C + 75 ° C


TT-FIL-20/6

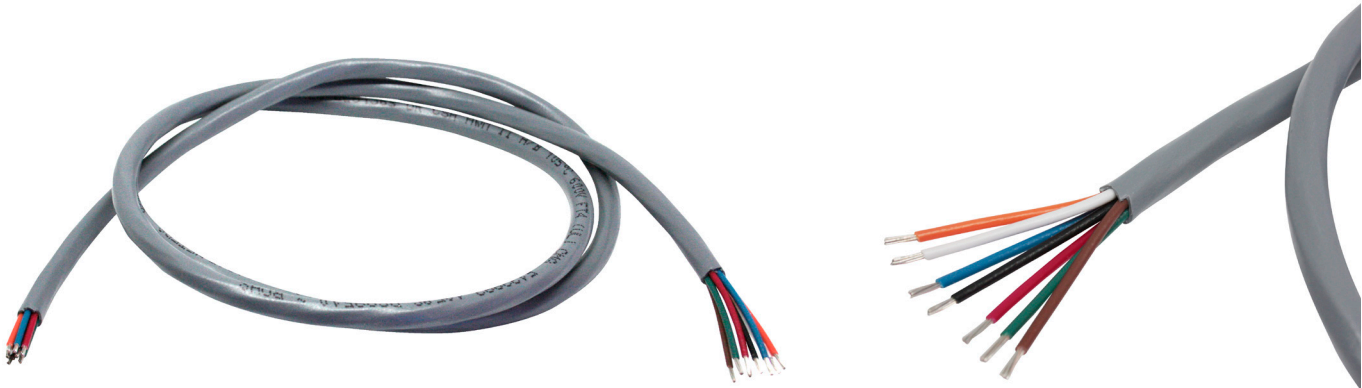

- Multi-conductor cable.
- Twisted tinned copper conductors.
- Insulation: FT4 semi-rigid gray PVC.
- Compatible with 12V and 24V lighting.

Voltage	600 vDC
Caliber	20
Conductors	7
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-20/7-BOX
Operating temperature	-20 ° C + 105° C

TT-FIL-22/6

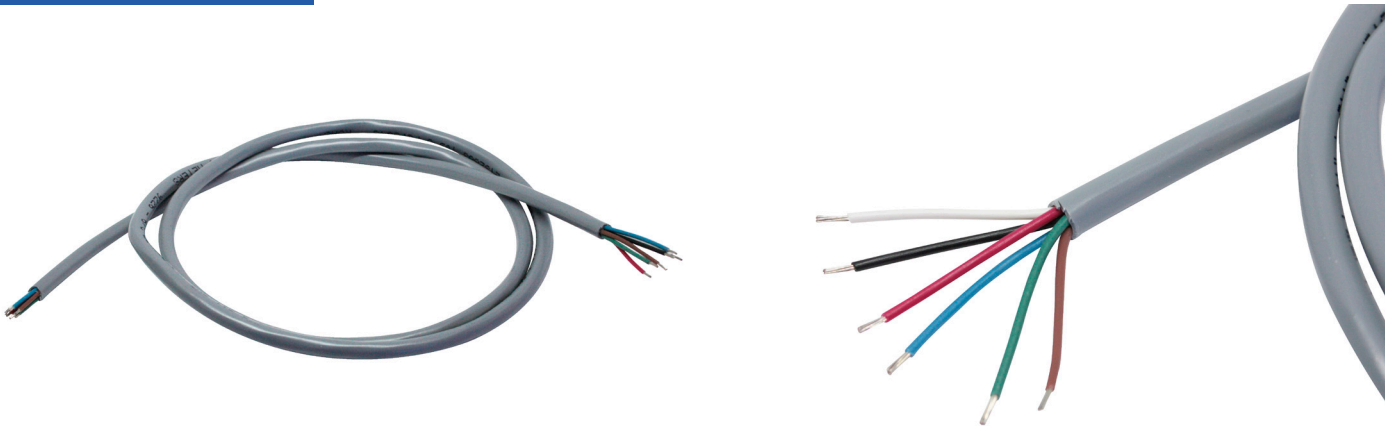

- Multi-conductor cable.
- Twisted tinned copper conductors.
- Insulation: FT4 semi-rigid gray PVC.
- Compatible with 12V and 24V lighting.

Voltage	600 vDC
Caliber	22
Conductors	6
Lenght	0.3 m/1 ft 300 m/982 ft with code TT-FIL-22/6-BOX
Operating temperature	-20 ° C + 105 ° C

TT-FIL-IEC



- NEMA-5-15P Male to Bare Wire AC Cable.


Voltage	300 vDC
Caliber	16
Conductors	3
Lenght	1,78m 70"
Operating temperature	-40°C - 105°C

TT-ACC-ETOUPE



- Nylon cable glands.
- NBR seal and EPDM o-ring.

Size	36mm 1 7/16"
Cable diameter	3-6.5mm
Operating temperature	-40°C - 100°C

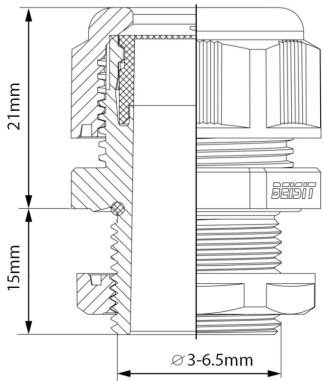

TT-ACC-CONNECT- STRIPE2



Strip Width	10mm $\frac{3}{8}$ "
Size	24 x 14mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pole	2P
Amperage	5A max.

TT-ACC-CONNECT- STRIPE2A



Strip Width	10mm $\frac{3}{8}$ "
Size	19.6 x 14.6 mm $\frac{3}{4}$ x $\frac{9}{16}$ "
Pole	2P
Amperage	5A max.

TT-ACC-CONNECT- STRIPE2B



Strip Width	10mm $\frac{3}{8}$ "
Size	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pole	3P
Amperage	5A max.

TT-ACC-CONNECT- STRIPE2C



Strip Width	10mm $\frac{3}{8}$ "
Size	19.6 x 14.6 mm $\frac{3}{4}$ x $\frac{9}{16}$ "
Pole	3P
Amperage	5A max.

TT-ACC-CONNECT- STRIPE2D



Strip Width	10mm $\frac{3}{8}$ "
Size	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pole	4P
Amperage	5A max.

TT-ACC-CONNECT- STRIPE2E



Strip Width	10mm $\frac{3}{8}$ "
Size	24.3 x 14.6 mm $\frac{15}{16}$ x $\frac{9}{16}$ "
Pole	4P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE2F



Strip Width	12mm
Size	24.3 x 17.7 mm $\frac{15}{16}$ x $\frac{11}{16}$ "
Pole	5P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE2G



Strip Width	12mm
Size	19.6 x 17.7mm $\frac{3}{4}$ x $\frac{11}{16}$ "
Pole	5P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE2H



Strip Width	12mm
Size	24.3 x 17.7mm $\frac{15}{16}$ x $\frac{11}{16}$ "
Pole	6P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE2I



Strip Width	12mm
Size	19.6 x 17.7 mm $\frac{3}{4}$ x $\frac{11}{16}$ "
Pole	6P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE2L



Strip Width	10mm $\frac{3}{8}$ "
Size	26.9 x 14.6mm $1 \frac{1}{16}$ x $\frac{9}{16}$ "
Pole	4P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE3



Strip Width	10mm $\frac{3}{8}$ "
Pole	2P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3A



Strip Width	10mm $\frac{3}{8}$ "
Pole	2P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3B



Strip Width	10mm $\frac{3}{8}$ "
Pole	3P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3C



Strip Width	10mm $\frac{3}{8}$ "
Pole	3P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3D



Strip Width	10mm $\frac{3}{8}$ "
Pole	4P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3E



Strip Width	10mm $\frac{3}{8}$ "
Pole	4P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3F



Strip Width	12mm
Pole	5P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3G



Strip Width	12mm
Pole	5P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3H



Strip Width	12mm
Pole	6P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3I



Strip Width	-
Pole	6P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3J



Strip Width	10mm $\frac{3}{8}$ "
Pole	2P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3K



Strip Width	10mm $\frac{3}{8}$ "
Pole	3P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3L



Strip Width	10mm $\frac{3}{8}$ "
Pole	4P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE3N



Strip Width	-
Pole	6P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE4



Strip Width	10mm $\frac{3}{8}$ "
Size	15.4 x 11.5 mm $\frac{5}{8}$ x $\frac{7}{16}$ "
Pole	2P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE4A



Strip Width	10mm $\frac{3}{8}$ "
Size	21.6 x 11.5 mm $\frac{7}{8}$ x $\frac{7}{16}$ "
Pole	2P
Amperage	3,5A max.

TT-ACC-CONNECT-
STRIPE5



Strip Width	10mm $\frac{3}{8}$ "
Size	13.3 x 11.5 mm $\frac{9}{16}$ x $\frac{7}{16}$ "
Pole	2P
Amperage	6A max.

TT-ACC-CONNECT-
STRIPE5A



Strip Width	10mm $\frac{3}{8}$ "
Size	14.6 x 11.5mm $\frac{9}{16}$ x $\frac{7}{16}$ "
Pole	2P
Amperage	6A max.

TT-ACC-CONNECT-
STRIPE5J



Strip Width	-
Size	-
Pole	2P
Amperage	6A max.

TT-ACC-CONNECT-STRIPE6



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	3 max.

TT-ACC-CONNECT-STRIPE6A



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	5 max.

TT-ACC-CONNECT-STRIPE6J



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	4 max.

TT-ACC-CONNECT-STRIPE7



Strip Width	8mm $\frac{5}{16}$ "
Size	13.3 x 11.5 mm $\frac{9}{16}$ " x $\frac{7}{16}$ "
Pole	2P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE7A



Strip Width	8mm $\frac{5}{16}$ "
Size	14.6 x 11.5mm $\frac{9}{16}$ " x $\frac{7}{16}$ "
Pole	2P
Amperage	5A max.

TT-ACC-CONNECT-STRIPE7J



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	5A max.

TT-ACC-CONNECT-

STRIPE9



Strip Width	10mm $\frac{3}{8}$ "
Size	-
Pole	2P
Amperage	3 max.

TT-ACC-CONNECT-

STRIPE9A



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	5 max.

TT-ACC-CONNECT-


STRIPE9J



Strip Width	8mm $\frac{5}{16}$ "
Size	-
Pole	2P
Amperage	4 max.

TT-ACC-FASTCLIP-2


- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation



Amperage	20A
Voltage	300 vDC
Width	13,2mm $\frac{9}{16}$ "
Height	8.4mm $\frac{11}{32}$ "
Depth	18.8mm $\frac{3}{4}$ "
Type actuation	Levier
Operating temperature	85°C

TT-ACC-FASTCLIP-5

- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation

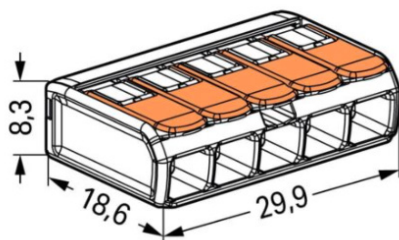

Amperage	20A
Voltage	300 vDC
Width	29,9mm $1\frac{3}{16}$ "
Height	8.3mm $\frac{11}{32}$ "
Depth	18.6mm $\frac{3}{4}$ "
Type actuation	Levier
Operating temperature	85°C


TT-ACC-CONNECT-
STRIPE8



- 9 in 1 fast connector
- No soldering require
- Compatible with all our TT-COB-L528 series LED strips

Amperage	3,5A
Voltage	12 vDC and 24 vDC
Caliber	22-20

Installation type

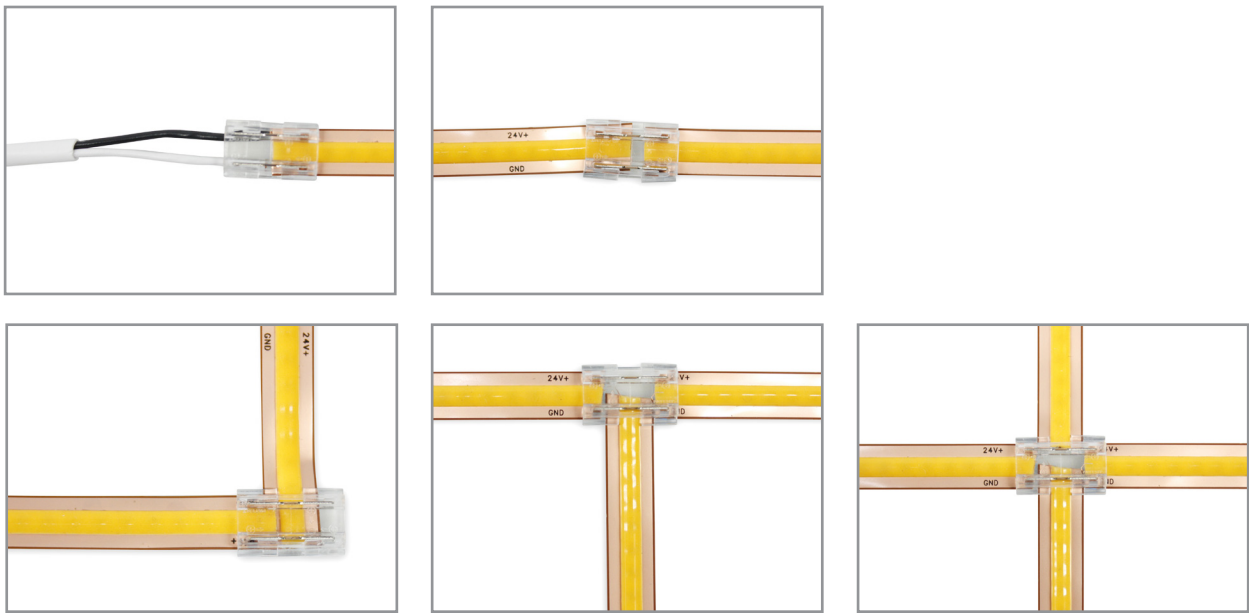

TT-ACC-CONNECT- STRIPE



- Connector for wire
- Very resistant, its shape will not change even when welded to the wires.

Amperage	9A
Voltage	250 vDC
Caliber	24-18
Pitch	4mm $\frac{3}{16}$ "
Pole	2P

TT-ACC-DOUBLEFACE



- 3M double-sided tape.

Width	10mm $\frac{3}{8}$ "
Lenght	50m $1968 \frac{1}{2}$ "

TT-ACC-DOUBLFACE2



- 3M double-sided tape.

Width	10mm $\frac{3}{8}$ "
Lenght	30m $1181 \frac{4}{32}$ "

ANNEXE



Credit photo: Godomo

LIMITED ONE (1) YEAR WARRANTY

Titanium Technology offers this limited warranty for one (1) year from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.

This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of one (1) year covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | |
|--------------------------|--------------------------|-----------------------|
| 1) Nicolaudie Controller | 5) TT-CAB-XX | 9) TT-WiFi |
| 2) LTECH Controller | 6) TT-DMX-XX | 10) Aluminium profile |
| 3) TT-ACC-XX | 7) TT-PSU-IP20 / PLUG-IN | 11) TT-Y-XX |
| 4) TT-AMP-XX | 8) TT-U-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.



LIMITED TWO (2) YEARS WARRANTY

Titanium Technology offers this limited warranty for two (2) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.



This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part of parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part of parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of two (2) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | |
|------------------------------|---------------|
| 1) TT-LUS-XX | 4) TT-STEP-XX |
| 2) TT-PSU-IP67-XX (MEANWELL) | 5) TT-UGD-XX |
| 3) TT-TRK-XX | |

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

LIMITED THREE (3) YEARS WARRANTY

Titanium Technology offers this limited warranty for three (3) years from the date of purchase of this Titanium Technology product (hereafter : the «Product»). A list of all the Titanium Technology products covered by this limited warranty is given at the end of this document.



This limited warranty is valid only for the Product and it may not be transferred.

The present limited warranty is not meant to exclude, restrict, limit or modify the legal warranty given by law to the purchaser of the Product.

This is a quality Product. It was made and selected with care. If the Product contains a manufacturing defect or if one or more parts of the Product is defective, the retailer commits to replace or repair, at its sole discretion, the defective part or parts without charge under the following cumulative conditions : 1) the purchaser must contact the retail store where the Product was purchased; 2) the purchaser must return the defective part or parts or the Product to the retailer; 3) the purchaser must provide the retailer the invoice as proof of purchase and date of purchase of the Product; 4) the purchaser must supply the Product identification information, including the serial number or the model number; and 5) the period of three (3) years covered by this limited warranty must not be expired. If the retailer decides to replace the defective part or parts, the replacement part or parts would be new or reconditioned, equivalent to new parts.

EXCLUSIONS AND LIMITATIONS OF THE LIMITED WARRANTY

This limited warranty is not applicable :

1. to consumable parts;
2. to normal wear;
3. when the Product is used for purposes other than those determined by the manufacturer;
4. when the Product is not installed by a qualified electrician when electrical work is required;
5. when the serial number or other identification information or the Product is erased or withdrawn;
6. to damages that are only aesthetic and do not affect the normal use of the Product, including scatches, bumps etc.;
7. to labour costs such as installation, de-installation or shipping of the Product which must be paid by the purchaser;
8. to service call costs, when the service call is made while the warranty is not valid;
9. when the damages, defects, faults or other problems arise from :
 - a. an abnormal use of the Product;
 - b. an inadequate maintenance of the Product;
 - c. a faulty installation of the Product or an installation that is not in accordance with the installation guide (if one is provided);
 - d. a modification, a repair or dismantling of the Product by a person not authorized by the retailer or the manufacturer;
 - e. the transportation by the purchaser, his employee, officer or representative;
 - f. a negligence by the purchaser, his employee, officer or representative;
 - g. an accident;
 - h. a case of force majeure (are considered force majeure : nature disasters, lightning, flood, fire etc.);
 - i. any event that is not caused by the Product itself.

In no circumstance can the manufacturer or retailer be held responsible for any extraordinary, special, indirect, accessory or consecutive damages resulting from the use of or the incapacity to use the Product. Their responsibility is limited to the sale price of the Product as indicated on the notice and paid by the purchaser at the time of purchase. It is understood that this is not meant to limit, restrict or exclude the protection given by the legal warranty.

FRENCH VERSION VS ENGLISH VERSION

In case of discrepancy between the French and the English versions of the text of this limited warranty, the French version shall prevail.

MODIFICATIONS

The present warranty text is subject to change at any time.

List of Titanium Technology products covered under this limited warranty :

- | | | | |
|-----------------|---------------------|--------------------|----------------------------------|
| 1) TT-2216-XX * | 6) TT-5050-XX * | 11) TT-DOWN-016-XX | 16) TT-PSU-IP20-XX
(MEANWELL) |
| 2) TT-2835-XX * | 7) TT-5630-XX * | 12) TT-DR-CV-XX | 17) TT-PUCK-2.2W-XX |
| 3) TT-335-XX * | 8) TT-COB-L528-XX * | 13) TT-DR-CVB-XX | 18) TT-PUCK-3W-XX |
| 4) TT-3528-XX * | 9) TT-DOWN-007-XX | 14) TT-DR-CVZ-XX | 19) TT-PUCK-400-VX |
| 5) TT-3538-XX * | 10) TT-DOWN-008-XX | 15) TT-FL-XX-XX | |

* LED strips are only guaranteed if they are installed in our aluminum profiles and use our transformers.

Note : This product list may not be up to date. Please refer to the product itself (including the package or installation guide) to make sure it is covered by this limited warranty.

A circular logo with a blue border. Inside the circle, the text "GARANTIE LIMITÉE" is at the top and "LIMITED WARRANTY" is at the bottom, both in blue. In the center, the number "5" is large and blue, with "ANS" above it and "YEARS" below it, all in blue.



TITANIUM TECHNOLOGY

2323, boulevard Versant Nord #111

Québec, QC

G1N 4P4 CANADA

Toll free (866)-476-8115

www.titaniumtechnology.com

sales@titaniumtechnology.com

www.facebook.com/titaniumtechnologie

TITANIUM TECHNOLOGY USA

NEWARK DE 19713

Toll free (866)-476-8115 ext.203

www.titaniumtechnology.com

sales@titaniumtechnology.com

www.facebook.com/titaniumtechnologie