


## SELECTION TOOLS FOR LED STRIPS

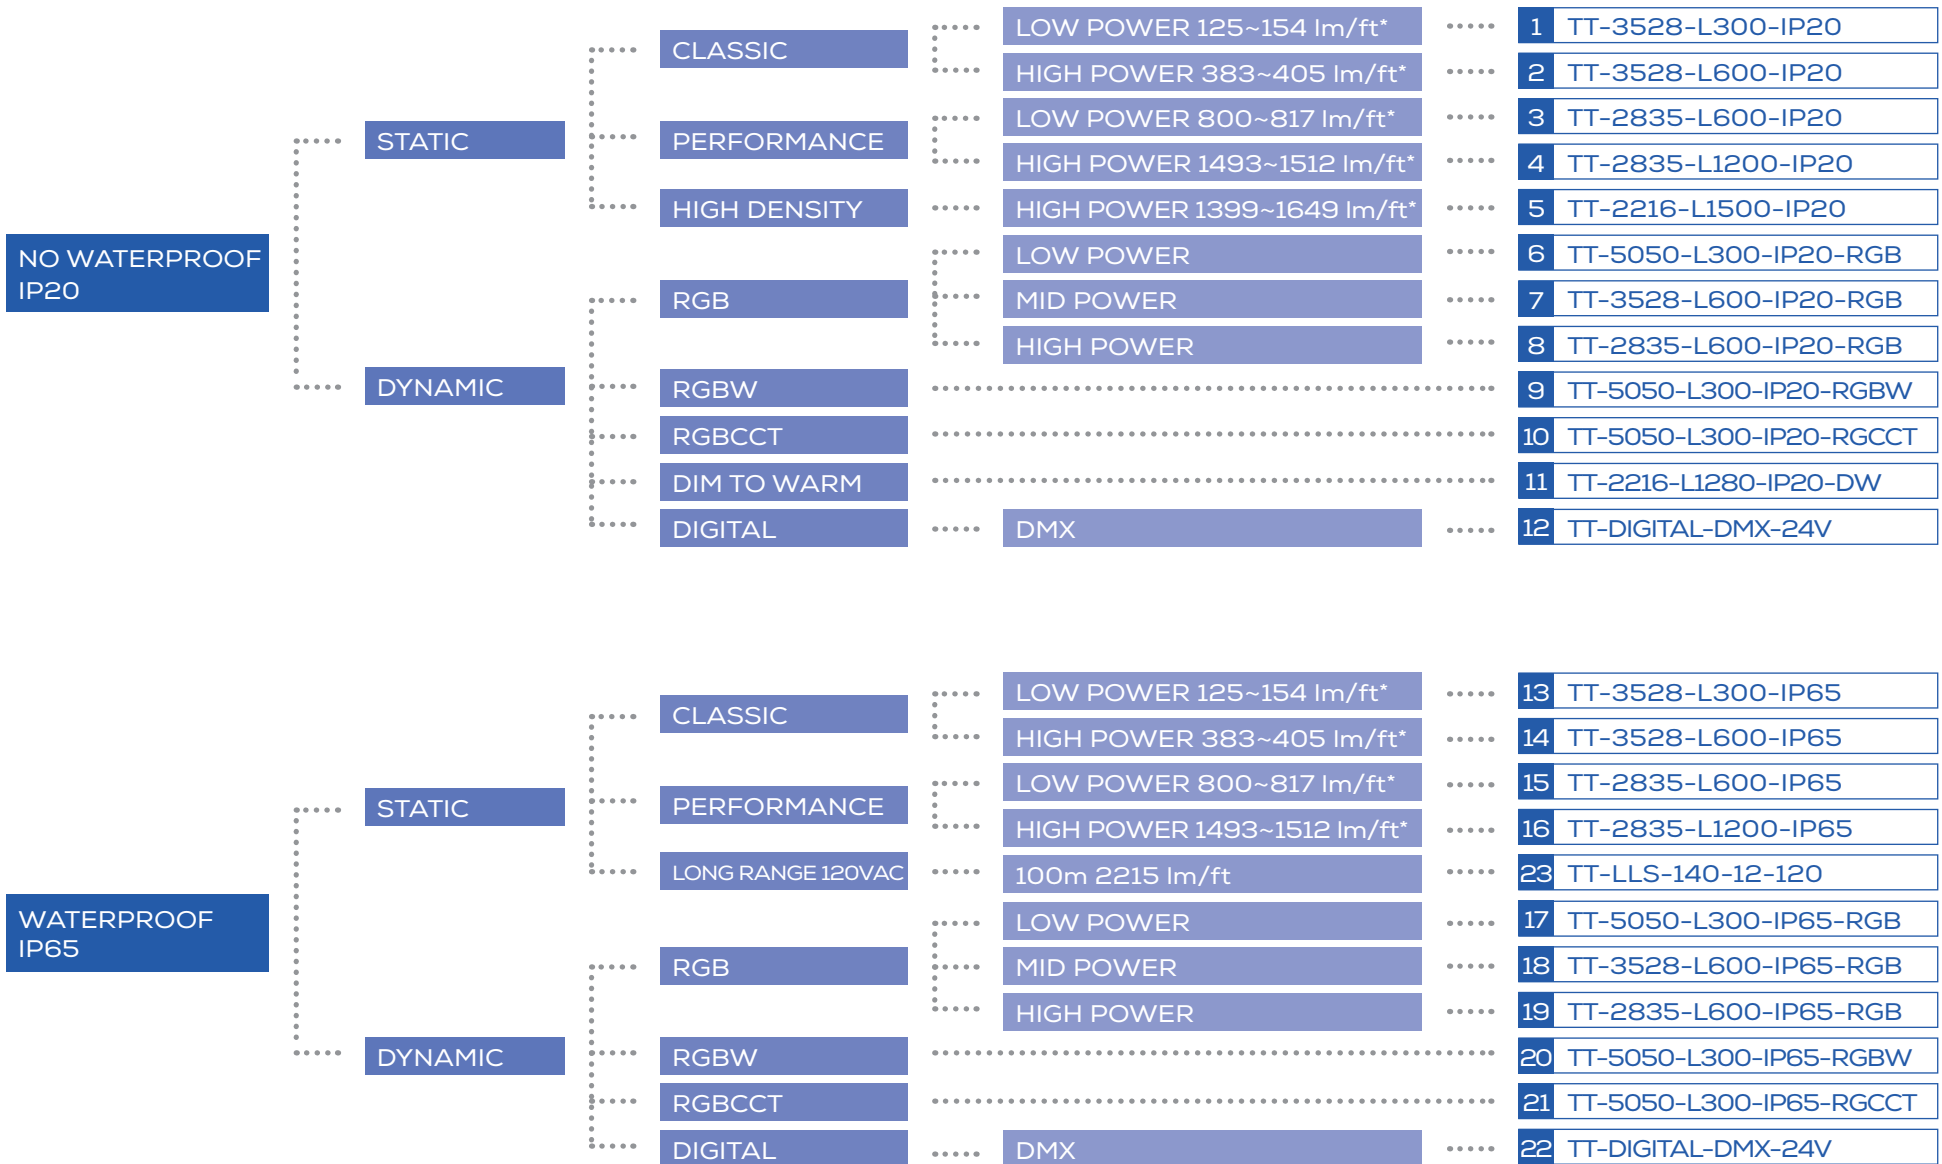

\* The number of lumens depends on type of CCT chosen.

## SELECTION TOOLS FOR LED STRIPS

### APPLICATIONS

1	2	<ul style="list-style-type: none"> <li>• Under cabinet</li> <li>• Cove (Low ambient light)</li> </ul>						
3		<ul style="list-style-type: none"> <li>• Cove high ambient light</li> <li>• Dark surface</li> <li>• Under cabinet</li> </ul>						
4	5	10	<ul style="list-style-type: none"> <li>• Wall grazing</li> <li>• Displays</li> </ul>					
15	16							
6	7	8	9	11	13	14	15	<ul style="list-style-type: none"> <li>• Display</li> <li>• Retail</li> <li>• Shelves</li> <li>• Under cabinet</li> <li>• Display / Accent</li> <li>• Back lighting</li> <li>• Cove high ambient</li> </ul>
12	17	18	19	20	21	22	23	<ul style="list-style-type: none"> <li>• Architectural</li> <li>• Entertainment</li> <li>• Retail</li> </ul>
17	18	19	20	22				<ul style="list-style-type: none"> <li>• Architectural</li> <li>• Building outline</li> <li>• Signage</li> </ul>

### DRIVERS

#### DIMMABLE

Dimmable drivers are only compatible with static tape.

1	2	3	4	5	13	14	15	16
---	---	---	---	---	----	----	----	----

TT-DR-CV-SERIES      TT-DR-CVB-SERIES




TT-DR-CV-BOX-SERIES




#### NON-DIMMABLE

Dimmable drivers are only compatible with static tape.


1	2	3	4	5	13	14	15	16
---	---	---	---	---	----	----	----	----

MEANWELL      PLUG-IN








### CONTROLLERS



#### RGB

6	7	8	TT-U-M3-MINI
17	18	19	



#### RGBW

9	TT-U-M4	TT-U-E4S	TT-U-UX8	TT-UB4
20				





#### RGB CCT

10	TT-U-E5S	TT-UB5
21		

#### DIGITAL

12	TT-STICK-DE3	TT-SUITE3-EC
22		

#### DIM TO WARM & STATIC

1	2	3	4	5	11	13	14	15	16
TT-U-01	TT-U-M1	TT-DX-01	TT-UB1						
									

# TITANIUM

## TECHNOLOGY

### NO WATERPROOF IP20

- 1** CLASSIC  
LOW POWER  
**TT-3528-L300-IP20**
- 12vDC, 24vDC
  - 60 LED/m
  - 5.8 W/m
  - 125 ~254 lm
  - CRI 90
  - CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber



- 2** CLASSIC  
HIGH POWER  
**TT-3528-L600-IP20**
- 12vDC, 24vDC
  - 120 LED/m
  - 9.84 W/m
  - 383 ~405 lm
  - CRI 90
  - CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber, RGB



- 3** PERFORMANCE  
LOW POWER  
**TT-2835-L600-IP20**
- 12vDC, 24vDC
  - 120 LED/m
  - 16.4 W/m
  - 800 ~817 lm
  - CRI 90
  - CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Crystal blue,  
Amber, Orange, Pink, UV, RGB



- 4** PERFORMANCE  
HIGH POWER  
**TT-2835-L1200-IP20**
- 24vDC
  - 240 LED/m
  - 30.4 W/m
  - 1493 ~1512 lm
  - CRI 90
  - CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber



- 5** HIGH DENSITY  
HIGH POWER  
**TT-2216-L1500-IP20**
- 24vDC
  - 300 LED/m
  - 34.12 W/m
  - 1399 ~1649 lm
  - CRI 90
  - CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber



- 6** RGB  
LOW POWER  
**TT-5050-L300-IP20-RGB**
- 12vDC, 24vDC
  - 60 LED/m
  - 18.27 W/m
  - CRI 90
  - CCT : RGB



- 7** RGB  
MID POWER  
**TT-3528-L600-IP20-RGB**
- 12vDC, 24vDC
  - 120 LED/m
  - 9.84 W/m
  - CRI 90
  - CCT : RGB



- 8** RGB  
HIGH POWER  
**TT-2835-L600-IP20-RGB**
- 12vDC, 24vDC
  - 120 LED/m
  - 16.4 W/m
  - CRI 90
  - CCT : RGB



- 9** RGBW  
**TT-5050-L300-IP20-RGBW**
- 12vDC, 24vDC
  - 60 LED/m
  - 18.27 W/m
  - CCT : RGB30K, RGB40K, RGB60K



- 10** RGB CCT  
**TT-5050-L300-IP20-RGB CCT**
- 12vDC, 24vDC
  - 60 LED/m
  - CCT : RGB + Warm white 30K +  
Cold white 60K



- 11** DIM TO WARM  
**TT-2216-L1280-IP20**
- 24vDC
  - 256 LED/m
  - 23W/m
  - 1800 lm
  - CRI 90
  - CCT : Warm white 30K~18K



- 12** DIGITAL  
DMX  
**TT-DIGITAL-DMX-24V-IP20**
- 24vDC
  - 60 LED/m
  - CCT : RGB30K, RGB40K,  
RGB60K, RGB



## WATERPROOF IP65

### 13 CLASSIC LOW POWER

#### TT-3528-L300-IP65

- 12vDC, 24vDC
- 60 LED/m
- 5.8 W/m
- 125 ~254 lm
- CRI 90
- CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber



### 14 CLASSIC HIGH POWER

#### TT-3528-L600-IP65

- 12vDC, 24vDC
- 120 LED/m
- 9.84 W/m
- 383 ~405 lm
- CRI 90
- CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber, RGB



### 15 PERFORMANCE LOW POWER

#### TT-2835-L600-IP65

- 12vDC, 24vDC
- 120 LED/m
- 16.4 W/m
- 800 ~817 lm
- CRI 90
- CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Crystal blue,  
Amber, Orange, Pink, UV, RGB



### 16 PERFORMANCE HIGH POWER

#### TT-2835-L1200-IP65

- 24vDC
- 240 LED/m
- 30.4 W/m
- 1493 ~1512 lm
- CRI 90
- CCT : 27K, 30K, 35K, 40K, 60K,  
Red, Green, Blue, Amber



### 17 RGB LOW POWER

#### TT-5050-L300-IP65-RGB

- 12vDC, 24vDC
- 60 LED/m
- 18.27 W/m
- CRI 90
- CCT : RGB



### 18 RGB MID POWER

#### TT-3528-L600-IP65-RGB

- 12vDC, 24vDC
- 120 LED/m
- 9.84 W/m
- CRI 90
- CCT : RGB



### 19 RGB HIGH POWER

#### TT-2835-L600-IP65-RGB

- 12vDC, 24vDC
- 120 LED/m
- 16.4 W/m
- CRI 90
- CCT : RGB



### 20 RGBW

#### TT-5050-L300-IP65-RGBW

- 12vDC, 24vDC
- 60 LED/m
- 18.27 W/m
- CCT : RGB30K, RGB40K, RGB60K



### 21 RGB CCT TT-5050-L300-IP65-RGB CCT

- 12vDC, 24vDC
- 60 LED/m
- CCT : RGB + Warm white 30K +  
Cold white 60K



### 22 DIGITAL DMX TT-DIGITAL-DMX-24V-IP67

- 24vDC
- 60 LED/m
- CCT : RGB30K, RGB40K,  
RGB60K, RGB



### 23 LONG RANGE 120VAC 100M TT-LLS-140-12-120

- 120 vDC
- 140 LED/m
- 21 W/m
- CRI 90
- CCT : 27K, 30K, 35K, 40K, 50K

