


# TITANIUM

TECHNOLOGIE

TT-3528-L600



- Ruban DEL SMD3528 en rouleau de 5 mètres.

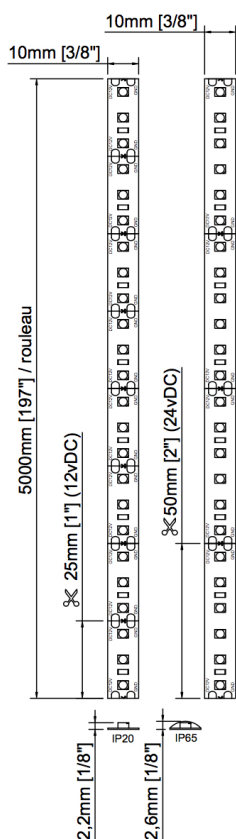

Tension	12vDC	24vDC
DEL/m	120 / m	
Puissance	9,84w / m 3w / pied 49,2w / rouleau	
Ampérage	0,82A / m 0,25A / pied 4,1A / rouleau	0,41A / m 0,13A / pied 2,05A / rouleau
Lumens	27K - 117 lm / pied 30K - 119 lm / pied 35K - 91 lm / pied 40K - 104 lm / pied 60K - 88 lm / pied	45 lm / w 44 lm / w 35 lm / w 39 lm / w 33 lm / w
IRC (RA)	90	
Angle	120°	
Dimension	IP20	10mm x 2,2mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP65	10mm x 2,6mm x 5000mm $\frac{3}{8}$ " x $\frac{1}{8}$ " x 196 $\frac{7}{8}$ "
	IP67	13mm x 5mm x 5000mm $\frac{1}{2}$ " x $\frac{3}{16}$ " x 196 $\frac{7}{8}$ "
Ligne de coupe	25 mm 1"	50 mm 2"
Finition	Blanc	
Gradable	Oui	
Couleur DEL	<b>27K</b> - Blanc chaud 2700K <b>30K</b> - Blanc chaud 3000K <b>35K</b> - Blanc neutre 3500K <b>40K</b> - Blanc neutre 4000K <b>60K</b> - Blanc froid 6000K <b>R</b> - Rouge <b>G</b> - Vert <b>B</b> - Bleu <b>A</b> - Ambre <b>RGB</b> - Couleurs mixtes 3:1	
Temp. fonctionnement	-40°C ~ 70°C	
IP	<b>20, 65, 67</b>	

## CODE PRODUIT

TT	SMD	DEL PAR ROULEAU	IP	COULEUR DEL	TENSION
TT	3528	L600	20	27K	24V
TT	3528	L600			

# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES

## Indoor Luminaire Photometric Data

### Description Information

Luminaire Name: TT-3528-L600-2700k-3-Milky-lens	Luminaire Catalog:	Test ID:
Lamp Name: TT-3528-L600-2700k-3-Milky-lens	Lamp Catalog: 3528	Test Date: 2021/03/20
Manufacture: TITANIUM TECHNOLOGIE	ShieldingAngle(°):	Test Machine: GON-2000
Test Lab:	Frequency(Hz):	Luminaire CCT(K):
Luminaire Size(W*L*H): 0.120*0.304*0.060	Lighting Area(m2): 0.055	Luminaire Weight(kg): 0.100
Test System: C, $\gamma$	Test Step: C=45.0 $\gamma$ =1.0	Temperature(°C): 25
		Humidity(%):

### Character Parameter

Lamp Speciality Parameter	
Lamp Rated Lumens(lm): 448.000	Lamp Number in Luminaire: 1
Lamp Norminal Power(W):	Lamp Rated Voltage(V):
Lamp Tested Power(W): 2.643	Lamp Tested Voltage(V): 12.3
Lamp Tested Current(A): 0.215	Lamp Tested PF:
Lamp Size(W*L*H): 0.120*0.304*0.060	
Luminaire Speciality	
Luminaire Lumens(lm): 36.412	Beam Angle(10%Imax): 87.4
Luminaire Efficiency: 8.13%	Left=-42.3 Right=45.1
Luminaire EER(lm/W): 13.777	Field Angle(10%Imax): 122.7
Muximum Cand.(cd): 20.592	Spacing Criteria S/MH(C0_180): 1.165
Max Cd. Angle(°): C=315.0 $\gamma$ =2.0	Spacing Criteria S/MH(C90_270): 1.136
Downward Lumens(lm): 36.412	CIE Type: Semi-Direct
Upward Lumens(lm): 0.000	ErP $\phi$ use(90deg): 27.220lm
Downward Total Efficiency%: 100.00	IRF(%): 134.692
Upward Total Efficiency%: 0.00	





# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES

## 2D Light Intensity Distribution Curve

Plane	[50%Ang.]	[10%Ang.]
C315.0:	87.4	122.7
C0.0:	88.9	122.6
C90.0:	89.4	123.2

Polar Graph

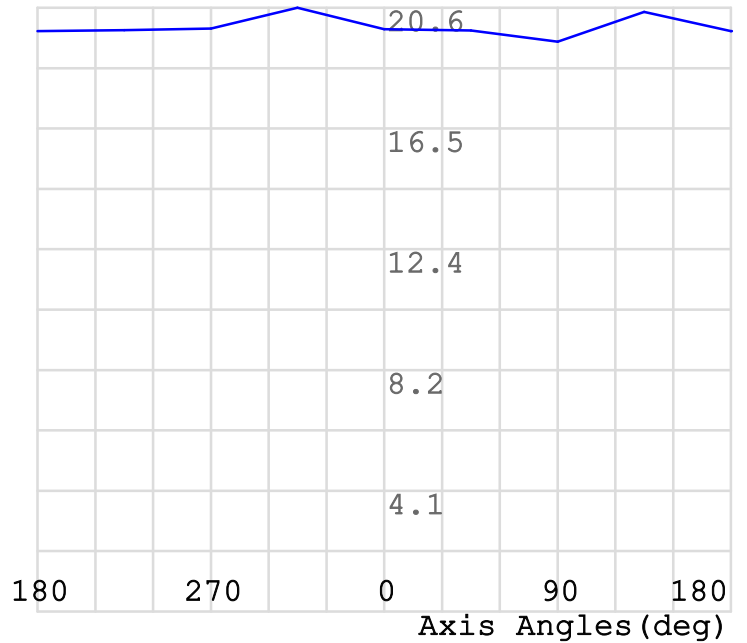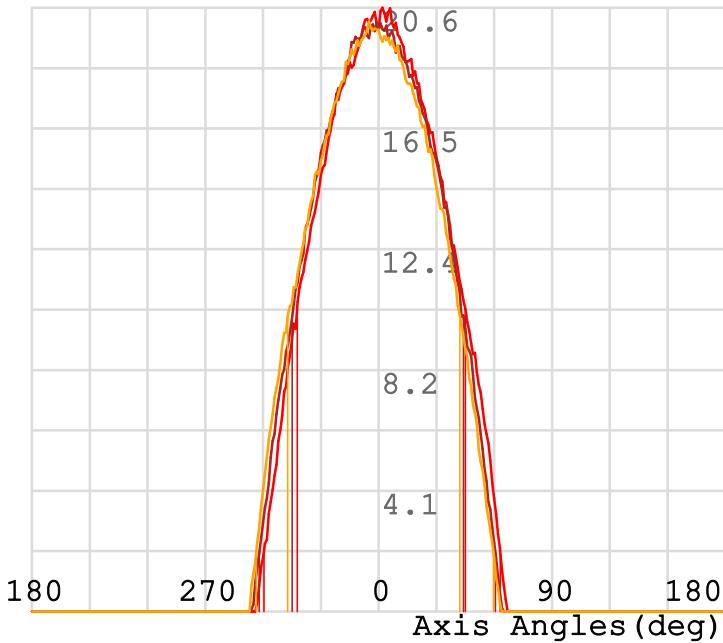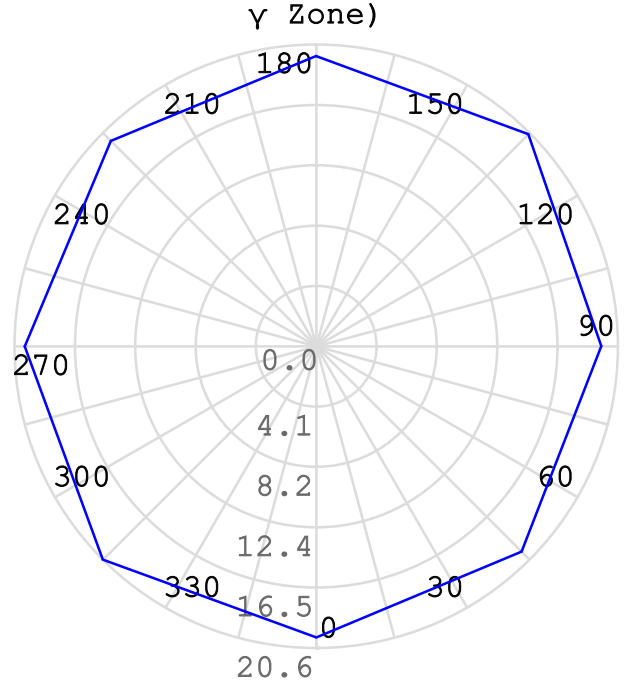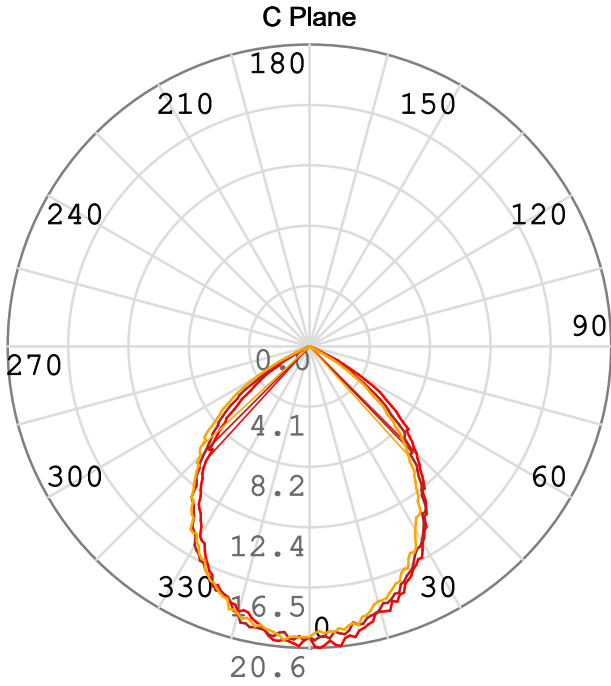


C Plane: C315.0\_135.0 ——— C0.0\_180.0 ——— C90.0\_270.0 ———  
 γ Cone: γ2.0 ———

# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES

## Rectangle ISO Light Intensity Curve

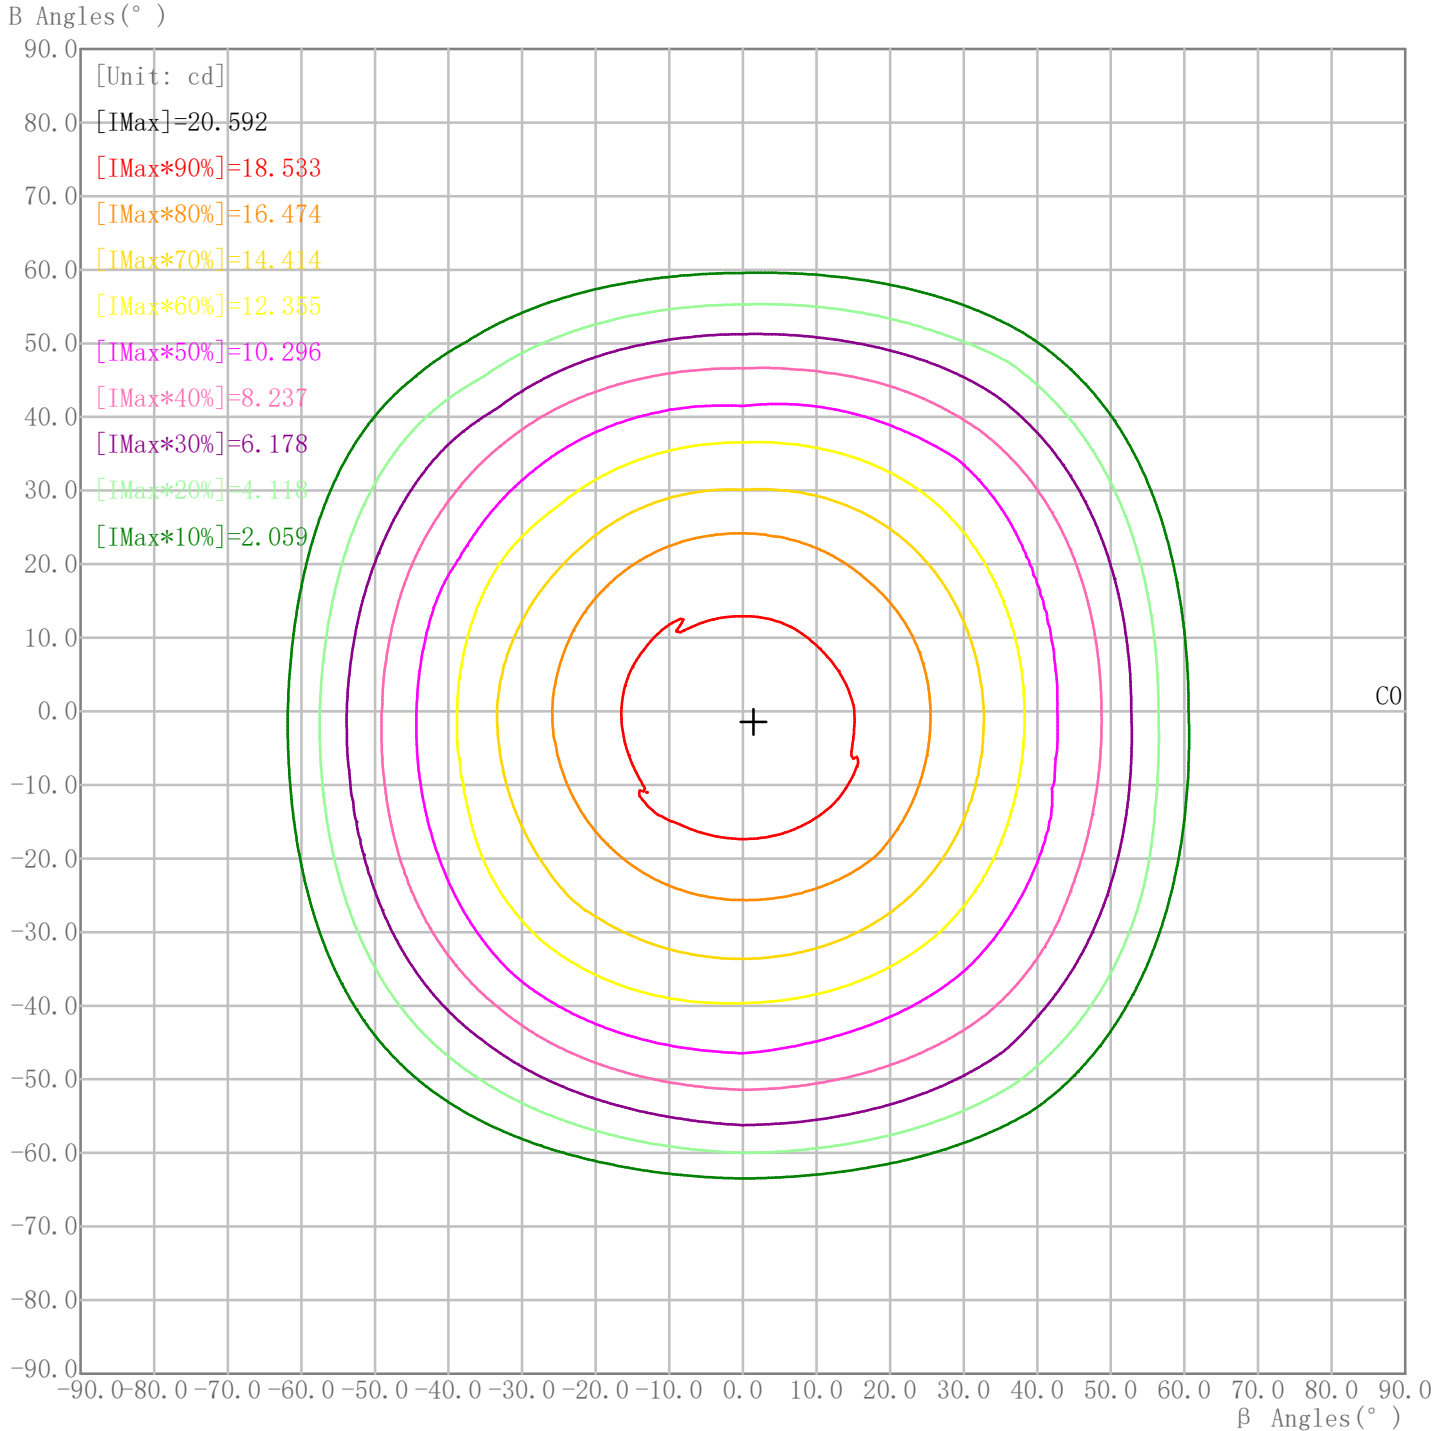


Curves: 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —

Maximum Light Intensity(cd): 20.59 Maximum Cd. Angles: H1.4 V-1.4

# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES


## Plane ISO-Illuminance Curve

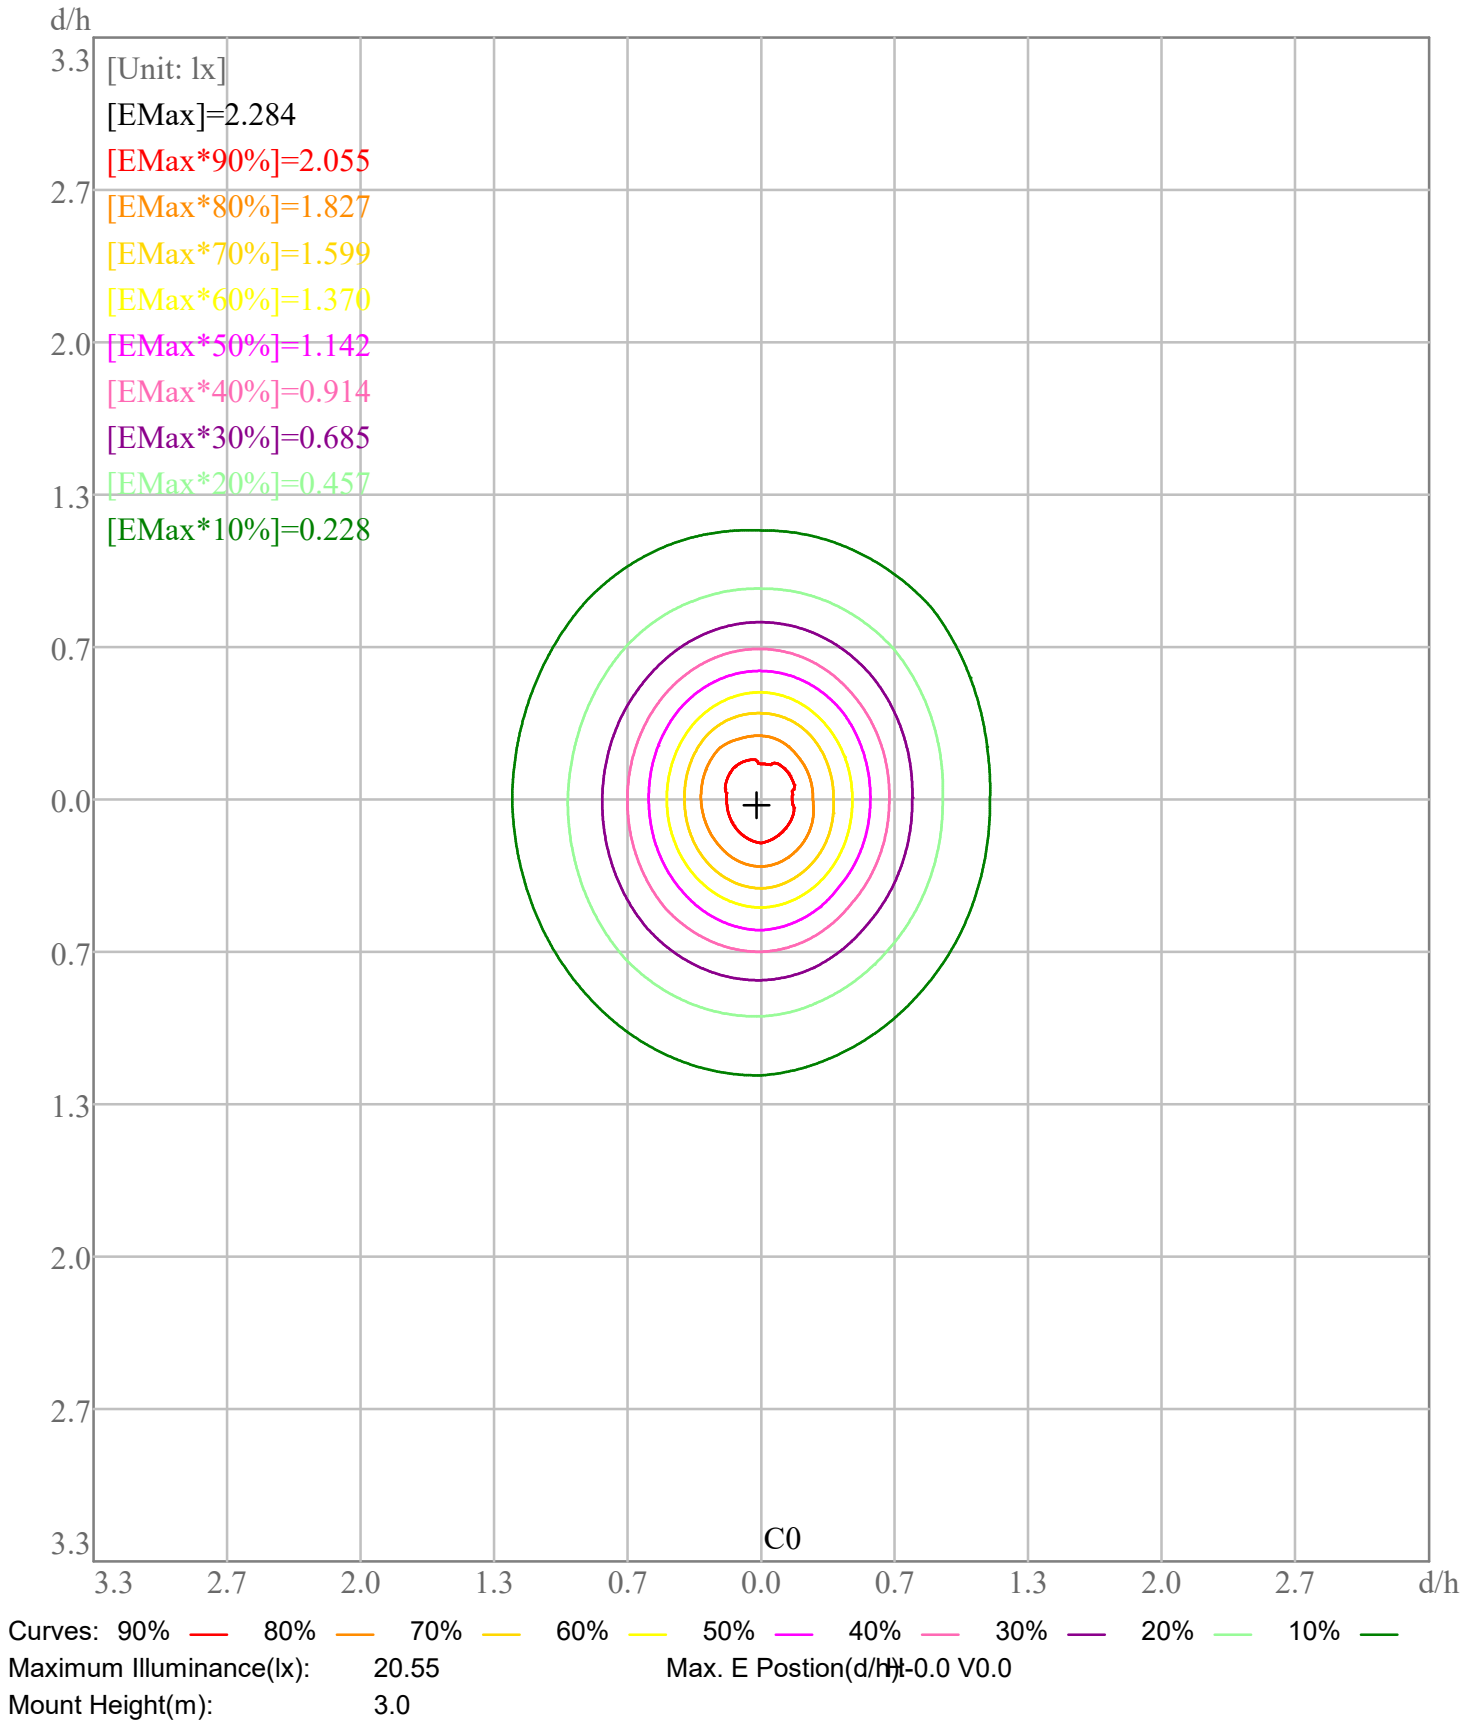


# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES

## Space ISO Illuminance Curve

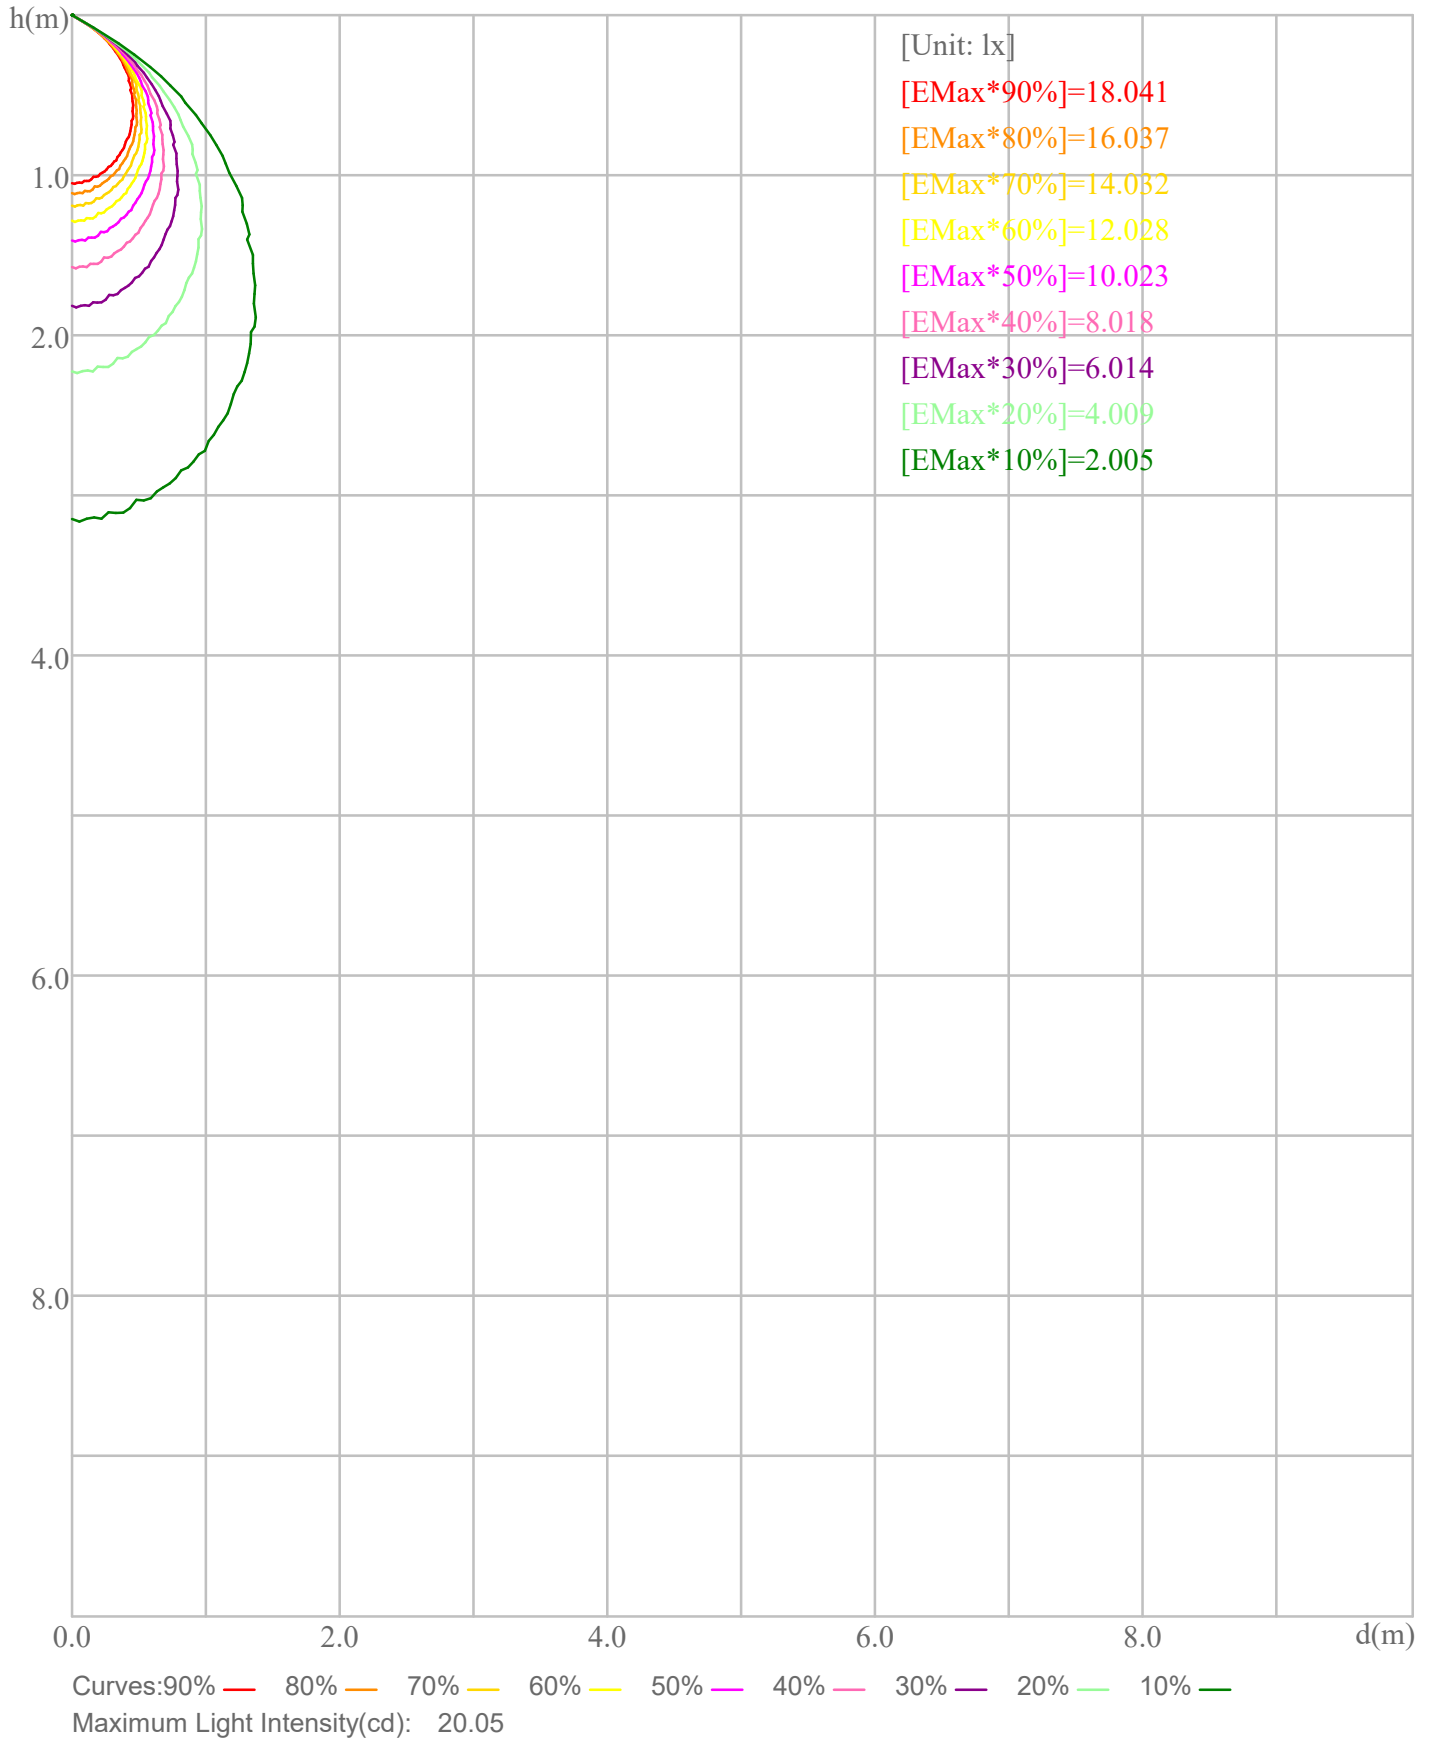

Illuminance-Distance Curve

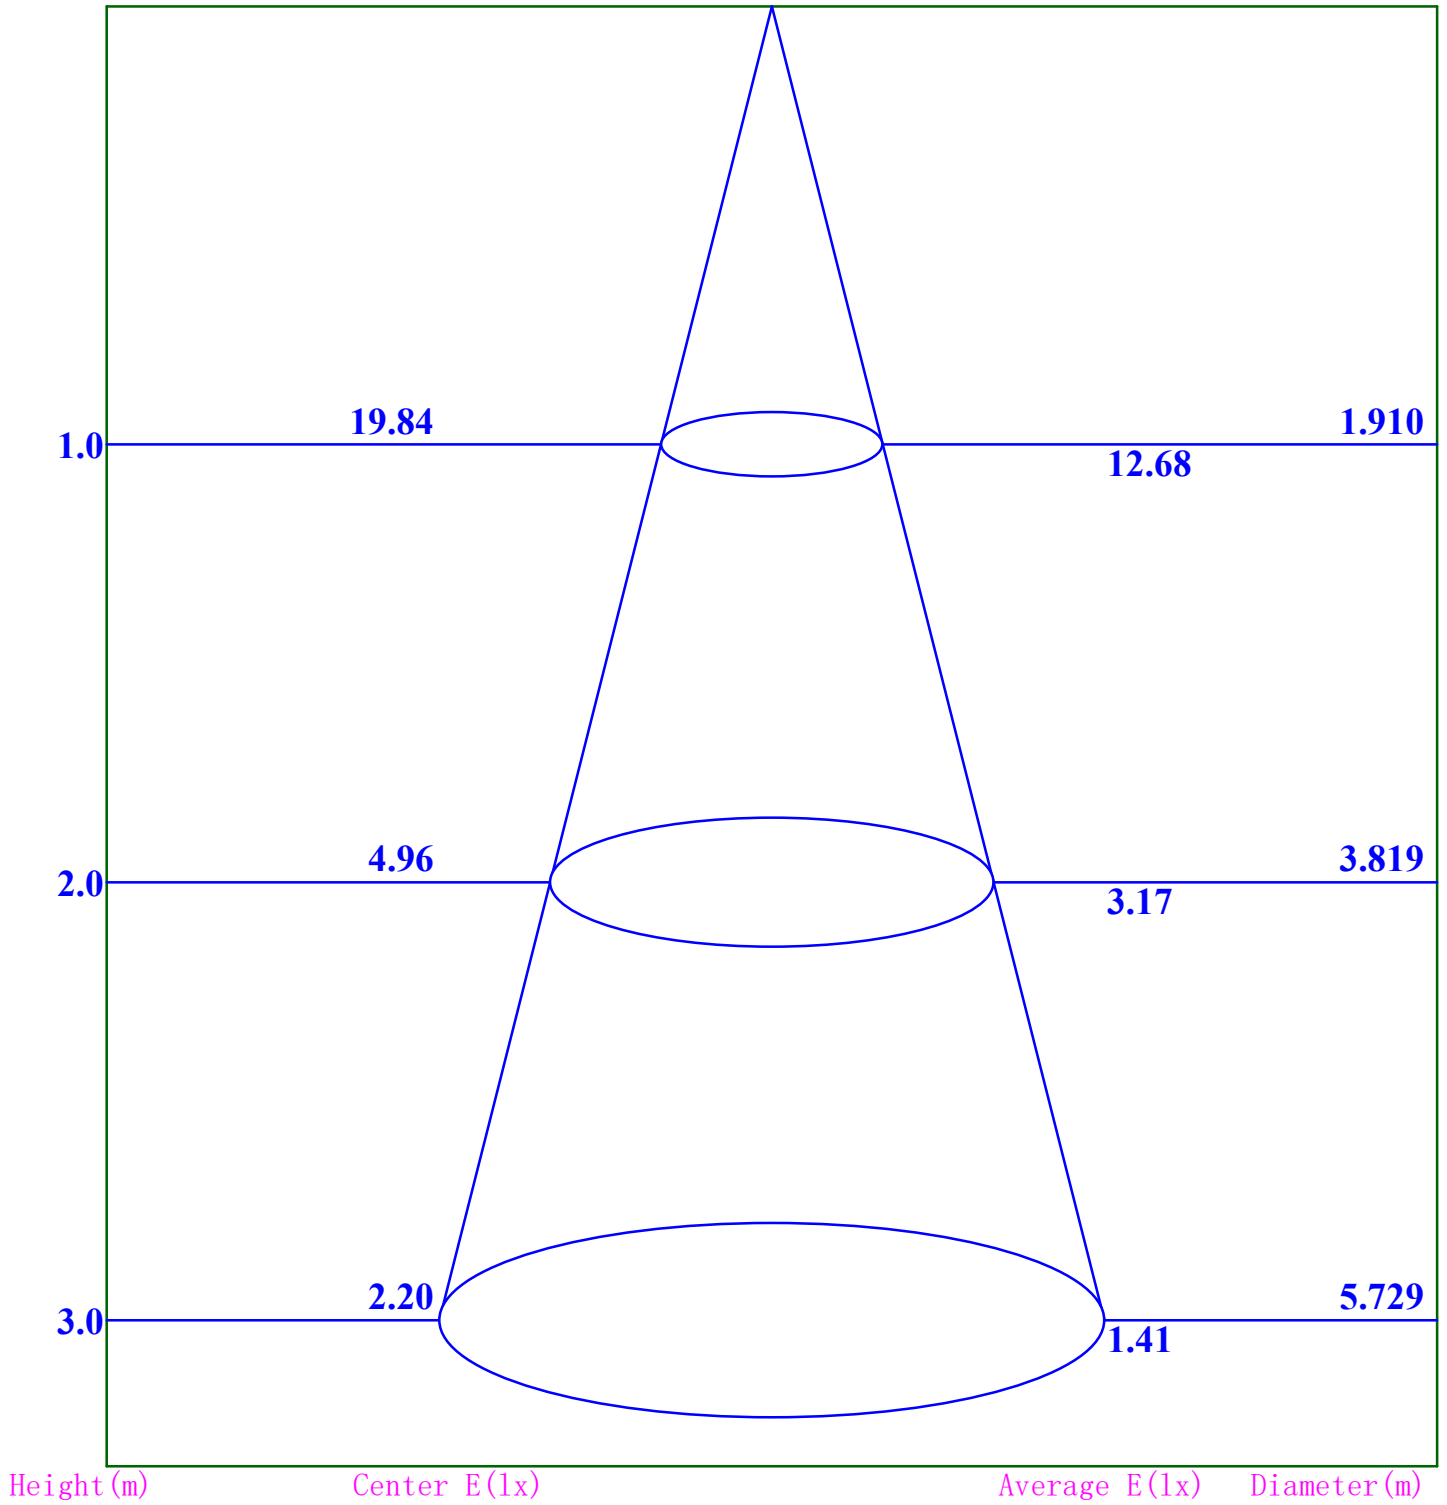

**Beam Angle:87.4**

# IES Indoor Report

Photometric Filename:TT-3528-L600-2700K-3-Milky LENS.IES

## Indoor Luminance Limiting Curve


Glare Grade Table

GI	Quality	Using Illuminance							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	249	207	155	86	0	0	0	0	0
C90	231	193	138	67	0	0	0	0	0

Luminance Limiting Curve

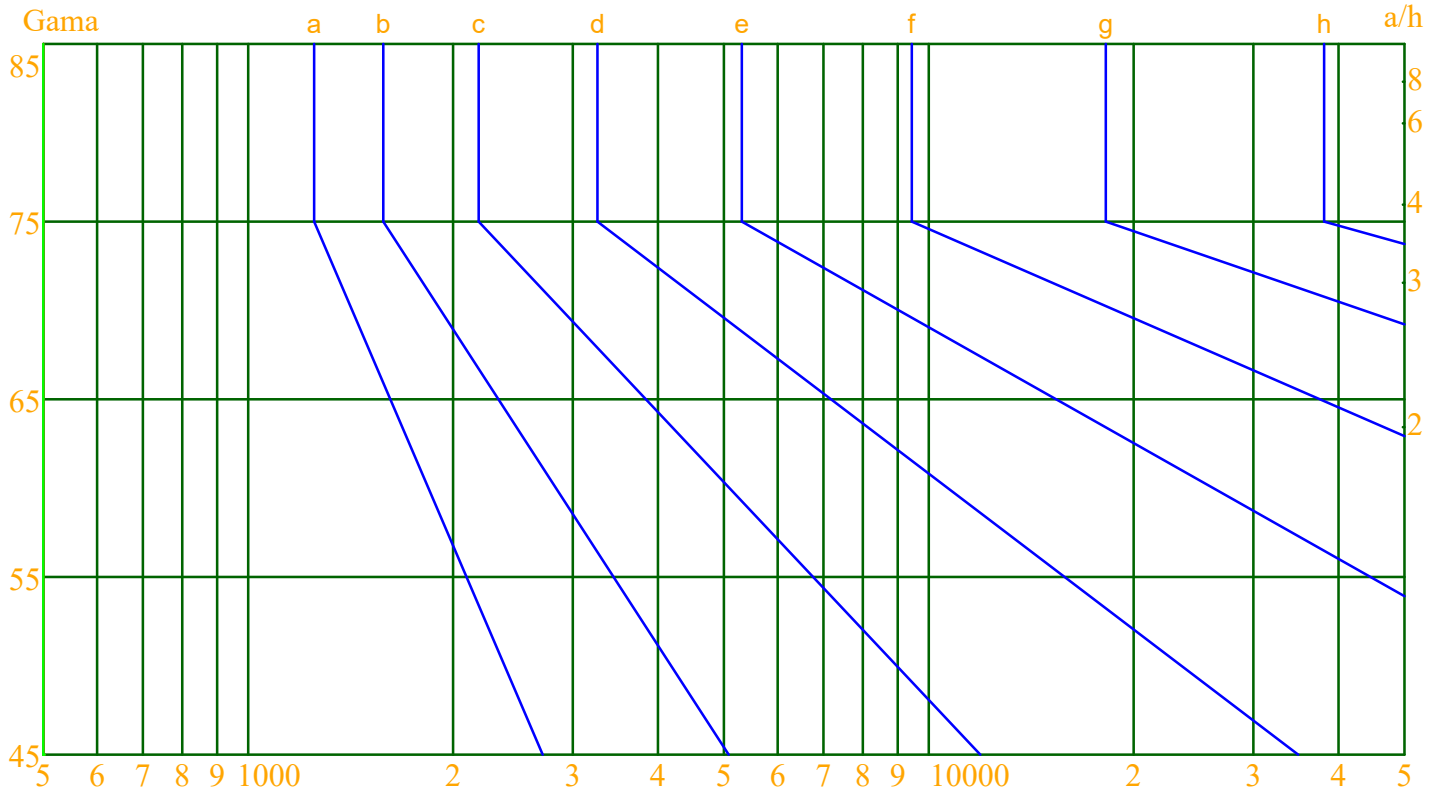


Luminous Size: Length(m)=0.304    Width(m)=0.120    Height(m)=0.060    Area(m<sup>2</sup>)=0.054720  
 Luminous Type: Without Luminous Side  
 Luminous Curves: C0-C180 Color: —    C90-C270 Color: —



# IES Indoor Report

Photometric Filename: TT-3528-L600-2700K-3-Milky LENS.IES

## Indoor Budgetary Estimate Table

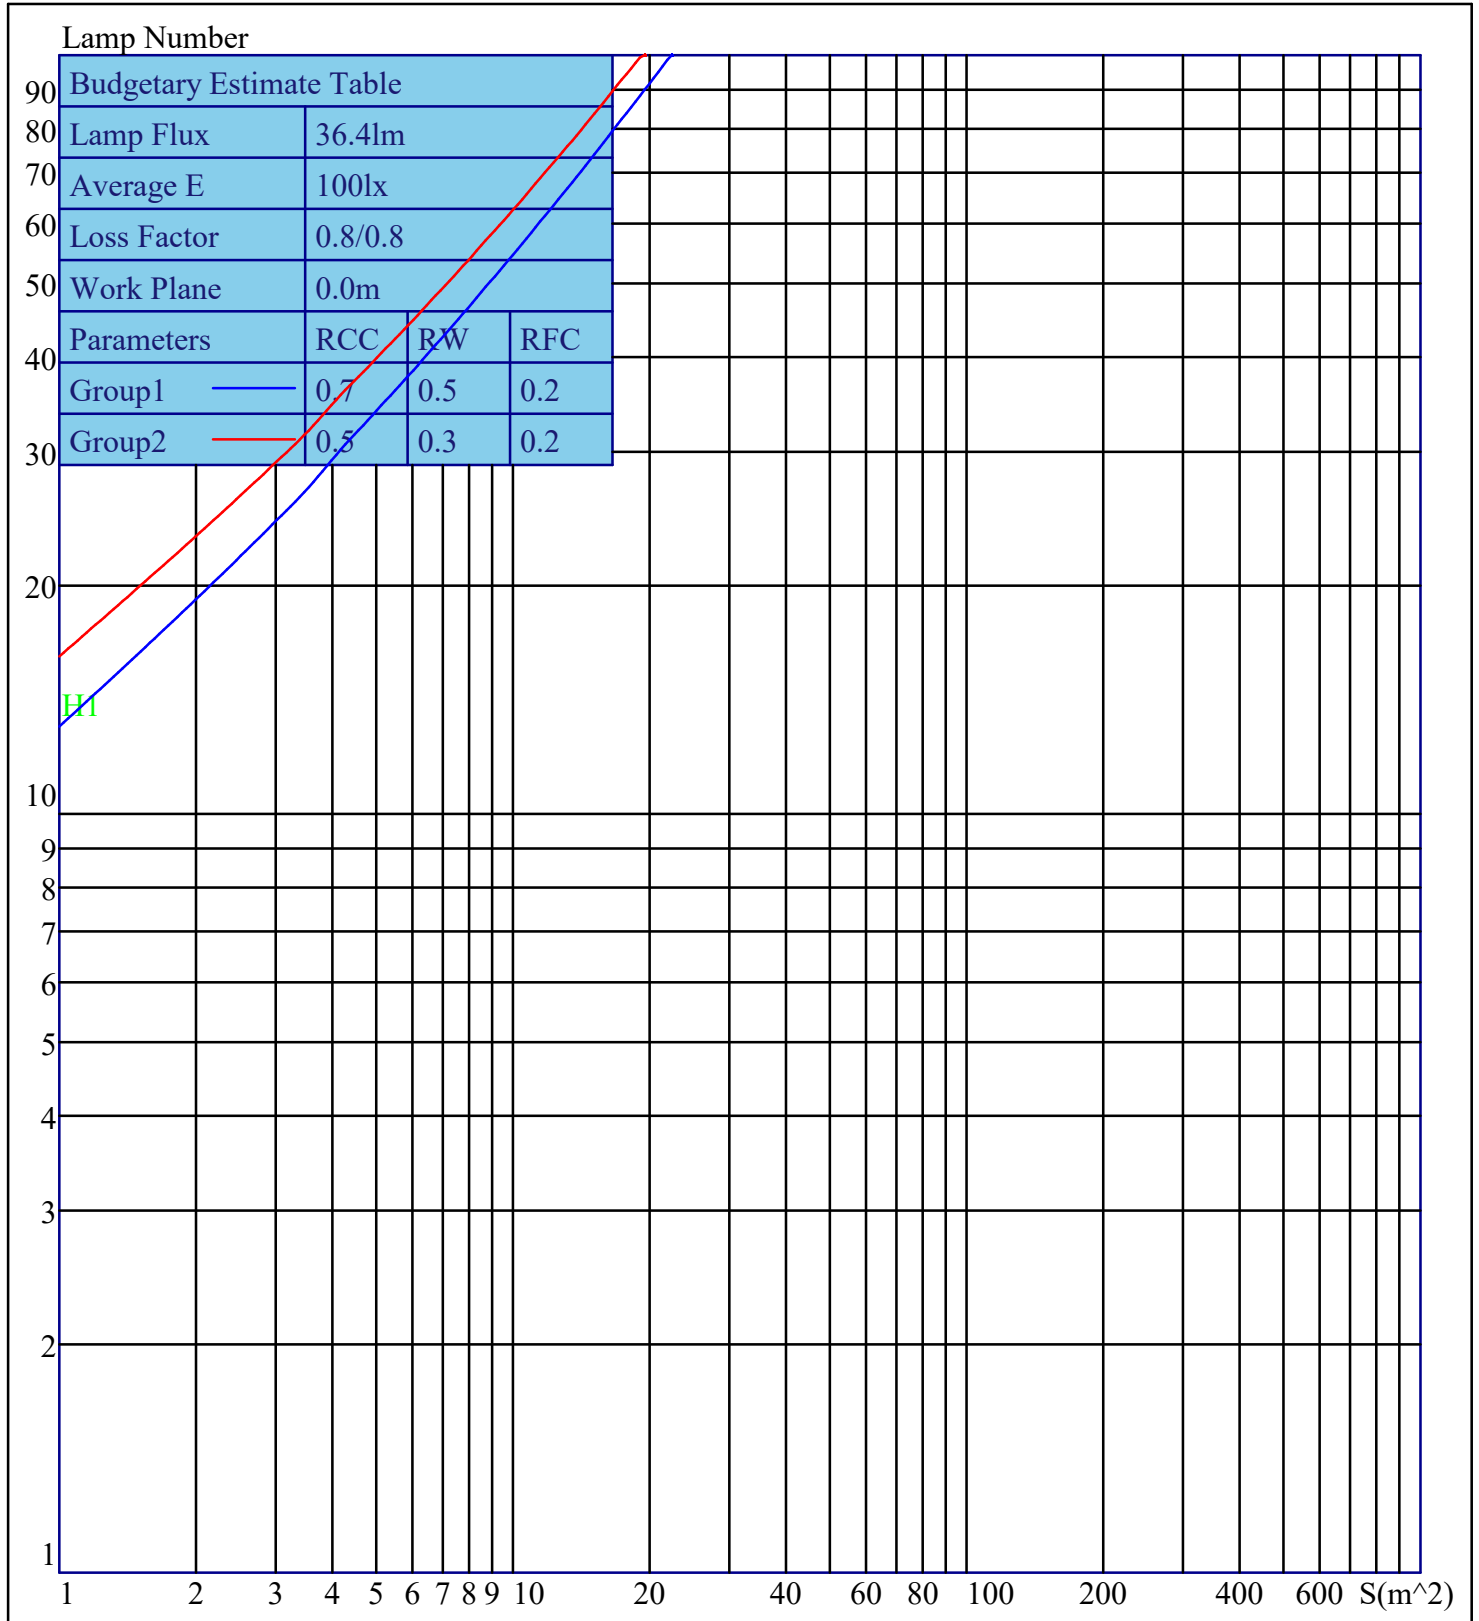

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8  
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8  
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2