


# TITANIUM

## TECHNOLOGY

TT-2216-L1500



- Del SMD2216 tape in 5 meter roll.

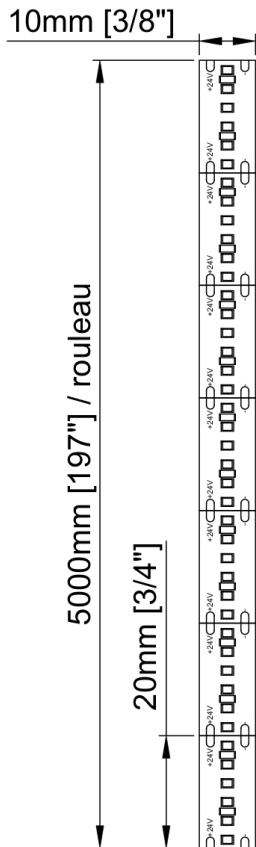

Voltage	24vDC		
LED/m	300 /m		
Poser	9,84w/m	16,40w/m	22,85w/m
	<b>3w/feet</b> 49,21w/roll	<b>5w/feet</b> 82,02w/roll.	<b>6w/feet</b> 114,25w/roll.
Amperage	0,39 / m	0,66 / m	0,82 / m
	0,12 / feet 1,95 / roll	0,2/ feet 3,3 / roll	0,25/ feet 4,1 / roll
Lumens	27K - 193 lm/feet	341 lm/feet	483 lm/feet
	30K - 243 lm/feet	391 lm/feet	433 lm/feet
	35K - 293 lm/feet	441 lm/feet	583 lm/feet
	40K - 343 lm/feet	491 lm/feet	633 lm/feet
	60K - 393 lm/feet	541 lm/feet	683 lm/feet
CRI	90		
Angle	120°		
Size	IP20	10mm x 1,1mm x 5000mm	
		3/8" x 1/16" x 1967/8"	
Cut line	20 mm 3/4"		
Finish	White		
Dimmable	Yes		
LED Colour	<b>27K</b> - Warm white 2700K		
	<b>30K</b> - Warm white 3000K		
	<b>35K</b> - Neutral white 3500K		
	<b>40K</b> - Neutral white 4000K		
	<b>60K</b> - Cold white 6000K		
	<b>R</b> - Red <b>G</b> - Green <b>B</b> - Blue <b>A</b> - Amber		
Working temp.	-40°C ~ 70°C		
IP	20		

### PRODUCT CODE

TT - SMD - LED PER ROLL - IP - POWER - LED COLOR - VOLTAGE

TT	-	2216	-	L1500	-	20	-	3W	-	27K	-	24V
TT	-	2216	-	L1500	-	20	-		-		-	24V