


- Ruban Del SMD2216 en rouleau de 5 mètres.

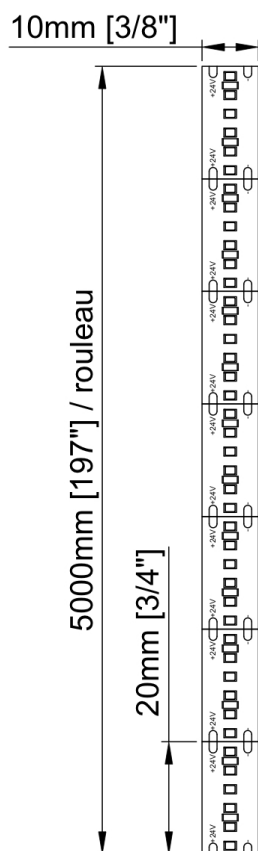

Tension	24vDC		
DEL/m	300 / m		
Puissance	9,84w/m	16,40w/m	22,85w/m
	<b>3w</b> /pied 49,21w/rouleau	<b>5w</b> /pied 82,02w/roul.	<b>6w</b> /pied 114,25w/roul.
Ampérage	0,39 / m	0,66 / m	0,82 / m
	0,12 / pied 1,95 / rouleau	0,2 / pied 3,3 / rouleau	0,25 / pied 4,1 / rouleau
Lumens	27K - 193 lm/pied	341 lm/pied	483 lm/pied
	30K - 243 lm/pied	391 lm/pied	433 lm/pied
	35K - 293 lm/pied	441 lm/pied	583 lm/pied
	40K - 343 lm/pied	491 lm/pied	633 lm/pied
	60K - 393 lm/pied	541 lm/pied	683 lm/pied
IRC	90		
Angle	120°		
Dimension	IP20	10mm x 1,1mm x 5000mm	
		3/8" x 1/16" x 1967/8"	
Ligne de coupe	20 mm 3/4"		
Finition	Blanc		
Gradable	Oui		
Couleur DEL	<b>27K</b> - Blanc chaud 2700K		
	<b>30K</b> - Blanc chaud 3000K		
	<b>35K</b> - Blanc neutre 3500K		
	<b>40K</b> - Blanc neutre 4000K		
	<b>50K</b> - Blanc froid 6000K		
	<b>R</b> - Rouge		
	<b>G</b> - Vert		
	<b>B</b> - Bleu		
	<b>A</b> - Ambre		
Temp. fonctionnement	-40°C ~ 70°C		
IP	20		

#### CODE PRODUIT

TT	SMD	DEL PAR ROULEAU	IP	PUISSANCE	COULEUR DEL	TENSION
TT	2216	L1500	20	3W	27K	24V
TT	2216	L1500	20			24V