


- Ruban Del SMD2216 en rouleau de 5 mètres.

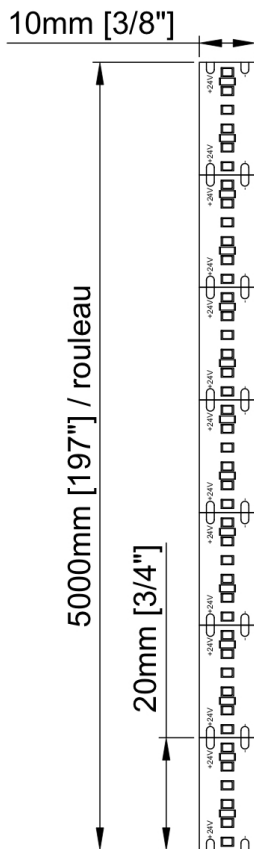

Tension	24vDC		
DEL/m	300 /m		
Puissance	9,84w/m	16,40w/m	22,85w/m
	3w/pied 49,21w/rouleau	5w/pied 82,02w/roul.	6w/pied 114,25w/roul.
Ampérage	0,39 / m	0,66 / m	0,82 / m
	1,95 / rouleau	3,3 / rouleau	4,1 / rouleau
Lumens	27K - 193 lm/pied	341 lm/pied	483 lm/pied
	30K - 243 lm/pied	391 lm/pied	433 lm/pied
	35K - 293 lm/pied	441 lm/pied	583 lm/pied
	40K - 343 lm/pied	491 lm/pied	633 lm/pied
	60K - 393 lm/pied	541 lm/pied	683 lm/pied
IRC	90		
Angle	120°		
Dimension	IP20	10mm x 1,1mm x 5000mm	
		3/8" x 1/16" x 1967/8"	
Ligne de coupe	20 mm 3/4"		
Finition	Blanc		
Gradable	Oui		
Couleur DEL	27K - Blanc chaud 2700K		
	30K - Blanc chaud 3000K		
	35K - Blanc neutre 3500K		
	40K - Blanc neutre 4000K		
	60K - Blanc froid 6000K		
	R - Rouge G - Vert B - Bleu A - Ambre		
Temp. fonctionnement	-40°C ~ 70°C		
IP	20		

CODE PRODUIT

TT	- SMD	- DEL PAR ROULEAU	- IP	- PUISSANCE	- COULEUR DEL	- TENSION
TT	- 2216	- L1500	- 20	- 3W	- 27K	- 24V
TT	- 2216	- L1500	- 20	-	-	- 24V