


TITANIUM

TECHNOLOGY

TT-ACC-FASTCLIP-2


- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation



Amperage	20A
Voltage	300 vDC
Width	13,2mm $\frac{9}{16}$ "
Height	8,4mm $\frac{11}{32}$ "
Depth	18,8mm $\frac{3}{4}$ "
Type actuation	Lever
Operating temperature	85°C

TT-ACC-FASTCLIP-5

- Connection of conductors of
- 0.14 to 4 mm²
- Installation of rigid, semi-rigid and flexible conductors
- Rapid installation of devices with higher power requirements
- Safe installation of long cables with larger conductor cross sections
- Mounting adapter for a compliant installation

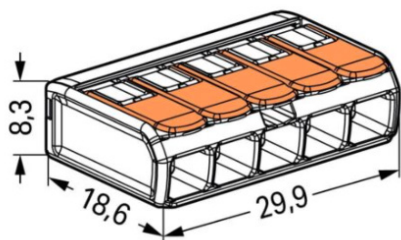

Amperage	20A
Voltage	300 vDC
Width	29,9mm $1\frac{3}{16}$ "
Height	8,3mm $\frac{11}{32}$ "
Depth	18,6mm $\frac{3}{4}$ "
Type actuation	Lever
Operating temperature	85°C